

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331726

Luminaire Tested: **SA2XXRDIP-C865D925U835-4F0-1E-UDD-F**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331726
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C865D925U835-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 925 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6717.7 lumens
Efficiency: N/A
Efficacy: 111.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 60.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331726

CATALOG NUMBER: SA2XXRDIP-C865D925U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

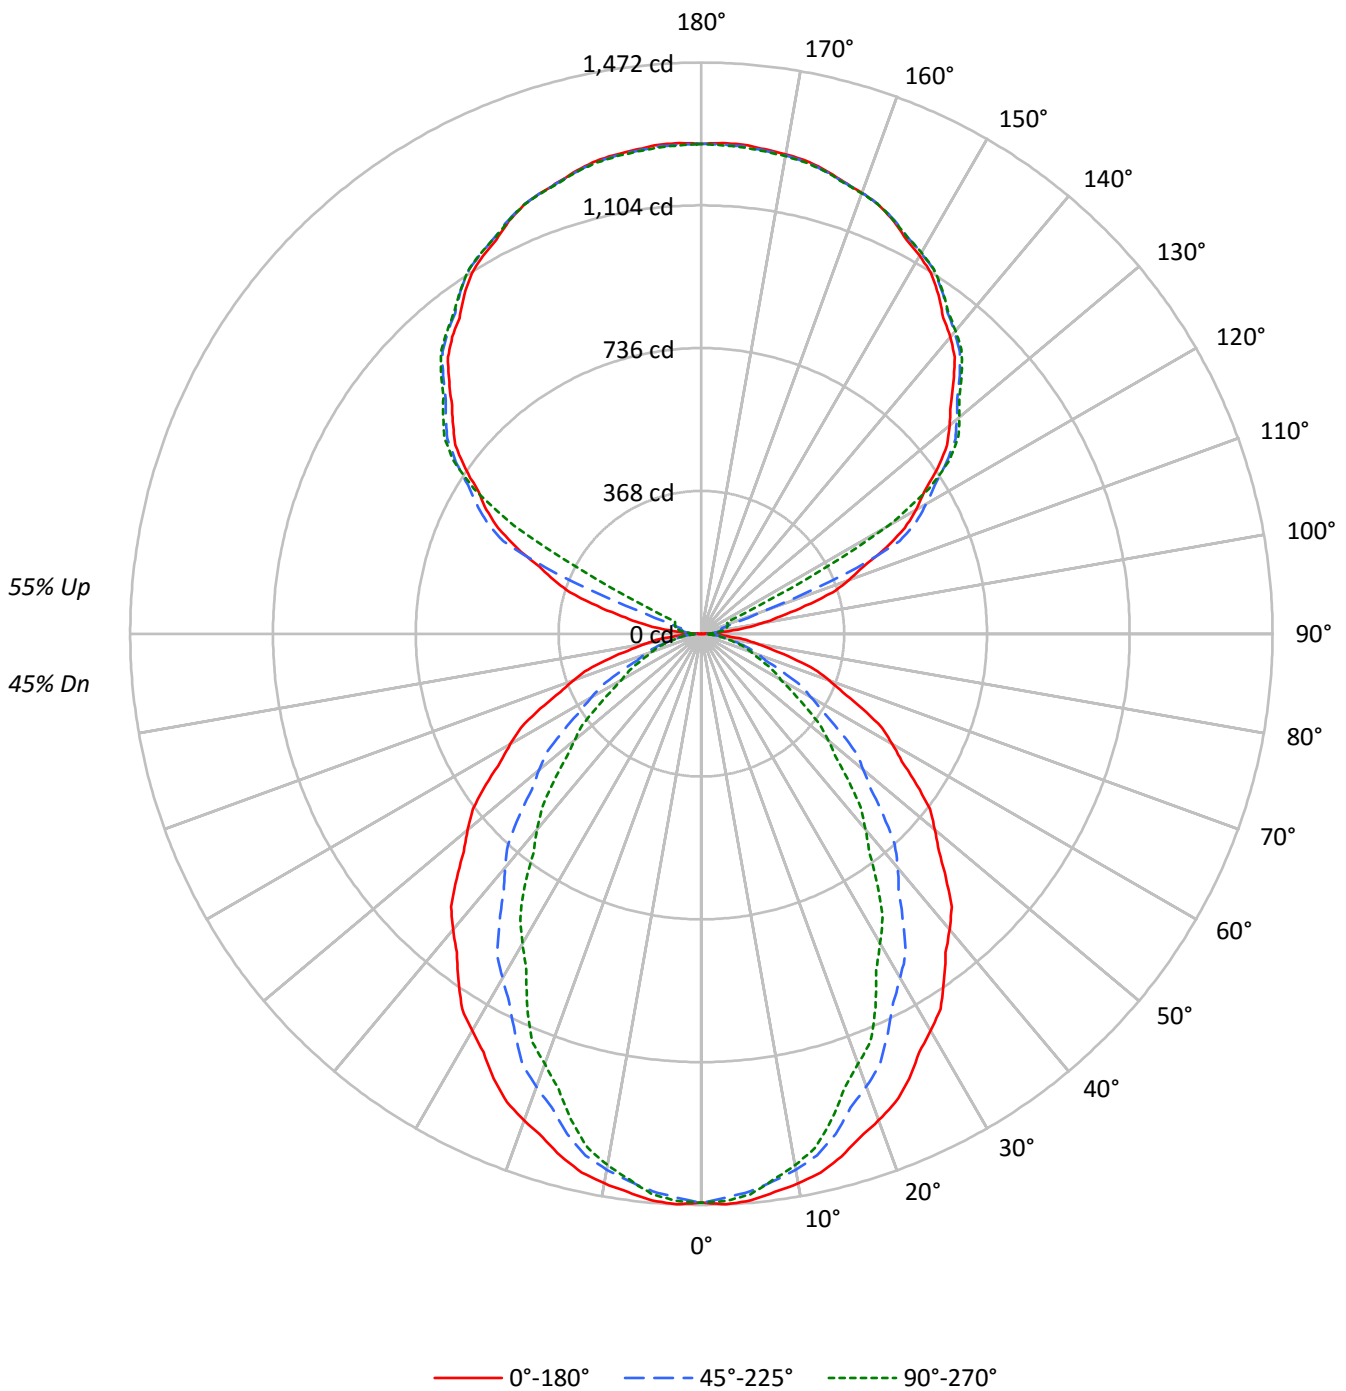



TEST NUMBER: P331726

CATALOG NUMBER: SA2XXRDIP-C865D925U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	81	81	81	65	65	65	51	51	51	45				
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	46	45	44	39				
2	89	82	76	71	81	75	70	66	63	59	56	52	49	47	41	39	38	33				
3	81	72	65	60	74	66	60	55	56	51	48	46	43	40	37	35	33	29				
4	74	64	56	51	68	59	53	47	50	45	41	41	38	35	33	31	29	25				
5	68	57	49	44	63	53	46	41	45	40	36	37	33	30	30	27	25	22				
6	63	52	44	38	58	48	41	36	41	35	31	34	30	27	27	25	22	19				
7	59	47	39	34	54	43	36	32	37	32	28	31	27	24	25	22	20	17				
8	54	42	35	30	50	39	33	28	34	28	25	28	24	21	23	20	18	16				
9	51	39	31	27	47	36	30	25	31	26	22	26	22	19	22	19	16	14				
10	47	36	29	24	44	33	27	23	29	24	20	24	20	18	20	17	15	13				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	23675	23675	23675
5°	23765	23378	23506
10°	23582	22996	22799
15°	23311	22313	21670
20°	22936	21340	20270
25°	22552	20236	18912
30°	22018	19099	17169
35°	21498	17864	15640
40°	20976	16585	13873
45°	20361	15150	12271
50°	19733	13700	10698
55°	19088	12141	9188
60°	18338	10498	7627
65°	17490	8821	6946
70°	16475	7265	6387
75°	15234	6625	5958
80°	13445	5923	5430
85°	10578	4668	4668



TEST NUMBER: P331726

CATALOG NUMBER: SA2XXRDIP-C865D925U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	137.2	2.0
10°-20°	376.8	5.6
20°-30°	529.2	7.9
30°-40°	577.1	8.6
40°-50°	530.6	7.9
50°-60°	416.7	6.2
60°-70°	271.7	4.0
70°-80°	140.1	2.1
80°-90°	39.5	0.6
90°-100°	42.1	0.6
100°-110°	154.4	2.3
110°-120°	412.7	6.1
120°-130°	681.3	10.1
130°-140°	724.5	10.8
140°-150°	673.4	10.0
150°-160°	541.4	8.1
160°-170°	348.9	5.2
170°-180°	120.1	1.8
0°-30°	1043.3	15.5
0°-40°	1620.3	24.1
0°-60°	2567.6	38.2
0°-90°	3018.9	44.9
90°-120°	609.2	9.1
90°-150°	2688.4	40.0
90°-180°	3699.0	55.1
0°-180°	6717.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1466	1466	1466	1466	1466	
5°	1466	1459	1442	1453	1450	139
15°	1395	1378	1335	1310	1296	393
25°	1266	1221	1136	1083	1062	582
35°	1091	1020	906	826	794	682
45°	892	800	664	573	537	688
55°	678	572	431	355	326	606
65°	458	350	231	188	182	454
75°	244	154	106	97	96	258
85°	57	31	25	25	25	67
90°	1	11	18	23	25	5
95°	59	31	36	40	39	73
105°	278	290	56	65	69	297
115°	525	541	564	160	75	517
125°	742	755	772	778	781	662
135°	919	933	942	950	949	709
145°	1066	1066	1080	1086	1082	666
155°	1174	1166	1176	1181	1174	541
165°	1237	1232	1234	1240	1234	349
175°	1265	1259	1260	1266	1258	120
180°	1262	1262	1262	1262	1262	



TEST NUMBER: P331726

CATALOG NUMBER: SA2XXRDIP-C865D925U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3
2.5°	1471.6	1470.4	1469.2	1468.0	1466.9	1465.0	1462.4	1459.8	1457.2	1454.6	1457.0
5°	1466.3	1464.8	1463.3	1461.8	1460.4	1457.7	1453.9	1450.1	1446.2	1442.4	1445.0
7.5°	1451.1	1449.3	1447.5	1445.7	1443.8	1440.7	1436.2	1431.7	1427.2	1422.7	1423.5
10°	1438.4	1436.3	1434.3	1432.2	1430.1	1426.2	1420.3	1414.4	1408.5	1402.6	1401.7
12.5°	1422.5	1419.9	1417.4	1414.9	1412.3	1407.3	1399.7	1392.2	1384.6	1377.1	1375.5
15°	1394.6	1391.4	1388.1	1384.9	1381.6	1375.0	1365.0	1355.0	1344.9	1334.9	1329.3
17.5°	1360.4	1355.4	1350.5	1345.5	1340.6	1331.7	1318.8	1305.9	1293.1	1280.2	1273.6
20°	1334.9	1329.0	1323.1	1317.2	1311.3	1301.0	1286.2	1271.5	1256.8	1242.0	1234.6
22.5°	1307.3	1300.7	1294.1	1287.5	1280.9	1269.3	1252.6	1236.0	1219.4	1202.7	1193.2
25°	1265.9	1256.5	1247.0	1237.6	1228.2	1213.7	1194.2	1174.8	1155.3	1135.9	1123.8
27.5°	1216.0	1205.7	1195.5	1185.2	1175.0	1158.9	1136.9	1115.0	1093.0	1071.1	1057.0
30°	1181.0	1169.8	1158.6	1147.4	1136.2	1118.8	1095.2	1071.6	1048.0	1024.4	1009.4
32.5°	1147.0	1133.9	1120.8	1107.7	1094.6	1076.1	1052.0	1027.9	1003.9	979.8	962.7
35°	1090.7	1075.7	1060.7	1045.6	1030.6	1010.1	984.1	958.2	932.3	906.3	887.7
37.5°	1034.5	1018.0	1001.5	984.9	968.4	946.3	918.7	891.0	863.4	835.7	815.2
40°	995.2	977.5	959.8	942.1	924.4	901.3	872.7	844.1	815.5	786.9	765.9
42.5°	954.9	936.2	917.6	899.0	880.3	856.2	826.7	797.1	767.6	738.0	716.4
45°	891.7	871.9	852.2	832.4	812.7	787.3	756.4	725.4	694.4	663.5	642.5
47.5°	830.1	809.2	788.3	767.3	746.4	719.9	688.0	656.0	624.0	592.1	571.3
50°	785.6	764.6	743.7	722.7	701.8	675.1	642.7	610.2	577.8	545.4	525.0
52.5°	742.0	720.1	698.3	676.4	654.5	627.7	596.0	564.2	532.5	500.8	481.1
55°	678.1	655.1	632.1	609.1	586.1	558.6	526.8	494.9	463.1	431.3	413.6
57.5°	612.5	588.9	565.3	541.7	518.2	491.1	460.4	429.8	399.2	368.6	352.4
60°	567.9	544.3	520.8	497.2	473.6	446.6	416.2	385.8	355.5	325.1	310.1
62.5°	524.4	500.8	477.2	453.6	430.0	403.8	374.8	345.9	316.9	287.9	273.6
65°	457.8	433.9	410.0	386.1	362.3	337.0	310.5	284.0	257.4	230.9	220.9
67.5°	393.6	369.9	346.2	322.4	298.7	274.9	251.1	227.2	203.3	179.4	174.8
70°	349.0	326.0	303.0	280.0	257.0	235.3	215.0	194.6	174.3	153.9	151.0
72.5°	306.5	284.5	262.4	240.4	218.3	199.1	182.8	166.4	150.1	133.8	131.3
75°	244.2	223.5	202.9	182.2	161.6	146.3	136.2	126.2	116.2	106.2	104.1
77.5°	182.9	164.7	146.6	128.5	110.4	99.0	94.1	89.3	84.5	79.6	78.4
80°	144.6	129.6	114.6	99.5	84.5	75.5	72.5	69.6	66.6	63.7	62.5
82.5°	109.6	97.9	86.1	74.4	62.7	55.8	53.8	51.8	49.8	47.8	47.1
85°	57.1	50.9	44.7	38.5	32.3	28.8	27.9	27.0	26.1	25.2	25.2
87.5°	17.2	15.7	14.3	12.8	11.4	10.8	11.2	11.5	11.8	12.1	12.1
90°	0.9	3.1	5.4	7.6	9.8	11.8	13.4	15.0	16.6	18.3	19.3
92.5°	18.4	18.2	18.0	17.8	17.6	17.9	18.8	19.6	20.4	21.2	21.7
95°	59.4	52.7	46.0	39.3	32.6	29.9	31.4	32.8	34.2	35.6	36.6
97.5°	117.8	98.9	80.1	61.2	42.3	34.5	37.8	41.1	44.4	47.7	48.5
100°	161.7	133.8	106.0	78.2	50.4	38.3	41.7	45.2	48.6	52.1	53.7
102.5°	209.9	204.0	198.1	192.2	186.3	169.0	140.1	111.2	82.4	53.5	55.6
105°	277.6	283.7	289.8	295.9	302.0	277.3	221.9	166.5	111.1	55.7	57.9
107.5°	354.9	359.8	364.7	369.6	374.6	343.8	277.3	210.9	144.4	78.0	75.7
110°	404.6	408.9	413.1	417.4	421.6	394.4	335.8	277.1	218.5	159.8	139.5



TEST NUMBER: P331726

CATALOG NUMBER: SA2XXRDIP-C865D925U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	451.3	455.1	458.9	462.7	466.4	461.1	446.6	432.1	417.6	403.1	329.1
115°	525.1	528.6	532.0	535.5	538.9	543.2	548.3	553.4	558.4	563.5	469.5
117.5°	591.1	594.9	598.8	602.7	606.5	610.2	613.7	617.2	620.7	624.1	601.4
120°	639.3	642.3	645.4	648.4	651.5	654.8	658.5	662.1	665.8	669.4	671.9
122.5°	680.2	683.4	686.6	689.8	693.0	696.6	700.6	704.6	708.6	712.6	714.0
125°	742.5	745.1	747.8	750.4	753.1	756.3	760.2	764.0	767.9	771.7	773.2
127.5°	798.9	801.9	804.8	807.7	810.6	813.5	816.4	819.3	822.2	825.1	827.1
130°	834.8	838.0	841.2	844.5	847.7	850.5	852.7	854.9	857.2	859.4	861.6
132.5°	871.3	874.0	876.8	879.6	882.3	884.8	887.1	889.3	891.5	893.7	895.7
135°	918.8	922.0	925.3	928.5	931.8	934.3	936.1	938.0	939.8	941.6	943.6
137.5°	966.8	969.1	971.4	973.6	975.9	978.1	980.1	982.2	984.3	986.4	988.3
140°	998.2	999.9	1001.5	1003.1	1004.7	1006.7	1008.9	1011.1	1013.4	1015.6	1017.4
142.5°	1024.5	1026.0	1027.5	1028.9	1030.4	1032.4	1034.9	1037.5	1040.1	1042.6	1044.3
145°	1065.8	1065.6	1065.4	1065.2	1065.0	1066.6	1070.1	1073.5	1077.0	1080.4	1081.8
147.5°	1101.8	1101.0	1100.3	1099.5	1098.7	1100.0	1103.4	1106.9	1110.3	1113.7	1114.7
150°	1125.2	1123.8	1122.3	1120.9	1119.5	1120.4	1123.7	1126.9	1130.2	1133.4	1134.6
152.5°	1144.8	1143.3	1141.7	1140.2	1138.6	1139.3	1142.4	1145.5	1148.6	1151.7	1152.9
155°	1173.6	1171.8	1169.9	1168.1	1166.3	1166.6	1169.0	1171.5	1173.9	1176.3	1177.5
157.5°	1196.0	1194.5	1193.0	1191.4	1189.9	1190.0	1191.7	1193.4	1195.1	1196.8	1198.2
160°	1209.2	1208.0	1206.8	1205.5	1204.3	1204.3	1205.5	1206.8	1208.0	1209.2	1210.4
162.5°	1220.9	1219.7	1218.5	1217.2	1216.0	1215.9	1217.0	1218.0	1219.1	1220.2	1221.5
165°	1236.6	1235.4	1234.2	1232.9	1231.7	1231.4	1232.0	1232.6	1233.3	1233.9	1235.3
167.5°	1248.3	1247.1	1245.9	1244.6	1243.4	1243.1	1243.7	1244.2	1244.8	1245.4	1246.8
170°	1254.9	1253.6	1252.4	1251.2	1250.0	1249.6	1250.0	1250.4	1250.8	1251.2	1252.6
172.5°	1259.2	1258.0	1256.8	1255.6	1254.4	1254.0	1254.4	1254.8	1255.2	1255.6	1257.0
175°	1264.9	1263.5	1262.1	1260.6	1259.2	1258.7	1259.1	1259.5	1259.9	1260.3	1261.8
177.5°	1265.8	1264.7	1263.6	1262.4	1261.3	1260.8	1261.0	1261.1	1261.3	1261.4	1262.6
180°	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2



TEST NUMBER: P331726

CATALOG NUMBER: SA2XXRDIP-C865D925U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3	1466.3
2.5°	1459.3	1461.7	1464.0	1465.0	1464.5	1464.0	1463.6	1463.1
5°	1447.7	1450.3	1453.0	1453.9	1453.0	1452.1	1451.2	1450.3
7.5°	1424.3	1425.0	1425.8	1425.4	1423.9	1422.4	1420.8	1419.3
10°	1400.8	1399.9	1399.0	1397.7	1395.9	1394.2	1392.4	1390.6
12.5°	1373.9	1372.3	1370.7	1368.5	1365.5	1362.6	1359.6	1356.7
15°	1323.7	1318.1	1312.5	1308.2	1305.3	1302.3	1299.4	1296.4
17.5°	1266.9	1260.2	1253.6	1247.7	1242.6	1237.6	1232.5	1227.4
20°	1227.3	1219.9	1212.5	1205.6	1199.1	1192.6	1186.1	1179.7
22.5°	1183.8	1174.3	1164.8	1157.6	1152.8	1147.9	1143.1	1138.3
25°	1111.7	1099.6	1087.5	1079.2	1074.8	1070.4	1066.0	1061.6
27.5°	1042.9	1028.8	1014.7	1004.2	997.2	990.1	983.1	976.1
30°	994.3	979.3	964.2	952.7	944.8	936.8	928.9	920.9
32.5°	945.5	928.3	911.2	898.8	891.4	883.9	876.4	868.9
35°	869.1	850.6	832.0	819.5	813.0	806.5	800.0	793.5
37.5°	794.8	774.3	753.9	739.9	732.5	725.0	717.6	710.2
40°	745.0	724.1	703.1	688.8	681.2	673.5	665.8	658.2
42.5°	694.8	673.1	651.5	636.9	629.5	622.1	614.6	607.2
45°	621.6	600.7	579.7	565.7	558.6	551.6	544.5	537.4
47.5°	550.4	529.6	508.8	495.2	488.8	482.3	475.9	469.5
50°	504.7	484.3	464.0	450.7	444.5	438.3	432.1	425.9
52.5°	461.5	441.9	422.2	409.6	403.8	398.1	392.4	386.7
55°	395.9	378.2	360.5	348.8	343.2	337.6	332.0	326.4
57.5°	336.2	320.0	303.8	293.3	288.6	283.8	279.1	274.4
60°	295.0	280.0	264.9	255.1	250.3	245.6	240.9	236.2
62.5°	259.3	245.0	230.6	222.0	219.2	216.4	213.5	210.7
65°	210.8	200.8	190.8	185.3	184.4	183.6	182.7	181.8
67.5°	170.2	165.6	161.0	158.2	157.3	156.3	155.4	154.5
70°	148.0	145.1	142.1	140.1	138.9	137.7	136.5	135.3
72.5°	128.8	126.3	123.8	122.3	121.5	120.8	120.1	119.4
75°	102.0	100.0	97.9	96.7	96.4	96.1	95.8	95.5
77.5°	77.3	76.1	74.9	74.1	73.6	73.1	72.7	72.2
80°	61.3	60.2	59.0	58.4	58.4	58.4	58.4	58.4
82.5°	46.4	45.6	44.9	44.6	44.6	44.6	44.6	44.6
85°	25.2	25.2	25.2	25.2	25.2	25.2	25.2	25.2
87.5°	12.1	12.0	12.0	12.0	12.1	12.2	12.3	12.4
90°	20.3	21.3	22.3	23.0	23.4	23.8	24.3	24.7
92.5°	22.2	22.8	23.3	23.7	23.9	24.2	24.4	24.7
95°	37.6	38.7	39.7	40.1	39.9	39.7	39.5	39.3
97.5°	49.3	50.1	50.9	51.4	51.7	51.9	52.2	52.4
100°	55.3	56.9	58.6	59.6	60.0	60.4	60.8	61.2
102.5°	57.7	59.9	62.0	63.3	63.9	64.4	65.0	65.6
105°	60.2	62.4	64.6	66.2	67.0	67.8	68.6	69.4
107.5°	73.4	71.2	68.9	68.2	69.0	69.8	70.6	71.4
110°	119.2	98.9	78.6	68.9	69.7	70.5	71.3	72.2



TEST NUMBER: P331726

CATALOG NUMBER: SA2XXRDIP-C865D925U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	255.1	181.0	107.0	70.3	70.9	71.6	72.2	72.9
115°	375.6	281.6	187.6	133.3	118.7	104.1	89.5	74.9
117.5°	578.7	556.0	533.2	497.8	449.8	401.8	353.8	305.8
120°	674.3	676.8	679.2	666.7	639.3	611.9	584.5	557.1
122.5°	715.5	716.9	718.4	716.5	711.2	705.8	700.5	695.2
125°	774.6	776.0	777.4	778.4	779.0	779.6	780.3	780.9
127.5°	829.2	831.3	833.4	834.4	834.6	834.7	834.8	834.9
130°	863.9	866.1	868.3	869.4	869.2	868.9	868.7	868.5
132.5°	897.6	899.5	901.4	902.2	902.0	901.8	901.6	901.4
135°	945.7	947.7	949.7	950.5	950.1	949.7	949.3	948.9
137.5°	990.3	992.3	994.3	995.0	994.3	993.6	992.9	992.2
140°	1019.2	1021.1	1022.9	1023.3	1022.3	1021.3	1020.3	1019.2
142.5°	1045.9	1047.6	1049.3	1049.6	1048.6	1047.6	1046.6	1045.5
145°	1083.3	1084.7	1086.1	1086.3	1085.3	1084.3	1083.3	1082.3
147.5°	1115.8	1116.8	1117.9	1118.0	1117.1	1116.3	1115.4	1114.6
150°	1135.8	1137.1	1138.3	1138.4	1137.4	1136.3	1135.3	1134.3
152.5°	1154.1	1155.3	1156.5	1156.5	1155.1	1153.8	1152.5	1151.1
155°	1178.8	1180.0	1181.2	1181.0	1179.4	1177.7	1176.1	1174.5
157.5°	1199.5	1200.9	1202.3	1202.2	1200.6	1199.0	1197.4	1195.9
160°	1211.6	1212.9	1214.1	1214.0	1212.5	1211.1	1209.7	1208.3
162.5°	1222.9	1224.3	1225.7	1225.5	1223.8	1222.0	1220.3	1218.5
165°	1236.7	1238.1	1239.5	1239.5	1238.1	1236.7	1235.3	1233.9
167.5°	1248.2	1249.6	1251.1	1250.8	1249.0	1247.2	1245.4	1243.5
170°	1254.1	1255.5	1256.9	1256.7	1254.9	1253.0	1251.2	1249.4
172.5°	1258.4	1259.9	1261.3	1261.1	1259.2	1257.4	1255.6	1253.8
175°	1263.2	1264.6	1266.0	1265.7	1263.7	1261.7	1259.6	1257.6
177.5°	1263.7	1264.9	1266.0	1265.8	1264.4	1262.9	1261.4	1260.0
180°	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2	1262.2

(END OF REPORT)