

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331454-935

Luminaire Tested: **SA2XXDIP-C1005D925U935-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331454-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C1005D925U935-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 925 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6342.4 lumens
Efficiency: N/A
Efficacy: 94.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 66.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331454-935
CATALOG NUMBER: SA2XXDIP-C1005D925U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

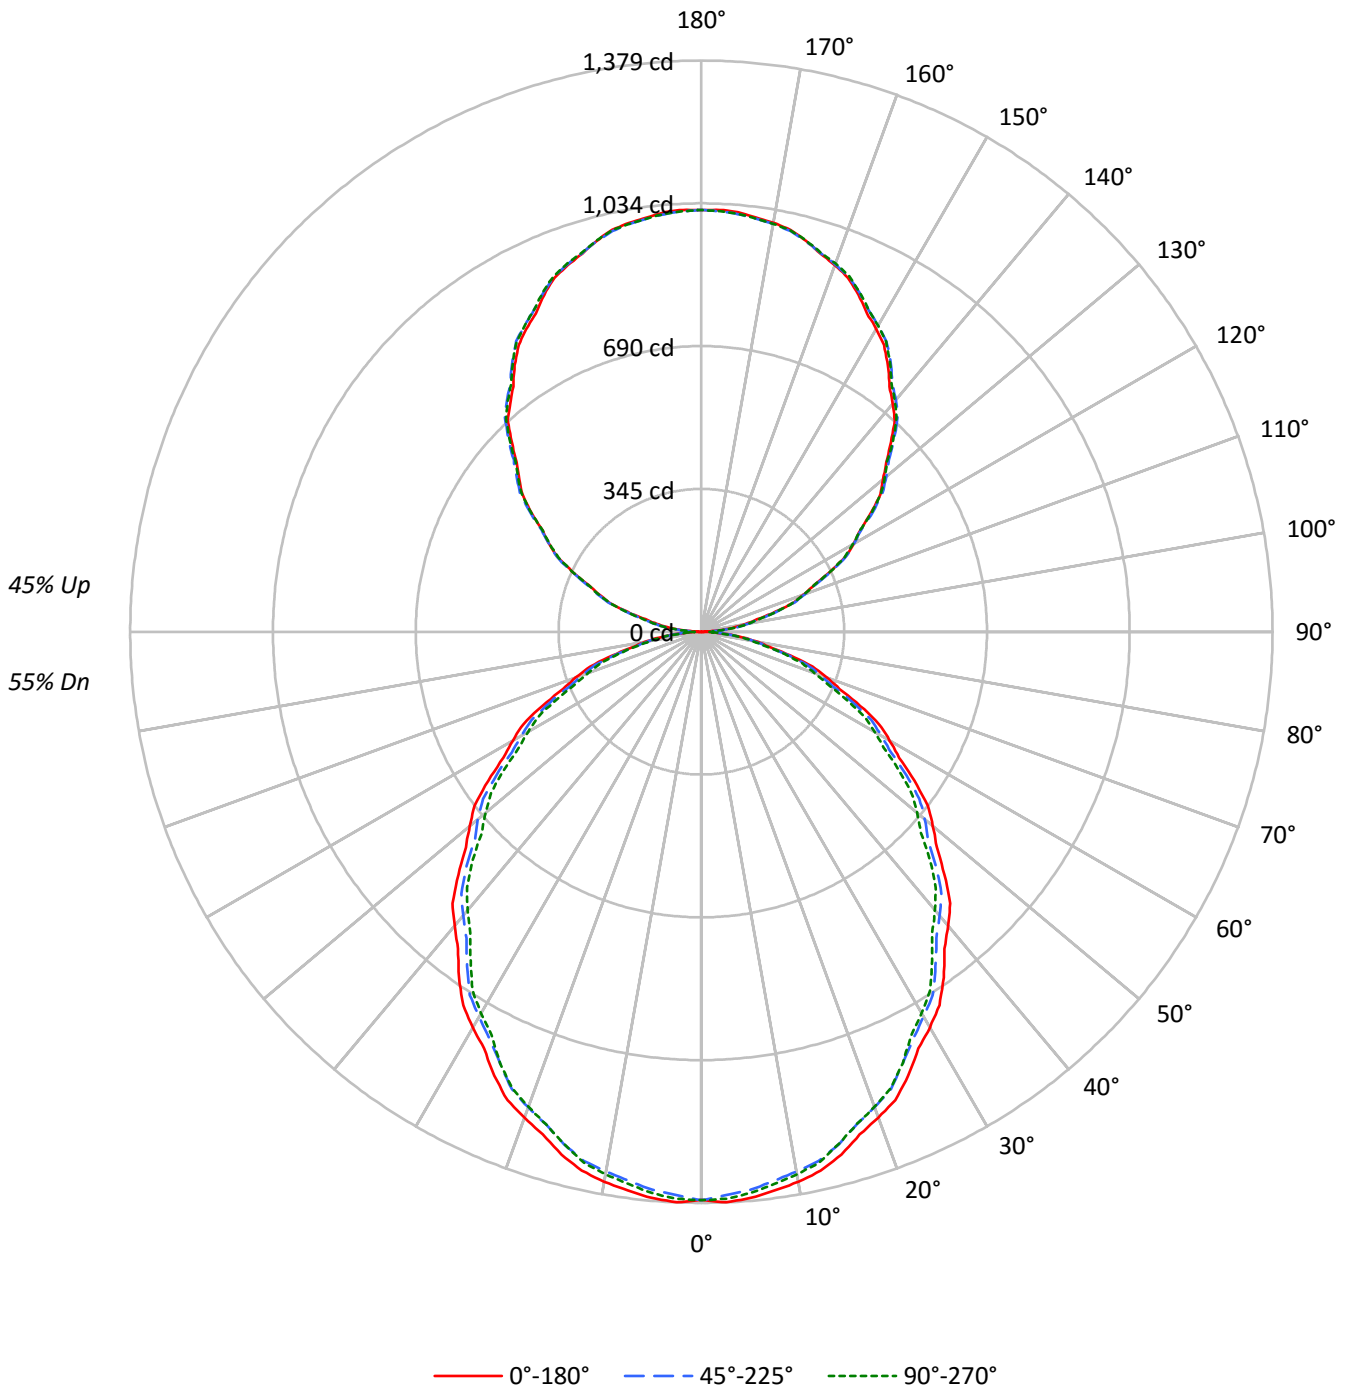



TEST NUMBER: P331454-935

CATALOG NUMBER: SA2XXDIP-C1005D925U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	95	91	87	92	88	85	81	76	73	71	64	62	61	54	52	51	46
2	90	83	76	71	83	77	71	67	66	62	59	56	53	51	47	45	43	39
3	82	73	65	59	76	68	61	56	58	53	49	50	46	43	42	39	37	33
4	75	64	56	50	70	60	53	47	52	46	42	44	40	37	37	34	32	28
5	69	57	49	43	64	54	46	41	47	41	36	40	35	32	34	30	28	25
6	64	51	43	37	59	48	41	35	42	36	32	36	32	28	31	27	24	22
7	59	46	38	33	55	44	36	31	38	32	28	33	28	25	28	24	22	19
8	55	42	34	29	51	40	33	28	35	29	25	30	25	22	26	22	19	17
9	51	39	31	26	47	36	29	25	32	26	22	28	23	20	24	20	18	15
10	48	35	28	23	44	33	27	22	29	24	20	26	21	18	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	22157	22157	22157
5°	22242	21921	22049
10°	22109	21697	21807
15°	21835	21417	21396
20°	21448	20993	20972
25°	21063	20475	20475
30°	20566	19999	19827
35°	20103	19429	19141
40°	19524	18858	18493
45°	18952	18287	17838
50°	18329	17698	17071
55°	17681	17011	16380
60°	16956	16191	15594
65°	16180	15373	14670
70°	15196	14389	13704
75°	13830	13250	12926
80°	12273	11901	11288
85°	10022	9541	8540



TEST NUMBER: P331454-935

CATALOG NUMBER: SA2XXDIP-C1005D925U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	129.0	2.0
10°-20°	363.1	5.7
20°-30°	533.7	8.4
30°-40°	619.9	9.8
40°-50°	619.3	9.8
50°-60°	540.0	8.5
60°-70°	399.3	6.3
70°-80°	226.2	3.6
80°-90°	64.9	1.0
90°-100°	64.5	1.0
100°-110°	200.4	3.2
110°-120°	342.5	5.4
120°-130°	450.4	7.1
130°-140°	505.6	8.0
140°-150°	495.7	7.8
150°-160°	415.8	6.6
160°-170°	275.8	4.3
170°-180°	96.4	1.5
0°-30°	1025.8	16.2
0°-40°	1645.7	25.9
0°-60°	2805.0	44.2
0°-90°	3495.4	55.1
90°-120°	607.4	9.6
90°-150°	2059.1	32.5
90°-180°	2847.0	44.9
0°-180°	6342.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1372	1372	1372	1372	1372	
5°	1372	1366	1352	1362	1360	130
15°	1306	1298	1281	1286	1280	368
25°	1182	1171	1149	1152	1149	544
35°	1020	1006	986	978	971	637
45°	830	820	801	787	781	640
55°	628	620	604	589	582	561
65°	424	415	402	391	384	419
75°	222	219	212	205	207	237
85°	54	53	52	48	46	62
90°	1	12	30	28	29	5
95°	45	53	55	55	53	51
105°	185	187	189	191	191	195
115°	344	348	347	346	344	340
125°	500	507	505	503	502	447
135°	647	656	658	657	655	500
145°	785	791	796	797	794	490
155°	898	900	903	907	905	413
165°	977	976	976	982	978	275
175°	1016	1014	1012	1018	1013	97
180°	1018	1018	1018	1018	1018	



TEST NUMBER: P331454-935

CATALOG NUMBER: SA2XXDIP-C1005D925U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3
2.5°	1378.6	1377.4	1376.3	1375.1	1373.9	1372.1	1369.5	1366.9	1364.3	1361.8	1364.1
5°	1372.3	1371.1	1369.9	1368.7	1367.6	1365.4	1362.2	1358.9	1355.7	1352.5	1354.9
7.5°	1360.1	1358.3	1356.5	1354.7	1352.9	1350.3	1347.0	1343.8	1340.5	1337.2	1339.5
10°	1348.5	1346.5	1344.5	1342.4	1340.3	1337.6	1334.0	1330.5	1327.0	1323.4	1325.9
12.5°	1332.7	1330.8	1329.0	1327.2	1325.4	1322.8	1319.2	1315.7	1312.3	1308.7	1310.4
15°	1306.3	1304.6	1302.8	1301.1	1299.2	1296.5	1292.7	1288.8	1285.0	1281.3	1282.5
17.5°	1272.6	1270.7	1269.0	1267.2	1265.5	1262.7	1258.8	1254.9	1251.0	1247.2	1248.5
20°	1248.3	1246.5	1244.7	1242.9	1241.2	1238.3	1234.2	1230.1	1226.0	1221.8	1222.7
22.5°	1224.0	1221.5	1219.1	1216.6	1214.1	1211.0	1207.1	1203.2	1199.4	1195.5	1195.7
25°	1182.3	1179.9	1177.6	1175.3	1172.9	1169.2	1164.2	1159.3	1154.3	1149.3	1149.9
27.5°	1134.8	1132.6	1130.6	1128.4	1126.4	1123.3	1119.4	1115.4	1111.6	1107.6	1106.7
30°	1103.1	1100.8	1098.4	1096.1	1093.7	1090.4	1086.0	1081.6	1077.2	1072.7	1071.9
32.5°	1069.4	1067.5	1065.6	1063.7	1061.8	1058.6	1054.0	1049.3	1044.7	1040.0	1038.5
35°	1019.9	1017.0	1014.1	1011.2	1008.2	1004.4	999.7	995.1	990.4	985.7	984.0
37.5°	964.3	961.7	959.2	956.6	954.0	950.4	945.6	941.0	936.3	931.6	929.4
40°	926.3	923.9	921.6	919.3	916.9	913.4	908.7	904.0	899.3	894.7	892.0
42.5°	889.3	887.0	884.7	882.4	879.9	876.4	871.8	867.0	862.4	857.6	854.8
45°	830.0	827.9	825.9	823.8	821.7	818.6	814.2	809.8	805.4	800.9	797.7
47.5°	770.9	769.0	767.0	765.1	763.1	759.8	755.3	750.7	746.1	741.6	738.1
50°	729.7	728.2	726.8	725.3	723.8	721.0	717.0	712.8	708.7	704.6	700.5
52.5°	689.6	687.7	685.7	683.8	681.8	678.9	675.0	671.1	667.4	663.5	660.0
55°	628.1	626.3	624.6	622.8	621.0	618.4	614.9	611.4	607.9	604.3	600.8
57.5°	566.4	564.9	563.5	562.1	560.7	558.1	554.2	550.4	546.5	542.6	539.2
60°	525.1	524.0	522.8	521.7	520.5	517.8	513.8	509.6	505.5	501.4	498.2
62.5°	485.1	483.2	481.3	479.4	477.5	475.0	471.8	468.7	465.5	462.4	459.3
65°	423.5	421.8	420.1	418.3	416.6	414.1	411.2	408.3	405.4	402.4	399.8
67.5°	361.0	359.6	358.2	356.8	355.4	353.4	350.7	348.1	345.4	342.9	340.8
70°	321.9	320.8	319.6	318.5	317.3	315.4	312.7	310.0	307.5	304.8	302.7
72.5°	281.8	280.7	279.5	278.4	277.2	275.7	274.1	272.3	270.6	268.9	266.8
75°	221.7	221.1	220.5	219.9	219.3	218.3	216.8	215.3	213.9	212.4	210.7
77.5°	167.8	166.9	165.8	164.9	163.8	163.1	162.5	161.9	161.3	160.7	159.8
80°	132.0	131.6	131.4	131.0	130.8	130.4	129.8	129.2	128.5	128.0	127.1
82.5°	98.2	98.2	98.1	98.0	97.9	97.7	97.4	97.0	96.7	96.3	95.2
85°	54.1	53.8	53.6	53.2	53.0	52.6	52.3	52.0	51.7	51.5	50.5
87.5°	19.2	19.2	19.1	19.1	19.1	19.3	19.7	20.1	20.4	20.8	20.0
90°	0.9	3.2	5.4	7.7	10.0	13.3	17.5	21.7	25.8	30.0	29.7
92.5°	15.3	17.0	18.7	20.3	22.0	23.3	24.4	25.3	26.3	27.3	27.4
95°	44.7	46.6	48.5	50.4	52.3	53.5	53.8	54.2	54.6	55.0	55.0
97.5°	81.6	83.3	85.0	86.7	88.3	89.5	90.3	91.0	91.7	92.5	92.5
100°	109.1	110.6	112.2	113.7	115.2	116.3	116.8	117.4	118.0	118.6	118.6
102.5°	138.0	139.2	140.4	141.6	142.8	143.9	144.6	145.3	146.0	146.8	146.9
105°	184.8	185.3	185.9	186.5	187.0	187.5	187.9	188.3	188.6	189.0	189.4
107.5°	231.8	232.6	233.5	234.4	235.2	235.6	235.6	235.6	235.6	235.6	235.7
110°	262.1	263.2	264.3	265.5	266.7	267.3	267.3	267.3	267.3	267.3	267.3



TEST NUMBER: P331454-935

CATALOG NUMBER: SA2XXDIP-C1005D925U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	295.1	296.2	297.4	298.5	299.6	300.1	300.0	299.8	299.7	299.5	299.1
115°	343.7	344.8	345.9	347.2	348.3	348.6	348.3	347.9	347.5	347.2	347.0
117.5°	392.2	393.6	395.2	396.7	398.3	398.5	397.4	396.3	395.3	394.3	393.7
120°	424.5	426.0	427.5	429.0	430.6	430.6	429.0	427.5	426.0	424.5	424.5
122.5°	454.0	455.8	457.7	459.5	461.3	461.8	460.6	459.6	458.6	457.4	457.0
125°	500.1	501.8	503.5	505.2	507.0	507.6	507.0	506.4	505.8	505.2	504.6
127.5°	544.9	547.1	549.3	551.5	553.6	554.4	553.7	553.0	552.3	551.6	551.0
130°	573.1	575.6	578.1	580.6	583.1	584.1	583.7	583.3	583.0	582.6	582.2
132.5°	604.8	606.7	608.8	610.8	612.9	613.9	614.0	614.1	614.1	614.2	613.4
135°	647.0	649.1	651.2	653.3	655.4	656.7	657.0	657.4	657.8	658.1	658.0
137.5°	691.6	693.2	694.9	696.6	698.4	699.5	700.0	700.5	701.0	701.5	701.4
140°	718.3	720.1	721.8	723.5	725.2	726.5	727.5	728.4	729.4	730.4	730.4
142.5°	745.8	747.5	749.2	751.0	752.7	753.9	754.5	755.2	755.8	756.5	756.6
145°	785.3	786.7	788.0	789.4	790.7	791.9	793.1	794.2	795.4	796.5	796.7
147.5°	820.5	822.2	823.8	825.4	827.0	828.2	829.0	829.7	830.4	831.2	831.6
150°	844.6	845.8	846.9	848.1	849.2	850.2	850.9	851.7	852.5	853.3	853.8
152.5°	865.9	867.1	868.2	869.4	870.6	871.6	872.5	873.4	874.3	875.2	876.0
155°	897.9	898.5	899.1	899.7	900.2	900.8	901.4	901.9	902.5	903.0	904.0
157.5°	925.2	925.6	926.0	926.3	926.8	927.1	927.5	927.8	928.2	928.5	929.8
160°	941.8	942.1	942.5	942.9	943.2	943.6	943.7	943.9	944.1	944.3	945.5
162.5°	956.8	956.9	957.0	957.1	957.2	957.3	957.5	957.7	957.9	958.0	959.3
165°	977.0	976.8	976.5	976.4	976.2	976.1	976.1	976.1	976.1	976.1	977.4
167.5°	993.8	993.2	992.6	992.0	991.5	991.2	991.2	991.1	991.1	991.0	992.4
170°	1002.7	1002.1	1001.6	1001.0	1000.4	1000.1	999.9	999.7	999.4	999.3	1000.7
172.5°	1008.9	1008.3	1007.8	1007.2	1006.6	1006.3	1006.1	1005.8	1005.6	1005.5	1006.9
175°	1016.5	1015.9	1015.3	1014.8	1014.2	1013.7	1013.3	1013.0	1012.5	1012.2	1013.5
177.5°	1019.6	1019.1	1018.6	1018.2	1017.7	1017.4	1017.0	1016.8	1016.4	1016.2	1017.0
180°	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2



TEST NUMBER: P331454-935

CATALOG NUMBER: SA2XXDIP-C1005D925U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3	1372.3
2.5°	1366.4	1368.7	1371.1	1372.1	1371.6	1371.1	1370.6	1370.2
5°	1357.2	1359.5	1361.8	1362.8	1362.2	1361.6	1361.0	1360.4
7.5°	1341.9	1344.2	1346.6	1347.5	1346.8	1346.2	1345.5	1344.9
10°	1328.2	1330.5	1332.8	1333.6	1332.7	1331.8	1330.9	1330.1
12.5°	1312.0	1313.6	1315.3	1315.8	1315.1	1314.5	1313.8	1313.2
15°	1283.6	1284.8	1285.9	1285.8	1284.4	1282.9	1281.4	1280.0
17.5°	1249.9	1251.3	1252.6	1252.6	1251.1	1249.7	1248.4	1246.9
20°	1223.7	1224.5	1225.4	1225.2	1224.1	1222.9	1221.8	1220.6
22.5°	1195.8	1196.0	1196.2	1195.9	1195.2	1194.6	1193.8	1193.1
25°	1150.5	1151.1	1151.7	1151.7	1151.1	1150.5	1149.9	1149.3
27.5°	1105.9	1104.9	1104.1	1102.9	1101.6	1100.1	1098.7	1097.3
30°	1071.0	1070.1	1069.3	1068.2	1067.0	1065.8	1064.7	1063.5
32.5°	1036.9	1035.3	1033.7	1032.3	1031.1	1030.0	1028.8	1027.6
35°	982.1	980.4	978.6	977.1	975.6	974.1	972.6	971.1
37.5°	927.2	925.1	922.9	921.1	919.7	918.3	916.9	915.5
40°	889.3	886.7	884.1	882.2	881.0	879.9	878.7	877.4
42.5°	852.0	849.0	846.2	844.0	842.3	840.7	839.0	837.3
45°	794.5	791.3	788.1	785.8	784.6	783.5	782.3	781.2
47.5°	734.8	731.3	728.0	725.4	723.7	722.0	720.3	718.6
50°	696.4	692.3	688.2	685.4	684.0	682.5	681.1	679.6
52.5°	656.7	653.2	649.9	647.2	645.2	643.3	641.4	639.5
55°	597.3	593.7	590.3	587.8	586.3	584.9	583.4	581.9
57.5°	535.6	532.2	528.7	526.4	525.4	524.3	523.1	522.0
60°	495.0	491.7	488.5	486.5	485.6	484.7	483.8	482.9
62.5°	456.4	453.4	450.4	448.3	447.2	446.1	445.0	443.8
65°	397.2	394.5	391.9	389.9	388.4	386.9	385.5	384.0
67.5°	338.7	336.7	334.6	332.9	331.8	330.6	329.5	328.3
70°	300.7	298.7	296.6	295.0	293.8	292.7	291.4	290.3
72.5°	264.8	262.8	260.7	259.2	258.3	257.4	256.4	255.5
75°	209.0	207.2	205.4	204.8	205.4	206.0	206.6	207.2
77.5°	158.9	158.1	157.2	156.4	155.5	154.7	153.9	153.1
80°	126.2	125.4	124.5	123.7	123.1	122.6	122.0	121.4
82.5°	94.1	93.0	91.9	91.3	91.1	91.0	90.9	90.7
85°	49.7	48.8	48.0	47.4	47.1	46.8	46.5	46.1
87.5°	19.2	18.4	17.7	17.2	17.0	16.8	16.6	16.4
90°	29.3	28.9	28.6	28.4	28.7	28.8	29.0	29.2
92.5°	27.5	27.6	27.6	27.7	27.7	27.7	27.8	27.8
95°	55.0	55.0	55.0	54.8	54.4	54.1	53.6	53.3
97.5°	92.5	92.5	92.5	92.5	92.4	92.4	92.3	92.3
100°	118.6	118.6	118.6	118.5	118.3	118.1	117.9	117.7
102.5°	147.1	147.2	147.4	147.3	147.1	147.0	146.8	146.6
105°	189.8	190.2	190.5	190.7	190.7	190.7	190.7	190.7
107.5°	235.9	236.1	236.2	235.8	235.0	234.1	233.2	232.3
110°	267.3	267.3	267.3	266.9	266.4	265.8	265.2	264.7



TEST NUMBER: P331454-935

CATALOG NUMBER: SA2XXDIP-C1005D925U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	298.6	298.2	297.7	297.2	296.9	296.4	296.0	295.6
115°	346.7	346.6	346.4	345.9	345.4	344.8	344.2	343.7
117.5°	393.3	392.9	392.4	391.8	391.3	390.7	390.1	389.6
120°	424.5	424.5	424.5	424.2	423.6	423.0	422.5	421.9
122.5°	456.5	456.1	455.6	455.2	454.8	454.3	453.9	453.5
125°	504.1	503.5	502.9	502.6	502.4	502.1	502.0	501.8
127.5°	550.3	549.6	548.9	548.2	547.6	547.0	546.4	545.8
130°	581.8	581.4	581.0	580.5	579.7	578.9	578.2	577.4
132.5°	612.5	611.7	610.8	610.1	609.5	608.9	608.3	607.7
135°	657.8	657.6	657.4	657.0	656.4	655.9	655.3	654.7
137.5°	701.2	701.0	700.9	700.4	699.6	698.9	698.1	697.3
140°	730.4	730.4	730.4	730.0	729.2	728.4	727.7	726.9
142.5°	756.8	756.9	757.1	756.8	756.0	755.3	754.5	753.7
145°	796.9	797.1	797.3	797.0	796.3	795.5	794.7	793.9
147.5°	832.1	832.5	832.9	832.8	832.1	831.3	830.6	829.8
150°	854.4	855.0	855.5	855.5	855.0	854.4	853.8	853.3
152.5°	876.7	877.4	878.1	878.1	877.4	876.7	876.0	875.2
155°	905.0	905.9	906.9	907.1	906.5	905.9	905.3	904.7
157.5°	931.1	932.4	933.7	933.8	933.0	932.0	931.1	930.2
160°	946.6	947.7	948.9	949.1	948.3	947.5	946.8	946.0
162.5°	960.6	961.9	963.2	963.5	962.5	961.6	960.7	959.8
165°	978.8	980.1	981.5	981.6	980.7	979.7	978.8	977.8
167.5°	993.7	995.1	996.3	996.5	995.6	994.5	993.6	992.6
170°	1001.9	1003.3	1004.6	1004.7	1003.6	1002.5	1001.3	1000.1
172.5°	1008.1	1009.5	1010.8	1010.9	1009.8	1008.7	1007.5	1006.3
175°	1014.9	1016.2	1017.5	1017.6	1016.5	1015.3	1014.2	1013.1
177.5°	1018.0	1018.9	1019.8	1019.8	1018.9	1018.0	1017.0	1016.2
180°	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2

(END OF REPORT)