

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331266-935

Luminaire Tested: **SA2XXDIP-C290D725U935-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331266-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C290D725U935-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 725 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3473.5 lumens
Efficiency: N/A
Efficacy: 111.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 31.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331266-935
CATALOG NUMBER: SA2XXDIP-C290D725U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

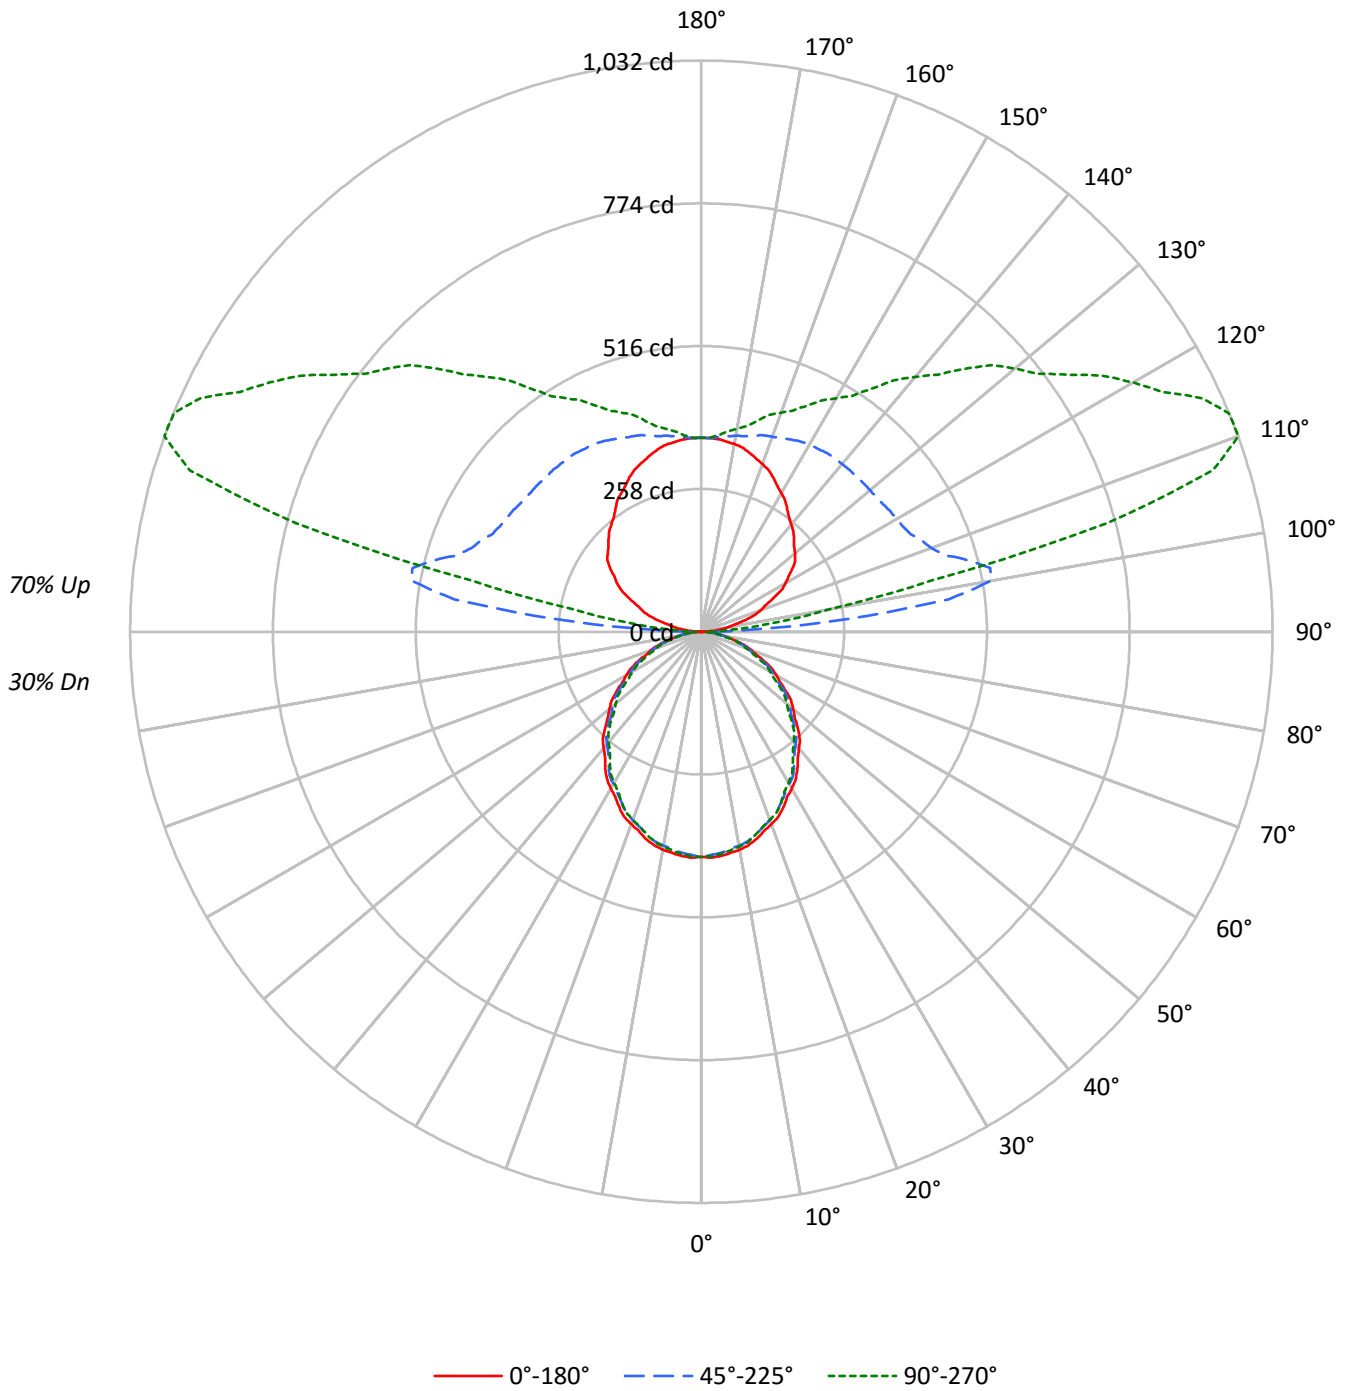



TEST NUMBER: P331266-935

CATALOG NUMBER: SA2XXDIP-C290D725U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	38	38	38	30
1	93	89	85	82	84	80	77	74	63	61	59	48	46	45	33	32	32	25
2	85	78	72	67	76	70	65	61	55	52	49	42	39	37	29	28	27	21
3	77	68	61	56	69	61	55	51	49	44	41	37	34	32	26	24	23	18
4	71	60	53	47	63	54	48	43	43	39	35	33	30	27	23	21	20	15
5	65	54	46	40	58	48	42	37	39	34	30	29	26	23	21	19	17	13
6	60	48	40	34	53	43	37	32	35	30	26	26	23	20	19	17	15	12
7	55	43	35	30	49	39	32	28	31	26	23	24	21	18	17	15	13	10
8	51	39	32	26	46	35	29	24	28	24	20	22	18	16	16	14	12	9
9	47	36	28	23	42	32	26	22	26	21	18	20	17	14	15	12	11	8
10	44	32	25	21	40	29	23	19	24	19	16	19	15	13	13	11	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6567	6567	6567
5°	6592	6498	6536
10°	6555	6432	6465
15°	6472	6349	6342
20°	6357	6223	6216
25°	6242	6070	6070
30°	6096	5929	5876
35°	5960	5757	5673
40°	5788	5590	5482
45°	5617	5421	5286
50°	5433	5247	5061
55°	5239	5044	4856
60°	5028	4799	4624
65°	4795	4558	4348
70°	4504	4263	4060
75°	4099	3924	3830
80°	3636	3533	3347
85°	2964	2816	2538



TEST NUMBER: P331266-935

CATALOG NUMBER: SA2XXDIP-C290D725U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	38.3	1.1
10°-20°	107.6	3.1
20°-30°	158.2	4.6
30°-40°	183.8	5.3
40°-50°	183.6	5.3
50°-60°	160.1	4.6
60°-70°	118.4	3.4
70°-80°	67.0	1.9
80°-90°	21.2	0.6
90°-100°	139.9	4.0
100°-110°	474.9	13.7
110°-120°	504.5	14.5
120°-130°	415.3	12.0
130°-140°	333.5	9.6
140°-150°	252.0	7.3
150°-160°	177.1	5.1
160°-170°	104.3	3.0
170°-180°	33.9	1.0
0°-30°	304.1	8.8
0°-40°	487.8	14.0
0°-60°	831.5	23.9
0°-90°	1038.0	29.9
90°-120°	1119.3	32.2
90°-150°	2120.1	61.0
90°-180°	2435.0	70.1
0°-180°	3473.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	407	407	407	407	407	
5°	407	405	401	404	403	39
15°	387	385	380	381	379	109
25°	350	347	341	341	341	161
35°	302	298	292	290	288	189
45°	246	243	237	233	232	190
55°	186	184	179	175	172	166
65°	126	123	119	116	114	124
75°	66	65	63	61	61	70
85°	16	16	15	14	14	18
90°	1	9	23	22	22	2
95°	24	58	264	100	77	25
105°	82	124	499	892	758	87
115°	145	183	417	861	998	143
125°	202	239	401	698	810	179
135°	237	283	396	586	671	183
145°	270	311	394	490	536	170
155°	308	332	383	433	450	141
165°	335	345	367	389	395	94
175°	349	350	353	357	356	33
180°	350	350	350	350	350	



TEST NUMBER: P331266-935

CATALOG NUMBER: SA2XXDIP-C290D725U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7
2.5°	408.6	408.3	407.9	407.6	407.3	406.7	406.0	405.2	404.4	403.6	404.3
5°	406.7	406.4	406.0	405.7	405.4	404.8	403.8	402.9	401.8	400.9	401.6
7.5°	403.2	402.6	402.1	401.6	401.1	400.3	399.3	398.3	397.4	396.4	397.1
10°	399.8	399.2	398.6	398.0	397.3	396.5	395.5	394.4	393.4	392.3	393.0
12.5°	395.0	394.5	394.0	393.4	392.9	392.1	391.1	390.0	389.0	388.0	388.4
15°	387.2	386.7	386.2	385.6	385.1	384.4	383.1	382.0	380.9	379.8	380.1
17.5°	377.2	376.7	376.2	375.7	375.1	374.3	373.2	372.0	370.8	369.7	370.1
20°	370.0	369.5	368.9	368.4	367.9	367.0	365.8	364.6	363.4	362.2	362.5
22.5°	362.8	362.1	361.4	360.6	359.9	359.0	357.8	356.6	355.5	354.4	354.4
25°	350.4	349.7	349.0	348.4	347.7	346.6	345.1	343.6	342.2	340.7	340.9
27.5°	336.4	335.8	335.1	334.5	333.9	332.9	331.8	330.6	329.5	328.3	328.0
30°	327.0	326.3	325.6	324.9	324.2	323.2	321.9	320.6	319.3	318.0	317.7
32.5°	316.9	316.4	315.9	315.3	314.8	313.7	312.4	311.1	309.7	308.3	307.8
35°	302.4	301.4	300.6	299.7	298.9	297.7	296.4	295.0	293.6	292.1	291.6
37.5°	285.9	285.1	284.3	283.5	282.8	281.7	280.3	279.0	277.5	276.1	275.5
40°	274.6	273.9	273.2	272.5	271.8	270.8	269.3	267.9	266.6	265.2	264.4
42.5°	263.6	262.9	262.3	261.6	260.9	259.8	258.4	257.0	255.6	254.3	253.4
45°	246.0	245.4	244.8	244.2	243.6	242.6	241.3	240.0	238.8	237.4	236.4
47.5°	228.5	227.9	227.4	226.8	226.2	225.2	223.9	222.6	221.2	219.8	218.8
50°	216.3	215.9	215.4	215.0	214.6	213.7	212.5	211.3	210.1	208.9	207.7
52.5°	204.4	203.8	203.3	202.7	202.1	201.2	200.1	199.0	197.8	196.7	195.6
55°	186.1	185.6	185.1	184.6	184.1	183.3	182.3	181.2	180.2	179.2	178.1
57.5°	167.9	167.5	167.0	166.6	166.2	165.4	164.3	163.2	162.0	160.8	159.8
60°	155.7	155.3	155.0	154.6	154.3	153.5	152.3	151.1	149.8	148.6	147.7
62.5°	143.8	143.2	142.7	142.2	141.5	140.8	139.8	139.0	138.0	137.1	136.1
65°	125.5	125.0	124.5	124.0	123.5	122.8	121.9	121.1	120.2	119.3	118.5
67.5°	107.0	106.6	106.2	105.7	105.4	104.8	103.9	103.1	102.4	101.6	101.0
70°	95.4	95.1	94.7	94.4	94.0	93.5	92.7	92.0	91.1	90.3	89.7
72.5°	83.5	83.2	82.8	82.5	82.1	81.7	81.2	80.8	80.2	79.7	79.1
75°	65.7	65.5	65.3	65.2	65.0	64.7	64.3	63.8	63.4	62.9	62.4
77.5°	49.8	49.4	49.2	48.9	48.6	48.3	48.1	48.0	47.8	47.6	47.4
80°	39.1	39.0	38.9	38.8	38.7	38.7	38.5	38.3	38.1	38.0	37.7
82.5°	29.1	29.1	29.1	29.0	29.0	28.9	28.8	28.8	28.7	28.6	28.2
85°	16.0	15.9	15.8	15.8	15.7	15.6	15.5	15.4	15.3	15.2	15.0
87.5°	5.8	6.0	6.5	6.5	6.7	7.0	7.5	8.3	9.0	9.0	8.6
90°	0.7	2.7	5.4	6.7	8.1	10.1	13.4	18.2	22.2	22.9	22.2
92.5°	8.2	11.9	16.7	19.6	24.2	30.6	45.8	67.2	86.3	87.5	73.9
95°	23.6	26.3	33.0	39.0	49.8	66.0	96.9	155.5	233.6	263.8	230.8
97.5°	38.4	42.0	49.2	58.3	70.7	88.9	127.9	209.5	339.2	450.4	472.5
100°	51.8	53.8	59.9	70.7	84.1	103.0	138.6	220.8	366.1	531.7	628.6
102.5°	64.2	65.7	71.7	82.5	96.5	115.4	148.4	221.3	355.9	534.4	686.7
105°	82.1	84.8	89.5	99.6	114.4	133.3	164.9	224.8	335.9	498.7	677.8
107.5°	101.5	103.7	108.2	117.5	132.2	151.2	181.8	234.1	325.9	460.5	618.6
110°	114.4	117.1	121.1	129.9	144.0	163.6	193.1	241.6	323.7	442.2	581.5



TEST NUMBER: P331266-935

CATALOG NUMBER: SA2XXDIP-C290D725U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	126.2	129.0	133.5	141.7	155.3	175.4	204.0	249.7	324.3	430.3	555.7
115°	144.7	148.1	152.1	160.1	173.7	191.8	220.8	261.8	327.1	417.3	523.7
117.5°	163.8	166.5	170.6	177.7	190.6	209.5	236.3	274.7	331.9	411.0	503.4
120°	175.6	178.4	182.4	188.5	201.9	220.8	247.0	283.4	335.2	407.2	492.7
122.5°	187.0	189.2	193.1	199.8	213.2	232.6	257.3	290.9	339.0	405.0	483.5
125°	201.9	204.0	207.9	216.0	229.5	248.3	272.6	302.9	344.6	401.1	470.5
127.5°	213.8	216.5	222.1	231.0	243.9	263.3	286.9	314.0	350.4	398.8	458.3
130°	220.8	223.4	230.1	239.6	253.0	271.9	295.5	321.1	354.7	397.8	450.3
132.5°	227.2	230.5	237.7	247.7	261.7	280.5	303.0	328.0	359.0	397.3	443.8
135°	236.9	239.6	247.7	257.8	273.3	292.1	313.7	337.2	364.1	396.4	434.8
137.5°	246.1	249.3	257.4	268.1	283.5	301.0	322.3	344.2	368.7	396.3	428.4
140°	253.0	255.7	263.8	274.6	289.4	306.9	327.1	347.9	370.8	395.7	424.7
142.5°	260.0	262.3	269.8	280.5	294.8	311.3	330.9	351.2	372.5	395.7	420.9
145°	270.5	273.3	280.0	290.1	303.5	318.3	336.6	355.3	374.2	394.4	415.9
147.5°	281.9	283.9	290.3	299.6	310.8	324.0	341.1	357.7	374.8	392.0	410.9
150°	289.4	291.4	296.8	305.6	315.6	327.8	343.3	358.7	374.2	390.4	406.5
152.5°	297.0	297.9	303.2	310.9	320.5	331.6	345.4	359.3	373.2	387.7	402.8
155°	307.5	308.2	312.3	319.7	327.1	337.2	348.6	360.1	371.5	383.0	395.7
157.5°	316.5	317.1	320.4	326.8	332.8	341.2	350.9	360.1	368.4	378.2	389.2
160°	322.4	323.0	325.7	331.1	336.6	343.9	352.0	360.1	366.8	374.9	384.4
162.5°	328.3	327.9	330.6	334.9	339.8	345.5	352.6	359.6	365.2	372.2	380.0
165°	335.2	334.5	335.9	339.9	343.3	347.3	353.4	358.1	362.1	366.8	372.9
167.5°	340.9	340.0	341.2	343.8	346.2	348.8	353.2	357.1	359.0	362.1	365.8
170°	344.6	343.3	343.9	345.9	347.3	349.3	352.7	356.0	357.4	359.4	362.1
172.5°	346.7	345.9	345.5	347.6	348.4	349.8	352.1	354.4	355.2	356.2	358.3
175°	349.3	348.6	347.9	349.3	349.3	350.0	351.3	352.7	352.0	352.7	353.4
177.5°	350.5	349.5	348.9	350.0	350.0	350.0	350.5	351.6	350.5	350.0	350.5
180°	350.0	350.0	350.0	350.0	350.0	350.0	350.0	350.0	350.0	350.0	350.0



TEST NUMBER: P331266-935

CATALOG NUMBER: SA2XXDIP-C290D725U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7
2.5°	405.0	405.7	406.4	406.7	406.6	406.4	406.3	406.1
5°	402.3	403.0	403.7	404.0	403.8	403.6	403.5	403.3
7.5°	397.8	398.5	399.2	399.4	399.2	399.0	398.8	398.6
10°	393.7	394.4	395.1	395.3	395.0	394.8	394.5	394.3
12.5°	388.9	389.3	389.9	390.0	389.9	389.6	389.4	389.3
15°	380.5	380.8	381.2	381.2	380.7	380.3	379.9	379.4
17.5°	370.5	370.9	371.3	371.3	370.8	370.5	370.1	369.6
20°	362.7	363.0	363.3	363.2	362.8	362.5	362.1	361.8
22.5°	354.5	354.6	354.6	354.5	354.3	354.0	353.9	353.7
25°	341.0	341.2	341.4	341.4	341.2	341.0	340.9	340.7
27.5°	327.8	327.5	327.3	326.9	326.5	326.1	325.7	325.3
30°	317.5	317.2	316.9	316.7	316.3	316.0	315.6	315.2
32.5°	307.4	306.9	306.4	306.0	305.7	305.3	305.0	304.6
35°	291.1	290.6	290.1	289.6	289.2	288.8	288.3	287.8
37.5°	274.8	274.2	273.5	273.0	272.6	272.2	271.8	271.4
40°	263.6	262.9	262.1	261.5	261.1	260.8	260.5	260.1
42.5°	252.5	251.7	250.8	250.1	249.7	249.2	248.7	248.2
45°	235.5	234.5	233.6	232.9	232.6	232.2	231.9	231.5
47.5°	217.8	216.8	215.8	215.0	214.6	214.0	213.5	213.0
50°	206.5	205.2	204.0	203.2	202.8	202.3	201.9	201.5
52.5°	194.7	193.6	192.6	191.8	191.2	190.7	190.1	189.5
55°	177.0	176.0	175.0	174.3	173.8	173.3	172.9	172.5
57.5°	158.8	157.7	156.7	156.0	155.8	155.4	155.1	154.7
60°	146.7	145.8	144.8	144.2	144.0	143.7	143.4	143.2
62.5°	135.3	134.4	133.5	132.9	132.6	132.2	131.9	131.6
65°	117.7	116.9	116.1	115.5	115.1	114.7	114.3	113.8
67.5°	100.4	99.8	99.2	98.7	98.3	98.0	97.6	97.3
70°	89.1	88.5	87.9	87.5	87.1	86.7	86.4	86.0
72.5°	78.5	77.9	77.3	76.8	76.5	76.3	76.0	75.7
75°	61.9	61.4	60.9	60.7	60.9	61.0	61.2	61.4
77.5°	47.1	46.8	46.6	46.3	46.1	45.9	45.6	45.4
80°	37.5	37.2	36.9	36.7	36.5	36.3	36.2	36.0
82.5°	27.9	27.6	27.2	27.0	27.0	26.9	26.9	26.9
85°	14.7	14.5	14.2	14.0	13.9	13.9	13.8	13.7
87.5°	8.3	7.8	7.8	7.8	7.7	7.7	7.7	7.6
90°	21.5	20.2	21.5	22.2	22.2	22.2	22.2	22.2
92.5°	58.7	50.4	44.7	40.6	40.0	37.8	38.4	37.3
95°	176.3	135.3	107.0	92.2	83.4	78.1	76.0	76.7
97.5°	411.5	336.7	263.8	215.2	183.0	166.5	156.7	151.0
100°	614.5	531.1	438.9	357.4	301.5	272.6	253.0	240.9
102.5°	747.5	728.7	661.2	574.9	514.2	464.8	440.4	424.0
105°	817.8	893.8	902.6	880.4	838.6	796.9	767.9	758.5
107.5°	767.2	881.7	951.7	984.3	989.5	987.2	981.5	968.9
110°	723.5	844.0	930.1	985.3	1014.3	1027.1	1033.1	1032.4



TEST NUMBER: P331266-935

CATALOG NUMBER: SA2XXDIP-C290D725U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	683.7	799.3	891.4	954.7	994.9	1016.3	1027.8	1031.4
115°	634.6	738.3	826.5	895.8	943.6	974.6	992.0	998.2
117.5°	597.8	688.8	768.8	833.8	882.5	915.2	933.7	938.7
120°	579.5	663.0	734.3	795.6	842.7	874.3	893.8	900.5
122.5°	565.0	641.4	708.9	764.3	806.6	837.7	855.1	860.7
125°	543.8	613.1	672.4	722.8	761.9	787.5	804.3	809.7
127.5°	523.0	585.7	641.5	688.1	722.2	746.1	760.7	765.0
130°	509.5	567.4	620.5	665.0	697.9	720.8	734.3	739.7
132.5°	496.5	550.2	599.0	640.8	673.2	696.0	708.4	713.3
135°	478.5	523.0	567.4	605.0	634.0	656.3	668.3	671.1
137.5°	464.2	501.3	536.6	569.4	595.8	614.9	625.5	629.6
140°	455.0	487.3	518.2	547.9	569.4	586.9	597.0	601.1
142.5°	447.5	474.9	501.5	526.3	546.8	562.7	571.7	572.5
145°	436.8	459.0	479.9	499.4	515.6	527.0	533.7	535.7
147.5°	428.6	446.1	462.4	476.6	490.0	499.1	503.7	504.9
150°	422.7	437.5	451.6	463.7	473.8	481.9	485.9	486.6
152.5°	416.7	430.5	442.5	453.0	460.9	467.9	470.9	471.0
155°	408.5	419.3	429.4	436.8	444.2	448.9	451.6	450.3
157.5°	399.0	408.0	416.5	422.2	427.5	431.4	432.7	432.7
160°	393.0	400.5	407.9	412.6	417.3	420.7	421.3	421.3
162.5°	387.1	393.5	399.8	403.5	408.1	410.4	411.1	410.5
165°	378.2	383.0	387.7	390.4	393.0	395.7	395.7	395.1
167.5°	369.8	373.4	376.6	379.1	380.3	381.8	381.6	380.8
170°	365.5	367.5	370.1	371.5	372.2	374.2	373.5	372.2
172.5°	360.6	362.1	364.3	365.1	365.8	366.7	366.0	365.2
175°	355.3	356.0	356.7	357.4	357.4	358.1	357.4	356.0
177.5°	351.6	351.6	352.1	352.1	352.1	352.1	351.6	350.5
180°	350.0	350.0	350.0	350.0	350.0	350.0	350.0	350.0

(END OF REPORT)