

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331273-935

Luminaire Tested: **SA2XXDIP-C290D925U935-4F0-1E-UDD-F**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331273-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C290D925U935-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 925 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4222.2 lumens
Efficiency: N/A
Efficacy: 113.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 37.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331273-935
CATALOG NUMBER: SA2XXDIP-C290D925U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

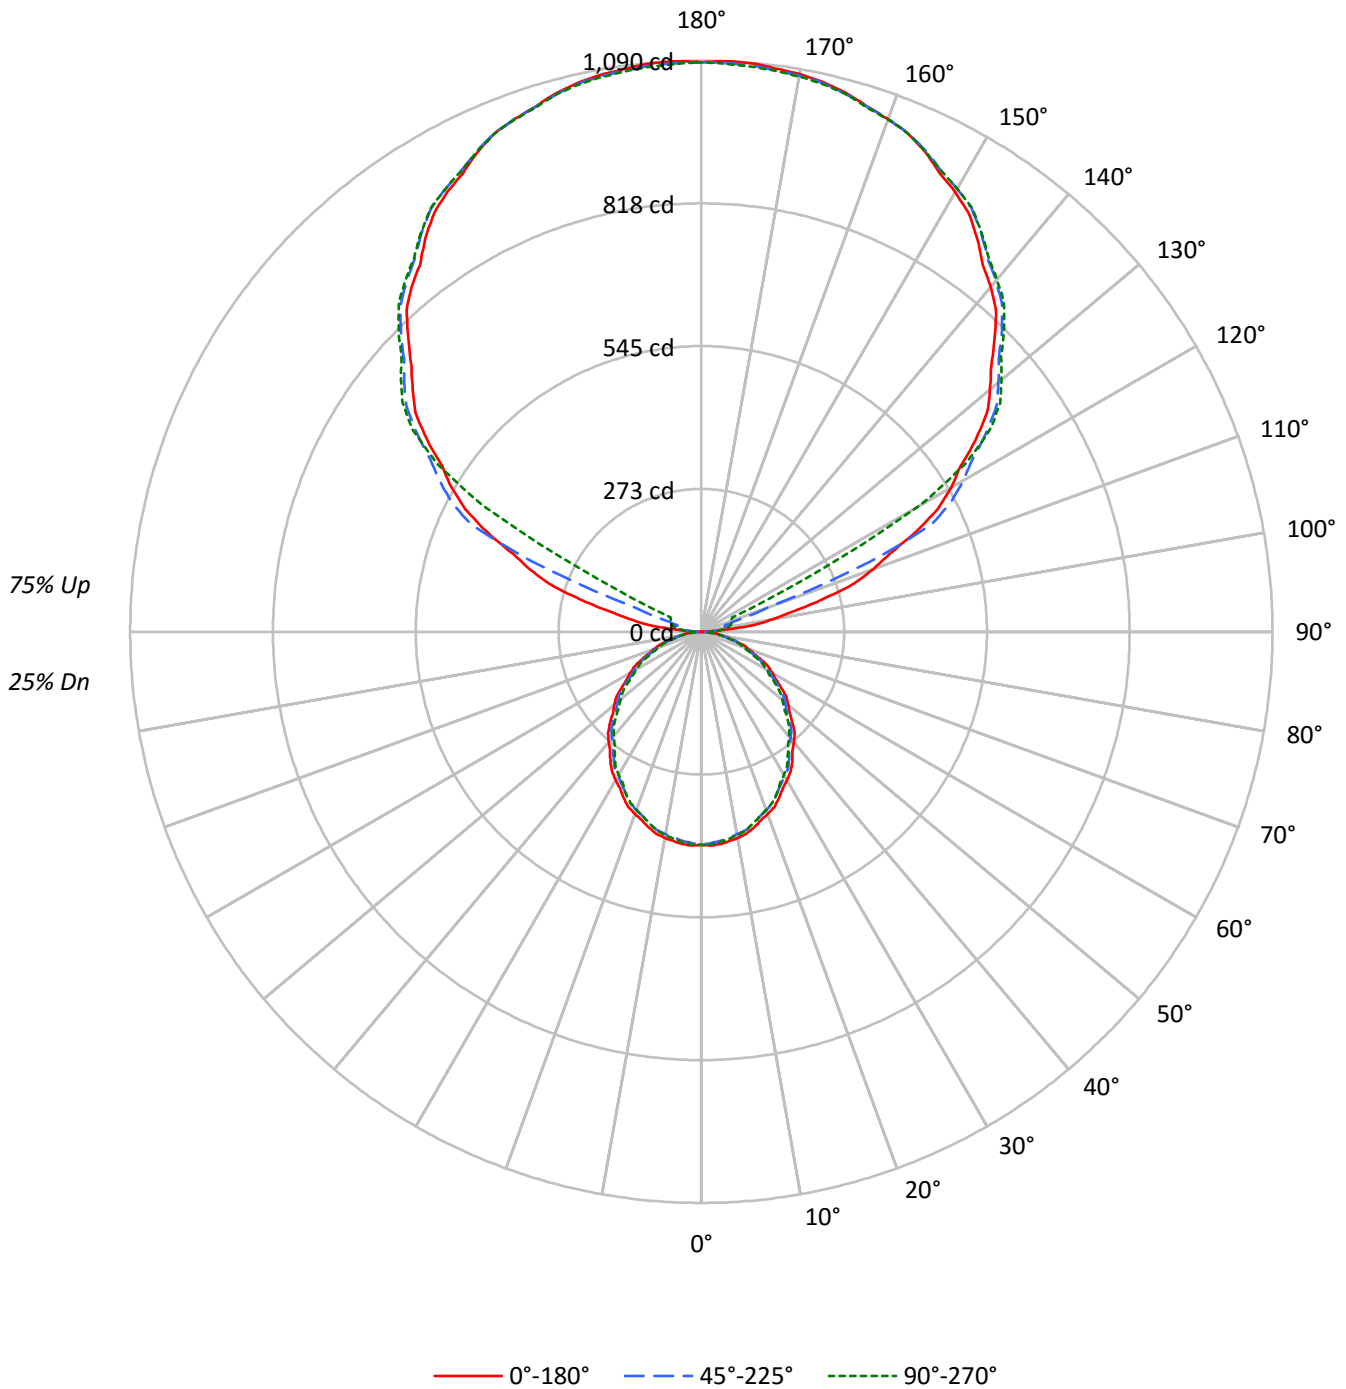



TEST NUMBER: P331273-935

CATALOG NUMBER: SA2XXDIP-C290D925U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	33	33	33	25
1	92	88	84	81	82	78	75	72	60	58	57	44	43	42	29	28	28	21
2	84	77	71	66	74	68	64	59	53	50	47	39	37	35	25	24	23	17
3	76	67	60	55	68	60	54	50	47	43	39	34	32	29	22	21	20	15
4	70	59	52	46	62	53	47	42	41	37	33	30	27	25	20	18	17	13
5	64	53	45	39	57	47	41	36	37	32	29	27	24	22	18	16	15	11
6	59	47	39	34	52	42	36	31	33	28	25	24	21	19	16	14	13	10
7	54	42	35	30	48	38	32	27	30	25	22	22	19	17	15	13	11	9
8	50	38	31	26	45	34	28	24	27	22	19	20	17	15	14	12	10	8
9	47	35	28	23	41	31	25	21	25	20	17	18	15	13	13	11	9	7
10	43	32	25	20	39	29	23	19	23	18	15	17	14	12	12	10	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6567	6567	6567
5°	6592	6498	6536
10°	6555	6432	6465
15°	6472	6349	6342
20°	6357	6223	6216
25°	6242	6070	6070
30°	6096	5929	5876
35°	5960	5757	5673
40°	5788	5590	5482
45°	5617	5421	5286
50°	5433	5247	5061
55°	5239	5044	4856
60°	5028	4799	4624
65°	4795	4558	4348
70°	4504	4263	4060
75°	4099	3924	3830
80°	3636	3533	3347
85°	2964	2816	2538



TEST NUMBER: P331273-935

CATALOG NUMBER: SA2XXDIP-C290D925U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	38.3	0.9
10°-20°	107.6	2.5
20°-30°	158.2	3.7
30°-40°	183.8	4.4
40°-50°	183.6	4.3
50°-60°	160.1	3.8
60°-70°	118.4	2.8
70°-80°	67.0	1.6
80°-90°	20.7	0.5
90°-100°	36.2	0.9
100°-110°	132.9	3.1
110°-120°	355.3	8.4
120°-130°	586.6	13.9
130°-140°	623.8	14.8
140°-150°	579.8	13.7
150°-160°	466.2	11.0
160°-170°	300.4	7.1
170°-180°	103.4	2.4
0°-30°	304.1	7.2
0°-40°	487.8	11.6
0°-60°	831.5	19.7
0°-90°	1037.6	24.6
90°-120°	524.5	12.4
90°-150°	2314.7	54.8
90°-180°	3185.0	75.4
0°-180°	4222.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	407	407	407	407	407	
5°	407	405	401	404	403	39
15°	387	385	380	381	379	109
25°	350	347	341	341	341	161
35°	302	298	292	290	288	189
45°	246	243	237	233	232	190
55°	186	184	179	175	172	166
65°	126	123	119	116	114	124
75°	66	65	63	61	61	70
85°	16	16	15	14	14	18
90°	1	9	16	20	21	3
95°	51	27	31	34	34	63
105°	239	249	48	56	60	255
115°	452	466	485	138	64	445
125°	639	650	664	670	672	570
135°	791	803	811	818	817	611
145°	918	918	930	935	932	574
155°	1010	1004	1013	1017	1011	465
165°	1065	1060	1062	1067	1062	301
175°	1089	1084	1085	1090	1083	104
180°	1087	1087	1087	1087	1087	



TEST NUMBER: P331273-935

CATALOG NUMBER: SA2XXDIP-C290D925U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7
2.5°	408.6	408.3	407.9	407.6	407.3	406.7	406.0	405.2	404.4	403.6	404.3
5°	406.7	406.4	406.0	405.7	405.4	404.8	403.8	402.9	401.8	400.9	401.6
7.5°	403.2	402.6	402.1	401.6	401.1	400.3	399.3	398.3	397.4	396.4	397.1
10°	399.8	399.2	398.6	398.0	397.3	396.5	395.5	394.4	393.4	392.3	393.0
12.5°	395.0	394.5	394.0	393.4	392.9	392.1	391.1	390.0	389.0	388.0	388.4
15°	387.2	386.7	386.2	385.6	385.1	384.4	383.1	382.0	380.9	379.8	380.1
17.5°	377.2	376.7	376.2	375.7	375.1	374.3	373.2	372.0	370.8	369.7	370.1
20°	370.0	369.5	368.9	368.4	367.9	367.0	365.8	364.6	363.4	362.2	362.5
22.5°	362.8	362.1	361.4	360.6	359.9	359.0	357.8	356.6	355.5	354.4	354.4
25°	350.4	349.7	349.0	348.4	347.7	346.6	345.1	343.6	342.2	340.7	340.9
27.5°	336.4	335.8	335.1	334.5	333.9	332.9	331.8	330.6	329.5	328.3	328.0
30°	327.0	326.3	325.6	324.9	324.2	323.2	321.9	320.6	319.3	318.0	317.7
32.5°	316.9	316.4	315.9	315.3	314.8	313.7	312.4	311.1	309.7	308.3	307.8
35°	302.4	301.4	300.6	299.7	298.9	297.7	296.4	295.0	293.6	292.1	291.6
37.5°	285.9	285.1	284.3	283.5	282.8	281.7	280.3	279.0	277.5	276.1	275.5
40°	274.6	273.9	273.2	272.5	271.8	270.8	269.3	267.9	266.6	265.2	264.4
42.5°	263.6	262.9	262.3	261.6	260.9	259.8	258.4	257.0	255.6	254.3	253.4
45°	246.0	245.4	244.8	244.2	243.6	242.6	241.3	240.0	238.8	237.4	236.4
47.5°	228.5	227.9	227.4	226.8	226.2	225.2	223.9	222.6	221.2	219.8	218.8
50°	216.3	215.9	215.4	215.0	214.6	213.7	212.5	211.3	210.1	208.9	207.7
52.5°	204.4	203.8	203.3	202.7	202.1	201.2	200.1	199.0	197.8	196.7	195.6
55°	186.1	185.6	185.1	184.6	184.1	183.3	182.3	181.2	180.2	179.2	178.1
57.5°	167.9	167.5	167.0	166.6	166.2	165.4	164.3	163.2	162.0	160.8	159.8
60°	155.7	155.3	155.0	154.6	154.3	153.5	152.3	151.1	149.8	148.6	147.7
62.5°	143.8	143.2	142.7	142.2	141.5	140.8	139.8	139.0	138.0	137.1	136.1
65°	125.5	125.0	124.5	124.0	123.5	122.8	121.9	121.1	120.2	119.3	118.5
67.5°	107.0	106.6	106.2	105.7	105.4	104.8	103.9	103.1	102.4	101.6	101.0
70°	95.4	95.1	94.7	94.4	94.0	93.5	92.7	92.0	91.1	90.3	89.7
72.5°	83.5	83.2	82.8	82.5	82.1	81.7	81.2	80.8	80.2	79.7	79.1
75°	65.7	65.5	65.3	65.2	65.0	64.7	64.3	63.8	63.4	62.9	62.4
77.5°	49.8	49.4	49.2	48.9	48.6	48.3	48.1	48.0	47.8	47.6	47.4
80°	39.1	39.0	38.9	38.8	38.7	38.7	38.5	38.3	38.1	38.0	37.7
82.5°	29.1	29.1	29.1	29.0	29.0	28.9	28.8	28.8	28.7	28.6	28.2
85°	16.0	15.9	15.8	15.8	15.7	15.6	15.5	15.4	15.3	15.2	15.0
87.5°	5.8	6.0	6.3	6.5	6.8	7.0	7.1	7.2	7.4	7.5	7.5
90°	0.8	2.7	4.6	6.5	8.4	10.2	11.5	12.9	14.3	15.8	16.6
92.5°	15.8	15.7	15.5	15.3	15.2	15.4	16.2	16.9	17.6	18.3	18.7
95°	51.1	45.4	39.6	33.8	28.1	25.7	27.0	28.2	29.4	30.7	31.5
97.5°	101.4	85.2	69.0	52.7	36.4	29.7	32.5	35.4	38.2	41.1	41.8
100°	139.2	115.2	91.3	67.3	43.4	33.0	35.9	38.9	41.8	44.9	46.2
102.5°	180.7	175.6	170.6	165.5	160.4	145.5	120.6	95.7	70.9	46.1	47.9
105°	239.0	244.3	249.5	254.8	260.0	238.8	191.1	143.4	95.7	48.0	49.9
107.5°	305.6	309.8	314.0	318.2	322.5	296.0	238.8	181.6	124.3	67.2	65.2
110°	348.4	352.1	355.7	359.4	363.0	339.6	289.1	238.6	188.1	137.6	120.1



TEST NUMBER: P331273-935

CATALOG NUMBER: SA2XXDIP-C290D925U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	388.6	391.8	395.1	398.4	401.6	397.0	384.5	372.0	359.6	347.1	283.4
115°	452.1	455.1	458.1	461.1	464.0	467.7	472.1	476.5	480.8	485.2	404.2
117.5°	508.9	512.2	515.6	518.9	522.2	525.4	528.4	531.4	534.4	537.4	517.8
120°	550.4	553.0	555.7	558.3	560.9	563.8	567.0	570.1	573.3	576.4	578.5
122.5°	585.7	588.4	591.2	593.9	596.7	599.8	603.2	606.7	610.1	613.5	614.8
125°	639.3	641.5	643.9	646.1	648.4	651.2	654.5	657.8	661.2	664.4	665.7
127.5°	687.9	690.4	692.9	695.4	697.9	700.4	702.9	705.4	707.9	710.4	712.1
130°	718.8	721.5	724.3	727.1	729.9	732.3	734.2	736.1	738.0	739.9	741.8
132.5°	750.2	752.5	754.9	757.3	759.7	761.8	763.8	765.7	767.6	769.5	771.2
135°	791.1	793.8	796.7	799.4	802.3	804.4	806.0	807.6	809.2	810.7	812.4
137.5°	832.4	834.4	836.4	838.3	840.2	842.1	843.9	845.7	847.5	849.3	850.9
140°	859.5	860.9	862.3	863.7	865.0	866.8	868.7	870.6	872.5	874.4	876.0
142.5°	882.1	883.4	884.7	885.9	887.2	888.9	891.0	893.3	895.5	897.7	899.1
145°	917.7	917.5	917.3	917.1	917.0	918.3	921.4	924.3	927.3	930.2	931.4
147.5°	948.6	948.0	947.4	946.7	946.0	947.1	950.0	953.0	956.0	958.9	959.8
150°	968.8	967.6	966.3	965.1	963.9	964.7	967.5	970.3	973.1	975.9	976.9
152.5°	985.8	984.4	983.0	981.7	980.3	980.9	983.6	986.3	988.9	991.6	992.6
155°	1010.5	1008.9	1007.3	1005.7	1004.2	1004.4	1006.5	1008.7	1010.7	1012.8	1013.8
157.5°	1029.8	1028.5	1027.2	1025.8	1024.5	1024.6	1026.1	1027.5	1029.0	1030.4	1031.7
160°	1041.1	1040.1	1039.1	1037.9	1036.9	1036.9	1037.9	1039.1	1040.1	1041.1	1042.2
162.5°	1051.2	1050.2	1049.1	1048.0	1047.0	1046.9	1047.8	1048.7	1049.6	1050.6	1051.7
165°	1064.7	1063.7	1062.6	1061.5	1060.5	1060.2	1060.8	1061.3	1061.9	1062.4	1063.6
167.5°	1074.8	1073.8	1072.7	1071.6	1070.6	1070.3	1070.8	1071.3	1071.8	1072.3	1073.5
170°	1080.5	1079.3	1078.3	1077.3	1076.2	1075.9	1076.2	1076.6	1076.9	1077.3	1078.5
172.5°	1084.2	1083.1	1082.1	1081.1	1080.0	1079.7	1080.0	1080.4	1080.7	1081.1	1082.3
175°	1089.1	1087.9	1086.7	1085.4	1084.2	1083.7	1084.1	1084.4	1084.8	1085.1	1086.4
177.5°	1089.9	1088.9	1088.0	1086.9	1086.0	1085.5	1085.7	1085.8	1086.0	1086.1	1087.1
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8



TEST NUMBER: P331273-935

CATALOG NUMBER: SA2XXDIP-C290D925U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	406.7	406.7	406.7	406.7	406.7	406.7	406.7	406.7
2.5°	405.0	405.7	406.4	406.7	406.6	406.4	406.3	406.1
5°	402.3	403.0	403.7	404.0	403.8	403.6	403.5	403.3
7.5°	397.8	398.5	399.2	399.4	399.2	399.0	398.8	398.6
10°	393.7	394.4	395.1	395.3	395.0	394.8	394.5	394.3
12.5°	388.9	389.3	389.9	390.0	389.9	389.6	389.4	389.3
15°	380.5	380.8	381.2	381.2	380.7	380.3	379.9	379.4
17.5°	370.5	370.9	371.3	371.3	370.8	370.5	370.1	369.6
20°	362.7	363.0	363.3	363.2	362.8	362.5	362.1	361.8
22.5°	354.5	354.6	354.6	354.5	354.3	354.0	353.9	353.7
25°	341.0	341.2	341.4	341.4	341.2	341.0	340.9	340.7
27.5°	327.8	327.5	327.3	326.9	326.5	326.1	325.7	325.3
30°	317.5	317.2	316.9	316.7	316.3	316.0	315.6	315.2
32.5°	307.4	306.9	306.4	306.0	305.7	305.3	305.0	304.6
35°	291.1	290.6	290.1	289.6	289.2	288.8	288.3	287.8
37.5°	274.8	274.2	273.5	273.0	272.6	272.2	271.8	271.4
40°	263.6	262.9	262.1	261.5	261.1	260.8	260.5	260.1
42.5°	252.5	251.7	250.8	250.1	249.7	249.2	248.7	248.2
45°	235.5	234.5	233.6	232.9	232.6	232.2	231.9	231.5
47.5°	217.8	216.8	215.8	215.0	214.6	214.0	213.5	213.0
50°	206.5	205.2	204.0	203.2	202.8	202.3	201.9	201.5
52.5°	194.7	193.6	192.6	191.8	191.2	190.7	190.1	189.5
55°	177.0	176.0	175.0	174.3	173.8	173.3	172.9	172.5
57.5°	158.8	157.7	156.7	156.0	155.8	155.4	155.1	154.7
60°	146.7	145.8	144.8	144.2	144.0	143.7	143.4	143.2
62.5°	135.3	134.4	133.5	132.9	132.6	132.2	131.9	131.6
65°	117.7	116.9	116.1	115.5	115.1	114.7	114.3	113.8
67.5°	100.4	99.8	99.2	98.7	98.3	98.0	97.6	97.3
70°	89.1	88.5	87.9	87.5	87.1	86.7	86.4	86.0
72.5°	78.5	77.9	77.3	76.8	76.5	76.3	76.0	75.7
75°	61.9	61.4	60.9	60.7	60.9	61.0	61.2	61.4
77.5°	47.1	46.8	46.6	46.3	46.1	45.9	45.6	45.4
80°	37.5	37.2	36.9	36.7	36.5	36.3	36.2	36.0
82.5°	27.9	27.6	27.2	27.0	27.0	26.9	26.9	26.9
85°	14.7	14.5	14.2	14.0	13.9	13.9	13.8	13.7
87.5°	7.5	7.4	7.4	7.4	7.4	7.4	7.4	7.4
90°	17.5	18.3	19.2	19.8	20.1	20.5	20.9	21.3
92.5°	19.1	19.6	20.1	20.4	20.6	20.8	21.0	21.3
95°	32.4	33.3	34.2	34.5	34.4	34.2	34.0	33.8
97.5°	42.4	43.1	43.8	44.3	44.5	44.7	44.9	45.1
100°	47.6	49.0	50.5	51.3	51.7	52.0	52.3	52.7
102.5°	49.7	51.6	53.4	54.5	55.0	55.4	56.0	56.5
105°	51.8	53.7	55.6	57.0	57.7	58.4	59.1	59.8
107.5°	63.2	61.3	59.3	58.7	59.4	60.1	60.8	61.5
110°	102.6	85.2	67.7	59.3	60.0	60.7	61.4	62.2



TEST NUMBER: P331273-935

CATALOG NUMBER: SA2XXDIP-C290D925U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	219.6	155.8	92.1	60.5	61.0	61.6	62.2	62.8
115°	323.4	242.5	161.5	114.8	102.2	89.6	77.1	64.5
117.5°	498.3	478.7	459.1	428.6	387.3	345.9	304.6	263.3
120°	580.6	582.7	584.8	574.0	550.4	526.8	503.3	479.7
122.5°	616.0	617.3	618.5	616.9	612.3	607.7	603.1	598.6
125°	666.9	668.1	669.3	670.2	670.7	671.2	671.8	672.4
127.5°	713.9	715.7	717.6	718.4	718.6	718.7	718.8	718.8
130°	743.8	745.7	747.6	748.6	748.4	748.1	748.0	747.8
132.5°	772.8	774.5	776.1	776.8	776.6	776.4	776.3	776.1
135°	814.2	816.0	817.7	818.4	818.0	817.7	817.3	817.0
137.5°	852.6	854.4	856.1	856.7	856.1	855.5	854.9	854.3
140°	877.5	879.2	880.7	881.1	880.2	879.3	878.5	877.5
142.5°	900.5	902.0	903.4	903.7	902.8	902.0	901.1	900.2
145°	932.7	933.9	935.1	935.3	934.4	933.6	932.7	931.9
147.5°	960.7	961.6	962.5	962.6	961.8	961.1	960.4	959.7
150°	977.9	979.0	980.1	980.2	979.3	978.4	977.5	976.6
152.5°	993.7	994.7	995.7	995.7	994.5	993.4	992.3	991.1
155°	1014.9	1016.0	1017.0	1016.8	1015.5	1014.0	1012.6	1011.2
157.5°	1032.8	1034.0	1035.2	1035.1	1033.7	1032.3	1031.0	1029.7
160°	1043.2	1044.3	1045.3	1045.3	1044.0	1042.8	1041.6	1040.3
162.5°	1052.9	1054.1	1055.3	1055.2	1053.7	1052.1	1050.7	1049.1
165°	1064.8	1066.0	1067.2	1067.2	1066.0	1064.8	1063.6	1062.4
167.5°	1074.7	1075.9	1077.2	1076.9	1075.4	1073.8	1072.3	1070.7
170°	1079.8	1081.0	1082.2	1082.0	1080.5	1078.8	1077.3	1075.7
172.5°	1083.5	1084.8	1086.0	1085.8	1084.2	1082.6	1081.1	1079.5
175°	1087.6	1088.8	1090.0	1089.8	1088.0	1086.3	1084.5	1082.8
177.5°	1088.0	1089.1	1090.0	1089.9	1088.6	1087.4	1086.1	1084.9
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8

(END OF REPORT)