

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331285-935

Luminaire Tested: **SA2XXDIP-C485D330U935-4F0-1E-UDD-A**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331285-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C485D330U935-4F0-1E-UDD-A
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 330 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2974.3 lumens
Efficiency: N/A
Efficacy: 108.2 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 27.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331285-935

CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

Luminous Intensity Polar Plot

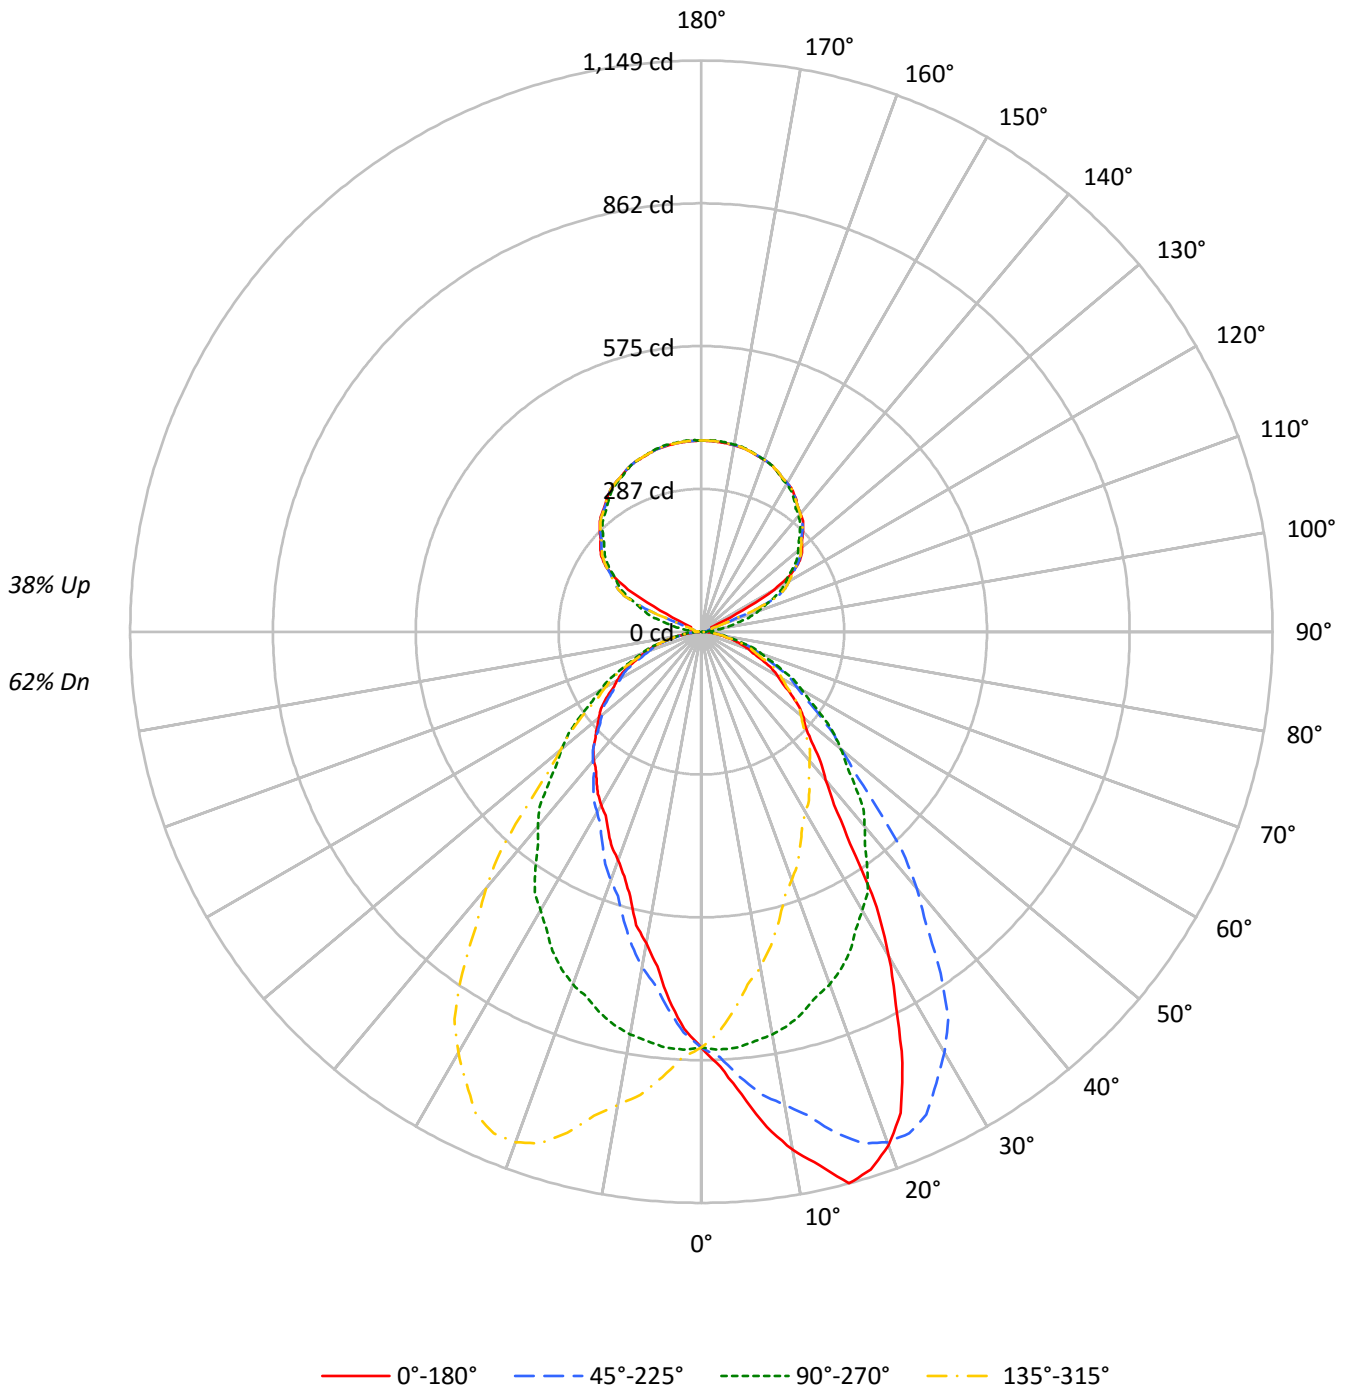



TEST NUMBER: P331285-935

CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									20
RC	80									50									30									10									0									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67	62	62	62	62	62	62	62	62	62	62	62	62	62																
1	101	97	93	90	95	91	88	85	80	77	75	70	68	66	60	59	58	53	53	53	53	53	53	53	53	53	53	53	53	53																
2	93	85	79	74	87	80	75	71	71	67	63	62	59	56	54	52	50	46	46	46	46	46	46	46	46	46	46	46	46	46																
3	85	76	68	63	79	71	65	60	63	58	54	55	52	48	48	45	43	39	39	39	39	39	39	39	39	39	39	39	39	39																
4	78	67	60	54	73	64	57	51	56	51	47	50	45	42	44	40	38	34	34	34	34	34	34	34	34	34	34	34	34	34																
5	72	60	52	46	67	57	50	45	51	45	41	45	40	37	40	36	33	30	30	30	30	30	30	30	30	30	30	30	30	30																
6	66	55	47	41	62	52	44	39	46	40	36	41	36	33	36	32	30	27	27	27	27	27	27	27	27	27	27	27	27	27																
7	62	49	42	36	58	47	40	35	42	36	32	37	33	29	33	29	27	24	24	24	24	24	24	24	24	24	24	24	24	24																
8	57	45	37	32	54	43	36	31	39	33	29	34	30	26	31	27	24	22	22	22	22	22	22	22	22	22	22	22	22	22																
9	54	41	34	29	50	39	33	28	35	30	26	32	27	24	28	25	22	20	20	20	20	20	20	20	20	20	20	20	20	20																
10	50	38	31	26	47	36	30	25	33	27	23	30	25	22	26	23	20	18	18	18	18	18	18	18	18	18	18	18	18	18																

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	13508	13508	13508	13508
5°	15144	13598	12049	13598
10°	17354	13485	10427	13485
15°	19199	13237	9212	13237
20°	18907	12972	8399	12972
25°	17047	12618	7883	12618
30°	14087	12055	7506	12055
35°	10267	11466	7238	11466
40°	8201	10768	7088	10768
45°	7165	9965	6887	9965
50°	6737	9183	6752	9183
55°	6210	8391	6570	8391
60°	5690	7550	6290	7550
65°	5184	6793	6021	6793
70°	4707	6057	5618	6057
75°	4173	5234	4972	5234
80°	3589	4342	3998	4342
85°	3223	3223	2371	3223



TEST NUMBER: P331285-935

CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	79.7	2.7
10°-20°	231.6	7.8
20°-30°	336.2	11.3
30°-40°	354.8	11.9
40°-50°	314.1	10.6
50°-60°	250.7	8.4
60°-70°	170.4	5.7
70°-80°	87.4	2.9
80°-90°	22.0	0.7
90°-100°	12.8	0.4
100°-110°	47.1	1.6
110°-120°	125.8	4.2
120°-130°	207.7	7.0
130°-140°	220.8	7.4
140°-150°	205.3	6.9
150°-160°	165.0	5.5
160°-170°	106.3	3.6
170°-180°	36.6	1.2
0°-30°	647.5	21.8
0°-40°	1002.3	33.7
0°-60°	1567.1	52.7
0°-90°	1846.8	62.1
90°-120°	185.7	6.2
90°-150°	819.5	27.6
90°-180°	1127.0	37.9
0°-180°	2974.3	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	837	837	837	837	837	
5°	934	839	743	839	934	93
15°	1149	792	551	792	1149	317
25°	957	708	442	708	957	432
35°	521	582	367	582	521	339
45°	314	436	302	436	314	247
55°	221	298	233	298	221	198
65°	136	178	158	178	136	135
75°	67	84	80	84	67	71
85°	17	17	13	17	17	19
90°	8	0	8	0	8	4
95°	12	18	12	18	12	11
105°	21	85	21	85	21	22
115°	23	160	23	160	23	57
125°	238	226	238	226	238	206
135°	289	280	289	280	289	223
145°	330	325	330	325	330	206
155°	358	358	358	358	358	165
165°	376	377	376	377	376	106
175°	383	386	383	386	383	37
180°	385	385	385	385	385	



TEST NUMBER: P331285-935

CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6
2.5°	875.3	875.6	876.0	871.9	871.4	871.4	867.8	864.7	861.1	856.2	856.7
5°	934.4	938.0	939.3	935.4	929.6	928.9	923.5	914.5	906.1	899.4	894.6
7.5°	1005.0	1006.4	1003.3	998.2	993.9	986.2	976.0	966.0	952.1	939.3	929.8
10°	1058.5	1060.5	1055.0	1047.6	1041.5	1032.5	1017.7	1002.5	984.3	966.6	952.4
12.5°	1099.2	1104.0	1096.9	1096.0	1085.5	1073.2	1055.5	1047.8	1022.1	997.5	982.2
15°	1148.6	1148.2	1148.9	1142.8	1135.1	1133.2	1114.5	1094.2	1057.9	1043.4	1018.3
17.5°	1134.3	1139.2	1141.4	1141.3	1141.2	1140.0	1133.9	1121.2	1102.9	1079.5	1050.6
20°	1100.4	1106.7	1107.8	1115.2	1119.3	1124.8	1127.0	1123.5	1112.2	1092.6	1067.6
22.5°	1047.8	1049.6	1052.7	1064.2	1073.2	1086.9	1094.1	1106.0	1101.6	1092.1	1071.2
25°	956.9	953.7	964.9	970.8	991.6	1013.5	1029.2	1046.6	1062.0	1071.4	1065.3
27.5°	847.7	842.9	859.8	875.1	892.1	915.8	940.3	969.3	993.4	1023.6	1034.0
30°	755.6	758.5	774.6	791.0	816.7	850.2	877.8	909.6	944.1	977.8	1001.3
32.5°	656.3	667.4	677.6	702.7	725.4	762.7	803.2	843.0	886.0	924.3	960.6
35°	520.9	533.7	547.9	566.3	598.1	635.1	674.6	728.3	786.9	839.2	882.4
37.5°	438.4	436.4	444.5	457.8	483.5	513.4	558.9	612.0	680.9	742.4	803.2
40°	389.1	387.8	393.6	405.8	425.4	447.3	487.2	533.7	597.8	673.0	745.4
42.5°	355.1	355.9	359.1	367.7	381.2	399.2	429.0	468.7	527.3	598.1	675.9
45°	313.8	316.1	319.6	323.8	331.5	346.3	363.0	391.3	437.6	496.8	573.3
47.5°	284.1	284.2	287.7	291.4	296.0	304.4	318.1	335.8	368.4	416.6	482.4
50°	268.2	265.9	268.5	271.4	276.2	282.0	291.0	307.7	329.6	368.5	423.4
52.5°	248.7	248.7	251.0	252.1	256.4	262.2	270.4	282.0	301.8	332.3	377.5
55°	220.6	222.2	223.5	225.4	229.3	233.4	239.9	247.6	263.0	285.9	319.3
57.5°	194.2	194.8	196.0	199.7	202.2	206.0	212.1	219.1	229.1	246.1	271.2
60°	176.2	176.2	178.7	180.4	183.6	187.4	192.3	199.1	208.0	221.9	242.1
62.5°	159.7	159.5	160.5	163.2	165.6	169.2	174.0	179.8	188.2	200.5	217.1
65°	135.7	135.1	137.0	137.6	140.2	143.7	147.6	153.7	160.5	169.4	184.3
67.5°	112.5	113.3	114.3	115.5	117.0	120.7	123.3	127.6	133.3	140.8	150.8
70°	99.7	99.7	99.7	100.7	102.5	104.5	107.1	110.6	116.1	122.5	131.5
72.5°	85.2	86.3	87.3	86.8	89.2	90.3	93.4	95.4	100.7	104.8	112.7
75°	66.9	66.9	66.9	68.4	69.5	70.4	72.3	74.3	76.9	82.0	86.2
77.5°	49.9	49.8	50.1	50.5	51.5	52.7	53.2	55.0	57.3	59.8	63.3
80°	38.6	39.3	39.5	40.2	40.2	40.8	41.2	43.4	45.0	46.7	48.9
82.5°	29.9	30.0	30.0	30.1	30.4	30.8	31.6	32.4	32.9	34.3	36.0
85°	17.4	17.0	17.0	17.7	17.4	17.4	18.0	18.7	18.7	18.9	20.0
87.5°	8.2	8.2	8.4	8.1	8.1	8.3	8.3	7.9	8.1	8.4	8.4
90°	7.5	7.4	7.2	7.1	7.1	6.8	6.5	6.2	5.9	5.6	5.1
92.5°	7.5	7.4	7.4	7.3	7.2	7.1	7.0	6.8	6.6	6.5	6.2
95°	12.0	12.1	12.1	12.1	12.2	12.1	11.8	11.5	11.2	10.8	10.4
97.5°	16.0	15.9	15.8	15.8	15.7	15.5	15.2	15.1	14.8	14.6	13.5
100°	18.7	18.5	18.4	18.3	18.2	17.8	17.4	16.9	16.4	15.8	14.8
102.5°	20.0	19.8	19.6	19.5	19.3	18.9	18.3	17.6	17.0	16.3	25.1
105°	21.2	20.9	20.7	20.4	20.1	19.7	19.0	18.3	17.7	17.0	33.8
107.5°	21.8	21.5	21.3	21.0	20.8	21.0	21.7	22.4	23.1	23.8	44.0
110°	22.0	21.8	21.5	21.3	21.0	23.9	30.1	36.3	42.5	48.7	66.6



TEST NUMBER: P331285-935

CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	22.2	22.0	21.8	21.6	21.4	32.6	55.2	77.7	100.3	122.9	127.3
115°	22.8	27.3	31.8	36.2	40.6	57.2	85.8	114.5	143.1	171.8	170.2
117.5°	93.2	107.9	122.5	137.2	151.8	162.6	169.4	176.4	183.3	190.3	189.2
120°	169.8	178.1	186.5	194.8	203.2	207.0	206.3	205.5	204.8	204.1	202.9
122.5°	211.9	213.5	215.2	216.8	218.3	219.0	218.5	218.1	217.7	217.2	216.0
125°	238.0	237.8	237.6	237.5	237.3	236.9	236.5	236.1	235.7	235.2	234.0
127.5°	254.5	254.4	254.4	254.4	254.3	254.0	253.4	252.8	252.1	251.5	250.6
130°	264.8	264.8	264.8	264.9	265.0	264.7	264.0	263.3	262.6	262.0	261.3
132.5°	274.7	274.8	274.9	274.9	275.0	274.7	274.1	273.6	273.0	272.4	271.7
135°	289.2	289.4	289.5	289.6	289.7	289.5	288.9	288.3	287.7	287.1	286.5
137.5°	302.5	302.6	302.9	303.1	303.2	303.1	302.5	301.9	301.3	300.7	300.1
140°	310.6	311.0	311.3	311.6	311.9	311.8	311.3	310.6	310.1	309.5	308.9
142.5°	318.7	319.0	319.3	319.6	319.9	319.9	319.3	318.8	318.3	317.8	317.0
145°	329.8	330.2	330.5	330.8	331.1	331.1	330.6	330.2	329.8	329.3	328.3
147.5°	339.8	340.0	340.3	340.5	340.8	340.8	340.4	340.1	339.8	339.5	338.5
150°	345.8	346.0	346.4	346.7	347.0	347.0	346.6	346.2	345.9	345.5	344.5
152.5°	350.9	351.3	351.7	352.1	352.5	352.5	352.1	351.8	351.4	351.0	350.1
155°	358.0	358.5	359.0	359.5	360.0	360.1	359.6	359.3	359.0	358.5	357.8
157.5°	364.5	365.0	365.5	365.9	366.4	366.4	366.1	365.7	365.2	364.8	364.3
160°	368.3	368.8	369.2	369.6	370.1	370.1	369.7	369.4	368.9	368.6	368.2
162.5°	371.4	372.0	372.5	373.0	373.6	373.6	373.2	372.7	372.4	372.0	371.6
165°	376.1	376.5	376.9	377.4	377.8	377.8	377.4	376.9	376.5	376.1	375.9
167.5°	379.0	379.6	380.1	380.7	381.3	381.3	380.9	380.5	380.0	379.6	379.4
170°	380.8	381.4	381.9	382.5	383.1	383.1	382.7	382.3	381.9	381.4	381.3
172.5°	382.2	382.7	383.3	383.8	384.4	384.4	384.0	383.6	383.1	382.7	382.6
175°	383.3	383.9	384.6	385.2	385.8	385.9	385.5	385.0	384.6	384.2	384.1
177.5°	384.1	384.5	385.0	385.4	385.8	385.9	385.6	385.2	384.9	384.5	384.4
180°	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7



TEST NUMBER: P331285-935

CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6
2.5°	858.5	856.4	855.1	850.6	846.4	842.3	841.0	841.5	835.9	830.5	828.2
5°	892.0	885.5	879.4	870.7	860.5	849.2	843.4	839.0	827.7	815.5	808.4
7.5°	922.0	912.7	901.0	884.7	869.7	852.0	840.7	830.8	814.2	797.0	786.5
10°	940.2	927.6	912.6	892.6	874.3	852.7	837.7	822.5	803.2	782.6	769.8
12.5°	955.9	939.0	924.1	898.5	876.8	849.9	832.0	810.7	790.4	765.9	753.3
15°	993.2	962.1	933.8	904.8	878.1	840.5	820.6	791.9	765.3	735.0	720.6
17.5°	1022.1	987.1	942.5	905.8	874.6	832.9	803.7	769.4	737.8	703.3	683.6
20°	1038.6	998.4	950.5	906.8	869.4	821.9	790.1	755.0	718.0	679.1	657.9
22.5°	1048.4	1006.2	958.7	902.9	859.2	812.9	772.8	734.4	696.9	655.0	632.7
25°	1051.5	1012.9	962.7	899.7	846.3	793.9	745.6	708.3	663.1	623.8	591.3
27.5°	1036.1	1008.5	960.3	893.6	831.5	770.2	716.4	674.2	626.3	583.8	551.0
30°	1017.4	1001.3	954.3	887.4	819.6	753.7	694.6	646.6	599.1	555.9	522.5
32.5°	988.3	984.8	943.6	878.7	807.0	732.9	671.7	623.2	570.5	528.1	496.3
35°	931.2	946.7	920.6	859.2	783.3	703.3	637.0	581.7	527.0	486.5	456.6
37.5°	854.7	893.0	886.2	830.5	751.2	671.0	597.8	540.0	487.9	447.0	417.7
40°	801.9	850.8	857.9	808.7	728.7	646.0	568.5	510.9	460.1	422.8	393.2
42.5°	745.4	802.5	821.9	782.5	704.0	619.7	542.3	482.7	432.4	396.1	369.9
45°	650.5	726.1	761.1	738.6	662.7	576.5	496.8	436.4	390.7	356.6	336.3
47.5°	561.8	644.4	691.6	683.5	616.8	531.5	452.7	394.7	350.3	323.0	304.9
50°	499.0	583.9	640.8	643.4	583.9	499.4	420.3	365.6	324.8	299.4	284.6
52.5°	444.5	525.6	587.6	601.2	547.2	465.9	391.2	336.8	300.8	277.5	264.2
55°	373.3	441.8	510.7	535.7	492.3	415.1	345.9	298.1	264.3	248.2	236.7
57.5°	310.4	367.5	431.0	458.7	432.0	365.9	301.1	259.5	232.1	218.0	209.1
60°	277.2	322.2	378.8	411.9	388.7	329.9	273.3	233.8	211.3	198.7	190.4
62.5°	246.3	286.2	334.0	364.3	351.7	296.2	245.6	210.6	191.2	179.4	173.4
65°	203.2	234.7	271.7	299.7	291.4	249.2	207.8	177.8	162.4	153.1	148.3
67.5°	167.3	190.1	215.8	240.2	233.5	203.6	170.4	147.1	135.5	127.5	124.7
70°	144.7	162.0	184.9	204.5	199.1	174.6	148.3	128.3	118.3	111.6	108.7
72.5°	123.1	137.3	154.8	170.8	167.1	146.8	124.8	109.8	102.1	95.9	93.5
75°	92.9	103.8	114.5	125.1	124.2	108.4	95.5	83.9	77.8	73.0	72.1
77.5°	68.6	74.7	82.0	88.3	86.5	77.5	67.4	60.8	56.3	53.0	52.5
80°	52.4	56.0	61.1	65.6	63.4	59.5	51.5	46.7	43.4	40.2	38.9
82.5°	38.0	41.6	44.6	47.1	45.4	41.8	36.8	33.5	31.6	29.4	28.8
85°	20.0	21.9	23.2	23.8	23.2	20.9	18.7	17.4	15.8	14.8	14.5
87.5°	8.6	8.5	8.4	8.9	7.9	7.7	6.6	5.7	5.6	5.5	5.1
90°	4.6	4.0	3.6	3.0	2.3	1.6	0.9	0.3	0.9	1.6	2.3
92.5°	5.9	5.7	5.5	5.3	5.4	5.5	5.6	5.6	5.6	5.5	5.4
95°	10.0	9.6	9.1	9.9	12.0	14.0	16.0	18.1	16.0	14.0	12.0
97.5°	12.5	11.5	10.5	12.9	18.7	24.4	30.1	35.9	30.1	24.4	18.7
100°	13.8	12.7	11.6	15.4	23.8	32.3	40.8	49.2	40.8	32.3	23.8
102.5°	33.9	42.7	51.5	56.8	58.6	60.4	62.2	64.0	62.2	60.4	58.6
105°	50.8	67.7	84.6	92.0	90.2	88.3	86.4	84.6	86.4	88.3	90.2
107.5°	64.3	84.6	104.8	114.2	112.7	111.2	109.7	108.1	109.7	111.2	112.7
110°	84.5	102.4	120.2	128.5	127.3	126.0	124.6	123.3	124.6	126.0	127.3



TEST NUMBER: P331285-935

CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	131.7	136.1	140.5	142.2	141.0	139.9	138.7	137.6	138.7	139.9	141.0
115°	168.7	167.1	165.6	164.3	163.2	162.2	161.1	160.1	161.1	162.2	163.2
117.5°	188.1	187.1	186.0	184.9	183.7	182.5	181.3	180.2	181.3	182.5	183.7
120°	201.8	200.7	199.6	198.5	197.7	196.7	195.8	194.8	195.8	196.7	197.7
122.5°	214.7	213.5	212.3	211.3	210.3	209.3	208.4	207.3	208.4	209.3	210.3
125°	232.9	231.7	230.6	229.5	228.8	227.9	227.1	226.4	227.1	227.9	228.8
127.5°	249.8	248.8	248.0	247.1	246.2	245.3	244.4	243.5	244.4	245.3	246.2
130°	260.6	259.9	259.2	258.4	257.4	256.4	255.5	254.4	255.5	256.4	257.4
132.5°	271.0	270.4	269.7	269.0	268.1	267.3	266.4	265.6	266.4	267.3	268.1
135°	285.9	285.3	284.8	284.0	283.0	282.1	281.0	280.1	281.0	282.1	283.0
137.5°	299.4	298.8	298.2	297.5	296.8	296.1	295.4	294.7	295.4	296.1	296.8
140°	308.2	307.5	306.9	306.3	305.7	305.2	304.8	304.3	304.8	305.2	305.7
142.5°	316.2	315.5	314.7	314.1	313.7	313.1	312.7	312.3	312.7	313.1	313.7
145°	327.3	326.1	325.1	324.6	324.7	324.8	324.9	324.9	324.9	324.8	324.7
147.5°	337.4	336.3	335.3	334.9	335.1	335.4	335.6	335.9	335.6	335.4	335.1
150°	343.5	342.5	341.6	341.2	341.6	342.1	342.5	342.9	342.5	342.1	341.6
152.5°	349.1	348.2	347.2	347.1	347.5	348.0	348.5	349.0	348.5	348.0	347.5
155°	357.1	356.4	355.6	355.5	356.0	356.6	357.1	357.7	357.1	356.6	356.0
157.5°	363.8	363.3	362.7	362.7	363.2	363.6	364.1	364.5	364.1	363.6	363.2
160°	367.8	367.5	367.1	367.1	367.5	367.8	368.2	368.6	368.2	367.8	367.5
162.5°	371.3	370.9	370.7	370.7	371.0	371.4	371.8	372.1	371.8	371.4	371.0
165°	375.7	375.6	375.4	375.5	375.8	376.2	376.6	376.9	376.6	376.2	375.8
167.5°	379.3	379.1	378.9	379.0	379.4	379.8	380.1	380.5	380.1	379.8	379.4
170°	381.2	381.0	380.9	381.0	381.4	381.8	382.1	382.5	382.1	381.8	381.4
172.5°	382.5	382.4	382.2	382.4	382.7	383.1	383.5	383.8	383.5	383.1	382.7
175°	383.9	383.8	383.7	383.8	384.3	384.7	385.1	385.6	385.1	384.7	384.3
177.5°	384.4	384.4	384.4	384.4	384.8	385.1	385.5	385.8	385.5	385.1	384.8
180°	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7



TEST NUMBER: P331285-935

CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6
2.5°	825.6	824.1	818.6	815.8	811.2	806.8	804.0	805.3	806.3	805.8	805.0
5°	801.9	795.8	786.5	778.4	772.7	762.1	757.6	755.4	753.4	751.1	748.9
7.5°	773.8	764.1	750.8	739.3	728.5	715.3	707.8	703.3	698.6	693.5	689.1
10°	753.7	740.2	726.1	710.0	697.2	685.2	674.6	667.5	661.1	655.0	650.5
12.5°	732.6	717.0	699.6	677.6	663.4	646.4	644.8	632.3	622.2	618.5	613.2
15°	699.0	677.2	655.0	629.0	617.7	602.3	592.6	583.0	574.3	568.2	566.5
17.5°	660.9	632.6	610.5	591.9	573.4	557.6	548.7	541.0	533.8	525.6	524.6
20°	631.8	607.4	583.3	566.9	547.9	531.8	520.9	513.2	507.0	502.2	498.1
22.5°	604.3	577.6	555.5	537.5	518.8	505.8	497.2	489.8	484.7	479.4	475.4
25°	560.2	539.2	515.1	494.9	479.4	471.1	464.0	457.5	454.3	450.8	446.3
27.5°	521.5	498.3	475.7	460.0	446.4	439.0	434.0	429.6	426.6	424.6	422.0
30°	494.2	470.7	453.1	437.6	426.4	419.0	415.8	413.2	409.7	408.4	407.1
32.5°	468.0	446.9	431.7	418.4	407.6	402.8	399.8	397.5	394.8	393.5	390.9
35°	430.8	413.2	398.4	391.0	382.3	378.2	375.9	372.6	370.1	368.9	368.5
37.5°	396.0	380.6	370.8	361.4	357.7	355.1	352.1	349.8	349.0	348.9	348.5
40°	373.3	360.8	352.1	344.4	342.8	338.9	336.3	334.4	334.4	334.8	334.4
42.5°	352.8	341.5	333.8	327.2	325.3	323.0	320.4	320.3	320.8	321.8	320.8
45°	321.6	313.5	308.1	304.8	301.3	299.0	298.7	299.7	300.0	300.3	301.3
47.5°	292.8	287.5	282.6	279.1	277.5	277.1	276.7	278.4	279.9	280.5	282.0
50°	275.9	269.8	265.6	263.4	262.1	261.4	262.1	264.0	265.3	266.9	267.9
52.5°	256.8	252.5	249.7	247.9	247.4	247.8	247.9	250.1	252.2	252.7	253.2
55°	230.6	227.3	226.7	223.8	225.1	224.7	226.4	227.6	229.5	231.5	231.9
57.5°	204.3	201.7	200.0	200.3	200.6	202.1	203.4	205.7	207.8	209.7	210.0
60°	186.8	185.5	184.6	184.6	185.2	187.2	188.7	191.0	192.3	193.6	194.5
62.5°	170.9	169.6	168.6	169.1	170.8	171.9	173.8	175.0	176.3	177.6	178.1
65°	145.7	145.0	146.0	146.6	147.0	148.5	150.8	151.8	153.1	153.7	155.9
67.5°	122.4	122.6	122.4	123.4	125.2	125.6	127.7	130.0	130.3	131.5	132.9
70°	106.8	107.4	108.1	108.7	110.3	110.9	112.5	113.5	114.8	115.7	116.8
72.5°	92.4	92.5	93.2	93.0	94.4	95.7	97.1	98.1	99.4	100.6	101.5
75°	71.0	71.0	71.7	72.1	73.6	75.3	74.9	75.6	76.9	78.2	78.8
77.5°	51.9	51.2	51.9	52.2	52.7	54.1	54.3	55.3	56.7	56.3	57.0
80°	39.5	38.6	39.5	39.9	39.9	41.5	41.5	42.1	43.0	42.1	43.0
82.5°	28.2	27.8	28.5	28.6	29.1	29.1	29.6	29.8	30.7	30.3	30.7
85°	14.1	13.9	14.1	13.9	14.1	14.5	14.5	14.1	14.1	14.8	13.9
87.5°	5.0	4.8	4.6	4.7	4.6	4.5	4.3	4.3	4.4	4.0	4.0
90°	3.0	3.6	4.0	4.6	5.1	5.6	5.9	6.2	6.5	6.8	7.1
92.5°	5.3	5.5	5.7	5.9	6.2	6.5	6.6	6.8	7.0	7.1	7.2
95°	9.9	9.1	9.6	10.0	10.4	10.8	11.2	11.5	11.8	12.1	12.2
97.5°	12.9	10.5	11.5	12.5	13.5	14.6	14.8	15.1	15.2	15.5	15.7
100°	15.4	11.6	12.7	13.8	14.8	15.8	16.4	16.9	17.4	17.8	18.2
102.5°	56.8	51.5	42.7	33.9	25.1	16.3	17.0	17.6	18.3	18.9	19.3
105°	92.0	84.6	67.7	50.8	33.8	17.0	17.7	18.3	19.0	19.7	20.1
107.5°	114.2	104.8	84.6	64.3	44.0	23.8	23.1	22.4	21.7	21.0	20.8
110°	128.5	120.2	102.4	84.5	66.6	48.7	42.5	36.3	30.1	23.9	21.0



TEST NUMBER: P331285-935

CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	142.2	140.5	136.1	131.7	127.3	122.9	100.3	77.7	55.2	32.6	21.4
115°	164.3	165.6	167.1	168.7	170.2	171.8	143.1	114.5	85.8	57.2	40.6
117.5°	184.9	186.0	187.1	188.1	189.2	190.3	183.3	176.4	169.4	162.6	151.8
120°	198.5	199.6	200.7	201.8	202.9	204.1	204.8	205.5	206.3	207.0	203.2
122.5°	211.3	212.3	213.5	214.7	216.0	217.2	217.7	218.1	218.5	219.0	218.3
125°	229.5	230.6	231.7	232.9	234.0	235.2	235.7	236.1	236.5	236.9	237.3
127.5°	247.1	248.0	248.8	249.8	250.6	251.5	252.1	252.8	253.4	254.0	254.3
130°	258.4	259.2	259.9	260.6	261.3	262.0	262.6	263.3	264.0	264.7	265.0
132.5°	269.0	269.7	270.4	271.0	271.7	272.4	273.0	273.6	274.1	274.7	275.0
135°	284.0	284.8	285.3	285.9	286.5	287.1	287.7	288.3	288.9	289.5	289.7
137.5°	297.5	298.2	298.8	299.4	300.1	300.7	301.3	301.9	302.5	303.1	303.2
140°	306.3	306.9	307.5	308.2	308.9	309.5	310.1	310.6	311.3	311.8	311.9
142.5°	314.1	314.7	315.5	316.2	317.0	317.8	318.3	318.8	319.3	319.9	319.9
145°	324.6	325.1	326.1	327.3	328.3	329.3	329.8	330.2	330.6	331.1	331.1
147.5°	334.9	335.3	336.3	337.4	338.5	339.5	339.8	340.1	340.4	340.8	340.8
150°	341.2	341.6	342.5	343.5	344.5	345.5	345.9	346.2	346.6	347.0	347.0
152.5°	347.1	347.2	348.2	349.1	350.1	351.0	351.4	351.8	352.1	352.5	352.5
155°	355.5	355.6	356.4	357.1	357.8	358.5	359.0	359.3	359.6	360.1	360.0
157.5°	362.7	362.7	363.3	363.8	364.3	364.8	365.2	365.7	366.1	366.4	366.4
160°	367.1	367.1	367.5	367.8	368.2	368.6	368.9	369.4	369.7	370.1	370.1
162.5°	370.7	370.7	370.9	371.3	371.6	372.0	372.4	372.7	373.2	373.6	373.6
165°	375.5	375.4	375.6	375.7	375.9	376.1	376.5	376.9	377.4	377.8	377.8
167.5°	379.0	378.9	379.1	379.3	379.4	379.6	380.0	380.5	380.9	381.3	381.3
170°	381.0	380.9	381.0	381.2	381.3	381.4	381.9	382.3	382.7	383.1	383.1
172.5°	382.4	382.2	382.4	382.5	382.6	382.7	383.1	383.6	384.0	384.4	384.4
175°	383.8	383.7	383.8	383.9	384.1	384.2	384.6	385.0	385.5	385.9	385.8
177.5°	384.4	384.4	384.4	384.4	384.4	384.5	384.9	385.2	385.6	385.9	385.8
180°	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7



TEST NUMBER: P331285-935

CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6
2.5°	802.5	801.9	801.9	799.6	801.9	801.9	802.5	805.0	805.8	806.3	805.3
5°	744.4	743.4	741.8	743.4	741.8	743.4	744.4	748.9	751.1	753.4	755.4
7.5°	687.0	683.1	682.5	678.7	682.5	683.1	687.0	689.1	693.5	698.6	703.3
10°	645.1	642.5	642.1	636.0	642.1	642.5	645.1	650.5	655.0	661.1	667.5
12.5°	613.1	606.9	608.2	604.7	608.2	606.9	613.1	613.2	618.5	622.2	632.3
15°	557.8	557.8	556.6	551.1	556.6	557.8	557.8	566.5	568.2	574.3	583.0
17.5°	518.2	517.5	514.4	516.0	514.4	517.5	518.2	524.6	525.6	533.8	541.0
20°	494.6	492.6	488.8	488.8	488.8	492.6	494.6	498.1	502.2	507.0	513.2
22.5°	472.2	472.0	468.0	469.2	468.0	472.0	472.2	475.4	479.4	484.7	489.8
25°	446.0	443.4	441.5	442.5	441.5	443.4	446.0	446.3	450.8	454.3	457.5
27.5°	421.2	419.7	419.7	417.0	419.7	419.7	421.2	422.0	424.6	426.6	429.6
30°	406.7	403.6	404.2	402.6	404.2	403.6	406.7	407.1	408.4	409.7	413.2
32.5°	390.3	389.2	388.5	387.1	388.5	389.2	390.3	390.9	393.5	394.8	397.5
35°	367.8	368.2	366.5	367.2	366.5	368.2	367.8	368.5	368.9	370.1	372.6
37.5°	348.3	349.3	348.5	348.7	348.5	349.3	348.3	348.5	348.9	349.0	349.8
40°	335.4	335.4	335.4	336.3	335.4	335.4	335.4	334.4	334.8	334.4	334.4
42.5°	323.0	322.5	322.0	321.9	322.0	322.5	323.0	320.8	321.8	320.8	320.3
45°	302.0	302.9	303.2	301.6	303.2	302.9	302.0	301.3	300.3	300.0	299.7
47.5°	282.8	282.9	282.8	284.2	282.8	282.9	282.8	282.0	280.5	279.9	278.4
50°	269.5	268.8	269.5	268.8	269.5	268.8	269.5	267.9	266.9	265.3	264.0
52.5°	255.3	255.5	255.0	254.9	255.0	255.5	255.3	253.2	252.7	252.2	250.1
55°	233.2	233.8	233.4	233.4	233.4	233.8	233.2	231.9	231.5	229.5	227.6
57.5°	210.2	210.8	211.2	209.7	211.2	210.8	210.2	210.0	209.7	207.8	205.7
60°	194.2	195.8	195.5	194.8	195.5	195.8	194.2	194.5	193.6	192.3	191.0
62.5°	179.5	180.1	180.0	179.9	180.0	180.1	179.5	178.1	177.6	176.3	175.0
65°	156.9	157.6	156.6	157.6	156.6	157.6	156.9	155.9	153.7	153.1	151.8
67.5°	132.5	132.8	133.5	133.9	133.5	132.8	132.5	132.9	131.5	130.3	130.0
70°	117.4	117.0	118.0	119.0	118.0	117.0	117.4	116.8	115.7	114.8	113.5
72.5°	101.4	102.1	101.8	102.5	101.8	102.1	101.4	101.5	100.6	99.4	98.1
75°	78.2	79.1	78.8	79.7	78.8	79.1	78.2	78.8	78.2	76.9	75.6
77.5°	56.5	56.6	56.5	57.0	56.5	56.6	56.5	57.0	56.3	56.7	55.3
80°	43.0	42.4	41.8	43.0	41.8	42.4	43.0	43.0	42.1	43.0	42.1
82.5°	30.0	30.4	29.7	29.7	29.7	30.4	30.0	30.7	30.3	30.7	29.8
85°	13.9	13.5	12.8	12.8	12.8	13.5	13.9	13.9	14.8	14.1	14.1
87.5°	4.0	3.8	3.8	3.5	3.8	3.8	4.0	4.0	4.0	4.4	4.3
90°	7.1	7.2	7.4	7.5	7.4	7.2	7.1	7.1	6.8	6.5	6.2
92.5°	7.3	7.4	7.4	7.5	7.4	7.4	7.3	7.2	7.1	7.0	6.8
95°	12.1	12.1	12.1	12.0	12.1	12.1	12.1	12.2	12.1	11.8	11.5
97.5°	15.8	15.8	15.9	16.0	15.9	15.8	15.8	15.7	15.5	15.2	15.1
100°	18.3	18.4	18.5	18.7	18.5	18.4	18.3	18.2	17.8	17.4	16.9
102.5°	19.5	19.6	19.8	20.0	19.8	19.6	19.5	19.3	18.9	18.3	17.6
105°	20.4	20.7	20.9	21.2	20.9	20.7	20.4	20.1	19.7	19.0	18.3
107.5°	21.0	21.3	21.5	21.8	21.5	21.3	21.0	20.8	21.0	21.7	22.4
110°	21.3	21.5	21.8	22.0	21.8	21.5	21.3	21.0	23.9	30.1	36.3



TEST NUMBER: P331285-935

CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	21.6	21.8	22.0	22.2	22.0	21.8	21.6	21.4	32.6	55.2	77.7
115°	36.2	31.8	27.3	22.8	27.3	31.8	36.2	40.6	57.2	85.8	114.5
117.5°	137.2	122.5	107.9	93.2	107.9	122.5	137.2	151.8	162.6	169.4	176.4
120°	194.8	186.5	178.1	169.8	178.1	186.5	194.8	203.2	207.0	206.3	205.5
122.5°	216.8	215.2	213.5	211.9	213.5	215.2	216.8	218.3	219.0	218.5	218.1
125°	237.5	237.6	237.8	238.0	237.8	237.6	237.5	237.3	236.9	236.5	236.1
127.5°	254.4	254.4	254.4	254.5	254.4	254.4	254.4	254.3	254.0	253.4	252.8
130°	264.9	264.8	264.8	264.8	264.8	264.8	264.9	265.0	264.7	264.0	263.3
132.5°	274.9	274.9	274.8	274.7	274.8	274.9	274.9	275.0	274.7	274.1	273.6
135°	289.6	289.5	289.4	289.2	289.4	289.5	289.6	289.7	289.5	288.9	288.3
137.5°	303.1	302.9	302.6	302.5	302.6	302.9	303.1	303.2	303.1	302.5	301.9
140°	311.6	311.3	311.0	310.6	311.0	311.3	311.6	311.9	311.8	311.3	310.6
142.5°	319.6	319.3	319.0	318.7	319.0	319.3	319.6	319.9	319.9	319.3	318.8
145°	330.8	330.5	330.2	329.8	330.2	330.5	330.8	331.1	331.1	330.6	330.2
147.5°	340.5	340.3	340.0	339.8	340.0	340.3	340.5	340.8	340.8	340.4	340.1
150°	346.7	346.4	346.0	345.8	346.0	346.4	346.7	347.0	347.0	346.6	346.2
152.5°	352.1	351.7	351.3	350.9	351.3	351.7	352.1	352.5	352.5	352.1	351.8
155°	359.5	359.0	358.5	358.0	358.5	359.0	359.5	360.0	360.1	359.6	359.3
157.5°	365.9	365.5	365.0	364.5	365.0	365.5	365.9	366.4	366.4	366.1	365.7
160°	369.6	369.2	368.8	368.3	368.8	369.2	369.6	370.1	370.1	369.7	369.4
162.5°	373.0	372.5	372.0	371.4	372.0	372.5	373.0	373.6	373.6	373.2	372.7
165°	377.4	376.9	376.5	376.1	376.5	376.9	377.4	377.8	377.8	377.4	376.9
167.5°	380.7	380.1	379.6	379.0	379.6	380.1	380.7	381.3	381.3	380.9	380.5
170°	382.5	381.9	381.4	380.8	381.4	381.9	382.5	383.1	383.1	382.7	382.3
172.5°	383.8	383.3	382.7	382.2	382.7	383.3	383.8	384.4	384.4	384.0	383.6
175°	385.2	384.6	383.9	383.3	383.9	384.6	385.2	385.8	385.9	385.5	385.0
177.5°	385.4	385.0	384.5	384.1	384.5	385.0	385.4	385.8	385.9	385.6	385.2
180°	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7



TEST NUMBER: P331285-935

CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6
2.5°	804.0	806.8	811.2	815.8	818.6	824.1	825.6	828.2	830.5	835.9	841.5
5°	757.6	762.1	772.7	778.4	786.5	795.8	801.9	808.4	815.5	827.7	839.0
7.5°	707.8	715.3	728.5	739.3	750.8	764.1	773.8	786.5	797.0	814.2	830.8
10°	674.6	685.2	697.2	710.0	726.1	740.2	753.7	769.8	782.6	803.2	822.5
12.5°	644.8	646.4	663.4	677.6	699.6	717.0	732.6	753.3	765.9	790.4	810.7
15°	592.6	602.3	617.7	629.0	655.0	677.2	699.0	720.6	735.0	765.3	791.9
17.5°	548.7	557.6	573.4	591.9	610.5	632.6	660.9	683.6	703.3	737.8	769.4
20°	520.9	531.8	547.9	566.9	583.3	607.4	631.8	657.9	679.1	718.0	755.0
22.5°	497.2	505.8	518.8	537.5	555.5	577.6	604.3	632.7	655.0	696.9	734.4
25°	464.0	471.1	479.4	494.9	515.1	539.2	560.2	591.3	623.8	663.1	708.3
27.5°	434.0	439.0	446.4	460.0	475.7	498.3	521.5	551.0	583.8	626.3	674.2
30°	415.8	419.0	426.4	437.6	453.1	470.7	494.2	522.5	555.9	599.1	646.6
32.5°	399.8	402.8	407.6	418.4	431.7	446.9	468.0	496.3	528.1	570.5	623.2
35°	375.9	378.2	382.3	391.0	398.4	413.2	430.8	456.6	486.5	527.0	581.7
37.5°	352.1	355.1	357.7	361.4	370.8	380.6	396.0	417.7	447.0	487.9	540.0
40°	336.3	338.9	342.8	344.4	352.1	360.8	373.3	393.2	422.8	460.1	510.9
42.5°	320.4	323.0	325.3	327.2	333.8	341.5	352.8	369.9	396.1	432.4	482.7
45°	298.7	299.0	301.3	304.8	308.1	313.5	321.6	336.3	356.6	390.7	436.4
47.5°	276.7	277.1	277.5	279.1	282.6	287.5	292.8	304.9	323.0	350.3	394.7
50°	262.1	261.4	262.1	263.4	265.6	269.8	275.9	284.6	299.4	324.8	365.6
52.5°	247.9	247.8	247.4	247.9	249.7	252.5	256.8	264.2	277.5	300.8	336.8
55°	226.4	224.7	225.1	223.8	226.7	227.3	230.6	236.7	248.2	264.3	298.1
57.5°	203.4	202.1	200.6	200.3	200.0	201.7	204.3	209.1	218.0	232.1	259.5
60°	188.7	187.2	185.2	184.6	184.6	185.5	186.8	190.4	198.7	211.3	233.8
62.5°	173.8	171.9	170.8	169.1	168.6	169.6	170.9	173.4	179.4	191.2	210.6
65°	150.8	148.5	147.0	146.6	146.0	145.0	145.7	148.3	153.1	162.4	177.8
67.5°	127.7	125.6	125.2	123.4	122.4	122.6	122.4	124.7	127.5	135.5	147.1
70°	112.5	110.9	110.3	108.7	108.1	107.4	106.8	108.7	111.6	118.3	128.3
72.5°	97.1	95.7	94.4	93.0	93.2	92.5	92.4	93.5	95.9	102.1	109.8
75°	74.9	75.3	73.6	72.1	71.7	71.0	71.0	72.1	73.0	77.8	83.9
77.5°	54.3	54.1	52.7	52.2	51.9	51.2	51.9	52.5	53.0	56.3	60.8
80°	41.5	41.5	39.9	39.9	39.5	38.6	39.5	38.9	40.2	43.4	46.7
82.5°	29.6	29.1	29.1	28.6	28.5	27.8	28.2	28.8	29.4	31.6	33.5
85°	14.5	14.5	14.1	13.9	14.1	13.9	14.1	14.5	14.8	15.8	17.4
87.5°	4.3	4.5	4.6	4.7	4.6	4.8	5.0	5.1	5.5	5.6	5.7
90°	5.9	5.6	5.1	4.6	4.0	3.6	3.0	2.3	1.6	0.9	0.3
92.5°	6.6	6.5	6.2	5.9	5.7	5.5	5.3	5.4	5.5	5.6	5.6
95°	11.2	10.8	10.4	10.0	9.6	9.1	9.9	12.0	14.0	16.0	18.1
97.5°	14.8	14.6	13.5	12.5	11.5	10.5	12.9	18.7	24.4	30.1	35.9
100°	16.4	15.8	14.8	13.8	12.7	11.6	15.4	23.8	32.3	40.8	49.2
102.5°	17.0	16.3	25.1	33.9	42.7	51.5	56.8	58.6	60.4	62.2	64.0
105°	17.7	17.0	33.8	50.8	67.7	84.6	92.0	90.2	88.3	86.4	84.6
107.5°	23.1	23.8	44.0	64.3	84.6	104.8	114.2	112.7	111.2	109.7	108.1
110°	42.5	48.7	66.6	84.5	102.4	120.2	128.5	127.3	126.0	124.6	123.3



TEST NUMBER: P331285-935

CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	100.3	122.9	127.3	131.7	136.1	140.5	142.2	141.0	139.9	138.7	137.6
115°	143.1	171.8	170.2	168.7	167.1	165.6	164.3	163.2	162.2	161.1	160.1
117.5°	183.3	190.3	189.2	188.1	187.1	186.0	184.9	183.7	182.5	181.3	180.2
120°	204.8	204.1	202.9	201.8	200.7	199.6	198.5	197.7	196.7	195.8	194.8
122.5°	217.7	217.2	216.0	214.7	213.5	212.3	211.3	210.3	209.3	208.4	207.3
125°	235.7	235.2	234.0	232.9	231.7	230.6	229.5	228.8	227.9	227.1	226.4
127.5°	252.1	251.5	250.6	249.8	248.8	248.0	247.1	246.2	245.3	244.4	243.5
130°	262.6	262.0	261.3	260.6	259.9	259.2	258.4	257.4	256.4	255.5	254.4
132.5°	273.0	272.4	271.7	271.0	270.4	269.7	269.0	268.1	267.3	266.4	265.6
135°	287.7	287.1	286.5	285.9	285.3	284.8	284.0	283.0	282.1	281.0	280.1
137.5°	301.3	300.7	300.1	299.4	298.8	298.2	297.5	296.8	296.1	295.4	294.7
140°	310.1	309.5	308.9	308.2	307.5	306.9	306.3	305.7	305.2	304.8	304.3
142.5°	318.3	317.8	317.0	316.2	315.5	314.7	314.1	313.7	313.1	312.7	312.3
145°	329.8	329.3	328.3	327.3	326.1	325.1	324.6	324.7	324.8	324.9	324.9
147.5°	339.8	339.5	338.5	337.4	336.3	335.3	334.9	335.1	335.4	335.6	335.9
150°	345.9	345.5	344.5	343.5	342.5	341.6	341.2	341.6	342.1	342.5	342.9
152.5°	351.4	351.0	350.1	349.1	348.2	347.2	347.1	347.5	348.0	348.5	349.0
155°	359.0	358.5	357.8	357.1	356.4	355.6	355.5	356.0	356.6	357.1	357.7
157.5°	365.2	364.8	364.3	363.8	363.3	362.7	362.7	363.2	363.6	364.1	364.5
160°	368.9	368.6	368.2	367.8	367.5	367.1	367.1	367.5	367.8	368.2	368.6
162.5°	372.4	372.0	371.6	371.3	370.9	370.7	370.7	371.0	371.4	371.8	372.1
165°	376.5	376.1	375.9	375.7	375.6	375.4	375.5	375.8	376.2	376.6	376.9
167.5°	380.0	379.6	379.4	379.3	379.1	378.9	379.0	379.4	379.8	380.1	380.5
170°	381.9	381.4	381.3	381.2	381.0	380.9	381.0	381.4	381.8	382.1	382.5
172.5°	383.1	382.7	382.6	382.5	382.4	382.2	382.4	382.7	383.1	383.5	383.8
175°	384.6	384.2	384.1	383.9	383.8	383.7	383.8	384.3	384.7	385.1	385.6
177.5°	384.9	384.5	384.4	384.4	384.4	384.4	384.4	384.8	385.1	385.5	385.8
180°	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7



TEST NUMBER: P331285-935
 CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6	836.6
2.5°	841.0	842.3	846.4	850.6	855.1	856.4	858.5	856.7	856.2	861.1	864.7
5°	843.4	849.2	860.5	870.7	879.4	885.5	892.0	894.6	899.4	906.1	914.5
7.5°	840.7	852.0	869.7	884.7	901.0	912.7	922.0	929.8	939.3	952.1	966.0
10°	837.7	852.7	874.3	892.6	912.6	927.6	940.2	952.4	966.6	984.3	1002.5
12.5°	832.0	849.9	876.8	898.5	924.1	939.0	955.9	982.2	997.5	1022.1	1047.8
15°	820.6	840.5	878.1	904.8	933.8	962.1	993.2	1018.3	1043.4	1057.9	1094.2
17.5°	803.7	832.9	874.6	905.8	942.5	987.1	1022.1	1050.6	1079.5	1102.9	1121.2
20°	790.1	821.9	869.4	906.8	950.5	998.4	1038.6	1067.6	1092.6	1112.2	1123.5
22.5°	772.8	812.9	859.2	902.9	958.7	1006.2	1048.4	1071.2	1092.1	1101.6	1106.0
25°	745.6	793.9	846.3	899.7	962.7	1012.9	1051.5	1065.3	1071.4	1062.0	1046.6
27.5°	716.4	770.2	831.5	893.6	960.3	1008.5	1036.1	1034.0	1023.6	993.4	969.3
30°	694.6	753.7	819.6	887.4	954.3	1001.3	1017.4	1001.3	977.8	944.1	909.6
32.5°	671.7	732.9	807.0	878.7	943.6	984.8	988.3	960.6	924.3	886.0	843.0
35°	637.0	703.3	783.3	859.2	920.6	946.7	931.2	882.4	839.2	786.9	728.3
37.5°	597.8	671.0	751.2	830.5	886.2	893.0	854.7	803.2	742.4	680.9	612.0
40°	568.5	646.0	728.7	808.7	857.9	850.8	801.9	745.4	673.0	597.8	533.7
42.5°	542.3	619.7	704.0	782.5	821.9	802.5	745.4	675.9	598.1	527.3	468.7
45°	496.8	576.5	662.7	738.6	761.1	726.1	650.5	573.3	496.8	437.6	391.3
47.5°	452.7	531.5	616.8	683.5	691.6	644.4	561.8	482.4	416.6	368.4	335.8
50°	420.3	499.4	583.9	643.4	640.8	583.9	499.0	423.4	368.5	329.6	307.7
52.5°	391.2	465.9	547.2	601.2	587.6	525.6	444.5	377.5	332.3	301.8	282.0
55°	345.9	415.1	492.3	535.7	510.7	441.8	373.3	319.3	285.9	263.0	247.6
57.5°	301.1	365.9	432.0	458.7	431.0	367.5	310.4	271.2	246.1	229.1	219.1
60°	273.3	329.9	388.7	411.9	378.8	322.2	277.2	242.1	221.9	208.0	199.1
62.5°	245.6	296.2	351.7	364.3	334.0	286.2	246.3	217.1	200.5	188.2	179.8
65°	207.8	249.2	291.4	299.7	271.7	234.7	203.2	184.3	169.4	160.5	153.7
67.5°	170.4	203.6	233.5	240.2	215.8	190.1	167.3	150.8	140.8	133.3	127.6
70°	148.3	174.6	199.1	204.5	184.9	162.0	144.7	131.5	122.5	116.1	110.6
72.5°	124.8	146.8	167.1	170.8	154.8	137.3	123.1	112.7	104.8	100.7	95.4
75°	95.5	108.4	124.2	125.1	114.5	103.8	92.9	86.2	82.0	76.9	74.3
77.5°	67.4	77.5	86.5	88.3	82.0	74.7	68.6	63.3	59.8	57.3	55.0
80°	51.5	59.5	63.4	65.6	61.1	56.0	52.4	48.9	46.7	45.0	43.4
82.5°	36.8	41.8	45.4	47.1	44.6	41.6	38.0	36.0	34.3	32.9	32.4
85°	18.7	20.9	23.2	23.8	23.2	21.9	20.0	20.0	18.9	18.7	18.7
87.5°	6.6	7.7	7.9	8.9	8.4	8.5	8.6	8.4	8.4	8.1	7.9
90°	0.9	1.6	2.3	3.0	3.6	4.0	4.6	5.1	5.6	5.9	6.2
92.5°	5.6	5.5	5.4	5.3	5.5	5.7	5.9	6.2	6.5	6.6	6.8
95°	16.0	14.0	12.0	9.9	9.1	9.6	10.0	10.4	10.8	11.2	11.5
97.5°	30.1	24.4	18.7	12.9	10.5	11.5	12.5	13.5	14.6	14.8	15.1
100°	40.8	32.3	23.8	15.4	11.6	12.7	13.8	14.8	15.8	16.4	16.9
102.5°	62.2	60.4	58.6	56.8	51.5	42.7	33.9	25.1	16.3	17.0	17.6
105°	86.4	88.3	90.2	92.0	84.6	67.7	50.8	33.8	17.0	17.7	18.3
107.5°	109.7	111.2	112.7	114.2	104.8	84.6	64.3	44.0	23.8	23.1	22.4
110°	124.6	126.0	127.3	128.5	120.2	102.4	84.5	66.6	48.7	42.5	36.3



TEST NUMBER: P331285-935

CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	138.7	139.9	141.0	142.2	140.5	136.1	131.7	127.3	122.9	100.3	77.7
115°	161.1	162.2	163.2	164.3	165.6	167.1	168.7	170.2	171.8	143.1	114.5
117.5°	181.3	182.5	183.7	184.9	186.0	187.1	188.1	189.2	190.3	183.3	176.4
120°	195.8	196.7	197.7	198.5	199.6	200.7	201.8	202.9	204.1	204.8	205.5
122.5°	208.4	209.3	210.3	211.3	212.3	213.5	214.7	216.0	217.2	217.7	218.1
125°	227.1	227.9	228.8	229.5	230.6	231.7	232.9	234.0	235.2	235.7	236.1
127.5°	244.4	245.3	246.2	247.1	248.0	248.8	249.8	250.6	251.5	252.1	252.8
130°	255.5	256.4	257.4	258.4	259.2	259.9	260.6	261.3	262.0	262.6	263.3
132.5°	266.4	267.3	268.1	269.0	269.7	270.4	271.0	271.7	272.4	273.0	273.6
135°	281.0	282.1	283.0	284.0	284.8	285.3	285.9	286.5	287.1	287.7	288.3
137.5°	295.4	296.1	296.8	297.5	298.2	298.8	299.4	300.1	300.7	301.3	301.9
140°	304.8	305.2	305.7	306.3	306.9	307.5	308.2	308.9	309.5	310.1	310.6
142.5°	312.7	313.1	313.7	314.1	314.7	315.5	316.2	317.0	317.8	318.3	318.8
145°	324.9	324.8	324.7	324.6	325.1	326.1	327.3	328.3	329.3	329.8	330.2
147.5°	335.6	335.4	335.1	334.9	335.3	336.3	337.4	338.5	339.5	339.8	340.1
150°	342.5	342.1	341.6	341.2	341.6	342.5	343.5	344.5	345.5	345.9	346.2
152.5°	348.5	348.0	347.5	347.1	347.2	348.2	349.1	350.1	351.0	351.4	351.8
155°	357.1	356.6	356.0	355.5	355.6	356.4	357.1	357.8	358.5	359.0	359.3
157.5°	364.1	363.6	363.2	362.7	362.7	363.3	363.8	364.3	364.8	365.2	365.7
160°	368.2	367.8	367.5	367.1	367.1	367.5	367.8	368.2	368.6	368.9	369.4
162.5°	371.8	371.4	371.0	370.7	370.7	370.9	371.3	371.6	372.0	372.4	372.7
165°	376.6	376.2	375.8	375.5	375.4	375.6	375.7	375.9	376.1	376.5	376.9
167.5°	380.1	379.8	379.4	379.0	378.9	379.1	379.3	379.4	379.6	380.0	380.5
170°	382.1	381.8	381.4	381.0	380.9	381.0	381.2	381.3	381.4	381.9	382.3
172.5°	383.5	383.1	382.7	382.4	382.2	382.4	382.5	382.6	382.7	383.1	383.6
175°	385.1	384.7	384.3	383.8	383.7	383.8	383.9	384.1	384.2	384.6	385.0
177.5°	385.5	385.1	384.8	384.4	384.4	384.4	384.4	384.4	384.5	384.9	385.2
180°	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7	384.7



TEST NUMBER: P331285-935
 CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	836.6	836.6	836.6	836.6	836.6	836.6	836.6
2.5°	867.8	871.4	871.4	871.9	876.0	875.6	875.3
5°	923.5	928.9	929.6	935.4	939.3	938.0	934.4
7.5°	976.0	986.2	993.9	998.2	1003.3	1006.4	1005.0
10°	1017.7	1032.5	1041.5	1047.6	1055.0	1060.5	1058.5
12.5°	1055.5	1073.2	1085.5	1096.0	1096.9	1104.0	1099.2
15°	1114.5	1133.2	1135.1	1142.8	1148.9	1148.2	1148.6
17.5°	1133.9	1140.0	1141.2	1141.3	1141.4	1139.2	1134.3
20°	1127.0	1124.8	1119.3	1115.2	1107.8	1106.7	1100.4
22.5°	1094.1	1086.9	1073.2	1064.2	1052.7	1049.6	1047.8
25°	1029.2	1013.5	991.6	970.8	964.9	953.7	956.9
27.5°	940.3	915.8	892.1	875.1	859.8	842.9	847.7
30°	877.8	850.2	816.7	791.0	774.6	758.5	755.6
32.5°	803.2	762.7	725.4	702.7	677.6	667.4	656.3
35°	674.6	635.1	598.1	566.3	547.9	533.7	520.9
37.5°	558.9	513.4	483.5	457.8	444.5	436.4	438.4
40°	487.2	447.3	425.4	405.8	393.6	387.8	389.1
42.5°	429.0	399.2	381.2	367.7	359.1	355.9	355.1
45°	363.0	346.3	331.5	323.8	319.6	316.1	313.8
47.5°	318.1	304.4	296.0	291.4	287.7	284.2	284.1
50°	291.0	282.0	276.2	271.4	268.5	265.9	268.2
52.5°	270.4	262.2	256.4	252.1	251.0	248.7	248.7
55°	239.9	233.4	229.3	225.4	223.5	222.2	220.6
57.5°	212.1	206.0	202.2	199.7	196.0	194.8	194.2
60°	192.3	187.4	183.6	180.4	178.7	176.2	176.2
62.5°	174.0	169.2	165.6	163.2	160.5	159.5	159.7
65°	147.6	143.7	140.2	137.6	137.0	135.1	135.7
67.5°	123.3	120.7	117.0	115.5	114.3	113.3	112.5
70°	107.1	104.5	102.5	100.7	99.7	99.7	99.7
72.5°	93.4	90.3	89.2	86.8	87.3	86.3	85.2
75°	72.3	70.4	69.5	68.4	66.9	66.9	66.9
77.5°	53.2	52.7	51.5	50.5	50.1	49.8	49.9
80°	41.2	40.8	40.2	40.2	39.5	39.3	38.6
82.5°	31.6	30.8	30.4	30.1	30.0	30.0	29.9
85°	18.0	17.4	17.4	17.7	17.0	17.0	17.4
87.5°	8.3	8.3	8.1	8.1	8.4	8.2	8.2
90°	6.5	6.8	7.1	7.1	7.2	7.4	7.5
92.5°	7.0	7.1	7.2	7.3	7.4	7.4	7.5
95°	11.8	12.1	12.2	12.1	12.1	12.1	12.0
97.5°	15.2	15.5	15.7	15.8	15.8	15.9	16.0
100°	17.4	17.8	18.2	18.3	18.4	18.5	18.7
102.5°	18.3	18.9	19.3	19.5	19.6	19.8	20.0
105°	19.0	19.7	20.1	20.4	20.7	20.9	21.2
107.5°	21.7	21.0	20.8	21.0	21.3	21.5	21.8
110°	30.1	23.9	21.0	21.3	21.5	21.8	22.0



TEST NUMBER: P331285-935

CATALOG NUMBER: SA2XXDIP-C485D330U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	55.2	32.6	21.4	21.6	21.8	22.0	22.2
115°	85.8	57.2	40.6	36.2	31.8	27.3	22.8
117.5°	169.4	162.6	151.8	137.2	122.5	107.9	93.2
120°	206.3	207.0	203.2	194.8	186.5	178.1	169.8
122.5°	218.5	219.0	218.3	216.8	215.2	213.5	211.9
125°	236.5	236.9	237.3	237.5	237.6	237.8	238.0
127.5°	253.4	254.0	254.3	254.4	254.4	254.4	254.5
130°	264.0	264.7	265.0	264.9	264.8	264.8	264.8
132.5°	274.1	274.7	275.0	274.9	274.9	274.8	274.7
135°	288.9	289.5	289.7	289.6	289.5	289.4	289.2
137.5°	302.5	303.1	303.2	303.1	302.9	302.6	302.5
140°	311.3	311.8	311.9	311.6	311.3	311.0	310.6
142.5°	319.3	319.9	319.9	319.6	319.3	319.0	318.7
145°	330.6	331.1	331.1	330.8	330.5	330.2	329.8
147.5°	340.4	340.8	340.8	340.5	340.3	340.0	339.8
150°	346.6	347.0	347.0	346.7	346.4	346.0	345.8
152.5°	352.1	352.5	352.5	352.1	351.7	351.3	350.9
155°	359.6	360.1	360.0	359.5	359.0	358.5	358.0
157.5°	366.1	366.4	366.4	365.9	365.5	365.0	364.5
160°	369.7	370.1	370.1	369.6	369.2	368.8	368.3
162.5°	373.2	373.6	373.6	373.0	372.5	372.0	371.4
165°	377.4	377.8	377.8	377.4	376.9	376.5	376.1
167.5°	380.9	381.3	381.3	380.7	380.1	379.6	379.0
170°	382.7	383.1	383.1	382.5	381.9	381.4	380.8
172.5°	384.0	384.4	384.4	383.8	383.3	382.7	382.2
175°	385.5	385.9	385.8	385.2	384.6	383.9	383.3
177.5°	385.6	385.9	385.8	385.4	385.0	384.5	384.1
180°	384.7	384.7	384.7	384.7	384.7	384.7	384.7

(END OF REPORT)