

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331666-935

Luminaire Tested: **SA2XXRDIP-C485D925U935-4F0-1E-UDD-F**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331666-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C485D925U935-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 925 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4648.8 lumens
Efficiency: N/A
Efficacy: 104.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 44.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331666-935
CATALOG NUMBER: SA2XXRDIP-C485D925U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

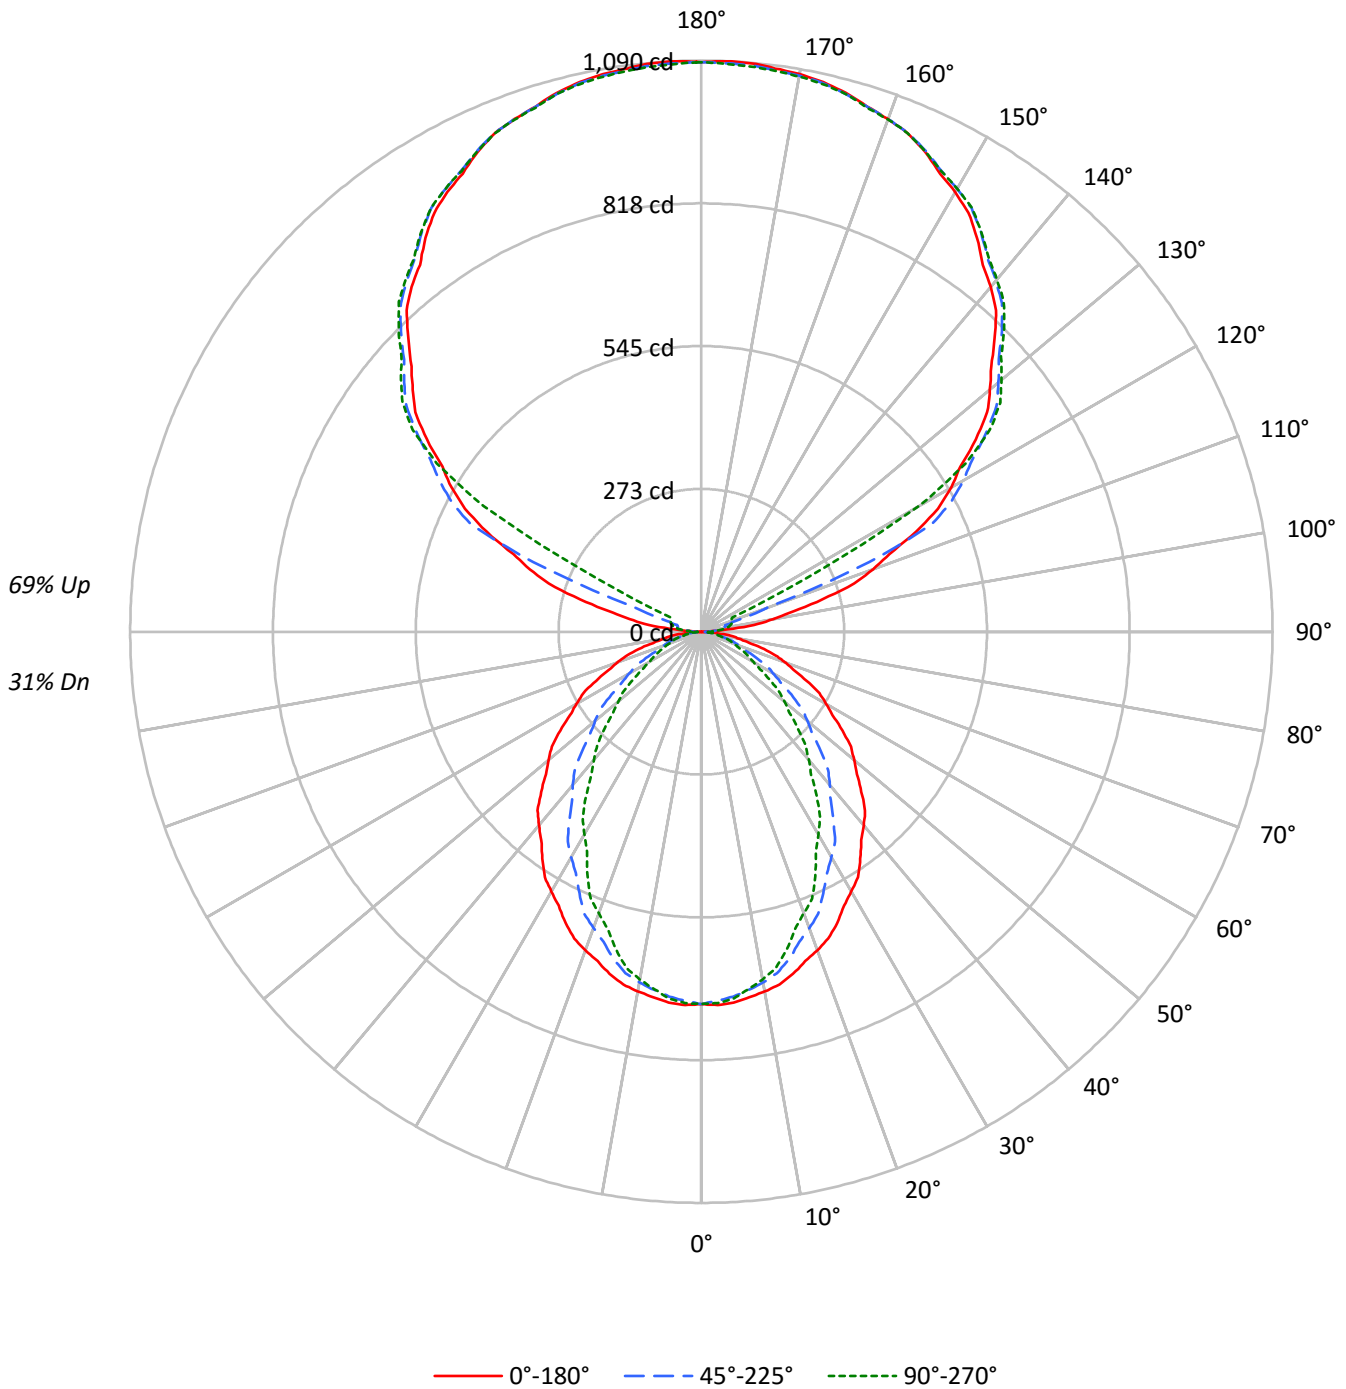



TEST NUMBER: P331666-935

CATALOG NUMBER: SA2XXRDIP-C485D925U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	103	103	103	103	92	92	92	92	73	73	73	55	55	55	39	39	39	31	31	31	20	
1	94	90	86	83	84	81	78	75	64	62	60	49	48	47	35	34	34	27	27	27	17	
2	86	79	73	68	77	71	66	62	57	53	50	43	41	39	31	30	29	23	23	23	15	
3	78	69	63	57	70	63	57	52	50	46	43	39	36	34	28	26	25	20	20	20	12	
4	72	62	54	48	64	56	49	44	45	40	37	35	31	29	25	23	22	17	17	17	10	
5	66	55	47	41	59	50	43	38	40	35	32	31	28	25	23	21	19	15	15	15	9	
6	61	49	42	36	54	45	38	33	36	31	28	28	25	22	21	19	17	14	14	14	8	
7	56	44	37	32	50	40	34	29	33	28	24	26	22	20	19	17	15	12	12	12	7	
8	52	40	33	28	47	37	30	26	30	25	22	23	20	18	17	15	14	11	11	11	6	
9	48	37	30	25	44	33	27	23	27	23	19	22	18	16	16	14	12	10	10	10	5	
10	45	34	27	22	41	31	25	21	25	21	17	20	17	14	15	13	11	9	9	9	4	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11472	11472	11472
5°	11515	11329	11391
10°	11429	11144	11049
15°	11296	10813	10502
20°	11115	10340	9821
25°	10929	9805	9164
30°	10670	9257	8321
35°	10419	8657	7579
40°	10163	8037	6721
45°	9866	7341	5948
50°	9560	6636	5184
55°	9250	5883	4453
60°	8887	5089	3694
65°	8478	4271	3366
70°	7983	3522	3097
75°	7380	3206	2888
80°	6518	2864	2631
85°	5113	2260	2260



TEST NUMBER: P331666-935

CATALOG NUMBER: SA2XXRDIP-C485D925U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.5	1.4
10°-20°	182.6	3.9
20°-30°	256.4	5.5
30°-40°	279.6	6.0
40°-50°	257.1	5.5
50°-60°	201.9	4.3
60°-70°	131.7	2.8
70°-80°	67.9	1.5
80°-90°	20.3	0.4
90°-100°	36.2	0.8
100°-110°	132.9	2.9
110°-120°	355.3	7.6
120°-130°	586.6	12.6
130°-140°	623.8	13.4
140°-150°	579.8	12.5
150°-160°	466.2	10.0
160°-170°	300.4	6.5
170°-180°	103.4	2.2
0°-30°	505.6	10.9
0°-40°	785.2	16.9
0°-60°	1244.3	26.8
0°-90°	1464.1	31.5
90°-120°	524.5	11.3
90°-150°	2314.7	49.8
90°-180°	3185.0	68.5
0°-180°	4648.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	710	710	710	710	710	
5°	710	707	699	704	703	67
15°	676	668	647	635	628	190
25°	614	592	550	525	514	282
35°	529	494	439	400	384	331
45°	432	388	322	278	260	334
55°	329	277	209	172	158	293
65°	222	169	112	91	88	220
75°	118	75	51	47	46	125
85°	28	15	12	12	12	33
90°	1	9	16	20	21	4
95°	51	27	31	34	34	63
105°	239	249	48	56	60	255
115°	452	466	485	138	64	445
125°	639	650	664	670	672	570
135°	791	803	811	818	817	611
145°	918	918	930	935	932	574
155°	1010	1004	1013	1017	1011	465
165°	1065	1060	1062	1067	1062	301
175°	1089	1084	1085	1090	1083	104
180°	1087	1087	1087	1087	1087	



TEST NUMBER: P331666-935

CATALOG NUMBER: SA2XXRDIP-C485D925U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	710.5	710.5	710.5	710.5	710.5	710.5	710.5	710.5	710.5	710.5	710.5
2.5°	713.1	712.6	712.0	711.4	710.8	709.9	708.7	707.4	706.1	704.9	706.0
5°	710.5	709.8	709.1	708.4	707.7	706.4	704.6	702.7	700.9	699.0	700.3
7.5°	703.2	702.3	701.5	700.5	699.6	698.1	695.9	693.8	691.6	689.5	689.8
10°	697.1	696.0	695.0	694.1	693.0	691.1	688.3	685.4	682.5	679.7	679.2
12.5°	689.3	688.1	686.8	685.6	684.4	682.0	678.3	674.7	671.0	667.4	666.6
15°	675.8	674.2	672.7	671.1	669.5	666.3	661.4	656.6	651.8	646.9	644.2
17.5°	659.3	656.9	654.4	652.0	649.6	645.3	639.1	632.8	626.6	620.4	617.2
20°	646.9	644.0	641.2	638.3	635.4	630.4	623.3	616.1	609.0	601.8	598.3
22.5°	633.5	630.3	627.1	623.9	620.7	615.1	607.0	598.9	590.9	582.8	578.2
25°	613.5	608.9	604.3	599.7	595.1	588.1	578.7	569.3	559.8	550.4	544.6
27.5°	589.3	584.3	579.3	574.4	569.4	561.5	551.0	540.3	529.7	519.0	512.2
30°	572.3	566.9	561.5	556.0	550.6	542.2	530.7	519.3	507.8	496.5	489.1
32.5°	555.9	549.5	543.1	536.8	530.5	521.4	509.8	498.1	486.5	474.8	466.5
35°	528.6	521.2	514.0	506.7	499.4	489.5	476.9	464.3	451.8	439.2	430.2
37.5°	501.3	493.3	485.3	477.3	469.3	458.6	445.2	431.8	418.4	405.0	395.0
40°	482.2	473.7	465.1	456.6	448.0	436.8	422.9	409.1	395.2	381.3	371.2
42.5°	462.7	453.7	444.6	435.7	426.6	414.9	400.6	386.2	372.0	357.7	347.2
45°	432.1	422.6	412.9	403.4	393.8	381.5	366.5	351.5	336.5	321.5	311.3
47.5°	402.3	392.1	382.0	371.9	361.7	348.9	333.4	317.9	302.4	286.9	276.8
50°	380.6	370.5	360.4	350.3	340.1	327.2	311.4	295.8	280.0	264.2	254.4
52.5°	359.6	349.0	338.4	327.8	317.2	304.2	288.8	273.5	258.0	242.7	233.2
55°	328.6	317.5	306.3	295.2	284.0	270.7	255.3	239.9	224.4	209.0	200.4
57.5°	296.8	285.4	274.0	262.5	251.1	238.0	223.2	208.3	193.5	178.7	170.7
60°	275.2	263.8	252.4	240.9	229.5	216.5	201.7	187.0	172.3	157.6	150.2
62.5°	254.1	242.7	231.3	219.8	208.4	195.7	181.7	167.6	153.6	139.6	132.6
65°	221.9	210.3	198.7	187.1	175.6	163.3	150.5	137.6	124.8	111.8	107.0
67.5°	190.7	179.3	167.7	156.3	144.7	133.2	121.7	110.1	98.5	87.0	84.7
70°	169.1	158.0	146.8	135.7	124.5	114.0	104.2	94.3	84.5	74.6	73.2
72.5°	148.5	137.8	127.2	116.5	105.8	96.5	88.6	80.7	72.8	64.8	63.6
75°	118.3	108.3	98.3	88.3	78.3	70.9	66.0	61.1	56.3	51.4	50.5
77.5°	88.6	79.8	71.0	62.3	53.6	48.0	45.6	43.3	40.9	38.6	38.0
80°	70.1	62.8	55.5	48.2	40.9	36.6	35.1	33.8	32.3	30.8	30.3
82.5°	53.1	47.4	41.8	36.1	30.4	27.0	26.1	25.1	24.1	23.2	22.8
85°	27.6	24.6	21.6	18.7	15.7	13.9	13.5	13.1	12.7	12.2	12.2
87.5°	8.4	7.8	7.3	6.8	6.3	6.1	6.5	6.7	7.0	7.2	7.3
90°	0.8	2.7	4.6	6.5	8.4	10.2	11.5	12.9	14.3	15.8	16.6
92.5°	15.8	15.7	15.5	15.3	15.2	15.4	16.2	16.9	17.6	18.3	18.7
95°	51.1	45.4	39.6	33.8	28.1	25.7	27.0	28.2	29.4	30.7	31.5
97.5°	101.4	85.2	69.0	52.7	36.4	29.7	32.5	35.4	38.2	41.1	41.8
100°	139.2	115.2	91.3	67.3	43.4	33.0	35.9	38.9	41.8	44.9	46.2
102.5°	180.7	175.6	170.6	165.5	160.4	145.5	120.6	95.7	70.9	46.1	47.9
105°	239.0	244.3	249.5	254.8	260.0	238.8	191.1	143.4	95.7	48.0	49.9
107.5°	305.6	309.8	314.0	318.2	322.5	296.0	238.8	181.6	124.3	67.2	65.2
110°	348.4	352.1	355.7	359.4	363.0	339.6	289.1	238.6	188.1	137.6	120.1



TEST NUMBER: P331666-935

CATALOG NUMBER: SA2XXRDIP-C485D925U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	388.6	391.8	395.1	398.4	401.6	397.0	384.5	372.0	359.6	347.1	283.4
115°	452.1	455.1	458.1	461.1	464.0	467.7	472.1	476.5	480.8	485.2	404.2
117.5°	508.9	512.2	515.6	518.9	522.2	525.4	528.4	531.4	534.4	537.4	517.8
120°	550.4	553.0	555.7	558.3	560.9	563.8	567.0	570.1	573.3	576.4	578.5
122.5°	585.7	588.4	591.2	593.9	596.7	599.8	603.2	606.7	610.1	613.5	614.8
125°	639.3	641.5	643.9	646.1	648.4	651.2	654.5	657.8	661.2	664.4	665.7
127.5°	687.9	690.4	692.9	695.4	697.9	700.4	702.9	705.4	707.9	710.4	712.1
130°	718.8	721.5	724.3	727.1	729.9	732.3	734.2	736.1	738.0	739.9	741.8
132.5°	750.2	752.5	754.9	757.3	759.7	761.8	763.8	765.7	767.6	769.5	771.2
135°	791.1	793.8	796.7	799.4	802.3	804.4	806.0	807.6	809.2	810.7	812.4
137.5°	832.4	834.4	836.4	838.3	840.2	842.1	843.9	845.7	847.5	849.3	850.9
140°	859.5	860.9	862.3	863.7	865.0	866.8	868.7	870.6	872.5	874.4	876.0
142.5°	882.1	883.4	884.7	885.9	887.2	888.9	891.0	893.3	895.5	897.7	899.1
145°	917.7	917.5	917.3	917.1	917.0	918.3	921.4	924.3	927.3	930.2	931.4
147.5°	948.6	948.0	947.4	946.7	946.0	947.1	950.0	953.0	956.0	958.9	959.8
150°	968.8	967.6	966.3	965.1	963.9	964.7	967.5	970.3	973.1	975.9	976.9
152.5°	985.8	984.4	983.0	981.7	980.3	980.9	983.6	986.3	988.9	991.6	992.6
155°	1010.5	1008.9	1007.3	1005.7	1004.2	1004.4	1006.5	1008.7	1010.7	1012.8	1013.8
157.5°	1029.8	1028.5	1027.2	1025.8	1024.5	1024.6	1026.1	1027.5	1029.0	1030.4	1031.7
160°	1041.1	1040.1	1039.1	1037.9	1036.9	1036.9	1037.9	1039.1	1040.1	1041.1	1042.2
162.5°	1051.2	1050.2	1049.1	1048.0	1047.0	1046.9	1047.8	1048.7	1049.6	1050.6	1051.7
165°	1064.7	1063.7	1062.6	1061.5	1060.5	1060.2	1060.8	1061.3	1061.9	1062.4	1063.6
167.5°	1074.8	1073.8	1072.7	1071.6	1070.6	1070.3	1070.8	1071.3	1071.8	1072.3	1073.5
170°	1080.5	1079.3	1078.3	1077.3	1076.2	1075.9	1076.2	1076.6	1076.9	1077.3	1078.5
172.5°	1084.2	1083.1	1082.1	1081.1	1080.0	1079.7	1080.0	1080.4	1080.7	1081.1	1082.3
175°	1089.1	1087.9	1086.7	1085.4	1084.2	1083.7	1084.1	1084.4	1084.8	1085.1	1086.4
177.5°	1089.9	1088.9	1088.0	1086.9	1086.0	1085.5	1085.7	1085.8	1086.0	1086.1	1087.1
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8



TEST NUMBER: P331666-935

CATALOG NUMBER: SA2XXRDIP-C485D925U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	710.5	710.5	710.5	710.5	710.5	710.5	710.5	710.5
2.5°	707.1	708.3	709.5	709.9	709.7	709.5	709.2	709.0
5°	701.5	702.8	704.1	704.6	704.1	703.7	703.3	702.8
7.5°	690.2	690.5	691.0	690.8	690.0	689.2	688.5	687.8
10°	678.8	678.4	678.0	677.3	676.5	675.6	674.8	673.9
12.5°	665.8	665.0	664.3	663.1	661.7	660.3	658.8	657.5
15°	641.4	638.8	636.0	634.0	632.5	631.1	629.6	628.3
17.5°	613.9	610.7	607.4	604.6	602.2	599.7	597.3	594.8
20°	594.7	591.2	587.5	584.2	581.1	577.9	574.8	571.6
22.5°	573.6	569.0	564.5	560.9	558.6	556.3	554.0	551.6
25°	538.7	532.9	527.0	523.0	520.8	518.7	516.6	514.4
27.5°	505.4	498.5	491.7	486.6	483.2	479.8	476.4	473.0
30°	481.8	474.6	467.3	461.7	457.8	454.0	450.1	446.3
32.5°	458.1	449.9	441.5	435.6	432.0	428.3	424.6	421.0
35°	421.2	412.2	403.2	397.1	394.0	390.8	387.7	384.5
37.5°	385.1	375.2	365.3	358.5	355.0	351.4	347.8	344.1
40°	361.0	350.9	340.7	333.8	330.1	326.4	322.6	318.9
42.5°	336.7	326.1	315.7	308.7	305.1	301.4	297.8	294.2
45°	301.2	291.1	280.9	274.1	270.7	267.3	263.8	260.5
47.5°	266.7	256.7	246.6	240.0	236.9	233.8	230.6	227.5
50°	244.5	234.7	224.8	218.4	215.4	212.4	209.4	206.4
52.5°	223.6	214.1	204.6	198.5	195.7	193.0	190.1	187.4
55°	191.8	183.2	174.7	169.0	166.3	163.6	160.9	158.2
57.5°	162.9	155.1	147.2	142.2	139.8	137.6	135.3	132.9
60°	142.9	135.7	128.4	123.6	121.3	119.0	116.8	114.4
62.5°	125.6	118.7	111.8	107.6	106.2	104.9	103.5	102.1
65°	102.2	97.3	92.5	89.8	89.4	88.9	88.5	88.1
67.5°	82.5	80.2	78.0	76.7	76.2	75.8	75.3	74.8
70°	71.7	70.3	68.9	67.8	67.3	66.7	66.1	65.6
72.5°	62.4	61.2	60.0	59.2	58.9	58.5	58.2	57.9
75°	49.4	48.5	47.4	46.8	46.8	46.6	46.4	46.3
77.5°	37.5	36.9	36.3	35.9	35.6	35.5	35.2	35.0
80°	29.7	29.2	28.6	28.3	28.3	28.3	28.3	28.3
82.5°	22.5	22.1	21.8	21.6	21.6	21.6	21.6	21.6
85°	12.2	12.2	12.2	12.2	12.2	12.2	12.2	12.2
87.5°	7.4	7.4	7.5	7.6	7.7	7.7	7.7	7.8
90°	17.5	18.3	19.2	19.8	20.1	20.5	20.9	21.3
92.5°	19.1	19.6	20.1	20.4	20.6	20.8	21.0	21.3
95°	32.4	33.3	34.2	34.5	34.4	34.2	34.0	33.8
97.5°	42.4	43.1	43.8	44.3	44.5	44.7	44.9	45.1
100°	47.6	49.0	50.5	51.3	51.7	52.0	52.3	52.7
102.5°	49.7	51.6	53.4	54.5	55.0	55.4	56.0	56.5
105°	51.8	53.7	55.6	57.0	57.7	58.4	59.1	59.8
107.5°	63.2	61.3	59.3	58.7	59.4	60.1	60.8	61.5
110°	102.6	85.2	67.7	59.3	60.0	60.7	61.4	62.2



TEST NUMBER: P331666-935

CATALOG NUMBER: SA2XXRDIP-C485D925U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	219.6	155.8	92.1	60.5	61.0	61.6	62.2	62.8
115°	323.4	242.5	161.5	114.8	102.2	89.6	77.1	64.5
117.5°	498.3	478.7	459.1	428.6	387.3	345.9	304.6	263.3
120°	580.6	582.7	584.8	574.0	550.4	526.8	503.3	479.7
122.5°	616.0	617.3	618.5	616.9	612.3	607.7	603.1	598.6
125°	666.9	668.1	669.3	670.2	670.7	671.2	671.8	672.4
127.5°	713.9	715.7	717.6	718.4	718.6	718.7	718.8	718.8
130°	743.8	745.7	747.6	748.6	748.4	748.1	748.0	747.8
132.5°	772.8	774.5	776.1	776.8	776.6	776.4	776.3	776.1
135°	814.2	816.0	817.7	818.4	818.0	817.7	817.3	817.0
137.5°	852.6	854.4	856.1	856.7	856.1	855.5	854.9	854.3
140°	877.5	879.2	880.7	881.1	880.2	879.3	878.5	877.5
142.5°	900.5	902.0	903.4	903.7	902.8	902.0	901.1	900.2
145°	932.7	933.9	935.1	935.3	934.4	933.6	932.7	931.9
147.5°	960.7	961.6	962.5	962.6	961.8	961.1	960.4	959.7
150°	977.9	979.0	980.1	980.2	979.3	978.4	977.5	976.6
152.5°	993.7	994.7	995.7	995.7	994.5	993.4	992.3	991.1
155°	1014.9	1016.0	1017.0	1016.8	1015.5	1014.0	1012.6	1011.2
157.5°	1032.8	1034.0	1035.2	1035.1	1033.7	1032.3	1031.0	1029.7
160°	1043.2	1044.3	1045.3	1045.3	1044.0	1042.8	1041.6	1040.3
162.5°	1052.9	1054.1	1055.3	1055.2	1053.7	1052.1	1050.7	1049.1
165°	1064.8	1066.0	1067.2	1067.2	1066.0	1064.8	1063.6	1062.4
167.5°	1074.7	1075.9	1077.2	1076.9	1075.4	1073.8	1072.3	1070.7
170°	1079.8	1081.0	1082.2	1082.0	1080.5	1078.8	1077.3	1075.7
172.5°	1083.5	1084.8	1086.0	1085.8	1084.2	1082.6	1081.1	1079.5
175°	1087.6	1088.8	1090.0	1089.8	1088.0	1086.3	1084.5	1082.8
177.5°	1088.0	1089.1	1090.0	1089.9	1088.6	1087.4	1086.1	1084.9
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8

(END OF REPORT)