

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331694-935

Luminaire Tested: **SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331694-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 925 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5037.1 lumens
Efficiency: N/A
Efficacy: 96.9 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 52
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331694-935
CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

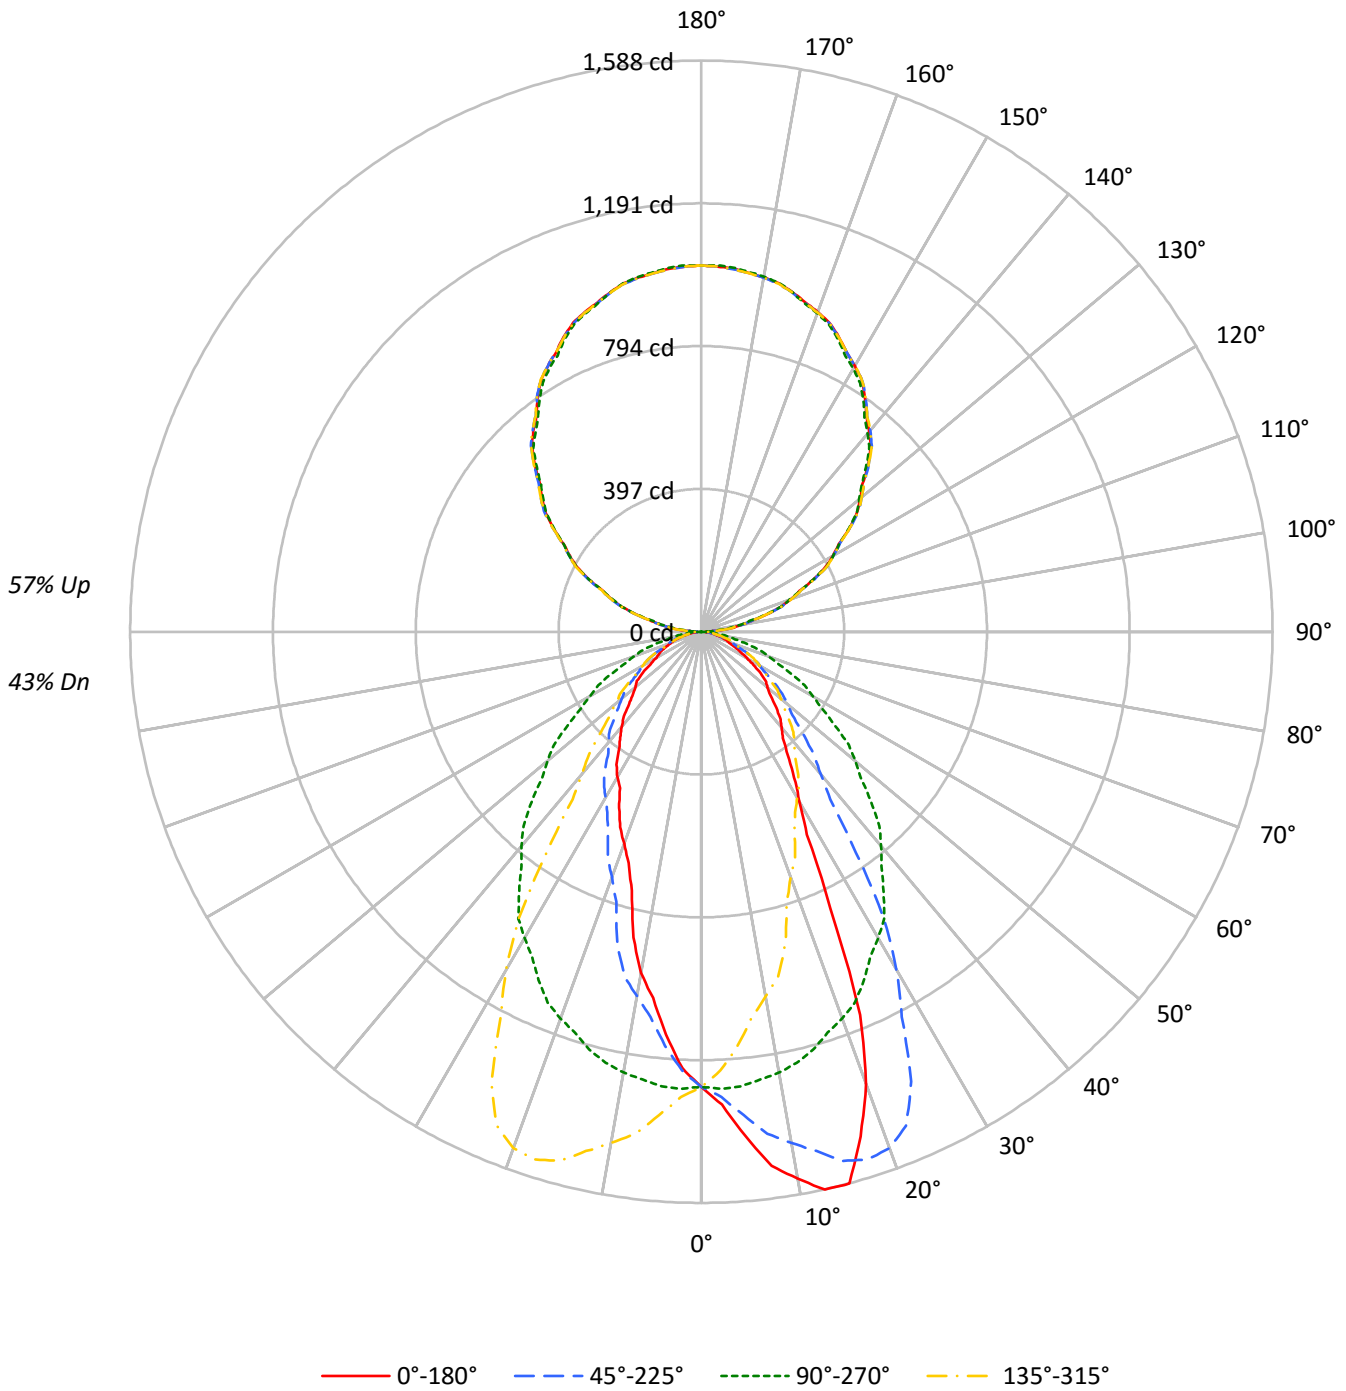



TEST NUMBER: P331694-935

CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	80	80	80	64	64	64	50	50	50	43				
1	97	93	89	86	89	85	82	79	71	69	67	58	56	55	45	44	44	38				
2	89	82	76	71	81	75	70	66	63	59	56	51	49	47	41	39	38	33				
3	82	73	66	60	74	67	61	56	56	52	48	46	43	40	37	35	33	29				
4	75	65	57	52	68	60	53	48	50	46	42	42	38	35	33	31	29	25				
5	69	58	50	45	63	54	47	42	45	40	37	38	34	31	30	28	26	23				
6	64	52	45	39	58	49	42	37	41	36	32	34	31	28	28	25	23	20				
7	59	48	40	35	54	44	37	33	38	33	29	32	28	25	26	23	21	18				
8	55	43	36	31	51	40	34	29	35	29	26	29	25	22	24	21	19	17				
9	51	40	33	28	47	37	31	26	32	27	23	27	23	20	22	19	17	15				
10	48	37	30	25	44	34	28	24	29	25	21	25	21	19	21	18	16	14				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	20423	20423	20423	20423
5°	22809	20551	18220	20551
10°	25306	20407	15795	20407
15°	26551	20107	12445	20107
20°	23017	19663	10768	19663
25°	15096	19057	9615	19057
30°	10161	18321	8701	18321
35°	8229	17394	7849	17394
40°	7318	16387	7263	16387
45°	6624	15203	6485	15203
50°	6028	14031	6006	14031
55°	5666	12732	5590	12732
60°	4740	11538	4682	11538
65°	3996	10476	4531	10476
70°	3696	9356	4277	9356
75°	3456	8141	3949	8141
80°	3189	6704	3515	6704
85°	2927	5298	3094	5298



TEST NUMBER: P331694-935

CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	119.9	2.4
10°-20°	334.1	6.6
20°-30°	430.5	8.5
30°-40°	409.1	8.1
40°-50°	350.5	7.0
50°-60°	266.9	5.3
60°-70°	168.7	3.3
70°-80°	84.3	1.7
80°-90°	26.0	0.5
90°-100°	64.5	1.3
100°-110°	200.4	4.0
110°-120°	342.5	6.8
120°-130°	450.4	8.9
130°-140°	505.6	10.0
140°-150°	495.7	9.8
150°-160°	415.8	8.3
160°-170°	275.8	5.5
170°-180°	96.4	1.9
0°-30°	884.5	17.6
0°-40°	1293.7	25.7
0°-60°	1911.1	37.9
0°-90°	2190.1	43.5
90°-120°	607.4	12.1
90°-150°	2059.1	40.9
90°-180°	2847.0	56.5
0°-180°	5037.1	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1265	1265	1265	1265	1265	
5°	1407	1268	1124	1268	1407	139
15°	1588	1203	744	1203	1588	428
25°	847	1070	540	1070	847	402
35°	418	882	398	882	418	267
45°	290	666	284	666	290	224
55°	201	452	199	452	201	177
65°	105	274	119	274	105	106
75°	55	130	63	130	55	59
85°	16	29	17	29	16	18
90°	29	1	29	1	29	13
95°	53	45	53	45	53	59
105°	191	185	191	185	191	201
115°	344	344	344	344	344	339
125°	502	500	502	500	502	447
135°	655	647	655	647	655	504
145°	794	785	794	785	794	496
155°	905	898	905	898	905	416
165°	978	977	978	977	978	276
175°	1013	1016	1013	1016	1013	96
180°	1018	1018	1018	1018	1018	



TEST NUMBER: P331694-935
 CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1316.2	1317.2	1318.4	1315.9	1315.9	1313.7	1309.2	1305.7	1295.8	1294.4	1294.4
5°	1407.3	1406.4	1408.2	1402.5	1394.6	1392.8	1384.4	1373.5	1362.0	1349.3	1346.6
7.5°	1497.8	1496.5	1493.0	1492.0	1485.9	1472.7	1459.2	1444.9	1425.9	1407.4	1398.1
10°	1543.5	1558.1	1549.2	1533.9	1537.0	1516.3	1505.3	1486.4	1470.6	1442.9	1436.8
12.5°	1588.5	1594.2	1591.5	1582.7	1578.7	1564.4	1549.6	1533.2	1504.0	1479.1	1457.5
15°	1588.4	1596.7	1598.9	1596.3	1598.4	1597.6	1589.7	1576.1	1550.6	1523.3	1499.6
17.5°	1471.1	1476.9	1491.3	1501.1	1513.4	1539.4	1552.2	1557.2	1553.4	1537.9	1521.2
20°	1339.6	1329.9	1370.4	1391.0	1408.6	1452.5	1490.3	1504.9	1528.1	1527.7	1523.3
22.5°	1153.2	1155.5	1193.9	1218.4	1269.7	1313.6	1356.8	1411.4	1456.4	1486.2	1503.7
25°	847.4	864.1	902.3	935.7	992.8	1074.6	1148.8	1235.0	1316.3	1380.4	1441.6
27.5°	636.4	637.7	668.0	698.8	732.7	799.7	893.2	996.1	1112.0	1207.6	1317.7
30°	545.0	542.3	555.1	574.0	603.0	654.9	725.1	826.3	941.8	1086.0	1214.4
32.5°	480.3	480.4	490.1	504.0	528.1	563.1	611.2	693.4	802.6	944.3	1094.8
35°	417.5	417.1	424.1	434.2	444.4	466.7	499.7	542.8	617.9	750.2	904.0
37.5°	372.6	374.4	377.9	384.2	395.4	407.9	427.7	456.6	510.1	588.3	717.6
40°	347.2	348.1	352.9	358.2	364.8	374.4	390.7	414.0	453.1	515.6	610.0
42.5°	324.0	324.9	328.3	333.2	338.4	348.1	361.5	381.7	413.4	462.1	540.0
45°	290.1	290.1	293.2	295.3	301.1	309.9	320.8	337.5	359.6	395.5	447.4
47.5°	258.2	258.3	260.4	264.2	267.8	274.6	285.4	299.0	315.0	342.9	387.2
50°	240.0	240.4	241.7	244.8	247.0	253.1	261.5	273.4	290.1	311.6	348.5
52.5°	225.2	224.9	226.6	227.9	229.5	233.8	240.0	250.6	265.4	284.2	314.8
55°	201.3	199.5	202.2	204.4	205.7	207.4	210.9	217.6	230.3	246.2	269.0
57.5°	171.4	170.7	172.5	174.6	178.7	183.5	186.4	190.6	197.3	208.6	231.3
60°	146.8	146.8	150.8	152.1	156.9	163.1	169.2	172.7	179.3	186.8	203.5
62.5°	125.0	125.4	127.2	128.5	131.2	138.8	147.4	155.2	161.4	168.5	179.6
65°	104.6	105.5	105.5	106.3	108.1	109.9	113.4	119.5	130.5	140.6	149.0
67.5°	88.8	89.0	89.3	90.1	90.7	92.6	93.9	96.7	99.3	108.8	119.2
70°	78.3	79.6	79.1	80.0	80.4	81.3	83.1	84.4	88.3	90.6	96.7
72.5°	68.4	69.3	69.2	69.8	70.9	71.1	72.5	73.9	76.4	78.3	81.5
75°	55.4	54.9	55.4	56.2	56.7	57.2	57.2	58.9	60.2	62.0	64.1
77.5°	42.7	43.1	43.0	43.1	43.2	44.0	43.9	44.8	46.1	46.9	48.0
80°	34.3	34.7	34.3	34.7	35.1	35.6	35.1	35.6	36.9	37.8	37.8
82.5°	26.5	26.6	26.9	26.9	27.0	27.1	27.8	27.9	28.8	28.7	29.0
85°	15.8	15.4	15.4	15.4	15.8	16.3	15.8	15.8	16.3	16.3	16.3
87.5°	11.5	11.8	11.7	11.7	11.7	11.7	11.8	12.2	11.9	12.3	11.2
90°	29.2	29.0	28.8	28.7	28.4	28.6	28.9	29.3	29.7	30.0	25.8
92.5°	27.8	27.8	27.7	27.7	27.7	27.6	27.6	27.5	27.4	27.3	26.3
95°	53.3	53.6	54.1	54.4	54.8	55.0	55.0	55.0	55.0	55.0	54.6
97.5°	92.3	92.3	92.4	92.4	92.5	92.5	92.5	92.5	92.5	92.5	91.7
100°	117.7	117.9	118.1	118.3	118.5	118.6	118.6	118.6	118.6	118.6	118.0
102.5°	146.6	146.8	147.0	147.1	147.3	147.4	147.2	147.1	146.9	146.8	146.0
105°	190.7	190.7	190.7	190.7	190.7	190.5	190.2	189.8	189.4	189.0	188.6
107.5°	232.3	233.2	234.1	235.0	235.8	236.2	236.1	235.9	235.7	235.6	235.6
110°	264.7	265.2	265.8	266.4	266.9	267.3	267.3	267.3	267.3	267.3	267.3



TEST NUMBER: P331694-935

CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	295.6	296.0	296.4	296.9	297.2	297.7	298.2	298.6	299.1	299.5	299.7
115°	343.7	344.2	344.8	345.4	345.9	346.4	346.6	346.7	347.0	347.2	347.5
117.5°	389.6	390.1	390.7	391.3	391.8	392.4	392.9	393.3	393.7	394.3	395.3
120°	421.9	422.5	423.0	423.6	424.2	424.5	424.5	424.5	424.5	424.5	426.0
122.5°	453.5	453.9	454.3	454.8	455.2	455.6	456.1	456.5	457.0	457.4	458.6
125°	501.8	502.0	502.1	502.4	502.6	502.9	503.5	504.1	504.6	505.2	505.8
127.5°	545.8	546.4	547.0	547.6	548.2	548.9	549.6	550.3	551.0	551.6	552.3
130°	577.4	578.2	578.9	579.7	580.5	581.0	581.4	581.8	582.2	582.6	583.0
132.5°	607.7	608.3	608.9	609.5	610.1	610.8	611.7	612.5	613.4	614.2	614.1
135°	654.7	655.3	655.9	656.4	657.0	657.4	657.6	657.8	658.0	658.1	657.8
137.5°	697.3	698.1	698.9	699.6	700.4	700.9	701.0	701.2	701.4	701.5	701.0
140°	726.9	727.7	728.4	729.2	730.0	730.4	730.4	730.4	730.4	730.4	729.4
142.5°	753.7	754.5	755.3	756.0	756.8	757.1	756.9	756.8	756.6	756.5	755.8
145°	793.9	794.7	795.5	796.3	797.0	797.3	797.1	796.9	796.7	796.5	795.4
147.5°	829.8	830.6	831.3	832.1	832.8	832.9	832.5	832.1	831.6	831.2	830.4
150°	853.3	853.8	854.4	855.0	855.5	855.5	855.0	854.4	853.8	853.3	852.5
152.5°	875.2	876.0	876.7	877.4	878.1	878.1	877.4	876.7	876.0	875.2	874.3
155°	904.7	905.3	905.9	906.5	907.1	906.9	905.9	905.0	904.0	903.0	902.5
157.5°	930.2	931.1	932.0	933.0	933.8	933.7	932.4	931.1	929.8	928.5	928.2
160°	946.0	946.8	947.5	948.3	949.1	948.9	947.7	946.6	945.5	944.3	944.1
162.5°	959.8	960.7	961.6	962.5	963.5	963.2	961.9	960.6	959.3	958.0	957.9
165°	977.8	978.8	979.7	980.7	981.6	981.5	980.1	978.8	977.4	976.1	976.1
167.5°	992.6	993.6	994.5	995.6	996.5	996.3	995.1	993.7	992.4	991.0	991.1
170°	1000.1	1001.3	1002.5	1003.6	1004.7	1004.6	1003.3	1001.9	1000.7	999.3	999.4
172.5°	1006.3	1007.5	1008.7	1009.8	1010.9	1010.8	1009.5	1008.1	1006.9	1005.5	1005.6
175°	1013.1	1014.2	1015.3	1016.5	1017.6	1017.5	1016.2	1014.9	1013.5	1012.2	1012.5
177.5°	1016.2	1017.0	1018.0	1018.9	1019.8	1019.8	1018.9	1018.0	1017.0	1016.2	1016.4
180°	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2



TEST NUMBER: P331694-935
 CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1295.1	1292.3	1289.9	1283.5	1280.4	1273.3	1272.3	1272.0	1262.7	1254.0	1251.5
5°	1339.6	1332.6	1322.0	1309.7	1296.9	1283.8	1275.0	1268.0	1250.3	1233.6	1224.0
7.5°	1384.4	1369.3	1351.1	1327.8	1308.4	1286.6	1270.4	1255.9	1231.0	1207.0	1190.9
10°	1417.8	1393.2	1369.1	1337.0	1311.9	1287.3	1264.5	1244.7	1216.5	1184.9	1162.4
12.5°	1438.6	1411.5	1378.2	1346.8	1314.4	1283.1	1252.5	1227.1	1194.0	1161.3	1134.7
15°	1466.6	1437.6	1397.1	1352.4	1310.6	1269.7	1234.6	1202.9	1159.9	1120.8	1088.2
17.5°	1489.5	1449.7	1406.2	1354.4	1306.1	1254.0	1208.8	1168.4	1120.4	1073.2	1034.9
20°	1496.9	1457.4	1407.3	1355.4	1298.3	1237.2	1188.4	1144.4	1093.0	1041.6	997.6
22.5°	1492.4	1461.6	1405.8	1343.8	1285.3	1221.3	1166.2	1115.3	1058.3	1005.7	954.8
25°	1461.4	1450.8	1398.1	1330.3	1263.6	1189.3	1125.6	1069.7	1004.7	948.5	893.0
27.5°	1389.0	1411.8	1379.1	1307.0	1232.7	1153.1	1081.4	1017.9	950.4	887.1	831.9
30°	1319.4	1371.7	1357.6	1290.8	1207.7	1129.5	1049.1	982.7	910.7	845.6	791.1
32.5°	1224.1	1310.5	1324.2	1268.3	1182.4	1096.5	1012.2	946.2	870.9	802.4	749.2
35°	1072.4	1201.6	1260.9	1225.3	1139.2	1046.5	959.4	882.5	806.9	739.3	686.5
37.5°	891.4	1067.4	1166.2	1168.8	1089.7	993.2	898.5	822.2	744.8	678.3	621.3
40°	774.0	964.7	1093.5	1122.1	1055.2	951.1	855.2	777.5	701.9	636.8	571.4
42.5°	668.5	858.5	1016.8	1066.5	1013.4	909.9	813.8	732.5	659.0	597.4	530.5
45°	540.6	706.7	881.2	970.0	940.6	844.7	743.2	665.8	596.8	543.6	479.5
47.5°	456.0	573.1	741.9	862.0	861.5	774.0	674.2	600.1	536.1	486.3	434.3
50°	407.9	509.8	652.6	788.9	800.3	726.9	632.0	558.6	498.9	446.5	404.8
52.5°	364.6	448.7	577.0	707.7	740.2	676.7	584.5	516.8	458.7	410.7	374.9
55°	308.1	373.2	470.7	592.9	642.1	597.3	515.6	452.3	405.2	364.8	334.0
57.5°	260.6	309.4	387.7	486.1	543.4	515.2	447.7	396.3	356.1	319.5	295.2
60°	230.7	270.7	337.1	419.3	482.6	462.8	405.2	357.3	323.0	291.4	268.5
62.5°	202.6	236.9	293.9	360.6	418.6	410.4	363.3	323.2	293.2	264.3	245.0
65°	163.1	188.1	232.5	284.8	331.4	335.4	301.5	274.2	247.5	224.5	207.4
67.5°	129.8	146.2	177.5	221.5	256.4	268.9	248.2	227.4	206.1	188.5	173.6
70°	109.4	122.6	145.5	181.1	213.2	226.4	214.5	198.2	179.8	165.2	152.5
72.5°	88.7	101.5	118.4	144.5	172.0	186.2	182.1	170.5	155.5	143.4	131.4
75°	66.8	70.8	82.2	99.8	121.3	133.6	136.7	130.5	118.6	109.4	102.4
77.5°	49.4	51.7	57.3	66.5	80.5	91.5	96.0	95.3	87.1	81.7	75.2
80°	39.5	40.9	43.5	47.4	58.0	69.0	72.1	72.1	66.4	64.1	57.6
82.5°	30.0	31.0	32.6	34.8	39.7	49.3	52.8	53.5	49.9	46.9	41.8
85°	17.1	16.7	17.6	18.9	19.8	22.4	27.7	28.6	27.7	24.2	22.8
87.5°	10.3	9.8	9.0	8.0	7.8	7.7	9.0	10.3	9.4	8.8	8.6
90°	21.7	17.5	13.3	10.0	7.7	5.4	3.2	0.9	3.2	5.4	7.7
92.5°	25.3	24.4	23.3	22.0	20.3	18.7	17.0	15.3	17.0	18.7	20.3
95°	54.2	53.8	53.5	52.3	50.4	48.5	46.6	44.7	46.6	48.5	50.4
97.5°	91.0	90.3	89.5	88.3	86.7	85.0	83.3	81.6	83.3	85.0	86.7
100°	117.4	116.8	116.3	115.2	113.7	112.2	110.6	109.1	110.6	112.2	113.7
102.5°	145.3	144.6	143.9	142.8	141.6	140.4	139.2	138.0	139.2	140.4	141.6
105°	188.3	187.9	187.5	187.0	186.5	185.9	185.3	184.8	185.3	185.9	186.5
107.5°	235.6	235.6	235.6	235.2	234.4	233.5	232.6	231.8	232.6	233.5	234.4
110°	267.3	267.3	267.3	266.7	265.5	264.3	263.2	262.1	263.2	264.3	265.5



TEST NUMBER: P331694-935

CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	299.8	300.0	300.1	299.6	298.5	297.4	296.2	295.1	296.2	297.4	298.5
115°	347.9	348.3	348.6	348.3	347.2	345.9	344.8	343.7	344.8	345.9	347.2
117.5°	396.3	397.4	398.5	398.3	396.7	395.2	393.6	392.2	393.6	395.2	396.7
120°	427.5	429.0	430.6	430.6	429.0	427.5	426.0	424.5	426.0	427.5	429.0
122.5°	459.6	460.6	461.8	461.3	459.5	457.7	455.8	454.0	455.8	457.7	459.5
125°	506.4	507.0	507.6	507.0	505.2	503.5	501.8	500.1	501.8	503.5	505.2
127.5°	553.0	553.7	554.4	553.6	551.5	549.3	547.1	544.9	547.1	549.3	551.5
130°	583.3	583.7	584.1	583.1	580.6	578.1	575.6	573.1	575.6	578.1	580.6
132.5°	614.1	614.0	613.9	612.9	610.8	608.8	606.7	604.8	606.7	608.8	610.8
135°	657.4	657.0	656.7	655.4	653.3	651.2	649.1	647.0	649.1	651.2	653.3
137.5°	700.5	700.0	699.5	698.4	696.6	694.9	693.2	691.6	693.2	694.9	696.6
140°	728.4	727.5	726.5	725.2	723.5	721.8	720.1	718.3	720.1	721.8	723.5
142.5°	755.2	754.5	753.9	752.7	751.0	749.2	747.5	745.8	747.5	749.2	751.0
145°	794.2	793.1	791.9	790.7	789.4	788.0	786.7	785.3	786.7	788.0	789.4
147.5°	829.7	829.0	828.2	827.0	825.4	823.8	822.2	820.5	822.2	823.8	825.4
150°	851.7	850.9	850.2	849.2	848.1	846.9	845.8	844.6	845.8	846.9	848.1
152.5°	873.4	872.5	871.6	870.6	869.4	868.2	867.1	865.9	867.1	868.2	869.4
155°	901.9	901.4	900.8	900.2	899.7	899.1	898.5	897.9	898.5	899.1	899.7
157.5°	927.8	927.5	927.1	926.8	926.3	926.0	925.6	925.2	925.6	926.0	926.3
160°	943.9	943.7	943.6	943.2	942.9	942.5	942.1	941.8	942.1	942.5	942.9
162.5°	957.7	957.5	957.3	957.2	957.1	957.0	956.9	956.8	956.9	957.0	957.1
165°	976.1	976.1	976.1	976.2	976.4	976.5	976.8	977.0	976.8	976.5	976.4
167.5°	991.1	991.2	991.2	991.5	992.0	992.6	993.2	993.8	993.2	992.6	992.0
170°	999.7	999.9	1000.1	1000.4	1001.0	1001.6	1002.1	1002.7	1002.1	1001.6	1001.0
172.5°	1005.8	1006.1	1006.3	1006.6	1007.2	1007.8	1008.3	1008.9	1008.3	1007.8	1007.2
175°	1013.0	1013.3	1013.7	1014.2	1014.8	1015.3	1015.9	1016.5	1015.9	1015.3	1014.8
177.5°	1016.8	1017.0	1017.4	1017.7	1018.2	1018.6	1019.1	1019.6	1019.1	1018.6	1018.2
180°	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2



TEST NUMBER: P331694-935

CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1247.0	1244.5	1239.9	1232.9	1228.6	1221.2	1216.3	1219.2	1219.9	1219.2	1218.5
5°	1213.5	1204.2	1191.5	1179.1	1167.8	1155.5	1148.4	1145.3	1139.2	1135.7	1133.9
7.5°	1172.9	1157.0	1139.0	1117.6	1099.3	1080.3	1070.6	1065.7	1053.1	1046.3	1040.3
10°	1142.7	1117.7	1099.7	1071.5	1054.4	1029.3	1012.2	1012.6	995.5	985.8	978.8
12.5°	1109.3	1081.8	1051.8	1026.5	1002.6	982.6	961.9	953.6	935.3	926.0	907.1
15°	1054.0	1021.8	990.2	955.9	931.8	900.5	870.6	834.1	804.7	779.2	772.2
17.5°	993.4	953.7	922.0	881.8	840.3	787.8	753.2	732.0	714.3	700.9	690.8
20°	951.9	911.5	877.7	817.0	761.2	725.7	700.2	683.9	665.4	650.9	643.0
22.5°	908.4	866.2	820.0	752.3	708.9	680.3	657.5	638.9	626.4	615.0	607.9
25°	846.4	800.3	724.3	677.7	642.6	612.7	596.8	585.4	572.2	556.8	549.8
27.5°	781.1	707.7	653.1	618.5	584.9	565.4	551.2	534.2	522.4	515.5	508.2
30°	732.2	658.8	616.2	578.4	554.7	533.1	516.4	506.8	495.3	483.5	478.6
32.5°	677.7	619.1	578.2	546.7	522.6	504.3	491.1	475.4	467.2	459.9	449.8
35°	610.0	565.7	528.3	502.8	479.9	465.0	449.6	440.4	425.4	419.3	415.3
37.5°	552.7	514.2	486.4	459.4	441.3	424.8	415.4	400.7	394.3	385.7	377.4
40°	520.4	482.6	455.7	433.8	413.5	401.2	389.4	377.5	367.8	363.9	353.8
42.5°	487.3	456.6	429.7	405.6	392.1	379.1	364.1	355.4	345.3	339.0	332.7
45°	441.7	414.5	391.6	371.8	356.9	343.3	333.6	319.1	313.4	300.6	295.3
47.5°	401.7	376.3	354.5	335.7	321.1	312.2	298.1	286.7	277.6	269.8	263.0
50°	373.2	352.1	331.0	314.3	301.1	288.3	273.8	268.1	254.0	250.0	246.2
52.5°	347.2	327.1	307.7	291.4	278.2	265.8	253.0	245.6	236.1	232.1	229.3
55°	310.7	291.4	272.9	258.4	245.2	232.5	224.5	215.3	210.9	207.8	204.4
57.5°	274.1	256.8	242.6	227.9	214.6	204.6	195.4	189.9	185.3	181.2	177.0
60°	251.0	234.3	221.5	207.8	194.2	185.9	178.9	172.3	167.0	160.8	159.1
62.5°	226.4	211.7	200.1	186.8	175.0	167.3	160.6	154.4	148.0	139.1	136.6
65°	192.5	181.1	168.8	157.8	147.2	139.7	130.1	123.0	120.5	119.5	119.1
67.5°	162.0	151.1	140.5	129.3	119.7	112.8	107.9	106.8	105.0	104.4	103.2
70°	141.5	131.4	120.9	110.3	101.1	99.8	98.0	96.3	94.0	93.2	92.3
72.5°	123.2	112.8	102.2	93.8	89.8	88.2	86.4	84.6	83.2	82.3	81.7
75°	94.5	84.8	77.8	74.7	72.5	71.2	68.5	67.2	66.4	65.0	64.6
77.5°	68.0	62.6	59.3	57.4	55.1	53.7	52.2	50.9	49.9	49.7	49.0
80°	51.8	49.2	47.0	44.4	43.5	41.8	41.3	40.0	40.5	39.1	39.1
82.5°	40.3	36.9	35.0	33.8	33.0	31.6	31.1	30.5	30.6	29.6	29.6
85°	20.7	19.8	18.9	18.0	18.0	16.7	17.1	16.7	16.7	15.8	15.4
87.5°	8.7	9.0	9.1	10.0	10.8	11.3	11.2	10.8	10.7	10.6	10.2
90°	10.0	13.3	17.5	21.7	25.8	30.0	29.7	29.3	28.9	28.6	28.4
92.5°	22.0	23.3	24.4	25.3	26.3	27.3	27.4	27.5	27.6	27.6	27.7
95°	52.3	53.5	53.8	54.2	54.6	55.0	55.0	55.0	55.0	55.0	54.8
97.5°	88.3	89.5	90.3	91.0	91.7	92.5	92.5	92.5	92.5	92.5	92.5
100°	115.2	116.3	116.8	117.4	118.0	118.6	118.6	118.6	118.6	118.6	118.5
102.5°	142.8	143.9	144.6	145.3	146.0	146.8	146.9	147.1	147.2	147.4	147.3
105°	187.0	187.5	187.9	188.3	188.6	189.0	189.4	189.8	190.2	190.5	190.7
107.5°	235.2	235.6	235.6	235.6	235.6	235.6	235.7	235.9	236.1	236.2	235.8
110°	266.7	267.3	267.3	267.3	267.3	267.3	267.3	267.3	267.3	267.3	266.9



TEST NUMBER: P331694-935

CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	299.6	300.1	300.0	299.8	299.7	299.5	299.1	298.6	298.2	297.7	297.2
115°	348.3	348.6	348.3	347.9	347.5	347.2	347.0	346.7	346.6	346.4	345.9
117.5°	398.3	398.5	397.4	396.3	395.3	394.3	393.7	393.3	392.9	392.4	391.8
120°	430.6	430.6	429.0	427.5	426.0	424.5	424.5	424.5	424.5	424.5	424.2
122.5°	461.3	461.8	460.6	459.6	458.6	457.4	457.0	456.5	456.1	455.6	455.2
125°	507.0	507.6	507.0	506.4	505.8	505.2	504.6	504.1	503.5	502.9	502.6
127.5°	553.6	554.4	553.7	553.0	552.3	551.6	551.0	550.3	549.6	548.9	548.2
130°	583.1	584.1	583.7	583.3	583.0	582.6	582.2	581.8	581.4	581.0	580.5
132.5°	612.9	613.9	614.0	614.1	614.1	614.2	613.4	612.5	611.7	610.8	610.1
135°	655.4	656.7	657.0	657.4	657.8	658.1	658.0	657.8	657.6	657.4	657.0
137.5°	698.4	699.5	700.0	700.5	701.0	701.5	701.4	701.2	701.0	700.9	700.4
140°	725.2	726.5	727.5	728.4	729.4	730.4	730.4	730.4	730.4	730.4	730.0
142.5°	752.7	753.9	754.5	755.2	755.8	756.5	756.6	756.8	756.9	757.1	756.8
145°	790.7	791.9	793.1	794.2	795.4	796.5	796.7	796.9	797.1	797.3	797.0
147.5°	827.0	828.2	829.0	829.7	830.4	831.2	831.6	832.1	832.5	832.9	832.8
150°	849.2	850.2	850.9	851.7	852.5	853.3	853.8	854.4	855.0	855.5	855.5
152.5°	870.6	871.6	872.5	873.4	874.3	875.2	876.0	876.7	877.4	878.1	878.1
155°	900.2	900.8	901.4	901.9	902.5	903.0	904.0	905.0	905.9	906.9	907.1
157.5°	926.8	927.1	927.5	927.8	928.2	928.5	929.8	931.1	932.4	933.7	933.8
160°	943.2	943.6	943.7	943.9	944.1	944.3	945.5	946.6	947.7	948.9	949.1
162.5°	957.2	957.3	957.5	957.7	957.9	958.0	959.3	960.6	961.9	963.2	963.5
165°	976.2	976.1	976.1	976.1	976.1	976.1	977.4	978.8	980.1	981.5	981.6
167.5°	991.5	991.2	991.2	991.1	991.1	991.0	992.4	993.7	995.1	996.3	996.5
170°	1000.4	1000.1	999.9	999.7	999.4	999.3	1000.7	1001.9	1003.3	1004.6	1004.7
172.5°	1006.6	1006.3	1006.1	1005.8	1005.6	1005.5	1006.9	1008.1	1009.5	1010.8	1010.9
175°	1014.2	1013.7	1013.3	1013.0	1012.5	1012.2	1013.5	1014.9	1016.2	1017.5	1017.6
177.5°	1017.7	1017.4	1017.0	1016.8	1016.4	1016.2	1017.0	1018.0	1018.9	1019.8	1019.8
180°	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2



TEST NUMBER: P331694-935

CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1214.6	1215.3	1214.3	1215.0	1214.3	1215.3	1214.6	1218.5	1219.2	1219.9	1219.2
5°	1131.7	1126.4	1125.6	1124.2	1125.6	1126.4	1131.7	1133.9	1135.7	1139.2	1145.3
7.5°	1032.8	1031.9	1029.8	1026.7	1029.8	1031.9	1032.8	1040.3	1046.3	1053.1	1065.7
10°	969.1	966.9	966.5	963.4	966.5	966.9	969.1	978.8	985.8	995.5	1012.6
12.5°	894.6	880.4	878.9	871.2	878.9	880.4	894.6	907.1	926.0	935.3	953.6
15°	761.6	759.1	750.2	744.5	750.2	759.1	761.6	772.2	779.2	804.7	834.1
17.5°	685.7	677.1	674.3	673.1	674.3	677.1	685.7	690.8	700.9	714.3	732.0
20°	636.8	629.0	627.6	626.7	627.6	629.0	636.8	643.0	650.9	665.4	683.9
22.5°	603.0	594.8	591.4	588.8	591.4	594.8	603.0	607.9	615.0	626.4	638.9
25°	545.4	542.3	540.6	539.7	540.6	542.3	545.4	549.8	556.8	572.2	585.4
27.5°	500.3	493.5	492.2	490.0	492.2	493.5	500.3	508.2	515.5	522.4	534.2
30°	474.7	472.4	469.4	466.7	469.4	472.4	474.7	478.6	483.5	495.3	506.8
32.5°	444.4	442.6	439.9	438.6	439.9	442.6	444.4	449.8	459.9	467.2	475.4
35°	411.0	404.8	402.2	398.2	402.2	404.8	411.0	415.3	419.3	425.4	440.4
37.5°	375.5	372.3	368.6	369.9	368.6	372.3	375.5	377.4	385.7	394.3	400.7
40°	348.1	345.9	345.0	344.6	345.0	345.9	348.1	353.8	363.9	367.8	377.5
42.5°	326.3	320.2	318.0	317.9	318.0	320.2	326.3	332.7	339.0	345.3	355.4
45°	293.2	287.4	283.4	284.0	283.4	287.4	293.2	295.3	300.6	313.4	319.1
47.5°	259.2	259.1	256.6	257.4	256.6	259.1	259.2	263.0	269.8	277.6	286.7
50°	243.1	240.4	238.7	239.1	238.7	240.4	243.1	246.2	250.0	254.0	268.1
52.5°	227.6	225.3	223.9	225.8	223.9	225.3	227.6	229.3	232.1	236.1	245.6
55°	202.2	199.5	199.1	198.6	199.1	199.5	202.2	204.4	207.8	210.9	215.3
57.5°	173.7	172.0	169.4	168.2	169.4	172.0	173.7	177.0	181.2	185.3	189.9
60°	153.3	149.9	145.5	145.0	145.5	149.9	153.3	159.1	160.8	167.0	172.3
62.5°	134.7	134.1	133.2	133.1	133.2	134.1	134.7	136.6	139.1	148.0	154.4
65°	118.2	117.8	118.2	118.6	118.2	117.8	118.2	119.1	119.5	120.5	123.0
67.5°	103.1	102.2	101.4	101.8	101.4	102.2	103.1	103.2	104.4	105.0	106.8
70°	91.4	91.0	90.6	90.6	90.6	91.0	91.4	92.3	93.2	94.0	96.3
72.5°	80.2	80.1	79.6	79.3	79.6	80.1	80.2	81.7	82.3	83.2	84.6
75°	64.1	63.3	63.3	63.3	63.3	63.3	64.1	64.6	65.0	66.4	67.2
77.5°	48.9	48.5	48.0	47.6	48.0	48.5	48.9	49.0	49.7	49.9	50.9
80°	38.7	38.2	37.8	37.8	37.8	38.2	38.7	39.1	39.1	40.5	40.0
82.5°	29.5	29.1	29.0	28.7	29.0	29.1	29.5	29.6	29.6	30.6	30.5
85°	15.8	16.3	15.8	16.7	15.8	16.3	15.8	15.4	15.8	16.7	16.7
87.5°	10.3	10.0	10.4	10.1	10.4	10.0	10.3	10.2	10.6	10.7	10.8
90°	28.7	28.8	29.0	29.2	29.0	28.8	28.7	28.4	28.6	28.9	29.3
92.5°	27.7	27.7	27.8	27.8	27.8	27.7	27.7	27.7	27.6	27.6	27.5
95°	54.4	54.1	53.6	53.3	53.6	54.1	54.4	54.8	55.0	55.0	55.0
97.5°	92.4	92.4	92.3	92.3	92.3	92.4	92.4	92.5	92.5	92.5	92.5
100°	118.3	118.1	117.9	117.7	117.9	118.1	118.3	118.5	118.6	118.6	118.6
102.5°	147.1	147.0	146.8	146.6	146.8	147.0	147.1	147.3	147.4	147.2	147.1
105°	190.7	190.7	190.7	190.7	190.7	190.7	190.7	190.7	190.5	190.2	189.8
107.5°	235.0	234.1	233.2	232.3	233.2	234.1	235.0	235.8	236.2	236.1	235.9
110°	266.4	265.8	265.2	264.7	265.2	265.8	266.4	266.9	267.3	267.3	267.3



TEST NUMBER: P331694-935

CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	296.9	296.4	296.0	295.6	296.0	296.4	296.9	297.2	297.7	298.2	298.6
115°	345.4	344.8	344.2	343.7	344.2	344.8	345.4	345.9	346.4	346.6	346.7
117.5°	391.3	390.7	390.1	389.6	390.1	390.7	391.3	391.8	392.4	392.9	393.3
120°	423.6	423.0	422.5	421.9	422.5	423.0	423.6	424.2	424.5	424.5	424.5
122.5°	454.8	454.3	453.9	453.5	453.9	454.3	454.8	455.2	455.6	456.1	456.5
125°	502.4	502.1	502.0	501.8	502.0	502.1	502.4	502.6	502.9	503.5	504.1
127.5°	547.6	547.0	546.4	545.8	546.4	547.0	547.6	548.2	548.9	549.6	550.3
130°	579.7	578.9	578.2	577.4	578.2	578.9	579.7	580.5	581.0	581.4	581.8
132.5°	609.5	608.9	608.3	607.7	608.3	608.9	609.5	610.1	610.8	611.7	612.5
135°	656.4	655.9	655.3	654.7	655.3	655.9	656.4	657.0	657.4	657.6	657.8
137.5°	699.6	698.9	698.1	697.3	698.1	698.9	699.6	700.4	700.9	701.0	701.2
140°	729.2	728.4	727.7	726.9	727.7	728.4	729.2	730.0	730.4	730.4	730.4
142.5°	756.0	755.3	754.5	753.7	754.5	755.3	756.0	756.8	757.1	756.9	756.8
145°	796.3	795.5	794.7	793.9	794.7	795.5	796.3	797.0	797.3	797.1	796.9
147.5°	832.1	831.3	830.6	829.8	830.6	831.3	832.1	832.8	832.9	832.5	832.1
150°	855.0	854.4	853.8	853.3	853.8	854.4	855.0	855.5	855.5	855.0	854.4
152.5°	877.4	876.7	876.0	875.2	876.0	876.7	877.4	878.1	878.1	877.4	876.7
155°	906.5	905.9	905.3	904.7	905.3	905.9	906.5	907.1	906.9	905.9	905.0
157.5°	933.0	932.0	931.1	930.2	931.1	932.0	933.0	933.8	933.7	932.4	931.1
160°	948.3	947.5	946.8	946.0	946.8	947.5	948.3	949.1	948.9	947.7	946.6
162.5°	962.5	961.6	960.7	959.8	960.7	961.6	962.5	963.5	963.2	961.9	960.6
165°	980.7	979.7	978.8	977.8	978.8	979.7	980.7	981.6	981.5	980.1	978.8
167.5°	995.6	994.5	993.6	992.6	993.6	994.5	995.6	996.5	996.3	995.1	993.7
170°	1003.6	1002.5	1001.3	1000.1	1001.3	1002.5	1003.6	1004.7	1004.6	1003.3	1001.9
172.5°	1009.8	1008.7	1007.5	1006.3	1007.5	1008.7	1009.8	1010.9	1010.8	1009.5	1008.1
175°	1016.5	1015.3	1014.2	1013.1	1014.2	1015.3	1016.5	1017.6	1017.5	1016.2	1014.9
177.5°	1018.9	1018.0	1017.0	1016.2	1017.0	1018.0	1018.9	1019.8	1019.8	1018.9	1018.0
180°	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2



TEST NUMBER: P331694-935

CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1216.3	1221.2	1228.6	1232.9	1239.9	1244.5	1247.0	1251.5	1254.0	1262.7	1272.0
5°	1148.4	1155.5	1167.8	1179.1	1191.5	1204.2	1213.5	1224.0	1233.6	1250.3	1268.0
7.5°	1070.6	1080.3	1099.3	1117.6	1139.0	1157.0	1172.9	1190.9	1207.0	1231.0	1255.9
10°	1012.2	1029.3	1054.4	1071.5	1099.7	1117.7	1142.7	1162.4	1184.9	1216.5	1244.7
12.5°	961.9	982.6	1002.6	1026.5	1051.8	1081.8	1109.3	1134.7	1161.3	1194.0	1227.1
15°	870.6	900.5	931.8	955.9	990.2	1021.8	1054.0	1088.2	1120.8	1159.9	1202.9
17.5°	753.2	787.8	840.3	881.8	922.0	953.7	993.4	1034.9	1073.2	1120.4	1168.4
20°	700.2	725.7	761.2	817.0	877.7	911.5	951.9	997.6	1041.6	1093.0	1144.4
22.5°	657.5	680.3	708.9	752.3	820.0	866.2	908.4	954.8	1005.7	1058.3	1115.3
25°	596.8	612.7	642.6	677.7	724.3	800.3	846.4	893.0	948.5	1004.7	1069.7
27.5°	551.2	565.4	584.9	618.5	653.1	707.7	781.1	831.9	887.1	950.4	1017.9
30°	516.4	533.1	554.7	578.4	616.2	658.8	732.2	791.1	845.6	910.7	982.7
32.5°	491.1	504.3	522.6	546.7	578.2	619.1	677.7	749.2	802.4	870.9	946.2
35°	449.6	465.0	479.9	502.8	528.3	565.7	610.0	686.5	739.3	806.9	882.5
37.5°	415.4	424.8	441.3	459.4	486.4	514.2	552.7	621.3	678.3	744.8	822.2
40°	389.4	401.2	413.5	433.8	455.7	482.6	520.4	571.4	636.8	701.9	777.5
42.5°	364.1	379.1	392.1	405.6	429.7	456.6	487.3	530.5	597.4	659.0	732.5
45°	333.6	343.3	356.9	371.8	391.6	414.5	441.7	479.5	543.6	596.8	665.8
47.5°	298.1	312.2	321.1	335.7	354.5	376.3	401.7	434.3	486.3	536.1	600.1
50°	273.8	288.3	301.1	314.3	331.0	352.1	373.2	404.8	446.5	498.9	558.6
52.5°	253.0	265.8	278.2	291.4	307.7	327.1	347.2	374.9	410.7	458.7	516.8
55°	224.5	232.5	245.2	258.4	272.9	291.4	310.7	334.0	364.8	405.2	452.3
57.5°	195.4	204.6	214.6	227.9	242.6	256.8	274.1	295.2	319.5	356.1	396.3
60°	178.9	185.9	194.2	207.8	221.5	234.3	251.0	268.5	291.4	323.0	357.3
62.5°	160.6	167.3	175.0	186.8	200.1	211.7	226.4	245.0	264.3	293.2	323.2
65°	130.1	139.7	147.2	157.8	168.8	181.1	192.5	207.4	224.5	247.5	274.2
67.5°	107.9	112.8	119.7	129.3	140.5	151.1	162.0	173.6	188.5	206.1	227.4
70°	98.0	99.8	101.1	110.3	120.9	131.4	141.5	152.5	165.2	179.8	198.2
72.5°	86.4	88.2	89.8	93.8	102.2	112.8	123.2	131.4	143.4	155.5	170.5
75°	68.5	71.2	72.5	74.7	77.8	84.8	94.5	102.4	109.4	118.6	130.5
77.5°	52.2	53.7	55.1	57.4	59.3	62.6	68.0	75.2	81.7	87.1	95.3
80°	41.3	41.8	43.5	44.4	47.0	49.2	51.8	57.6	64.1	66.4	72.1
82.5°	31.1	31.6	33.0	33.8	35.0	36.9	40.3	41.8	46.9	49.9	53.5
85°	17.1	16.7	18.0	18.0	18.9	19.8	20.7	22.8	24.2	27.7	28.6
87.5°	11.2	11.3	10.8	10.0	9.1	9.0	8.7	8.6	8.8	9.4	10.3
90°	29.7	30.0	25.8	21.7	17.5	13.3	10.0	7.7	5.4	3.2	0.9
92.5°	27.4	27.3	26.3	25.3	24.4	23.3	22.0	20.3	18.7	17.0	15.3
95°	55.0	55.0	54.6	54.2	53.8	53.5	52.3	50.4	48.5	46.6	44.7
97.5°	92.5	92.5	91.7	91.0	90.3	89.5	88.3	86.7	85.0	83.3	81.6
100°	118.6	118.6	118.0	117.4	116.8	116.3	115.2	113.7	112.2	110.6	109.1
102.5°	146.9	146.8	146.0	145.3	144.6	143.9	142.8	141.6	140.4	139.2	138.0
105°	189.4	189.0	188.6	188.3	187.9	187.5	187.0	186.5	185.9	185.3	184.8
107.5°	235.7	235.6	235.6	235.6	235.6	235.6	235.2	234.4	233.5	232.6	231.8
110°	267.3	267.3	267.3	267.3	267.3	267.3	266.7	265.5	264.3	263.2	262.1



TEST NUMBER: P331694-935

CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	299.1	299.5	299.7	299.8	300.0	300.1	299.6	298.5	297.4	296.2	295.1
115°	347.0	347.2	347.5	347.9	348.3	348.6	348.3	347.2	345.9	344.8	343.7
117.5°	393.7	394.3	395.3	396.3	397.4	398.5	398.3	396.7	395.2	393.6	392.2
120°	424.5	424.5	426.0	427.5	429.0	430.6	430.6	429.0	427.5	426.0	424.5
122.5°	457.0	457.4	458.6	459.6	460.6	461.8	461.3	459.5	457.7	455.8	454.0
125°	504.6	505.2	505.8	506.4	507.0	507.6	507.0	505.2	503.5	501.8	500.1
127.5°	551.0	551.6	552.3	553.0	553.7	554.4	553.6	551.5	549.3	547.1	544.9
130°	582.2	582.6	583.0	583.3	583.7	584.1	583.1	580.6	578.1	575.6	573.1
132.5°	613.4	614.2	614.1	614.1	614.0	613.9	612.9	610.8	608.8	606.7	604.8
135°	658.0	658.1	657.8	657.4	657.0	656.7	655.4	653.3	651.2	649.1	647.0
137.5°	701.4	701.5	701.0	700.5	700.0	699.5	698.4	696.6	694.9	693.2	691.6
140°	730.4	730.4	729.4	728.4	727.5	726.5	725.2	723.5	721.8	720.1	718.3
142.5°	756.6	756.5	755.8	755.2	754.5	753.9	752.7	751.0	749.2	747.5	745.8
145°	796.7	796.5	795.4	794.2	793.1	791.9	790.7	789.4	788.0	786.7	785.3
147.5°	831.6	831.2	830.4	829.7	829.0	828.2	827.0	825.4	823.8	822.2	820.5
150°	853.8	853.3	852.5	851.7	850.9	850.2	849.2	848.1	846.9	845.8	844.6
152.5°	876.0	875.2	874.3	873.4	872.5	871.6	870.6	869.4	868.2	867.1	865.9
155°	904.0	903.0	902.5	901.9	901.4	900.8	900.2	899.7	899.1	898.5	897.9
157.5°	929.8	928.5	928.2	927.8	927.5	927.1	926.8	926.3	926.0	925.6	925.2
160°	945.5	944.3	944.1	943.9	943.7	943.6	943.2	942.9	942.5	942.1	941.8
162.5°	959.3	958.0	957.9	957.7	957.5	957.3	957.2	957.1	957.0	956.9	956.8
165°	977.4	976.1	976.1	976.1	976.1	976.1	976.2	976.4	976.5	976.8	977.0
167.5°	992.4	991.0	991.1	991.1	991.2	991.2	991.5	992.0	992.6	993.2	993.8
170°	1000.7	999.3	999.4	999.7	999.9	1000.1	1000.4	1001.0	1001.6	1002.1	1002.7
172.5°	1006.9	1005.5	1005.6	1005.8	1006.1	1006.3	1006.6	1007.2	1007.8	1008.3	1008.9
175°	1013.5	1012.2	1012.5	1013.0	1013.3	1013.7	1014.2	1014.8	1015.3	1015.9	1016.5
177.5°	1017.0	1016.2	1016.4	1016.8	1017.0	1017.4	1017.7	1018.2	1018.6	1019.1	1019.6
180°	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2



TEST NUMBER: P331694-935

CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1272.3	1273.3	1280.4	1283.5	1289.9	1292.3	1295.1	1294.4	1294.4	1295.8	1305.7
5°	1275.0	1283.8	1296.9	1309.7	1322.0	1332.6	1339.6	1346.6	1349.3	1362.0	1373.5
7.5°	1270.4	1286.6	1308.4	1327.8	1351.1	1369.3	1384.4	1398.1	1407.4	1425.9	1444.9
10°	1264.5	1287.3	1311.9	1337.0	1369.1	1393.2	1417.8	1436.8	1442.9	1470.6	1486.4
12.5°	1252.5	1283.1	1314.4	1346.8	1378.2	1411.5	1438.6	1457.5	1479.1	1504.0	1533.2
15°	1234.6	1269.7	1310.6	1352.4	1397.1	1437.6	1466.6	1499.6	1523.3	1550.6	1576.1
17.5°	1208.8	1254.0	1306.1	1354.4	1406.2	1449.7	1489.5	1521.2	1537.9	1553.4	1557.2
20°	1188.4	1237.2	1298.3	1355.4	1407.3	1457.4	1496.9	1523.3	1527.7	1528.1	1504.9
22.5°	1166.2	1221.3	1285.3	1343.8	1405.8	1461.6	1492.4	1503.7	1486.2	1456.4	1411.4
25°	1125.6	1189.3	1263.6	1330.3	1398.1	1450.8	1461.4	1441.6	1380.4	1316.3	1235.0
27.5°	1081.4	1153.1	1232.7	1307.0	1379.1	1411.8	1389.0	1317.7	1207.6	1112.0	996.1
30°	1049.1	1129.5	1207.7	1290.8	1357.6	1371.7	1319.4	1214.4	1086.0	941.8	826.3
32.5°	1012.2	1096.5	1182.4	1268.3	1324.2	1310.5	1224.1	1094.8	944.3	802.6	693.4
35°	959.4	1046.5	1139.2	1225.3	1260.9	1201.6	1072.4	904.0	750.2	617.9	542.8
37.5°	898.5	993.2	1089.7	1168.8	1166.2	1067.4	891.4	717.6	588.3	510.1	456.6
40°	855.2	951.1	1055.2	1122.1	1093.5	964.7	774.0	610.0	515.6	453.1	414.0
42.5°	813.8	909.9	1013.4	1066.5	1016.8	858.5	668.5	540.0	462.1	413.4	381.7
45°	743.2	844.7	940.6	970.0	881.2	706.7	540.6	447.4	395.5	359.6	337.5
47.5°	674.2	774.0	861.5	862.0	741.9	573.1	456.0	387.2	342.9	315.0	299.0
50°	632.0	726.9	800.3	788.9	652.6	509.8	407.9	348.5	311.6	290.1	273.4
52.5°	584.5	676.7	740.2	707.7	577.0	448.7	364.6	314.8	284.2	265.4	250.6
55°	515.6	597.3	642.1	592.9	470.7	373.2	308.1	269.0	246.2	230.3	217.6
57.5°	447.7	515.2	543.4	486.1	387.7	309.4	260.6	231.3	208.6	197.3	190.6
60°	405.2	462.8	482.6	419.3	337.1	270.7	230.7	203.5	186.8	179.3	172.7
62.5°	363.3	410.4	418.6	360.6	293.9	236.9	202.6	179.6	168.5	161.4	155.2
65°	301.5	335.4	331.4	284.8	232.5	188.1	163.1	149.0	140.6	130.5	119.5
67.5°	248.2	268.9	256.4	221.5	177.5	146.2	129.8	119.2	108.8	99.3	96.7
70°	214.5	226.4	213.2	181.1	145.5	122.6	109.4	96.7	90.6	88.3	84.4
72.5°	182.1	186.2	172.0	144.5	118.4	101.5	88.7	81.5	78.3	76.4	73.9
75°	136.7	133.6	121.3	99.8	82.2	70.8	66.8	64.1	62.0	60.2	58.9
77.5°	96.0	91.5	80.5	66.5	57.3	51.7	49.4	48.0	46.9	46.1	44.8
80°	72.1	69.0	58.0	47.4	43.5	40.9	39.5	37.8	37.8	36.9	35.6
82.5°	52.8	49.3	39.7	34.8	32.6	31.0	30.0	29.0	28.7	28.8	27.9
85°	27.7	22.4	19.8	18.9	17.6	16.7	17.1	16.3	16.3	16.3	15.8
87.5°	9.0	7.7	7.8	8.0	9.0	9.8	10.3	11.2	12.3	11.9	12.2
90°	3.2	5.4	7.7	10.0	13.3	17.5	21.7	25.8	30.0	29.7	29.3
92.5°	17.0	18.7	20.3	22.0	23.3	24.4	25.3	26.3	27.3	27.4	27.5
95°	46.6	48.5	50.4	52.3	53.5	53.8	54.2	54.6	55.0	55.0	55.0
97.5°	83.3	85.0	86.7	88.3	89.5	90.3	91.0	91.7	92.5	92.5	92.5
100°	110.6	112.2	113.7	115.2	116.3	116.8	117.4	118.0	118.6	118.6	118.6
102.5°	139.2	140.4	141.6	142.8	143.9	144.6	145.3	146.0	146.8	146.9	147.1
105°	185.3	185.9	186.5	187.0	187.5	187.9	188.3	188.6	189.0	189.4	189.8
107.5°	232.6	233.5	234.4	235.2	235.6	235.6	235.6	235.6	235.6	235.7	235.9
110°	263.2	264.3	265.5	266.7	267.3	267.3	267.3	267.3	267.3	267.3	267.3



TEST NUMBER: P331694-935

CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	296.2	297.4	298.5	299.6	300.1	300.0	299.8	299.7	299.5	299.1	298.6
115°	344.8	345.9	347.2	348.3	348.6	348.3	347.9	347.5	347.2	347.0	346.7
117.5°	393.6	395.2	396.7	398.3	398.5	397.4	396.3	395.3	394.3	393.7	393.3
120°	426.0	427.5	429.0	430.6	430.6	429.0	427.5	426.0	424.5	424.5	424.5
122.5°	455.8	457.7	459.5	461.3	461.8	460.6	459.6	458.6	457.4	457.0	456.5
125°	501.8	503.5	505.2	507.0	507.6	507.0	506.4	505.8	505.2	504.6	504.1
127.5°	547.1	549.3	551.5	553.6	554.4	553.7	553.0	552.3	551.6	551.0	550.3
130°	575.6	578.1	580.6	583.1	584.1	583.7	583.3	583.0	582.6	582.2	581.8
132.5°	606.7	608.8	610.8	612.9	613.9	614.0	614.1	614.1	614.2	613.4	612.5
135°	649.1	651.2	653.3	655.4	656.7	657.0	657.4	657.8	658.1	658.0	657.8
137.5°	693.2	694.9	696.6	698.4	699.5	700.0	700.5	701.0	701.5	701.4	701.2
140°	720.1	721.8	723.5	725.2	726.5	727.5	728.4	729.4	730.4	730.4	730.4
142.5°	747.5	749.2	751.0	752.7	753.9	754.5	755.2	755.8	756.5	756.6	756.8
145°	786.7	788.0	789.4	790.7	791.9	793.1	794.2	795.4	796.5	796.7	796.9
147.5°	822.2	823.8	825.4	827.0	828.2	829.0	829.7	830.4	831.2	831.6	832.1
150°	845.8	846.9	848.1	849.2	850.2	850.9	851.7	852.5	853.3	853.8	854.4
152.5°	867.1	868.2	869.4	870.6	871.6	872.5	873.4	874.3	875.2	876.0	876.7
155°	898.5	899.1	899.7	900.2	900.8	901.4	901.9	902.5	903.0	904.0	905.0
157.5°	925.6	926.0	926.3	926.8	927.1	927.5	927.8	928.2	928.5	929.8	931.1
160°	942.1	942.5	942.9	943.2	943.6	943.7	943.9	944.1	944.3	945.5	946.6
162.5°	956.9	957.0	957.1	957.2	957.3	957.5	957.7	957.9	958.0	959.3	960.6
165°	976.8	976.5	976.4	976.2	976.1	976.1	976.1	976.1	976.1	977.4	978.8
167.5°	993.2	992.6	992.0	991.5	991.2	991.2	991.1	991.1	991.0	992.4	993.7
170°	1002.1	1001.6	1001.0	1000.4	1000.1	999.9	999.7	999.4	999.3	1000.7	1001.9
172.5°	1008.3	1007.8	1007.2	1006.6	1006.3	1006.1	1005.8	1005.6	1005.5	1006.9	1008.1
175°	1015.9	1015.3	1014.8	1014.2	1013.7	1013.3	1013.0	1012.5	1012.2	1013.5	1014.9
177.5°	1019.1	1018.6	1018.2	1017.7	1017.4	1017.0	1016.8	1016.4	1016.2	1017.0	1018.0
180°	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2



TEST NUMBER: P331694-935

CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1309.2	1313.7	1315.9	1315.9	1318.4	1317.2	1316.2
5°	1384.4	1392.8	1394.6	1402.5	1408.2	1406.4	1407.3
7.5°	1459.2	1472.7	1485.9	1492.0	1493.0	1496.5	1497.8
10°	1505.3	1516.3	1537.0	1533.9	1549.2	1558.1	1543.5
12.5°	1549.6	1564.4	1578.7	1582.7	1591.5	1594.2	1588.5
15°	1589.7	1597.6	1598.4	1596.3	1598.9	1596.7	1588.4
17.5°	1552.2	1539.4	1513.4	1501.1	1491.3	1476.9	1471.1
20°	1490.3	1452.5	1408.6	1391.0	1370.4	1329.9	1339.6
22.5°	1356.8	1313.6	1269.7	1218.4	1193.9	1155.5	1153.2
25°	1148.8	1074.6	992.8	935.7	902.3	864.1	847.4
27.5°	893.2	799.7	732.7	698.8	668.0	637.7	636.4
30°	725.1	654.9	603.0	574.0	555.1	542.3	545.0
32.5°	611.2	563.1	528.1	504.0	490.1	480.4	480.3
35°	499.7	466.7	444.4	434.2	424.1	417.1	417.5
37.5°	427.7	407.9	395.4	384.2	377.9	374.4	372.6
40°	390.7	374.4	364.8	358.2	352.9	348.1	347.2
42.5°	361.5	348.1	338.4	333.2	328.3	324.9	324.0
45°	320.8	309.9	301.1	295.3	293.2	290.1	290.1
47.5°	285.4	274.6	267.8	264.2	260.4	258.3	258.2
50°	261.5	253.1	247.0	244.8	241.7	240.4	240.0
52.5°	240.0	233.8	229.5	227.9	226.6	224.9	225.2
55°	210.9	207.4	205.7	204.4	202.2	199.5	201.3
57.5°	186.4	183.5	178.7	174.6	172.5	170.7	171.4
60°	169.2	163.1	156.9	152.1	150.8	146.8	146.8
62.5°	147.4	138.8	131.2	128.5	127.2	125.4	125.0
65°	113.4	109.9	108.1	106.3	105.5	105.5	104.6
67.5°	93.9	92.6	90.7	90.1	89.3	89.0	88.8
70°	83.1	81.3	80.4	80.0	79.1	79.6	78.3
72.5°	72.5	71.1	70.9	69.8	69.2	69.3	68.4
75°	57.2	57.2	56.7	56.2	55.4	54.9	55.4
77.5°	43.9	44.0	43.2	43.1	43.0	43.1	42.7
80°	35.1	35.6	35.1	34.7	34.3	34.7	34.3
82.5°	27.8	27.1	27.0	26.9	26.9	26.6	26.5
85°	15.8	16.3	15.8	15.4	15.4	15.4	15.8
87.5°	11.8	11.7	11.7	11.7	11.7	11.8	11.5
90°	28.9	28.6	28.4	28.7	28.8	29.0	29.2
92.5°	27.6	27.6	27.7	27.7	27.7	27.8	27.8
95°	55.0	55.0	54.8	54.4	54.1	53.6	53.3
97.5°	92.5	92.5	92.5	92.4	92.4	92.3	92.3
100°	118.6	118.6	118.5	118.3	118.1	117.9	117.7
102.5°	147.2	147.4	147.3	147.1	147.0	146.8	146.6
105°	190.2	190.5	190.7	190.7	190.7	190.7	190.7
107.5°	236.1	236.2	235.8	235.0	234.1	233.2	232.3
110°	267.3	267.3	266.9	266.4	265.8	265.2	264.7



TEST NUMBER: P331694-935

CATALOG NUMBER: SA2XXRDIP-C675D925U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	298.2	297.7	297.2	296.9	296.4	296.0	295.6
115°	346.6	346.4	345.9	345.4	344.8	344.2	343.7
117.5°	392.9	392.4	391.8	391.3	390.7	390.1	389.6
120°	424.5	424.5	424.2	423.6	423.0	422.5	421.9
122.5°	456.1	455.6	455.2	454.8	454.3	453.9	453.5
125°	503.5	502.9	502.6	502.4	502.1	502.0	501.8
127.5°	549.6	548.9	548.2	547.6	547.0	546.4	545.8
130°	581.4	581.0	580.5	579.7	578.9	578.2	577.4
132.5°	611.7	610.8	610.1	609.5	608.9	608.3	607.7
135°	657.6	657.4	657.0	656.4	655.9	655.3	654.7
137.5°	701.0	700.9	700.4	699.6	698.9	698.1	697.3
140°	730.4	730.4	730.0	729.2	728.4	727.7	726.9
142.5°	756.9	757.1	756.8	756.0	755.3	754.5	753.7
145°	797.1	797.3	797.0	796.3	795.5	794.7	793.9
147.5°	832.5	832.9	832.8	832.1	831.3	830.6	829.8
150°	855.0	855.5	855.5	855.0	854.4	853.8	853.3
152.5°	877.4	878.1	878.1	877.4	876.7	876.0	875.2
155°	905.9	906.9	907.1	906.5	905.9	905.3	904.7
157.5°	932.4	933.7	933.8	933.0	932.0	931.1	930.2
160°	947.7	948.9	949.1	948.3	947.5	946.8	946.0
162.5°	961.9	963.2	963.5	962.5	961.6	960.7	959.8
165°	980.1	981.5	981.6	980.7	979.7	978.8	977.8
167.5°	995.1	996.3	996.5	995.6	994.5	993.6	992.6
170°	1003.3	1004.6	1004.7	1003.6	1002.5	1001.3	1000.1
172.5°	1009.5	1010.8	1010.9	1009.8	1008.7	1007.5	1006.3
175°	1016.2	1017.5	1017.6	1016.5	1015.3	1014.2	1013.1
177.5°	1018.9	1019.8	1019.8	1018.9	1018.0	1017.0	1016.2
180°	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2

(END OF REPORT)