

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331723-935

Luminaire Tested: **SA2XXRDIP-C865D925U935-4F0-1E-UDD-A**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331723-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 925 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6028.8 lumens
Efficiency: N/A
Efficacy: 99.6 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 60.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331723-935
CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

Luminous Intensity Polar Plot

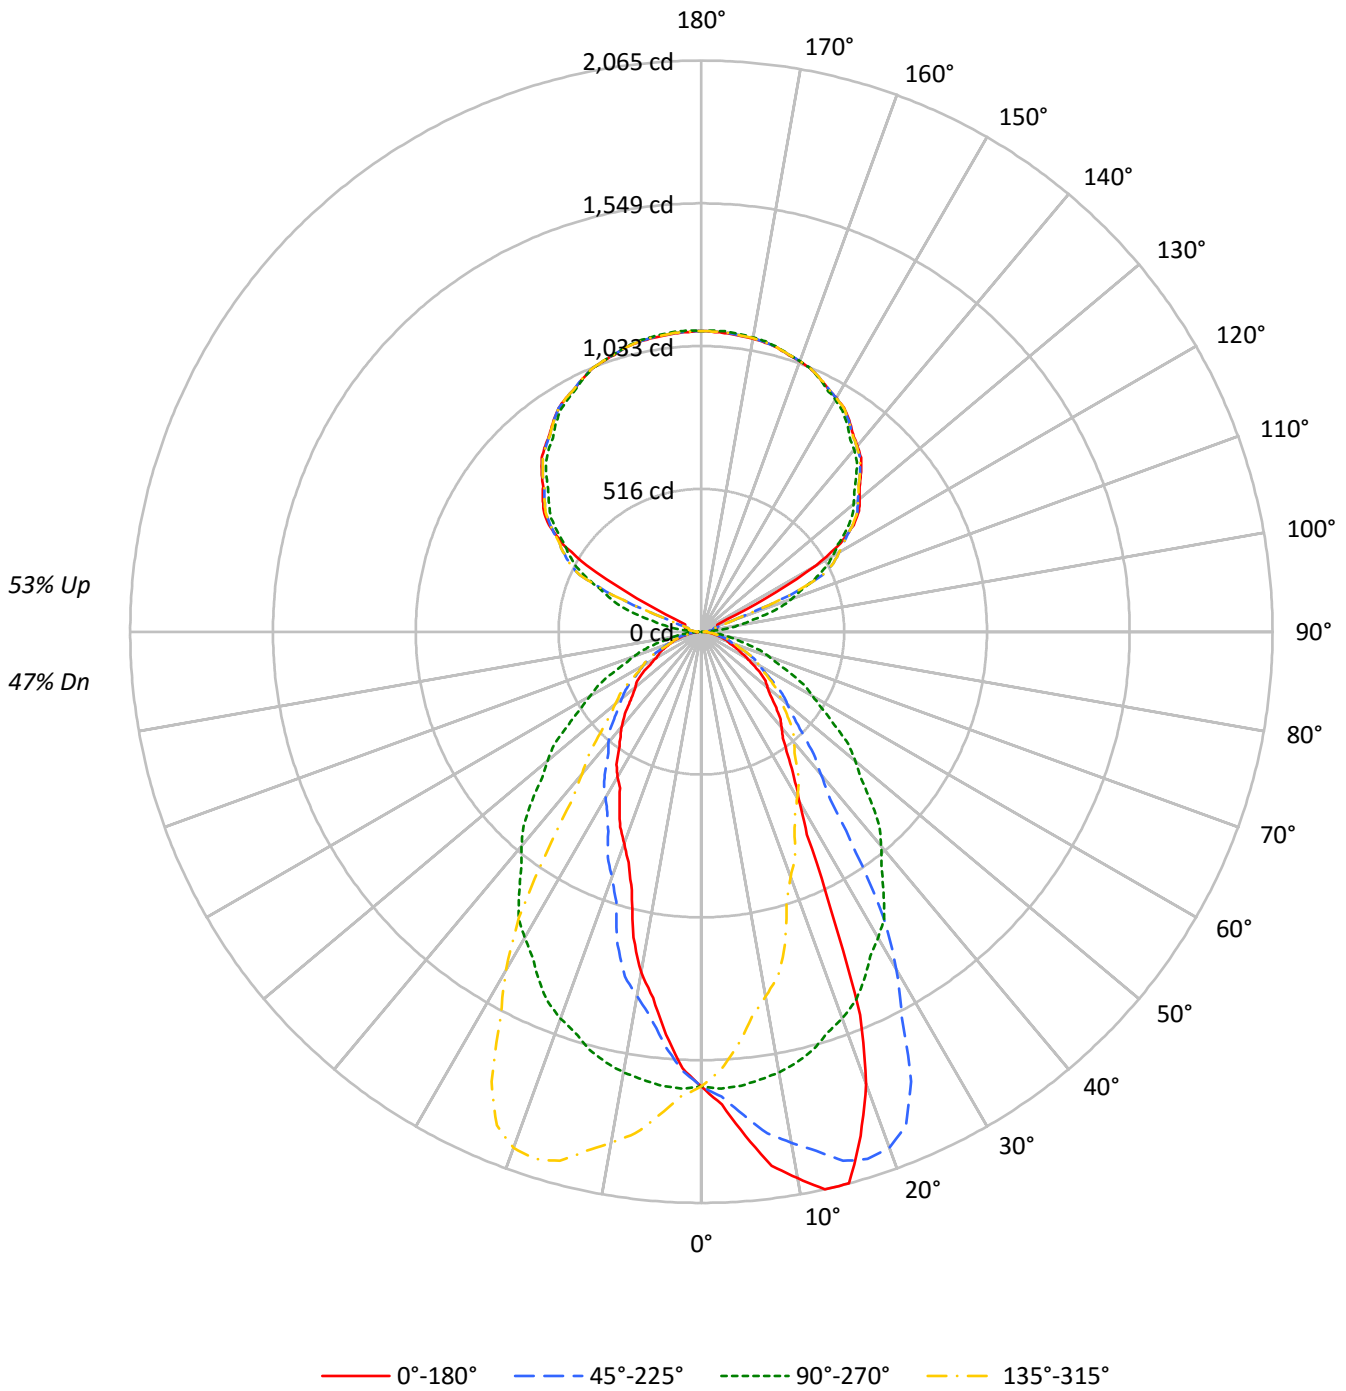



TEST NUMBER: P331723-935

CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	54	54	54	47
1	98	94	90	87	90	86	83	81	73	71	69	60	59	57	48	47	47	41
2	90	83	77	72	82	76	72	67	65	61	58	54	51	49	44	42	40	36
3	82	74	67	61	76	68	62	57	58	53	50	48	45	42	39	37	35	31
4	76	66	58	53	70	61	54	49	52	47	43	43	40	37	36	33	31	28
5	70	59	51	46	64	55	48	43	47	42	38	39	36	33	33	30	28	25
6	65	53	46	40	59	50	43	38	43	37	33	36	32	29	30	27	25	22
7	60	48	41	35	55	45	38	34	39	34	30	33	29	26	28	25	23	20
8	56	44	37	32	52	41	35	30	36	31	27	30	27	24	26	23	20	18
9	52	40	33	28	48	38	31	27	33	28	24	28	24	21	24	21	19	17
10	49	37	30	26	45	35	29	25	30	26	22	26	22	20	22	19	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	26547	26547	26547	26547
5°	29648	26712	23686	26712
10°	32893	26525	20530	26525
15°	34511	26136	16177	26136
20°	29919	25560	13998	25560
25°	19621	24772	12497	24772
30°	13207	23815	11311	23815
35°	10697	22610	10200	22610
40°	9512	21300	9440	21300
45°	8608	19763	8426	19763
50°	7834	18239	7804	18239
55°	7367	16549	7268	16549
60°	6161	14996	6090	14996
65°	5196	13620	5891	13620
70°	4801	12161	5556	12161
75°	4492	10586	5128	10586
80°	4147	8712	4575	8712
85°	3816	6873	4020	6873



TEST NUMBER: P331723-935

CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	155.9	2.6
10°-20°	434.3	7.2
20°-30°	559.6	9.3
30°-40°	531.8	8.8
40°-50°	455.6	7.6
50°-60°	346.9	5.8
60°-70°	219.3	3.6
70°-80°	109.5	1.8
80°-90°	31.2	0.5
90°-100°	36.2	0.6
100°-110°	132.9	2.2
110°-120°	355.3	5.9
120°-130°	586.6	9.7
130°-140°	623.8	10.3
140°-150°	579.8	9.6
150°-160°	466.2	7.7
160°-170°	300.4	5.0
170°-180°	103.4	1.7
0°-30°	1149.8	19.1
0°-40°	1681.6	27.9
0°-60°	2484.1	41.2
0°-90°	2844.1	47.2
90°-120°	524.5	8.7
90°-150°	2314.7	38.4
90°-180°	3185.0	52.8
0°-180°	6028.8	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1644	1644	1644	1644	1644	
5°	1829	1648	1461	1648	1829	181
15°	2065	1564	968	1564	2065	557
25°	1101	1390	702	1390	1101	523
35°	543	1147	518	1147	543	347
45°	377	866	369	866	377	292
55°	262	588	258	588	262	230
65°	136	356	154	356	136	138
75°	72	170	82	170	72	76
85°	21	37	22	37	21	23
90°	21	1	21	1	21	10
95°	34	51	34	51	34	32
105°	60	239	60	239	60	62
115°	64	452	64	452	64	162
125°	672	639	672	639	672	582
135°	817	791	817	791	817	630
145°	932	918	932	918	932	583
155°	1011	1010	1011	1010	1011	467
165°	1062	1065	1062	1065	1062	300
175°	1083	1089	1083	1089	1083	103
180°	1087	1087	1087	1087	1087	



TEST NUMBER: P331723-935

CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2
2.5°	1710.9	1712.3	1713.6	1710.4	1710.4	1707.7	1701.8	1697.2	1684.4	1682.6	1682.6
5°	1829.3	1828.1	1830.4	1823.0	1812.7	1810.4	1799.6	1785.3	1770.4	1753.9	1750.4
7.5°	1946.9	1945.2	1940.6	1939.4	1931.5	1914.3	1896.8	1878.2	1853.5	1829.4	1817.2
10°	2006.3	2025.2	2013.8	1993.7	1997.8	1970.9	1956.6	1932.1	1911.5	1875.5	1867.5
12.5°	2064.9	2072.3	2068.6	2057.3	2052.2	2033.5	2014.2	1992.9	1954.9	1922.6	1894.5
15°	2064.6	2075.4	2078.3	2074.9	2077.8	2076.6	2066.3	2048.6	2015.5	1980.0	1949.2
17.5°	1912.2	1919.8	1938.5	1951.1	1967.1	2001.0	2017.7	2024.1	2019.2	1999.0	1977.3
20°	1741.3	1728.7	1781.2	1808.1	1830.9	1888.1	1937.2	1956.1	1986.3	1985.8	1980.0
22.5°	1499.0	1502.0	1551.9	1583.7	1650.5	1707.5	1763.6	1834.5	1893.1	1931.8	1954.5
25°	1101.4	1123.2	1172.9	1216.2	1290.6	1396.8	1493.3	1605.3	1711.0	1794.4	1873.8
27.5°	827.2	828.8	868.2	908.4	952.4	1039.5	1161.1	1294.8	1445.4	1569.8	1712.8
30°	708.4	705.0	721.5	746.1	783.8	851.2	942.6	1074.0	1224.3	1411.6	1578.5
32.5°	624.3	624.5	637.0	655.1	686.5	731.9	794.5	901.3	1043.3	1227.4	1423.1
35°	542.7	542.2	551.3	564.4	577.6	606.7	649.5	705.5	803.2	975.2	1175.1
37.5°	484.2	486.7	491.2	499.4	513.9	530.1	555.9	593.5	663.1	764.7	932.8
40°	451.3	452.5	458.7	465.6	474.2	486.7	507.9	538.1	589.0	670.1	792.9
42.5°	421.1	422.3	426.7	433.2	439.9	452.5	469.9	496.1	537.4	600.6	702.0
45°	377.0	377.0	381.1	383.9	391.3	402.8	417.1	438.8	467.3	514.2	581.6
47.5°	335.7	335.8	338.5	343.4	348.0	357.0	371.0	388.7	409.5	445.7	503.3
50°	311.9	312.5	314.2	318.2	321.1	329.1	339.9	355.3	377.0	405.0	453.1
52.5°	292.7	292.4	294.5	296.3	298.3	303.9	312.0	325.6	345.1	369.4	409.1
55°	261.7	259.3	262.8	265.6	267.3	269.7	274.2	282.8	299.4	319.9	349.7
57.5°	222.8	221.9	224.3	226.9	232.3	238.4	242.4	247.8	256.4	271.1	300.6
60°	190.8	190.8	196.0	197.7	204.0	212.0	220.0	224.5	233.1	242.8	264.5
62.5°	162.5	162.9	165.3	167.0	170.6	180.4	191.6	201.6	209.7	219.0	233.4
65°	136.0	137.1	137.1	138.3	140.5	142.8	147.4	155.4	169.7	182.8	193.6
67.5°	115.4	115.7	116.1	117.3	117.8	120.3	122.2	125.7	129.0	141.5	154.9
70°	101.7	103.4	102.8	104.0	104.5	105.6	108.0	109.7	114.9	117.7	125.7
72.5°	88.9	90.1	90.1	90.7	92.2	92.5	94.3	96.0	99.3	101.7	106.0
75°	72.0	71.4	72.0	73.1	73.7	74.3	74.3	76.5	78.3	80.6	83.4
77.5°	55.5	56.1	56.0	56.1	56.2	57.3	57.2	58.1	59.8	61.0	62.4
80°	44.6	45.1	44.6	45.1	45.7	46.2	45.7	46.2	48.0	49.2	49.2
82.5°	34.5	34.6	35.0	35.0	35.2	35.3	36.1	36.2	37.5	37.3	37.7
85°	20.6	20.0	20.0	20.0	20.6	21.1	20.6	20.6	21.1	21.1	21.1
87.5°	11.5	12.0	11.9	11.8	11.7	11.6	11.5	11.7	11.1	11.4	10.7
90°	21.3	20.9	20.5	20.1	19.8	19.2	18.3	17.5	16.6	15.8	14.3
92.5°	21.3	21.0	20.8	20.6	20.4	20.1	19.6	19.1	18.7	18.3	17.6
95°	33.8	34.0	34.2	34.4	34.5	34.2	33.3	32.4	31.5	30.7	29.4
97.5°	45.1	44.9	44.7	44.5	44.3	43.8	43.1	42.4	41.8	41.1	38.2
100°	52.7	52.3	52.0	51.7	51.3	50.5	49.0	47.6	46.2	44.9	41.8
102.5°	56.5	56.0	55.4	55.0	54.5	53.4	51.6	49.7	47.9	46.1	70.9
105°	59.8	59.1	58.4	57.7	57.0	55.6	53.7	51.8	49.9	48.0	95.7
107.5°	61.5	60.8	60.1	59.4	58.7	59.3	61.3	63.2	65.2	67.2	124.3
110°	62.2	61.4	60.7	60.0	59.3	67.7	85.2	102.6	120.1	137.6	188.1



TEST NUMBER: P331723-935

CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	62.8	62.2	61.6	61.0	60.5	92.1	155.8	219.6	283.4	347.1	359.6
115°	64.5	77.1	89.6	102.2	114.8	161.5	242.5	323.4	404.2	485.2	480.8
117.5°	263.3	304.6	345.9	387.3	428.6	459.1	478.7	498.3	517.8	537.4	534.4
120°	479.7	503.3	526.8	550.4	574.0	584.8	582.7	580.6	578.5	576.4	573.3
122.5°	598.6	603.1	607.7	612.3	616.9	618.5	617.3	616.0	614.8	613.5	610.1
125°	672.4	671.8	671.2	670.7	670.2	669.3	668.1	666.9	665.7	664.4	661.2
127.5°	718.8	718.8	718.7	718.6	718.4	717.6	715.7	713.9	712.1	710.4	707.9
130°	747.8	748.0	748.1	748.4	748.6	747.6	745.7	743.8	741.8	739.9	738.0
132.5°	776.1	776.3	776.4	776.6	776.8	776.1	774.5	772.8	771.2	769.5	767.6
135°	817.0	817.3	817.7	818.0	818.4	817.7	816.0	814.2	812.4	810.7	809.2
137.5°	854.3	854.9	855.5	856.1	856.7	856.1	854.4	852.6	850.9	849.3	847.5
140°	877.5	878.5	879.3	880.2	881.1	880.7	879.2	877.5	876.0	874.4	872.5
142.5°	900.2	901.1	902.0	902.8	903.7	903.4	902.0	900.5	899.1	897.7	895.5
145°	931.9	932.7	933.6	934.4	935.3	935.1	933.9	932.7	931.4	930.2	927.3
147.5°	959.7	960.4	961.1	961.8	962.6	962.5	961.6	960.7	959.8	958.9	956.0
150°	976.6	977.5	978.4	979.3	980.2	980.1	979.0	977.9	976.9	975.9	973.1
152.5°	991.1	992.3	993.4	994.5	995.7	995.7	994.7	993.7	992.6	991.6	988.9
155°	1011.2	1012.6	1014.0	1015.5	1016.8	1017.0	1016.0	1014.9	1013.8	1012.8	1010.7
157.5°	1029.7	1031.0	1032.3	1033.7	1035.1	1035.2	1034.0	1032.8	1031.7	1030.4	1029.0
160°	1040.3	1041.6	1042.8	1044.0	1045.3	1045.3	1044.3	1043.2	1042.2	1041.1	1040.1
162.5°	1049.1	1050.7	1052.1	1053.7	1055.2	1055.3	1054.1	1052.9	1051.7	1050.6	1049.6
165°	1062.4	1063.6	1064.8	1066.0	1067.2	1067.2	1066.0	1064.8	1063.6	1062.4	1061.9
167.5°	1070.7	1072.3	1073.8	1075.4	1076.9	1077.2	1075.9	1074.7	1073.5	1072.3	1071.8
170°	1075.7	1077.3	1078.8	1080.5	1082.0	1082.2	1081.0	1079.8	1078.5	1077.3	1076.9
172.5°	1079.5	1081.1	1082.6	1084.2	1085.8	1086.0	1084.8	1083.5	1082.3	1081.1	1080.7
175°	1082.8	1084.5	1086.3	1088.0	1089.8	1090.0	1088.8	1087.6	1086.4	1085.1	1084.8
177.5°	1084.9	1086.1	1087.4	1088.6	1089.9	1090.0	1089.1	1088.0	1087.1	1086.1	1086.0
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8



TEST NUMBER: P331723-935

CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2
2.5°	1683.4	1679.8	1676.6	1668.4	1664.2	1655.1	1653.7	1653.3	1641.4	1630.0	1626.8
5°	1741.3	1732.2	1718.4	1702.5	1685.8	1668.7	1657.3	1648.1	1625.3	1603.6	1591.0
7.5°	1799.6	1779.9	1756.3	1726.0	1700.7	1672.4	1651.3	1632.5	1600.1	1569.0	1548.1
10°	1843.0	1810.9	1779.5	1737.8	1705.3	1673.3	1643.6	1617.9	1581.3	1540.2	1511.1
12.5°	1869.9	1834.7	1791.4	1750.7	1708.5	1667.8	1628.1	1595.0	1552.0	1509.6	1474.9
15°	1906.3	1868.6	1816.1	1757.8	1703.6	1650.5	1604.7	1563.6	1507.6	1456.7	1414.5
17.5°	1936.2	1884.3	1827.9	1760.5	1697.6	1630.1	1571.2	1518.7	1456.4	1395.1	1345.2
20°	1945.8	1894.4	1829.3	1761.9	1687.6	1608.2	1544.7	1487.6	1420.7	1353.9	1296.8
22.5°	1939.8	1899.9	1827.4	1746.7	1670.7	1587.6	1516.0	1449.7	1375.5	1307.3	1241.0
25°	1899.5	1885.8	1817.2	1729.2	1642.4	1545.9	1463.0	1390.5	1306.0	1232.9	1160.8
27.5°	1805.5	1835.0	1792.6	1698.8	1602.3	1498.8	1405.7	1323.1	1235.4	1153.1	1081.3
30°	1715.0	1783.0	1764.7	1677.8	1569.9	1468.2	1363.7	1277.4	1183.7	1099.2	1028.3
32.5°	1591.1	1703.4	1721.3	1648.6	1537.0	1425.2	1315.7	1229.9	1132.0	1042.9	973.9
35°	1394.0	1561.9	1639.0	1592.8	1480.7	1360.2	1247.1	1147.1	1048.9	960.9	892.3
37.5°	1158.6	1387.4	1516.0	1519.2	1416.4	1291.1	1167.9	1068.7	968.1	881.8	807.5
40°	1006.0	1254.0	1421.3	1458.4	1371.7	1236.2	1111.7	1010.6	912.3	827.8	742.7
42.5°	868.9	1115.9	1321.7	1386.3	1317.2	1182.8	1057.8	952.1	856.6	776.6	689.7
45°	702.7	918.6	1145.4	1260.8	1222.5	1098.0	966.0	865.5	775.8	706.7	623.3
47.5°	592.8	744.9	964.4	1120.5	1119.8	1006.2	876.3	780.1	696.8	632.1	564.6
50°	530.1	662.7	848.3	1025.5	1040.3	944.9	821.5	726.1	648.4	580.4	526.2
52.5°	473.9	583.2	750.1	919.9	962.2	879.5	759.8	671.8	596.3	533.8	487.3
55°	400.5	485.0	611.8	770.7	834.7	776.4	670.1	587.9	526.8	474.2	434.2
57.5°	338.8	402.2	503.9	631.8	706.4	669.7	582.0	515.2	462.9	415.3	383.7
60°	299.9	351.9	438.2	545.0	627.2	601.6	526.8	464.4	419.9	378.8	349.0
62.5°	263.4	308.1	381.9	468.6	544.1	533.5	472.3	420.1	381.1	343.5	318.4
65°	212.0	244.5	302.2	370.2	430.8	435.9	391.9	356.5	321.7	292.0	269.7
67.5°	168.8	190.0	230.7	287.9	333.3	349.5	322.6	295.6	267.9	245.0	225.7
70°	142.2	159.4	189.1	235.4	277.1	294.2	278.8	257.6	233.7	214.8	198.2
72.5°	115.3	132.0	153.9	187.9	223.6	242.1	236.8	221.5	202.1	186.5	170.8
75°	86.9	92.0	106.9	129.7	157.6	173.7	177.7	169.7	154.2	142.2	133.1
77.5°	64.2	67.3	74.4	86.4	104.7	118.9	124.8	123.8	113.2	106.2	97.7
80°	51.4	53.1	56.6	61.7	75.4	89.7	93.7	93.7	86.3	83.4	74.8
82.5°	39.1	40.3	42.4	45.2	51.7	64.1	68.5	69.5	64.7	61.0	54.2
85°	22.3	21.7	22.8	24.5	25.7	29.1	36.0	37.1	36.0	31.4	29.7
87.5°	10.3	10.5	10.2	9.5	9.6	9.6	11.5	13.4	12.0	11.0	10.4
90°	12.9	11.5	10.2	8.4	6.5	4.6	2.7	0.8	2.7	4.6	6.5
92.5°	16.9	16.2	15.4	15.2	15.3	15.5	15.7	15.8	15.7	15.5	15.3
95°	28.2	27.0	25.7	28.1	33.8	39.6	45.4	51.1	45.4	39.6	33.8
97.5°	35.4	32.5	29.7	36.4	52.7	69.0	85.2	101.4	85.2	69.0	52.7
100°	38.9	35.9	33.0	43.4	67.3	91.3	115.2	139.2	115.2	91.3	67.3
102.5°	95.7	120.6	145.5	160.4	165.5	170.6	175.6	180.7	175.6	170.6	165.5
105°	143.4	191.1	238.8	260.0	254.8	249.5	244.3	239.0	244.3	249.5	254.8
107.5°	181.6	238.8	296.0	322.5	318.2	314.0	309.8	305.6	309.8	314.0	318.2
110°	238.6	289.1	339.6	363.0	359.4	355.7	352.1	348.4	352.1	355.7	359.4



TEST NUMBER: P331723-935

CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	372.0	384.5	397.0	401.6	398.4	395.1	391.8	388.6	391.8	395.1	398.4
115°	476.5	472.1	467.7	464.0	461.1	458.1	455.1	452.1	455.1	458.1	461.1
117.5°	531.4	528.4	525.4	522.2	518.9	515.6	512.2	508.9	512.2	515.6	518.9
120°	570.1	567.0	563.8	560.9	558.3	555.7	553.0	550.4	553.0	555.7	558.3
122.5°	606.7	603.2	599.8	596.7	593.9	591.2	588.4	585.7	588.4	591.2	593.9
125°	657.8	654.5	651.2	648.4	646.1	643.9	641.5	639.3	641.5	643.9	646.1
127.5°	705.4	702.9	700.4	697.9	695.4	692.9	690.4	687.9	690.4	692.9	695.4
130°	736.1	734.2	732.3	729.9	727.1	724.3	721.5	718.8	721.5	724.3	727.1
132.5°	765.7	763.8	761.8	759.7	757.3	754.9	752.5	750.2	752.5	754.9	757.3
135°	807.6	806.0	804.4	802.3	799.4	796.7	793.8	791.1	793.8	796.7	799.4
137.5°	845.7	843.9	842.1	840.2	838.3	836.4	834.4	832.4	834.4	836.4	838.3
140°	870.6	868.7	866.8	865.0	863.7	862.3	860.9	859.5	860.9	862.3	863.7
142.5°	893.3	891.0	888.9	887.2	885.9	884.7	883.4	882.1	883.4	884.7	885.9
145°	924.3	921.4	918.3	917.0	917.1	917.3	917.5	917.7	917.5	917.3	917.1
147.5°	953.0	950.0	947.1	946.0	946.7	947.4	948.0	948.6	948.0	947.4	946.7
150°	970.3	967.5	964.7	963.9	965.1	966.3	967.6	968.8	967.6	966.3	965.1
152.5°	986.3	983.6	980.9	980.3	981.7	983.0	984.4	985.8	984.4	983.0	981.7
155°	1008.7	1006.5	1004.4	1004.2	1005.7	1007.3	1008.9	1010.5	1008.9	1007.3	1005.7
157.5°	1027.5	1026.1	1024.6	1024.5	1025.8	1027.2	1028.5	1029.8	1028.5	1027.2	1025.8
160°	1039.1	1037.9	1036.9	1036.9	1037.9	1039.1	1040.1	1041.1	1040.1	1039.1	1037.9
162.5°	1048.7	1047.8	1046.9	1047.0	1048.0	1049.1	1050.2	1051.2	1050.2	1049.1	1048.0
165°	1061.3	1060.8	1060.2	1060.5	1061.5	1062.6	1063.7	1064.7	1063.7	1062.6	1061.5
167.5°	1071.3	1070.8	1070.3	1070.6	1071.6	1072.7	1073.8	1074.8	1073.8	1072.7	1071.6
170°	1076.6	1076.2	1075.9	1076.2	1077.3	1078.3	1079.3	1080.5	1079.3	1078.3	1077.3
172.5°	1080.4	1080.0	1079.7	1080.0	1081.1	1082.1	1083.1	1084.2	1083.1	1082.1	1081.1
175°	1084.4	1084.1	1083.7	1084.2	1085.4	1086.7	1087.9	1089.1	1087.9	1086.7	1085.4
177.5°	1085.8	1085.7	1085.5	1086.0	1086.9	1088.0	1088.9	1089.9	1088.9	1088.0	1086.9
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8



TEST NUMBER: P331723-935

CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2
2.5°	1620.8	1617.6	1611.7	1602.6	1597.1	1587.5	1581.1	1584.8	1585.6	1584.8	1583.8
5°	1577.3	1565.3	1548.8	1532.8	1517.9	1501.9	1492.7	1488.8	1480.7	1476.2	1473.9
7.5°	1524.7	1504.0	1480.5	1452.7	1429.0	1404.2	1391.5	1385.3	1368.9	1359.9	1352.2
10°	1485.3	1452.8	1429.3	1392.8	1370.5	1337.9	1315.7	1316.2	1293.9	1281.3	1272.2
12.5°	1441.9	1406.2	1367.2	1334.3	1303.3	1277.1	1250.3	1239.4	1215.8	1203.7	1179.0
15°	1369.9	1328.3	1287.1	1242.5	1211.1	1170.5	1131.7	1084.3	1046.0	1012.9	1003.8
17.5°	1291.3	1239.7	1198.4	1146.1	1092.3	1024.1	979.0	951.5	928.4	910.9	897.9
20°	1237.4	1184.8	1140.8	1062.0	989.5	943.2	910.1	888.9	865.0	846.1	835.8
22.5°	1180.7	1125.8	1065.9	977.9	921.4	884.2	854.7	830.4	814.2	799.4	790.1
25°	1100.3	1040.3	941.5	880.9	835.2	796.3	775.8	761.0	743.8	723.8	714.6
27.5°	1015.3	919.9	848.9	803.9	760.3	735.0	716.5	694.3	679.0	670.0	660.5
30°	951.7	856.4	800.9	751.8	720.9	692.9	671.2	658.7	643.9	628.4	622.2
32.5°	880.9	804.7	751.6	710.7	679.3	655.5	638.3	618.0	607.3	597.8	584.6
35°	792.9	735.2	686.6	653.6	623.9	604.4	584.4	572.4	553.0	545.0	539.8
37.5°	718.4	668.4	632.1	597.2	573.7	552.2	539.9	520.9	512.5	501.4	490.5
40°	676.4	627.2	592.5	563.9	537.6	521.6	506.2	490.8	478.2	473.0	459.9
42.5°	633.4	593.5	558.6	527.3	509.7	492.8	473.3	461.9	448.9	440.6	432.5
45°	574.1	538.7	509.0	483.3	463.9	446.2	433.6	414.7	407.3	390.7	383.9
47.5°	522.0	489.1	460.8	436.4	417.4	405.9	387.4	372.7	360.8	350.7	341.8
50°	485.0	457.6	430.2	408.5	391.3	374.8	355.9	348.4	330.2	325.0	319.9
52.5°	451.2	425.2	400.0	378.8	361.6	345.5	328.9	319.3	306.9	301.8	298.0
55°	403.9	378.8	354.7	335.9	318.7	302.2	292.0	279.9	274.2	270.2	265.6
57.5°	356.4	333.7	315.4	296.3	279.1	265.9	254.0	246.8	240.8	235.6	230.1
60°	326.2	304.4	287.9	270.2	252.5	241.7	232.5	223.9	217.1	209.1	206.8
62.5°	294.2	275.3	260.0	242.8	227.4	217.4	208.7	200.6	192.4	180.7	177.5
65°	250.2	235.4	219.4	205.1	191.4	181.7	169.1	160.0	156.5	155.4	154.8
67.5°	210.4	196.4	182.7	168.1	155.6	146.6	140.2	138.8	136.4	135.7	134.1
70°	183.9	170.8	157.1	143.4	131.4	129.7	127.4	125.1	122.3	121.1	119.9
72.5°	160.1	146.6	132.9	121.9	116.8	114.6	112.3	110.0	108.1	106.9	106.2
75°	122.9	110.3	101.1	97.1	94.3	92.6	89.1	87.4	86.3	84.6	83.9
77.5°	88.4	81.4	77.1	74.6	71.6	69.8	67.8	66.1	64.9	64.6	63.6
80°	67.4	64.0	61.1	57.7	56.6	54.2	53.7	52.0	52.5	50.9	50.9
82.5°	52.3	48.0	45.5	44.0	42.9	41.0	40.5	39.6	39.8	38.5	38.5
85°	26.9	25.7	24.5	23.4	23.4	21.7	22.3	21.7	21.7	20.6	20.0
87.5°	10.4	10.2	9.6	9.9	10.2	10.0	10.2	9.9	10.1	10.2	9.9
90°	8.4	10.2	11.5	12.9	14.3	15.8	16.6	17.5	18.3	19.2	19.8
92.5°	15.2	15.4	16.2	16.9	17.6	18.3	18.7	19.1	19.6	20.1	20.4
95°	28.1	25.7	27.0	28.2	29.4	30.7	31.5	32.4	33.3	34.2	34.5
97.5°	36.4	29.7	32.5	35.4	38.2	41.1	41.8	42.4	43.1	43.8	44.3
100°	43.4	33.0	35.9	38.9	41.8	44.9	46.2	47.6	49.0	50.5	51.3
102.5°	160.4	145.5	120.6	95.7	70.9	46.1	47.9	49.7	51.6	53.4	54.5
105°	260.0	238.8	191.1	143.4	95.7	48.0	49.9	51.8	53.7	55.6	57.0
107.5°	322.5	296.0	238.8	181.6	124.3	67.2	65.2	63.2	61.3	59.3	58.7
110°	363.0	339.6	289.1	238.6	188.1	137.6	120.1	102.6	85.2	67.7	59.3



TEST NUMBER: P331723-935

CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	401.6	397.0	384.5	372.0	359.6	347.1	283.4	219.6	155.8	92.1	60.5
115°	464.0	467.7	472.1	476.5	480.8	485.2	404.2	323.4	242.5	161.5	114.8
117.5°	522.2	525.4	528.4	531.4	534.4	537.4	517.8	498.3	478.7	459.1	428.6
120°	560.9	563.8	567.0	570.1	573.3	576.4	578.5	580.6	582.7	584.8	574.0
122.5°	596.7	599.8	603.2	606.7	610.1	613.5	614.8	616.0	617.3	618.5	616.9
125°	648.4	651.2	654.5	657.8	661.2	664.4	665.7	666.9	668.1	669.3	670.2
127.5°	697.9	700.4	702.9	705.4	707.9	710.4	712.1	713.9	715.7	717.6	718.4
130°	729.9	732.3	734.2	736.1	738.0	739.9	741.8	743.8	745.7	747.6	748.6
132.5°	759.7	761.8	763.8	765.7	767.6	769.5	771.2	772.8	774.5	776.1	776.8
135°	802.3	804.4	806.0	807.6	809.2	810.7	812.4	814.2	816.0	817.7	818.4
137.5°	840.2	842.1	843.9	845.7	847.5	849.3	850.9	852.6	854.4	856.1	856.7
140°	865.0	866.8	868.7	870.6	872.5	874.4	876.0	877.5	879.2	880.7	881.1
142.5°	887.2	888.9	891.0	893.3	895.5	897.7	899.1	900.5	902.0	903.4	903.7
145°	917.0	918.3	921.4	924.3	927.3	930.2	931.4	932.7	933.9	935.1	935.3
147.5°	946.0	947.1	950.0	953.0	956.0	958.9	959.8	960.7	961.6	962.5	962.6
150°	963.9	964.7	967.5	970.3	973.1	975.9	976.9	977.9	979.0	980.1	980.2
152.5°	980.3	980.9	983.6	986.3	988.9	991.6	992.6	993.7	994.7	995.7	995.7
155°	1004.2	1004.4	1006.5	1008.7	1010.7	1012.8	1013.8	1014.9	1016.0	1017.0	1016.8
157.5°	1024.5	1024.6	1026.1	1027.5	1029.0	1030.4	1031.7	1032.8	1034.0	1035.2	1035.1
160°	1036.9	1036.9	1037.9	1039.1	1040.1	1041.1	1042.2	1043.2	1044.3	1045.3	1045.3
162.5°	1047.0	1046.9	1047.8	1048.7	1049.6	1050.6	1051.7	1052.9	1054.1	1055.3	1055.2
165°	1060.5	1060.2	1060.8	1061.3	1061.9	1062.4	1063.6	1064.8	1066.0	1067.2	1067.2
167.5°	1070.6	1070.3	1070.8	1071.3	1071.8	1072.3	1073.5	1074.7	1075.9	1077.2	1076.9
170°	1076.2	1075.9	1076.2	1076.6	1076.9	1077.3	1078.5	1079.8	1081.0	1082.2	1082.0
172.5°	1080.0	1079.7	1080.0	1080.4	1080.7	1081.1	1082.3	1083.5	1084.8	1086.0	1085.8
175°	1084.2	1083.7	1084.1	1084.4	1084.8	1085.1	1086.4	1087.6	1088.8	1090.0	1089.8
177.5°	1086.0	1085.5	1085.7	1085.8	1086.0	1086.1	1087.1	1088.0	1089.1	1090.0	1089.9
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8



TEST NUMBER: P331723-935

CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2
2.5°	1578.8	1579.7	1578.3	1579.2	1578.3	1579.7	1578.8	1583.8	1584.8	1585.6	1584.8
5°	1471.0	1464.2	1463.0	1461.4	1463.0	1464.2	1471.0	1473.9	1476.2	1480.7	1488.8
7.5°	1342.4	1341.4	1338.5	1334.6	1338.5	1341.4	1342.4	1352.2	1359.9	1368.9	1385.3
10°	1259.6	1256.8	1256.3	1252.2	1256.3	1256.8	1259.6	1272.2	1281.3	1293.9	1316.2
12.5°	1162.8	1144.4	1142.5	1132.5	1142.5	1144.4	1162.8	1179.0	1203.7	1215.8	1239.4
15°	990.1	986.6	975.2	967.8	975.2	986.6	990.1	1003.8	1012.9	1046.0	1084.3
17.5°	891.3	880.1	876.6	874.9	876.6	880.1	891.3	897.9	910.9	928.4	951.5
20°	827.8	817.5	815.8	814.7	815.8	817.5	827.8	835.8	846.1	865.0	888.9
22.5°	783.9	773.2	768.7	765.3	768.7	773.2	783.9	790.1	799.4	814.2	830.4
25°	708.9	705.0	702.7	701.5	702.7	705.0	708.9	714.6	723.8	743.8	761.0
27.5°	650.3	641.5	639.8	636.9	639.8	641.5	650.3	660.5	670.0	679.0	694.3
30°	617.0	614.2	610.1	606.7	610.1	614.2	617.0	622.2	628.4	643.9	658.7
32.5°	577.6	575.3	571.7	570.2	571.7	575.3	577.6	584.6	597.8	607.3	618.0
35°	534.2	526.2	522.7	517.5	522.7	526.2	534.2	539.8	545.0	553.0	572.4
37.5°	488.1	483.9	479.1	480.8	479.1	483.9	488.1	490.5	501.4	512.5	520.9
40°	452.5	449.6	448.5	447.9	448.5	449.6	452.5	459.9	473.0	478.2	490.8
42.5°	424.1	416.2	413.3	413.1	413.3	416.2	424.1	432.5	440.6	448.9	461.9
45°	381.1	373.6	368.5	369.0	368.5	373.6	381.1	383.9	390.7	407.3	414.7
47.5°	336.9	336.7	333.6	334.6	333.6	336.7	336.9	341.8	350.7	360.8	372.7
50°	315.9	312.5	310.2	310.7	310.2	312.5	315.9	319.9	325.0	330.2	348.4
52.5°	295.8	292.8	291.0	293.4	291.0	292.8	295.8	298.0	301.8	306.9	319.3
55°	262.8	259.3	258.8	258.2	258.8	259.3	262.8	265.6	270.2	274.2	279.9
57.5°	225.9	223.6	220.2	218.7	220.2	223.6	225.9	230.1	235.6	240.8	246.8
60°	199.4	194.8	189.1	188.6	189.1	194.8	199.4	206.8	209.1	217.1	223.9
62.5°	175.1	174.3	173.1	173.0	173.1	174.3	175.1	177.5	180.7	192.4	200.6
65°	153.7	153.1	153.7	154.2	153.7	153.1	153.7	154.8	155.4	156.5	160.0
67.5°	133.9	132.9	131.8	132.3	131.8	132.9	133.9	134.1	135.7	136.4	138.8
70°	118.8	118.2	117.7	117.7	117.7	118.2	118.8	119.9	121.1	122.3	125.1
72.5°	104.2	104.1	103.5	103.1	103.5	104.1	104.2	106.2	106.9	108.1	110.0
75°	83.4	82.2	82.2	82.2	82.2	82.2	83.4	83.9	84.6	86.3	87.4
77.5°	63.5	62.9	62.4	61.9	62.4	62.9	63.5	63.6	64.6	64.9	66.1
80°	50.3	49.7	49.2	49.2	49.2	49.7	50.3	50.9	50.9	52.5	52.0
82.5°	38.4	37.8	37.7	37.3	37.7	37.8	38.4	38.5	38.5	39.8	39.6
85°	20.6	21.1	20.6	21.7	20.6	21.1	20.6	20.0	20.6	21.7	21.7
87.5°	10.0	9.6	10.2	9.7	10.2	9.6	10.0	9.9	10.2	10.1	9.9
90°	20.1	20.5	20.9	21.3	20.9	20.5	20.1	19.8	19.2	18.3	17.5
92.5°	20.6	20.8	21.0	21.3	21.0	20.8	20.6	20.4	20.1	19.6	19.1
95°	34.4	34.2	34.0	33.8	34.0	34.2	34.4	34.5	34.2	33.3	32.4
97.5°	44.5	44.7	44.9	45.1	44.9	44.7	44.5	44.3	43.8	43.1	42.4
100°	51.7	52.0	52.3	52.7	52.3	52.0	51.7	51.3	50.5	49.0	47.6
102.5°	55.0	55.4	56.0	56.5	56.0	55.4	55.0	54.5	53.4	51.6	49.7
105°	57.7	58.4	59.1	59.8	59.1	58.4	57.7	57.0	55.6	53.7	51.8
107.5°	59.4	60.1	60.8	61.5	60.8	60.1	59.4	58.7	59.3	61.3	63.2
110°	60.0	60.7	61.4	62.2	61.4	60.7	60.0	59.3	67.7	85.2	102.6



TEST NUMBER: P331723-935

CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	61.0	61.6	62.2	62.8	62.2	61.6	61.0	60.5	92.1	155.8	219.6
115°	102.2	89.6	77.1	64.5	77.1	89.6	102.2	114.8	161.5	242.5	323.4
117.5°	387.3	345.9	304.6	263.3	304.6	345.9	387.3	428.6	459.1	478.7	498.3
120°	550.4	526.8	503.3	479.7	503.3	526.8	550.4	574.0	584.8	582.7	580.6
122.5°	612.3	607.7	603.1	598.6	603.1	607.7	612.3	616.9	618.5	617.3	616.0
125°	670.7	671.2	671.8	672.4	671.8	671.2	670.7	670.2	669.3	668.1	666.9
127.5°	718.6	718.7	718.8	718.8	718.8	718.7	718.6	718.4	717.6	715.7	713.9
130°	748.4	748.1	748.0	747.8	748.0	748.1	748.4	748.6	747.6	745.7	743.8
132.5°	776.6	776.4	776.3	776.1	776.3	776.4	776.6	776.8	776.1	774.5	772.8
135°	818.0	817.7	817.3	817.0	817.3	817.7	818.0	818.4	817.7	816.0	814.2
137.5°	856.1	855.5	854.9	854.3	854.9	855.5	856.1	856.7	856.1	854.4	852.6
140°	880.2	879.3	878.5	877.5	878.5	879.3	880.2	881.1	880.7	879.2	877.5
142.5°	902.8	902.0	901.1	900.2	901.1	902.0	902.8	903.7	903.4	902.0	900.5
145°	934.4	933.6	932.7	931.9	932.7	933.6	934.4	935.3	935.1	933.9	932.7
147.5°	961.8	961.1	960.4	959.7	960.4	961.1	961.8	962.6	962.5	961.6	960.7
150°	979.3	978.4	977.5	976.6	977.5	978.4	979.3	980.2	980.1	979.0	977.9
152.5°	994.5	993.4	992.3	991.1	992.3	993.4	994.5	995.7	995.7	994.7	993.7
155°	1015.5	1014.0	1012.6	1011.2	1012.6	1014.0	1015.5	1016.8	1017.0	1016.0	1014.9
157.5°	1033.7	1032.3	1031.0	1029.7	1031.0	1032.3	1033.7	1035.1	1035.2	1034.0	1032.8
160°	1044.0	1042.8	1041.6	1040.3	1041.6	1042.8	1044.0	1045.3	1045.3	1044.3	1043.2
162.5°	1053.7	1052.1	1050.7	1049.1	1050.7	1052.1	1053.7	1055.2	1055.3	1054.1	1052.9
165°	1066.0	1064.8	1063.6	1062.4	1063.6	1064.8	1066.0	1067.2	1067.2	1066.0	1064.8
167.5°	1075.4	1073.8	1072.3	1070.7	1072.3	1073.8	1075.4	1076.9	1077.2	1075.9	1074.7
170°	1080.5	1078.8	1077.3	1075.7	1077.3	1078.8	1080.5	1082.0	1082.2	1081.0	1079.8
172.5°	1084.2	1082.6	1081.1	1079.5	1081.1	1082.6	1084.2	1085.8	1086.0	1084.8	1083.5
175°	1088.0	1086.3	1084.5	1082.8	1084.5	1086.3	1088.0	1089.8	1090.0	1088.8	1087.6
177.5°	1088.6	1087.4	1086.1	1084.9	1086.1	1087.4	1088.6	1089.9	1090.0	1089.1	1088.0
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8



TEST NUMBER: P331723-935

CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2
2.5°	1581.1	1587.5	1597.1	1602.6	1611.7	1617.6	1620.8	1626.8	1630.0	1641.4	1653.3
5°	1492.7	1501.9	1517.9	1532.8	1548.8	1565.3	1577.3	1591.0	1603.6	1625.3	1648.1
7.5°	1391.5	1404.2	1429.0	1452.7	1480.5	1504.0	1524.7	1548.1	1569.0	1600.1	1632.5
10°	1315.7	1337.9	1370.5	1392.8	1429.3	1452.8	1485.3	1511.1	1540.2	1581.3	1617.9
12.5°	1250.3	1277.1	1303.3	1334.3	1367.2	1406.2	1441.9	1474.9	1509.6	1552.0	1595.0
15°	1131.7	1170.5	1211.1	1242.5	1287.1	1328.3	1369.9	1414.5	1456.7	1507.6	1563.6
17.5°	979.0	1024.1	1092.3	1146.1	1198.4	1239.7	1291.3	1345.2	1395.1	1456.4	1518.7
20°	910.1	943.2	989.5	1062.0	1140.8	1184.8	1237.4	1296.8	1353.9	1420.7	1487.6
22.5°	854.7	884.2	921.4	977.9	1065.9	1125.8	1180.7	1241.0	1307.3	1375.5	1449.7
25°	775.8	796.3	835.2	880.9	941.5	1040.3	1100.3	1160.8	1232.9	1306.0	1390.5
27.5°	716.5	735.0	760.3	803.9	848.9	919.9	1015.3	1081.3	1153.1	1235.4	1323.1
30°	671.2	692.9	720.9	751.8	800.9	856.4	951.7	1028.3	1099.2	1183.7	1277.4
32.5°	638.3	655.5	679.3	710.7	751.6	804.7	880.9	973.9	1042.9	1132.0	1229.9
35°	584.4	604.4	623.9	653.6	686.6	735.2	792.9	892.3	960.9	1048.9	1147.1
37.5°	539.9	552.2	573.7	597.2	632.1	668.4	718.4	807.5	881.8	968.1	1068.7
40°	506.2	521.6	537.6	563.9	592.5	627.2	676.4	742.7	827.8	912.3	1010.6
42.5°	473.3	492.8	509.7	527.3	558.6	593.5	633.4	689.7	776.6	856.6	952.1
45°	433.6	446.2	463.9	483.3	509.0	538.7	574.1	623.3	706.7	775.8	865.5
47.5°	387.4	405.9	417.4	436.4	460.8	489.1	522.0	564.6	632.1	696.8	780.1
50°	355.9	374.8	391.3	408.5	430.2	457.6	485.0	526.2	580.4	648.4	726.1
52.5°	328.9	345.5	361.6	378.8	400.0	425.2	451.2	487.3	533.8	596.3	671.8
55°	292.0	302.2	318.7	335.9	354.7	378.8	403.9	434.2	474.2	526.8	587.9
57.5°	254.0	265.9	279.1	296.3	315.4	333.7	356.4	383.7	415.3	462.9	515.2
60°	232.5	241.7	252.5	270.2	287.9	304.4	326.2	349.0	378.8	419.9	464.4
62.5°	208.7	217.4	227.4	242.8	260.0	275.3	294.2	318.4	343.5	381.1	420.1
65°	169.1	181.7	191.4	205.1	219.4	235.4	250.2	269.7	292.0	321.7	356.5
67.5°	140.2	146.6	155.6	168.1	182.7	196.4	210.4	225.7	245.0	267.9	295.6
70°	127.4	129.7	131.4	143.4	157.1	170.8	183.9	198.2	214.8	233.7	257.6
72.5°	112.3	114.6	116.8	121.9	132.9	146.6	160.1	170.8	186.5	202.1	221.5
75°	89.1	92.6	94.3	97.1	101.1	110.3	122.9	133.1	142.2	154.2	169.7
77.5°	67.8	69.8	71.6	74.6	77.1	81.4	88.4	97.7	106.2	113.2	123.8
80°	53.7	54.2	56.6	57.7	61.1	64.0	67.4	74.8	83.4	86.3	93.7
82.5°	40.5	41.0	42.9	44.0	45.5	48.0	52.3	54.2	61.0	64.7	69.5
85°	22.3	21.7	23.4	23.4	24.5	25.7	26.9	29.7	31.4	36.0	37.1
87.5°	10.2	10.0	10.2	9.9	9.6	10.2	10.4	10.4	11.0	12.0	13.4
90°	16.6	15.8	14.3	12.9	11.5	10.2	8.4	6.5	4.6	2.7	0.8
92.5°	18.7	18.3	17.6	16.9	16.2	15.4	15.2	15.3	15.5	15.7	15.8
95°	31.5	30.7	29.4	28.2	27.0	25.7	28.1	33.8	39.6	45.4	51.1
97.5°	41.8	41.1	38.2	35.4	32.5	29.7	36.4	52.7	69.0	85.2	101.4
100°	46.2	44.9	41.8	38.9	35.9	33.0	43.4	67.3	91.3	115.2	139.2
102.5°	47.9	46.1	70.9	95.7	120.6	145.5	160.4	165.5	170.6	175.6	180.7
105°	49.9	48.0	95.7	143.4	191.1	238.8	260.0	254.8	249.5	244.3	239.0
107.5°	65.2	67.2	124.3	181.6	238.8	296.0	322.5	318.2	314.0	309.8	305.6
110°	120.1	137.6	188.1	238.6	289.1	339.6	363.0	359.4	355.7	352.1	348.4



TEST NUMBER: P331723-935

CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	283.4	347.1	359.6	372.0	384.5	397.0	401.6	398.4	395.1	391.8	388.6
115°	404.2	485.2	480.8	476.5	472.1	467.7	464.0	461.1	458.1	455.1	452.1
117.5°	517.8	537.4	534.4	531.4	528.4	525.4	522.2	518.9	515.6	512.2	508.9
120°	578.5	576.4	573.3	570.1	567.0	563.8	560.9	558.3	555.7	553.0	550.4
122.5°	614.8	613.5	610.1	606.7	603.2	599.8	596.7	593.9	591.2	588.4	585.7
125°	665.7	664.4	661.2	657.8	654.5	651.2	648.4	646.1	643.9	641.5	639.3
127.5°	712.1	710.4	707.9	705.4	702.9	700.4	697.9	695.4	692.9	690.4	687.9
130°	741.8	739.9	738.0	736.1	734.2	732.3	729.9	727.1	724.3	721.5	718.8
132.5°	771.2	769.5	767.6	765.7	763.8	761.8	759.7	757.3	754.9	752.5	750.2
135°	812.4	810.7	809.2	807.6	806.0	804.4	802.3	799.4	796.7	793.8	791.1
137.5°	850.9	849.3	847.5	845.7	843.9	842.1	840.2	838.3	836.4	834.4	832.4
140°	876.0	874.4	872.5	870.6	868.7	866.8	865.0	863.7	862.3	860.9	859.5
142.5°	899.1	897.7	895.5	893.3	891.0	888.9	887.2	885.9	884.7	883.4	882.1
145°	931.4	930.2	927.3	924.3	921.4	918.3	917.0	917.1	917.3	917.5	917.7
147.5°	959.8	958.9	956.0	953.0	950.0	947.1	946.0	946.7	947.4	948.0	948.6
150°	976.9	975.9	973.1	970.3	967.5	964.7	963.9	965.1	966.3	967.6	968.8
152.5°	992.6	991.6	988.9	986.3	983.6	980.9	980.3	981.7	983.0	984.4	985.8
155°	1013.8	1012.8	1010.7	1008.7	1006.5	1004.4	1004.2	1005.7	1007.3	1008.9	1010.5
157.5°	1031.7	1030.4	1029.0	1027.5	1026.1	1024.6	1024.5	1025.8	1027.2	1028.5	1029.8
160°	1042.2	1041.1	1040.1	1039.1	1037.9	1036.9	1036.9	1037.9	1039.1	1040.1	1041.1
162.5°	1051.7	1050.6	1049.6	1048.7	1047.8	1046.9	1047.0	1048.0	1049.1	1050.2	1051.2
165°	1063.6	1062.4	1061.9	1061.3	1060.8	1060.2	1060.5	1061.5	1062.6	1063.7	1064.7
167.5°	1073.5	1072.3	1071.8	1071.3	1070.8	1070.3	1070.6	1071.6	1072.7	1073.8	1074.8
170°	1078.5	1077.3	1076.9	1076.6	1076.2	1075.9	1076.2	1077.3	1078.3	1079.3	1080.5
172.5°	1082.3	1081.1	1080.7	1080.4	1080.0	1079.7	1080.0	1081.1	1082.1	1083.1	1084.2
175°	1086.4	1085.1	1084.8	1084.4	1084.1	1083.7	1084.2	1085.4	1086.7	1087.9	1089.1
177.5°	1087.1	1086.1	1086.0	1085.8	1085.7	1085.5	1086.0	1086.9	1088.0	1088.9	1089.9
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8



TEST NUMBER: P331723-935
 CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2
2.5°	1653.7	1655.1	1664.2	1668.4	1676.6	1679.8	1683.4	1682.6	1682.6	1684.4	1697.2
5°	1657.3	1668.7	1685.8	1702.5	1718.4	1732.2	1741.3	1750.4	1753.9	1770.4	1785.3
7.5°	1651.3	1672.4	1700.7	1726.0	1756.3	1779.9	1799.6	1817.2	1829.4	1853.5	1878.2
10°	1643.6	1673.3	1705.3	1737.8	1779.5	1810.9	1843.0	1867.5	1875.5	1911.5	1932.1
12.5°	1628.1	1667.8	1708.5	1750.7	1791.4	1834.7	1869.9	1894.5	1922.6	1954.9	1992.9
15°	1604.7	1650.5	1703.6	1757.8	1816.1	1868.6	1906.3	1949.2	1980.0	2015.5	2048.6
17.5°	1571.2	1630.1	1697.6	1760.5	1827.9	1884.3	1936.2	1977.3	1999.0	2019.2	2024.1
20°	1544.7	1608.2	1687.6	1761.9	1829.3	1894.4	1945.8	1980.0	1985.8	1986.3	1956.1
22.5°	1516.0	1587.6	1670.7	1746.7	1827.4	1899.9	1939.8	1954.5	1931.8	1893.1	1834.5
25°	1463.0	1545.9	1642.4	1729.2	1817.2	1885.8	1899.5	1873.8	1794.4	1711.0	1605.3
27.5°	1405.7	1498.8	1602.3	1698.8	1792.6	1835.0	1805.5	1712.8	1569.8	1445.4	1294.8
30°	1363.7	1468.2	1569.9	1677.8	1764.7	1783.0	1715.0	1578.5	1411.6	1224.3	1074.0
32.5°	1315.7	1425.2	1537.0	1648.6	1721.3	1703.4	1591.1	1423.1	1227.4	1043.3	901.3
35°	1247.1	1360.2	1480.7	1592.8	1639.0	1561.9	1394.0	1175.1	975.2	803.2	705.5
37.5°	1167.9	1291.1	1416.4	1519.2	1516.0	1387.4	1158.6	932.8	764.7	663.1	593.5
40°	1111.7	1236.2	1371.7	1458.4	1421.3	1254.0	1006.0	792.9	670.1	589.0	538.1
42.5°	1057.8	1182.8	1317.2	1386.3	1321.7	1115.9	868.9	702.0	600.6	537.4	496.1
45°	966.0	1098.0	1222.5	1260.8	1145.4	918.6	702.7	581.6	514.2	467.3	438.8
47.5°	876.3	1006.2	1119.8	1120.5	964.4	744.9	592.8	503.3	445.7	409.5	388.7
50°	821.5	944.9	1040.3	1025.5	848.3	662.7	530.1	453.1	405.0	377.0	355.3
52.5°	759.8	879.5	962.2	919.9	750.1	583.2	473.9	409.1	369.4	345.1	325.6
55°	670.1	776.4	834.7	770.7	611.8	485.0	400.5	349.7	319.9	299.4	282.8
57.5°	582.0	669.7	706.4	631.8	503.9	402.2	338.8	300.6	271.1	256.4	247.8
60°	526.8	601.6	627.2	545.0	438.2	351.9	299.9	264.5	242.8	233.1	224.5
62.5°	472.3	533.5	544.1	468.6	381.9	308.1	263.4	233.4	219.0	209.7	201.6
65°	391.9	435.9	430.8	370.2	302.2	244.5	212.0	193.6	182.8	169.7	155.4
67.5°	322.6	349.5	333.3	287.9	230.7	190.0	168.8	154.9	141.5	129.0	125.7
70°	278.8	294.2	277.1	235.4	189.1	159.4	142.2	125.7	117.7	114.9	109.7
72.5°	236.8	242.1	223.6	187.9	153.9	132.0	115.3	106.0	101.7	99.3	96.0
75°	177.7	173.7	157.6	129.7	106.9	92.0	86.9	83.4	80.6	78.3	76.5
77.5°	124.8	118.9	104.7	86.4	74.4	67.3	64.2	62.4	61.0	59.8	58.1
80°	93.7	89.7	75.4	61.7	56.6	53.1	51.4	49.2	49.2	48.0	46.2
82.5°	68.5	64.1	51.7	45.2	42.4	40.3	39.1	37.7	37.3	37.5	36.2
85°	36.0	29.1	25.7	24.5	22.8	21.7	22.3	21.1	21.1	21.1	20.6
87.5°	11.5	9.6	9.6	9.5	10.2	10.5	10.3	10.7	11.4	11.1	11.7
90°	2.7	4.6	6.5	8.4	10.2	11.5	12.9	14.3	15.8	16.6	17.5
92.5°	15.7	15.5	15.3	15.2	15.4	16.2	16.9	17.6	18.3	18.7	19.1
95°	45.4	39.6	33.8	28.1	25.7	27.0	28.2	29.4	30.7	31.5	32.4
97.5°	85.2	69.0	52.7	36.4	29.7	32.5	35.4	38.2	41.1	41.8	42.4
100°	115.2	91.3	67.3	43.4	33.0	35.9	38.9	41.8	44.9	46.2	47.6
102.5°	175.6	170.6	165.5	160.4	145.5	120.6	95.7	70.9	46.1	47.9	49.7
105°	244.3	249.5	254.8	260.0	238.8	191.1	143.4	95.7	48.0	49.9	51.8
107.5°	309.8	314.0	318.2	322.5	296.0	238.8	181.6	124.3	67.2	65.2	63.2
110°	352.1	355.7	359.4	363.0	339.6	289.1	238.6	188.1	137.6	120.1	102.6



TEST NUMBER: P331723-935

CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	391.8	395.1	398.4	401.6	397.0	384.5	372.0	359.6	347.1	283.4	219.6
115°	455.1	458.1	461.1	464.0	467.7	472.1	476.5	480.8	485.2	404.2	323.4
117.5°	512.2	515.6	518.9	522.2	525.4	528.4	531.4	534.4	537.4	517.8	498.3
120°	553.0	555.7	558.3	560.9	563.8	567.0	570.1	573.3	576.4	578.5	580.6
122.5°	588.4	591.2	593.9	596.7	599.8	603.2	606.7	610.1	613.5	614.8	616.0
125°	641.5	643.9	646.1	648.4	651.2	654.5	657.8	661.2	664.4	665.7	666.9
127.5°	690.4	692.9	695.4	697.9	700.4	702.9	705.4	707.9	710.4	712.1	713.9
130°	721.5	724.3	727.1	729.9	732.3	734.2	736.1	738.0	739.9	741.8	743.8
132.5°	752.5	754.9	757.3	759.7	761.8	763.8	765.7	767.6	769.5	771.2	772.8
135°	793.8	796.7	799.4	802.3	804.4	806.0	807.6	809.2	810.7	812.4	814.2
137.5°	834.4	836.4	838.3	840.2	842.1	843.9	845.7	847.5	849.3	850.9	852.6
140°	860.9	862.3	863.7	865.0	866.8	868.7	870.6	872.5	874.4	876.0	877.5
142.5°	883.4	884.7	885.9	887.2	888.9	891.0	893.3	895.5	897.7	899.1	900.5
145°	917.5	917.3	917.1	917.0	918.3	921.4	924.3	927.3	930.2	931.4	932.7
147.5°	948.0	947.4	946.7	946.0	947.1	950.0	953.0	956.0	958.9	959.8	960.7
150°	967.6	966.3	965.1	963.9	964.7	967.5	970.3	973.1	975.9	976.9	977.9
152.5°	984.4	983.0	981.7	980.3	980.9	983.6	986.3	988.9	991.6	992.6	993.7
155°	1008.9	1007.3	1005.7	1004.2	1004.4	1006.5	1008.7	1010.7	1012.8	1013.8	1014.9
157.5°	1028.5	1027.2	1025.8	1024.5	1024.6	1026.1	1027.5	1029.0	1030.4	1031.7	1032.8
160°	1040.1	1039.1	1037.9	1036.9	1036.9	1037.9	1039.1	1040.1	1041.1	1042.2	1043.2
162.5°	1050.2	1049.1	1048.0	1047.0	1046.9	1047.8	1048.7	1049.6	1050.6	1051.7	1052.9
165°	1063.7	1062.6	1061.5	1060.5	1060.2	1060.8	1061.3	1061.9	1062.4	1063.6	1064.8
167.5°	1073.8	1072.7	1071.6	1070.6	1070.3	1070.8	1071.3	1071.8	1072.3	1073.5	1074.7
170°	1079.3	1078.3	1077.3	1076.2	1075.9	1076.2	1076.6	1076.9	1077.3	1078.5	1079.8
172.5°	1083.1	1082.1	1081.1	1080.0	1079.7	1080.0	1080.4	1080.7	1081.1	1082.3	1083.5
175°	1087.9	1086.7	1085.4	1084.2	1083.7	1084.1	1084.4	1084.8	1085.1	1086.4	1087.6
177.5°	1088.9	1088.0	1086.9	1086.0	1085.5	1085.7	1085.8	1086.0	1086.1	1087.1	1088.0
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8



TEST NUMBER: P331723-935

CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2	1644.2
2.5°	1701.8	1707.7	1710.4	1710.4	1713.6	1712.3	1710.9
5°	1799.6	1810.4	1812.7	1823.0	1830.4	1828.1	1829.3
7.5°	1896.8	1914.3	1931.5	1939.4	1940.6	1945.2	1946.9
10°	1956.6	1970.9	1997.8	1993.7	2013.8	2025.2	2006.3
12.5°	2014.2	2033.5	2052.2	2057.3	2068.6	2072.3	2064.9
15°	2066.3	2076.6	2077.8	2074.9	2078.3	2075.4	2064.6
17.5°	2017.7	2001.0	1967.1	1951.1	1938.5	1919.8	1912.2
20°	1937.2	1888.1	1830.9	1808.1	1781.2	1728.7	1741.3
22.5°	1763.6	1707.5	1650.5	1583.7	1551.9	1502.0	1499.0
25°	1493.3	1396.8	1290.6	1216.2	1172.9	1123.2	1101.4
27.5°	1161.1	1039.5	952.4	908.4	868.2	828.8	827.2
30°	942.6	851.2	783.8	746.1	721.5	705.0	708.4
32.5°	794.5	731.9	686.5	655.1	637.0	624.5	624.3
35°	649.5	606.7	577.6	564.4	551.3	542.2	542.7
37.5°	555.9	530.1	513.9	499.4	491.2	486.7	484.2
40°	507.9	486.7	474.2	465.6	458.7	452.5	451.3
42.5°	469.9	452.5	439.9	433.2	426.7	422.3	421.1
45°	417.1	402.8	391.3	383.9	381.1	377.0	377.0
47.5°	371.0	357.0	348.0	343.4	338.5	335.8	335.7
50°	339.9	329.1	321.1	318.2	314.2	312.5	311.9
52.5°	312.0	303.9	298.3	296.3	294.5	292.4	292.7
55°	274.2	269.7	267.3	265.6	262.8	259.3	261.7
57.5°	242.4	238.4	232.3	226.9	224.3	221.9	222.8
60°	220.0	212.0	204.0	197.7	196.0	190.8	190.8
62.5°	191.6	180.4	170.6	167.0	165.3	162.9	162.5
65°	147.4	142.8	140.5	138.3	137.1	137.1	136.0
67.5°	122.2	120.3	117.8	117.3	116.1	115.7	115.4
70°	108.0	105.6	104.5	104.0	102.8	103.4	101.7
72.5°	94.3	92.5	92.2	90.7	90.1	90.1	88.9
75°	74.3	74.3	73.7	73.1	72.0	71.4	72.0
77.5°	57.2	57.3	56.2	56.1	56.0	56.1	55.5
80°	45.7	46.2	45.7	45.1	44.6	45.1	44.6
82.5°	36.1	35.3	35.2	35.0	35.0	34.6	34.5
85°	20.6	21.1	20.6	20.0	20.0	20.0	20.6
87.5°	11.5	11.6	11.7	11.8	11.9	12.0	11.5
90°	18.3	19.2	19.8	20.1	20.5	20.9	21.3
92.5°	19.6	20.1	20.4	20.6	20.8	21.0	21.3
95°	33.3	34.2	34.5	34.4	34.2	34.0	33.8
97.5°	43.1	43.8	44.3	44.5	44.7	44.9	45.1
100°	49.0	50.5	51.3	51.7	52.0	52.3	52.7
102.5°	51.6	53.4	54.5	55.0	55.4	56.0	56.5
105°	53.7	55.6	57.0	57.7	58.4	59.1	59.8
107.5°	61.3	59.3	58.7	59.4	60.1	60.8	61.5
110°	85.2	67.7	59.3	60.0	60.7	61.4	62.2



TEST NUMBER: P331723-935

CATALOG NUMBER: SA2XXRDIP-C865D925U935-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	155.8	92.1	60.5	61.0	61.6	62.2	62.8
115°	242.5	161.5	114.8	102.2	89.6	77.1	64.5
117.5°	478.7	459.1	428.6	387.3	345.9	304.6	263.3
120°	582.7	584.8	574.0	550.4	526.8	503.3	479.7
122.5°	617.3	618.5	616.9	612.3	607.7	603.1	598.6
125°	668.1	669.3	670.2	670.7	671.2	671.8	672.4
127.5°	715.7	717.6	718.4	718.6	718.7	718.8	718.8
130°	745.7	747.6	748.6	748.4	748.1	748.0	747.8
132.5°	774.5	776.1	776.8	776.6	776.4	776.3	776.1
135°	816.0	817.7	818.4	818.0	817.7	817.3	817.0
137.5°	854.4	856.1	856.7	856.1	855.5	854.9	854.3
140°	879.2	880.7	881.1	880.2	879.3	878.5	877.5
142.5°	902.0	903.4	903.7	902.8	902.0	901.1	900.2
145°	933.9	935.1	935.3	934.4	933.6	932.7	931.9
147.5°	961.6	962.5	962.6	961.8	961.1	960.4	959.7
150°	979.0	980.1	980.2	979.3	978.4	977.5	976.6
152.5°	994.7	995.7	995.7	994.5	993.4	992.3	991.1
155°	1016.0	1017.0	1016.8	1015.5	1014.0	1012.6	1011.2
157.5°	1034.0	1035.2	1035.1	1033.7	1032.3	1031.0	1029.7
160°	1044.3	1045.3	1045.3	1044.0	1042.8	1041.6	1040.3
162.5°	1054.1	1055.3	1055.2	1053.7	1052.1	1050.7	1049.1
165°	1066.0	1067.2	1067.2	1066.0	1064.8	1063.6	1062.4
167.5°	1075.9	1077.2	1076.9	1075.4	1073.8	1072.3	1070.7
170°	1081.0	1082.2	1082.0	1080.5	1078.8	1077.3	1075.7
172.5°	1084.8	1086.0	1085.8	1084.2	1082.6	1081.1	1079.5
175°	1088.8	1090.0	1089.8	1088.0	1086.3	1084.5	1082.8
177.5°	1089.1	1090.0	1089.9	1088.6	1087.4	1086.1	1084.9
180°	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8	1086.8

(END OF REPORT)