

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331444-840

Luminaire Tested: **SA2XXDIP-C1005D725U840-4F0-1E-UDD-F**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331444-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C1005D725U840-4F0-1E-UDD-F
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 725 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7023.1 lumens
Efficiency: N/A
Efficacy: 115.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331444-840

CATALOG NUMBER: SA2XXDIP-C1005D725U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

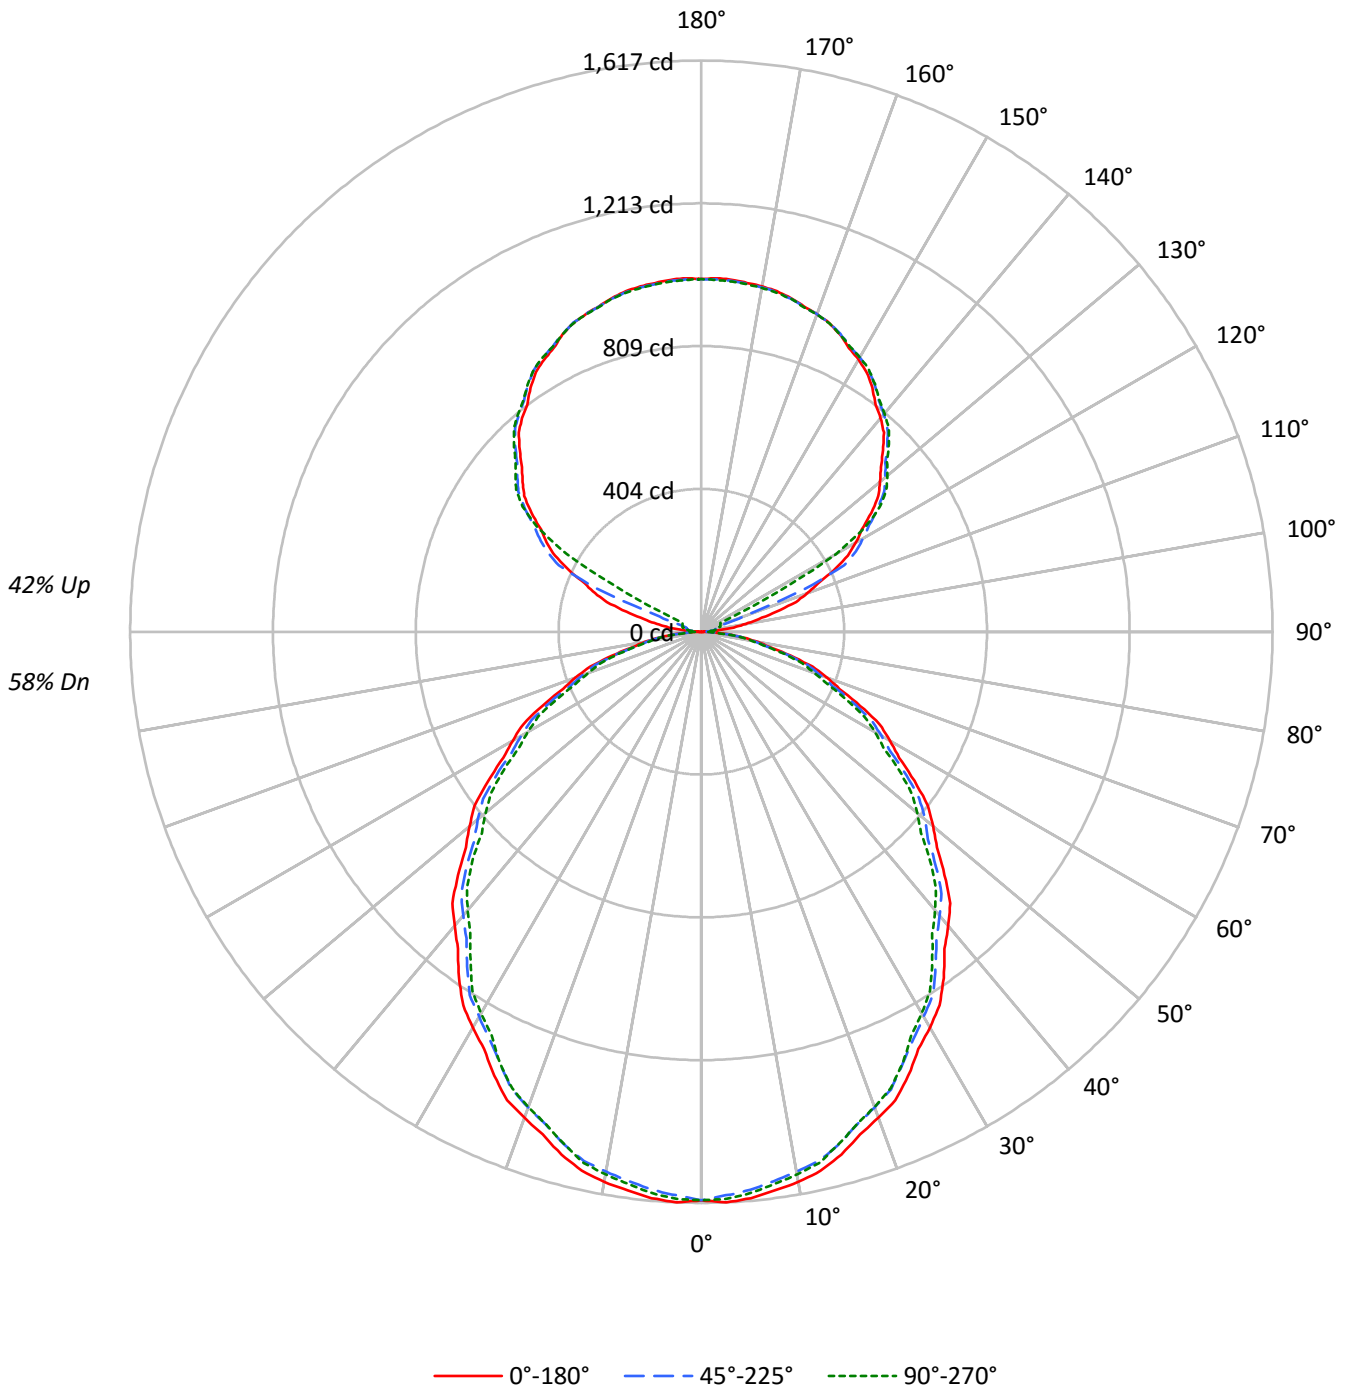



TEST NUMBER: P331444-840

CATALOG NUMBER: SA2XXDIP-C1005D725U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	64	64	64	58
1	100	95	91	88	93	89	86	82	77	75	72	66	65	63	56	55	54	49
2	91	83	77	72	84	78	72	68	68	63	60	58	55	52	50	47	45	41
3	83	73	66	60	77	68	62	57	60	55	50	52	48	44	44	41	39	35
4	76	65	57	51	70	61	54	48	53	47	43	46	42	38	39	36	33	30
5	70	58	50	43	65	54	47	41	48	42	37	41	37	33	35	32	29	26
6	64	52	44	38	60	49	41	36	43	37	32	37	33	29	32	28	26	23
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	29	26	23	20
8	55	43	35	29	51	40	33	28	36	30	25	31	26	23	27	23	20	18
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	18	16
10	48	36	28	24	45	34	27	23	30	25	21	27	22	19	23	19	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	25987	25987	25987
5°	26086	25710	25861
10°	25932	25450	25576
15°	25611	25120	25095
20°	25156	24624	24598
25°	24704	24015	24015
30°	24121	23457	23256
35°	23580	22787	22450
40°	22898	22118	21692
45°	22229	21450	20922
50°	21499	20760	20022
55°	20738	19952	19212
60°	19888	18991	18290
65°	18980	18032	17207
70°	17825	16877	16074
75°	16220	15540	15159
80°	14393	13966	13240
85°	11745	11189	10022



TEST NUMBER: P331444-840

CATALOG NUMBER: SA2XXDIP-C1005D725U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	151.3	2.2
10°-20°	425.9	6.1
20°-30°	626.0	8.9
30°-40°	727.1	10.4
40°-50°	726.3	10.3
50°-60°	633.4	9.0
60°-70°	468.3	6.7
70°-80°	265.3	3.8
80°-90°	73.8	1.1
90°-100°	33.3	0.5
100°-110°	122.1	1.7
110°-120°	326.4	4.6
120°-130°	538.9	7.7
130°-140°	573.1	8.2
140°-150°	532.7	7.6
150°-160°	428.3	6.1
160°-170°	276.0	3.9
170°-180°	95.0	1.4
0°-30°	1203.2	17.1
0°-40°	1930.3	27.5
0°-60°	3290.0	46.8
0°-90°	4097.4	58.3
90°-120°	481.9	6.9
90°-150°	2126.5	30.3
90°-180°	2926.0	41.7
0°-180°	7023.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1610	1610	1610	1610	1610	
5°	1610	1603	1586	1598	1596	153
15°	1532	1522	1503	1508	1501	431
25°	1387	1374	1348	1351	1348	638
35°	1196	1180	1156	1147	1139	747
45°	974	962	939	923	916	751
55°	737	727	709	691	682	658
65°	497	487	472	458	450	491
75°	260	257	249	241	243	278
85°	63	62	60	56	54	73
90°	1	9	14	18	20	5
95°	47	25	28	32	31	57
105°	220	229	44	52	55	235
115°	415	428	446	127	59	409
125°	587	597	610	615	618	523
135°	727	738	745	752	750	561
145°	843	843	854	859	856	527
155°	928	923	930	934	929	428
165°	978	974	976	980	976	276
175°	1000	996	997	1001	995	95
180°	998	998	998	998	998	



TEST NUMBER: P331444-840

CATALOG NUMBER: SA2XXDIP-C1005D725U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5
2.5°	1617.0	1615.6	1614.3	1612.9	1611.4	1609.3	1606.3	1603.3	1600.2	1597.2	1599.9
5°	1609.5	1608.2	1606.8	1605.4	1604.1	1601.4	1597.7	1593.9	1590.1	1586.3	1589.1
7.5°	1595.3	1593.2	1591.0	1588.9	1586.8	1583.8	1579.9	1576.1	1572.3	1568.4	1571.1
10°	1581.7	1579.3	1576.9	1574.5	1572.1	1568.8	1564.7	1560.5	1556.4	1552.3	1555.1
12.5°	1563.2	1560.9	1558.8	1556.7	1554.6	1551.5	1547.3	1543.2	1539.1	1535.0	1536.9
15°	1532.2	1530.1	1528.0	1526.0	1523.9	1520.7	1516.2	1511.7	1507.2	1502.8	1504.2
17.5°	1492.6	1490.5	1488.4	1486.3	1484.3	1481.0	1476.4	1471.9	1467.3	1462.9	1464.4
20°	1464.1	1462.0	1460.0	1457.8	1455.8	1452.4	1447.5	1442.8	1437.9	1433.1	1434.1
22.5°	1435.6	1432.7	1429.9	1426.9	1424.0	1420.4	1415.8	1411.3	1406.7	1402.2	1402.4
25°	1386.7	1383.9	1381.2	1378.5	1375.7	1371.4	1365.5	1359.7	1353.8	1348.0	1348.7
27.5°	1331.0	1328.5	1326.1	1323.5	1321.1	1317.6	1312.9	1308.3	1303.7	1299.1	1298.1
30°	1293.8	1291.1	1288.3	1285.6	1282.8	1278.9	1273.7	1268.6	1263.4	1258.2	1257.2
32.5°	1254.3	1252.0	1249.8	1247.6	1245.4	1241.6	1236.2	1230.7	1225.3	1219.8	1218.0
35°	1196.3	1192.9	1189.4	1186.0	1182.6	1178.1	1172.6	1167.1	1161.6	1156.1	1154.1
37.5°	1131.0	1128.0	1125.0	1122.0	1118.9	1114.7	1109.1	1103.7	1098.1	1092.7	1090.0
40°	1086.4	1083.7	1081.0	1078.2	1075.4	1071.4	1065.8	1060.4	1054.8	1049.4	1046.2
42.5°	1043.1	1040.4	1037.6	1034.9	1032.1	1027.9	1022.5	1016.9	1011.5	1005.9	1002.6
45°	973.5	971.1	968.7	966.2	963.8	960.1	954.9	949.8	944.6	939.4	935.6
47.5°	904.1	901.9	899.6	897.4	895.0	891.2	885.9	880.5	875.1	869.8	865.8
50°	855.9	854.1	852.4	850.7	849.0	845.7	840.9	836.1	831.2	826.5	821.6
52.5°	808.8	806.6	804.3	802.0	799.7	796.3	791.7	787.2	782.7	778.2	774.2
55°	736.7	734.6	732.6	730.5	728.4	725.3	721.2	717.1	713.0	708.8	704.7
57.5°	664.3	662.6	661.0	659.3	657.6	654.6	650.1	645.5	641.0	636.4	632.4
60°	615.9	614.6	613.2	611.9	610.5	607.3	602.6	597.7	592.9	588.1	584.3
62.5°	569.0	566.7	564.5	562.3	560.1	557.1	553.4	549.8	546.0	542.3	538.8
65°	496.8	494.7	492.7	490.6	488.6	485.7	482.3	478.9	475.4	472.0	469.0
67.5°	423.4	421.8	420.1	418.5	416.9	414.4	411.3	408.3	405.2	402.1	399.7
70°	377.6	376.3	374.9	373.5	372.1	369.9	366.8	363.7	360.6	357.5	355.1
72.5°	330.5	329.2	327.8	326.5	325.1	323.4	321.4	319.4	317.4	315.4	313.0
75°	260.0	259.3	258.6	257.9	257.2	256.0	254.3	252.6	250.9	249.1	247.1
77.5°	196.8	195.7	194.5	193.4	192.2	191.3	190.6	189.9	189.1	188.5	187.4
80°	154.8	154.4	154.1	153.7	153.4	152.9	152.2	151.5	150.8	150.2	149.1
82.5°	115.1	115.1	115.0	114.9	114.8	114.6	114.2	113.8	113.4	113.0	111.7
85°	63.4	63.1	62.8	62.4	62.1	61.7	61.4	61.0	60.7	60.4	59.3
87.5°	22.4	22.2	22.0	21.8	21.6	21.4	21.1	20.8	20.5	20.2	19.6
90°	0.7	2.5	4.2	6.1	7.8	9.3	10.6	11.9	13.1	14.4	15.2
92.5°	14.5	14.4	14.2	14.1	13.9	14.2	14.8	15.5	16.2	16.8	17.2
95°	47.0	41.7	36.4	31.1	25.8	23.6	24.8	26.0	27.1	28.2	29.0
97.5°	93.2	78.3	63.3	48.4	33.4	27.3	29.9	32.5	35.1	37.7	38.4
100°	127.8	105.8	83.9	61.9	39.9	30.3	33.0	35.7	38.5	41.2	42.4
102.5°	166.0	161.4	156.7	152.1	147.3	133.6	110.8	88.0	65.1	42.3	44.0
105°	219.6	224.4	229.2	234.1	238.8	219.3	175.5	131.7	87.9	44.0	45.8
107.5°	280.7	284.6	288.5	292.4	296.3	272.0	219.3	166.8	114.2	61.7	59.9
110°	320.0	323.4	326.8	330.1	333.5	311.9	265.6	219.2	172.8	126.4	110.4



TEST NUMBER: P331444-840

CATALOG NUMBER: SA2XXDIP-C1005D725U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	357.0	360.0	362.9	366.0	368.9	364.7	353.3	341.7	330.3	318.8	260.3
115°	415.4	418.1	420.8	423.5	426.3	429.7	433.6	437.7	441.7	445.8	371.4
117.5°	467.6	470.6	473.6	476.7	479.7	482.6	485.4	488.2	490.9	493.7	475.7
120°	505.6	508.1	510.5	512.9	515.3	518.0	520.9	523.7	526.6	529.5	531.4
122.5°	538.1	540.6	543.1	545.6	548.2	551.0	554.2	557.3	560.5	563.6	564.7
125°	587.3	589.4	591.5	593.6	595.6	598.2	601.3	604.3	607.3	610.5	611.6
127.5°	632.0	634.3	636.6	638.8	641.2	643.5	645.8	648.0	650.4	652.6	654.3
130°	660.2	662.9	665.4	667.9	670.6	672.7	674.5	676.2	678.0	679.7	681.6
132.5°	689.1	691.4	693.6	695.7	697.9	699.8	701.7	703.4	705.2	706.9	708.4
135°	726.7	729.3	731.8	734.5	737.0	739.0	740.4	741.8	743.4	744.8	746.4
137.5°	764.8	766.5	768.3	770.1	771.9	773.7	775.3	776.9	778.5	780.2	781.7
140°	789.6	790.8	792.1	793.5	794.7	796.3	798.0	799.8	801.5	803.3	804.8
142.5°	810.4	811.5	812.7	813.9	815.0	816.6	818.6	820.6	822.6	824.7	826.0
145°	843.0	842.8	842.7	842.5	842.4	843.6	846.4	849.1	851.8	854.5	855.8
147.5°	871.5	870.9	870.3	869.7	869.1	870.1	872.8	875.5	878.2	880.9	881.7
150°	890.0	888.9	887.8	886.7	885.4	886.3	888.8	891.3	893.9	896.5	897.5
152.5°	905.5	904.3	903.1	901.8	900.6	901.2	903.6	906.1	908.5	910.9	911.9
155°	928.3	926.9	925.3	923.9	922.5	922.7	924.6	926.6	928.5	930.4	931.4
157.5°	946.0	944.8	943.6	942.4	941.2	941.2	942.6	943.9	945.2	946.6	947.8
160°	956.4	955.4	954.5	953.5	952.6	952.6	953.5	954.5	955.4	956.4	957.5
162.5°	965.7	964.7	963.8	962.8	961.8	961.8	962.6	963.4	964.3	965.1	966.2
165°	978.2	977.1	976.2	975.2	974.2	974.0	974.5	975.0	975.4	975.9	977.0
167.5°	987.3	986.4	985.4	984.5	983.5	983.2	983.7	984.1	984.6	985.0	986.1
170°	992.6	991.6	990.7	989.7	988.8	988.4	988.8	989.1	989.4	989.7	990.8
172.5°	996.0	995.0	994.1	993.1	992.2	991.9	992.2	992.5	992.8	993.1	994.3
175°	1000.5	999.4	998.3	997.1	996.0	995.6	995.9	996.2	996.5	996.9	998.0
177.5°	1001.3	1000.4	999.5	998.6	997.6	997.2	997.3	997.5	997.6	997.7	998.7
180°	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4



TEST NUMBER: P331444-840

CATALOG NUMBER: SA2XXDIP-C1005D725U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5	1609.5
2.5°	1602.7	1605.4	1608.2	1609.3	1608.7	1608.2	1607.6	1607.1
5°	1591.9	1594.6	1597.3	1598.4	1597.7	1597.0	1596.3	1595.6
7.5°	1573.9	1576.6	1579.4	1580.4	1579.6	1578.9	1578.1	1577.4
10°	1557.8	1560.5	1563.3	1564.2	1563.2	1562.1	1561.0	1560.0
12.5°	1538.8	1540.8	1542.7	1543.3	1542.5	1541.8	1541.0	1540.2
15°	1505.5	1506.9	1508.2	1508.1	1506.4	1504.7	1503.0	1501.3
17.5°	1466.0	1467.6	1469.2	1469.2	1467.4	1465.8	1464.2	1462.5
20°	1435.2	1436.2	1437.2	1437.0	1435.7	1434.3	1433.0	1431.6
22.5°	1402.6	1402.8	1403.0	1402.7	1401.9	1401.1	1400.2	1399.4
25°	1349.4	1350.1	1350.8	1350.8	1350.1	1349.4	1348.7	1348.0
27.5°	1297.1	1296.0	1294.9	1293.6	1292.0	1290.3	1288.7	1287.1
30°	1256.2	1255.2	1254.2	1252.9	1251.5	1250.1	1248.8	1247.4
32.5°	1216.2	1214.3	1212.4	1210.8	1209.4	1208.1	1206.7	1205.3
35°	1152.0	1149.9	1147.8	1146.0	1144.3	1142.6	1140.7	1139.0
37.5°	1087.5	1085.0	1082.5	1080.4	1078.7	1077.0	1075.4	1073.8
40°	1043.1	1040.1	1036.9	1034.7	1033.3	1032.0	1030.6	1029.2
42.5°	999.3	995.8	992.5	989.9	988.0	986.0	984.1	982.1
45°	931.9	928.1	924.3	921.7	920.3	919.0	917.6	916.3
47.5°	861.8	857.8	853.8	850.8	848.8	846.9	844.9	842.8
50°	816.8	812.0	807.2	804.0	802.2	800.5	798.8	797.1
52.5°	770.2	766.2	762.2	759.1	756.8	754.6	752.2	750.0
55°	700.5	696.4	692.4	689.4	687.7	686.0	684.3	682.5
57.5°	628.2	624.2	620.2	617.4	616.2	614.9	613.6	612.3
60°	580.6	576.7	573.0	570.6	569.6	568.6	567.4	566.4
62.5°	535.3	531.8	528.3	525.8	524.5	523.2	521.9	520.6
65°	465.9	462.7	459.7	457.3	455.6	453.8	452.1	450.4
67.5°	397.3	394.9	392.4	390.5	389.2	387.8	386.5	385.1
70°	352.6	350.3	347.9	346.0	344.6	343.3	341.8	340.5
72.5°	310.6	308.2	305.8	304.1	303.0	301.8	300.7	299.6
75°	245.1	243.0	241.0	240.2	241.0	241.6	242.3	243.0
77.5°	186.4	185.4	184.4	183.4	182.4	181.5	180.5	179.6
80°	148.0	147.0	146.0	145.1	144.4	143.8	143.1	142.4
82.5°	110.4	109.1	107.8	107.0	106.8	106.7	106.6	106.4
85°	58.3	57.3	56.2	55.5	55.2	54.8	54.5	54.1
87.5°	18.9	18.3	17.6	17.2	16.9	16.7	16.5	16.3
90°	16.1	16.9	17.7	18.2	18.6	18.9	19.2	19.5
92.5°	17.6	18.0	18.4	18.8	18.9	19.1	19.3	19.5
95°	29.8	30.6	31.4	31.7	31.5	31.4	31.2	31.1
97.5°	39.0	39.6	40.3	40.7	40.9	41.1	41.3	41.5
100°	43.7	45.0	46.4	47.2	47.5	47.8	48.1	48.4
102.5°	45.6	47.4	49.0	50.1	50.5	51.0	51.4	51.9
105°	47.6	49.4	51.1	52.3	53.0	53.6	54.2	54.9
107.5°	58.1	56.2	54.5	53.9	54.5	55.2	55.8	56.5
110°	94.3	78.3	62.2	54.5	55.1	55.7	56.5	57.1



TEST NUMBER: P331444-840

CATALOG NUMBER: SA2XXDIP-C1005D725U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	201.8	143.2	84.6	55.5	56.1	56.7	57.2	57.7
115°	297.1	222.8	148.5	105.4	93.9	82.3	70.8	59.3
117.5°	457.8	439.7	421.7	393.7	355.8	317.8	279.8	241.9
120°	533.4	535.3	537.2	527.4	505.6	484.0	462.3	440.7
122.5°	565.9	567.0	568.3	566.7	562.5	558.3	554.1	549.9
125°	612.7	613.8	614.9	615.7	616.2	616.7	617.1	617.6
127.5°	655.9	657.5	659.1	660.0	660.1	660.2	660.4	660.5
130°	683.3	685.1	686.8	687.6	687.5	687.3	687.1	687.0
132.5°	709.9	711.4	713.0	713.7	713.5	713.4	713.2	713.0
135°	748.0	749.6	751.2	751.8	751.5	751.2	750.8	750.5
137.5°	783.4	784.9	786.5	787.0	786.5	785.9	785.4	784.8
140°	806.2	807.6	809.1	809.4	808.6	807.8	807.0	806.2
142.5°	827.3	828.6	829.9	830.2	829.4	828.6	827.8	827.0
145°	856.9	858.0	859.1	859.2	858.5	857.7	856.9	856.1
147.5°	882.5	883.4	884.2	884.3	883.6	882.9	882.3	881.6
150°	898.4	899.4	900.3	900.4	899.6	898.8	898.0	897.2
152.5°	912.8	913.8	914.8	914.7	913.7	912.6	911.6	910.5
155°	932.4	933.3	934.3	934.1	932.8	931.6	930.3	929.0
157.5°	948.8	949.9	951.0	950.9	949.7	948.4	947.2	945.9
160°	958.4	959.4	960.3	960.2	959.1	958.0	956.8	955.7
162.5°	967.2	968.4	969.5	969.4	968.0	966.5	965.2	963.8
165°	978.2	979.4	980.5	980.5	979.4	978.2	977.0	975.9
167.5°	987.3	988.5	989.6	989.4	988.0	986.5	985.0	983.6
170°	991.9	993.0	994.2	994.0	992.6	991.1	989.7	988.3
172.5°	995.4	996.5	997.6	997.4	996.0	994.6	993.1	991.7
175°	999.2	1000.3	1001.4	1001.2	999.6	997.9	996.3	994.7
177.5°	999.6	1000.5	1001.4	1001.3	1000.1	999.0	997.7	996.6
180°	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4

(END OF REPORT)