

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331258-840

Luminaire Tested: **SA2XXDIP-C290D725U840-4F0-1E-UDD-A**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P331258-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA2XXDIP-C290D725U840-4F0-1E-UDD-A  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 290 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 725 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4245.1 lumens  
Efficiency: N/A  
Efficacy: 136.1 lumens/watt  
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23  
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')  
CIE Type: Semi-Indirect

Input Watts (W): 31.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331258-840  
CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

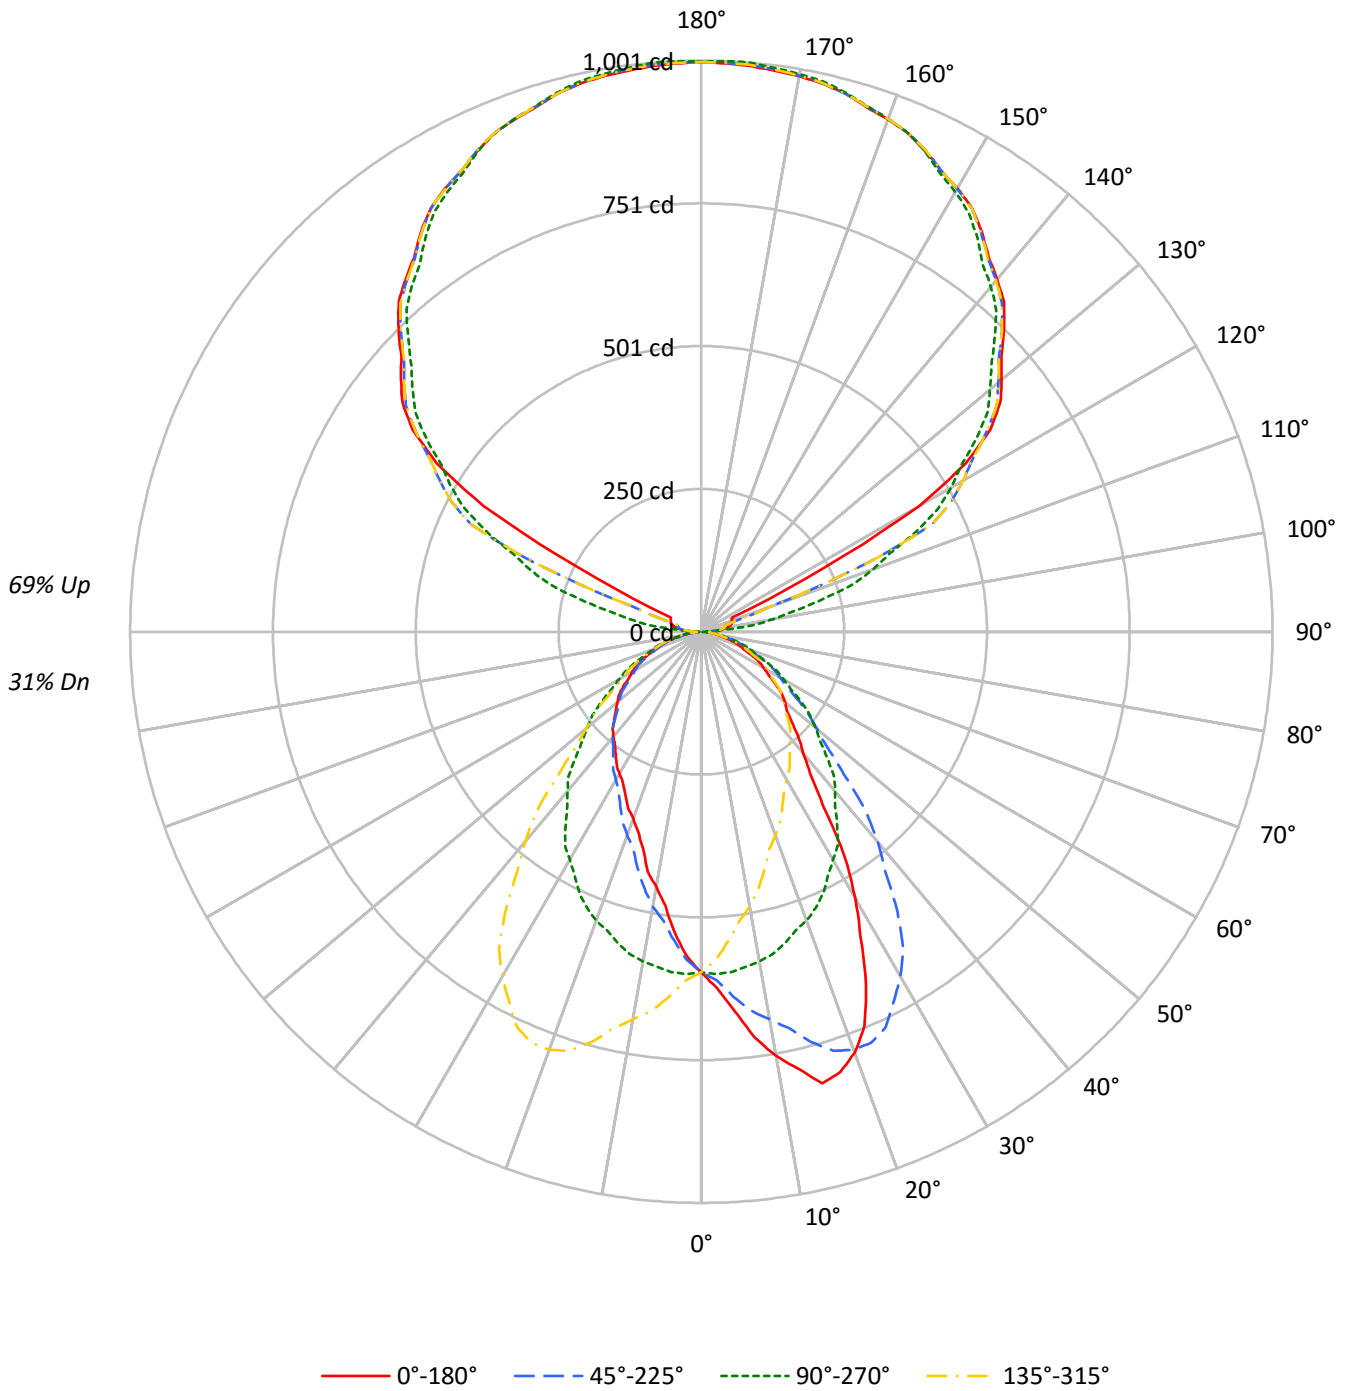



TEST NUMBER: P331258-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	103	103	103	103	92	92	92	92	73	73	73	55	55	55	39	39	39	31	31	31	0	
1	94	90	86	83	84	81	78	75	64	62	60	49	47	46	35	34	33	27	27	27	0	
2	86	79	73	68	77	71	66	62	56	53	50	43	41	39	31	30	28	23	23	23	0	
3	78	69	62	57	70	63	57	52	50	46	43	38	36	33	28	26	25	20	20	20	0	
4	72	61	54	48	64	56	49	44	45	40	36	34	31	29	25	23	21	17	17	17	0	
5	66	55	47	41	59	50	43	38	40	35	31	31	28	25	22	20	19	15	15	15	0	
6	61	49	41	36	54	45	38	33	36	31	28	28	25	22	20	18	17	13	13	13	0	
7	56	44	37	31	50	40	34	29	33	28	24	26	22	20	19	17	15	12	12	12	0	
8	52	40	33	28	47	37	30	26	30	25	22	23	20	17	17	15	13	11	11	11	0	
9	48	37	30	25	43	33	27	23	27	23	19	21	18	16	16	14	12	10	10	10	0	
10	45	34	27	22	41	31	25	20	25	20	17	20	17	14	15	13	11	9	9	9	0	

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	9637	9637	9637	9637
5°	10804	9700	8596	9700
10°	12381	9621	7438	9621
15°	13697	9444	6572	9444
20°	13490	9256	5991	9256
25°	12162	9002	5624	9002
30°	10051	8600	5354	8600
35°	7324	8180	5164	8180
40°	5851	7685	5056	7685
45°	5112	7108	4914	7108
50°	4808	6551	4818	6551
55°	4428	5987	4687	5987
60°	4059	5383	4492	5383
65°	3698	4844	4294	4844
70°	3356	4319	4008	4319
75°	2982	3737	3550	3737
80°	2566	3087	2854	3087
85°	2297	2297	1704	2297



TEST NUMBER: P331258-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	56.8	1.3
10°-20°	165.3	3.9
20°-30°	239.9	5.7
30°-40°	253.1	6.0
40°-50°	224.1	5.3
50°-60°	178.8	4.2
60°-70°	121.6	2.9
70°-80°	62.3	1.5
80°-90°	17.5	0.4
90°-100°	33.3	0.8
100°-110°	122.1	2.9
110°-120°	326.4	7.7
120°-130°	538.9	12.7
130°-140°	573.1	13.5
140°-150°	532.7	12.5
150°-160°	428.3	10.1
160°-170°	276.0	6.5
170°-180°	95.0	2.2
0°-30°	462.0	10.9
0°-40°	715.1	16.8
0°-60°	1118.0	26.3
0°-90°	1319.4	31.1
90°-120°	481.9	11.4
90°-150°	2126.5	50.1
90°-180°	2926.0	68.9
0°-180°	4245.1	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	597	597	597	597	597	
5°	667	598	530	598	667	67
15°	819	565	393	565	819	226
25°	683	505	316	505	683	309
35°	372	415	262	415	372	242
45°	224	311	215	311	224	176
55°	157	213	166	213	157	141
65°	97	127	112	127	97	96
75°	48	60	57	60	48	51
85°	12	12	9	12	12	14
90°	20	1	20	1	20	9
95°	31	47	31	47	31	29
105°	55	220	55	220	55	57
115°	59	415	59	415	59	148
125°	618	587	618	587	618	534
135°	750	727	750	727	750	578
145°	856	843	856	843	856	535
155°	929	928	929	928	929	429
165°	976	978	976	978	976	276
175°	995	1000	995	1000	995	95
180°	998	998	998	998	998	



TEST NUMBER: P331258-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9
2.5°	624.4	624.6	625.0	622.1	621.7	621.7	619.1	616.9	614.3	610.9	611.3
5°	666.6	669.1	670.0	667.3	663.2	662.8	658.8	652.5	646.4	641.7	638.2
7.5°	717.0	718.0	715.8	712.2	709.1	703.6	696.3	689.2	679.2	670.1	663.4
10°	755.2	756.6	752.7	747.4	743.1	736.6	726.1	715.3	702.3	689.6	679.5
12.5°	784.2	787.6	782.5	781.9	774.5	765.6	753.1	747.6	729.2	711.7	700.7
15°	819.4	819.2	819.7	815.3	809.8	808.4	795.2	780.6	754.8	744.4	726.5
17.5°	809.2	812.7	814.4	814.3	814.2	813.2	809.0	799.9	786.9	770.1	749.5
20°	785.1	789.6	790.3	795.6	798.6	802.4	804.1	801.5	793.6	779.5	761.6
22.5°	747.6	748.9	751.0	759.2	765.7	775.5	780.5	789.1	786.0	779.1	764.2
25°	682.7	680.4	688.4	692.6	707.5	723.1	734.4	746.7	757.7	764.4	760.0
27.5°	604.8	601.4	613.4	624.4	636.4	653.4	670.9	691.6	708.7	730.3	737.7
30°	539.1	541.2	552.6	564.3	582.7	606.5	626.3	648.9	673.6	697.6	714.4
32.5°	468.3	476.2	483.4	501.4	517.6	544.1	573.1	601.5	632.1	659.4	685.4
35°	371.6	380.8	390.9	403.9	426.7	453.0	481.3	519.6	561.4	598.7	629.4
37.5°	312.9	311.3	317.1	326.6	345.0	366.3	398.8	436.6	485.7	529.7	573.1
40°	277.6	276.7	280.7	289.5	303.5	319.1	347.6	380.8	426.5	480.2	531.8
42.5°	253.4	253.9	256.2	262.4	272.0	284.8	306.1	334.4	376.2	426.8	482.2
45°	223.9	225.5	228.0	231.1	236.5	247.1	259.0	279.2	312.3	354.5	409.0
47.5°	202.7	202.8	205.3	207.9	211.2	217.1	226.9	239.5	262.9	297.2	344.2
50°	191.4	189.8	191.6	193.6	197.0	201.2	207.6	219.5	235.1	262.9	302.2
52.5°	177.3	177.4	179.0	179.9	182.9	187.0	192.9	201.2	215.3	237.0	269.2
55°	157.3	158.5	159.5	160.8	163.6	166.5	171.2	176.6	187.6	203.9	227.8
57.5°	138.6	139.0	139.9	142.5	144.2	146.9	151.3	156.3	163.5	175.5	193.5
60°	125.7	125.7	127.5	128.7	131.0	133.7	137.1	142.0	148.5	158.2	172.8
62.5°	114.0	113.8	114.5	116.4	118.2	120.7	124.1	128.3	134.3	143.1	154.9
65°	96.8	96.3	97.8	98.2	100.0	102.5	105.3	109.7	114.5	120.9	131.5
67.5°	80.3	80.9	81.6	82.4	83.4	86.1	88.0	91.0	95.1	100.5	107.6
70°	71.1	71.1	71.1	71.8	73.2	74.5	76.3	78.9	82.8	87.4	93.8
72.5°	60.8	61.6	62.3	61.9	63.6	64.4	66.7	68.1	71.8	74.7	80.4
75°	47.8	47.8	47.8	48.9	49.6	50.2	51.6	53.0	54.8	58.5	61.5
77.5°	35.6	35.5	35.7	36.1	36.8	37.6	38.0	39.2	40.9	42.6	45.1
80°	27.6	28.0	28.2	28.7	28.7	29.1	29.4	31.0	32.1	33.2	34.8
82.5°	21.3	21.4	21.4	21.5	21.7	22.0	22.6	23.1	23.5	24.4	25.7
85°	12.4	12.1	12.1	12.6	12.4	12.4	12.8	13.3	13.3	13.5	14.2
87.5°	8.7	8.6	8.7	8.5	8.4	8.5	8.3	8.0	8.0	8.0	8.0
90°	19.5	19.2	18.9	18.6	18.2	17.7	16.9	16.1	15.2	14.4	13.1
92.5°	19.5	19.3	19.1	18.9	18.8	18.4	18.0	17.6	17.2	16.8	16.2
95°	31.1	31.2	31.4	31.5	31.7	31.4	30.6	29.8	29.0	28.2	27.1
97.5°	41.5	41.3	41.1	40.9	40.7	40.3	39.6	39.0	38.4	37.7	35.1
100°	48.4	48.1	47.8	47.5	47.2	46.4	45.0	43.7	42.4	41.2	38.5
102.5°	51.9	51.4	51.0	50.5	50.1	49.0	47.4	45.6	44.0	42.3	65.1
105°	54.9	54.2	53.6	53.0	52.3	51.1	49.4	47.6	45.8	44.0	87.9
107.5°	56.5	55.8	55.2	54.5	53.9	54.5	56.2	58.1	59.9	61.7	114.2
110°	57.1	56.5	55.7	55.1	54.5	62.2	78.3	94.3	110.4	126.4	172.8



TEST NUMBER: P331258-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	57.7	57.2	56.7	56.1	55.5	84.6	143.2	201.8	260.3	318.8	330.3
115°	59.3	70.8	82.3	93.9	105.4	148.5	222.8	297.1	371.4	445.8	441.7
117.5°	241.9	279.8	317.8	355.8	393.7	421.7	439.7	457.8	475.7	493.7	490.9
120°	440.7	462.3	484.0	505.6	527.4	537.2	535.3	533.4	531.4	529.5	526.6
122.5°	549.9	554.1	558.3	562.5	566.7	568.3	567.0	565.9	564.7	563.6	560.5
125°	617.6	617.1	616.7	616.2	615.7	614.9	613.8	612.7	611.6	610.5	607.3
127.5°	660.5	660.4	660.2	660.1	660.0	659.1	657.5	655.9	654.3	652.6	650.4
130°	687.0	687.1	687.3	687.5	687.6	686.8	685.1	683.3	681.6	679.7	678.0
132.5°	713.0	713.2	713.4	713.5	713.7	713.0	711.4	709.9	708.4	706.9	705.2
135°	750.5	750.8	751.2	751.5	751.8	751.2	749.6	748.0	746.4	744.8	743.4
137.5°	784.8	785.4	785.9	786.5	787.0	786.5	784.9	783.4	781.7	780.2	778.5
140°	806.2	807.0	807.8	808.6	809.4	809.1	807.6	806.2	804.8	803.3	801.5
142.5°	827.0	827.8	828.6	829.4	830.2	829.9	828.6	827.3	826.0	824.7	822.6
145°	856.1	856.9	857.7	858.5	859.2	859.1	858.0	856.9	855.8	854.5	851.8
147.5°	881.6	882.3	882.9	883.6	884.3	884.2	883.4	882.5	881.7	880.9	878.2
150°	897.2	898.0	898.8	899.6	900.4	900.3	899.4	898.4	897.5	896.5	893.9
152.5°	910.5	911.6	912.6	913.7	914.7	914.8	913.8	912.8	911.9	910.9	908.5
155°	929.0	930.3	931.6	932.8	934.1	934.3	933.3	932.4	931.4	930.4	928.5
157.5°	945.9	947.2	948.4	949.7	950.9	951.0	949.9	948.8	947.8	946.6	945.2
160°	955.7	956.8	958.0	959.1	960.2	960.3	959.4	958.4	957.5	956.4	955.4
162.5°	963.8	965.2	966.5	968.0	969.4	969.5	968.4	967.2	966.2	965.1	964.3
165°	975.9	977.0	978.2	979.4	980.5	980.5	979.4	978.2	977.0	975.9	975.4
167.5°	983.6	985.0	986.5	988.0	989.4	989.6	988.5	987.3	986.1	985.0	984.6
170°	988.3	989.7	991.1	992.6	994.0	994.2	993.0	991.9	990.8	989.7	989.4
172.5°	991.7	993.1	994.6	996.0	997.4	997.6	996.5	995.4	994.3	993.1	992.8
175°	994.7	996.3	997.9	999.6	1001.2	1001.4	1000.3	999.2	998.0	996.9	996.5
177.5°	996.6	997.7	999.0	1000.1	1001.3	1001.4	1000.5	999.6	998.7	997.7	997.6
180°	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4



TEST NUMBER: P331258-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9
2.5°	612.5	611.1	610.2	606.8	603.9	601.0	600.1	600.4	596.3	592.5	590.9
5°	636.4	631.8	627.4	621.3	613.9	605.8	601.8	598.5	590.5	581.8	576.7
7.5°	657.7	651.2	642.8	631.2	620.5	607.8	599.8	592.7	581.0	568.7	561.1
10°	670.8	661.9	651.1	636.8	623.8	608.3	597.6	586.8	573.1	558.4	549.2
12.5°	682.0	669.9	659.3	641.1	625.6	606.3	593.6	578.3	563.9	546.4	537.5
15°	708.6	686.4	666.2	645.5	626.5	599.7	585.4	565.0	546.0	524.4	514.1
17.5°	729.2	704.2	672.5	646.2	624.0	594.2	573.4	549.0	526.4	501.8	487.8
20°	740.9	712.3	678.1	646.9	620.4	586.3	563.6	538.7	512.3	484.5	469.4
22.5°	747.9	717.8	684.0	644.2	613.0	580.0	551.4	523.9	497.3	467.3	451.4
25°	750.1	722.7	686.8	641.9	603.8	566.4	532.0	505.3	473.0	445.0	421.9
27.5°	739.2	719.5	685.1	637.5	593.2	549.5	511.1	481.0	446.9	416.5	393.1
30°	725.8	714.4	680.9	633.2	584.7	537.8	495.5	461.3	427.4	396.7	372.7
32.5°	705.1	702.7	673.2	626.9	575.7	522.9	479.2	444.6	407.0	376.8	354.1
35°	664.4	675.4	656.8	613.0	558.9	501.7	454.4	415.0	376.0	347.1	325.8
37.5°	609.8	637.1	632.3	592.6	535.9	478.7	426.5	385.3	348.1	318.9	298.0
40°	572.1	607.0	612.1	576.9	519.9	460.9	405.6	364.6	328.3	301.6	280.5
42.5°	531.8	572.5	586.3	558.3	502.2	442.1	386.9	344.4	308.4	282.6	263.9
45°	464.1	518.0	543.0	526.9	472.8	411.3	354.5	311.3	278.7	254.4	239.9
47.5°	400.8	459.7	493.3	487.7	440.1	379.2	323.0	281.6	249.8	230.5	217.5
50°	356.1	416.6	457.2	459.1	416.6	356.3	299.8	260.8	231.7	213.6	203.0
52.5°	317.1	375.0	419.2	429.0	390.3	332.4	279.1	240.2	214.6	197.9	188.5
55°	266.3	315.2	364.3	382.2	351.2	296.2	246.8	212.7	188.5	177.1	168.8
57.5°	221.5	262.2	307.5	327.3	308.2	261.1	214.8	185.1	165.6	155.5	149.2
60°	197.7	229.8	270.2	293.9	277.3	235.4	195.0	166.7	150.7	141.8	135.8
62.5°	175.7	204.2	238.3	259.9	251.0	211.4	175.2	150.3	136.4	128.1	123.7
65°	145.0	167.4	193.9	213.8	207.8	177.8	148.1	126.8	115.8	109.2	105.7
67.5°	119.4	135.6	153.9	171.4	166.6	145.3	121.6	104.9	96.7	91.0	88.9
70°	103.2	115.6	131.9	145.9	142.0	124.6	105.7	91.5	84.4	79.6	77.6
72.5°	87.9	98.0	110.5	121.9	119.3	104.7	89.1	78.4	72.8	68.4	66.8
75°	66.3	74.1	81.7	89.3	88.6	77.4	68.2	59.9	55.5	52.1	51.4
77.5°	49.0	53.3	58.5	62.9	61.7	55.2	48.1	43.3	40.2	37.9	37.5
80°	37.4	39.9	43.6	46.8	45.2	42.4	36.7	33.2	31.0	28.7	27.8
82.5°	27.2	29.6	31.8	33.6	32.3	29.8	26.3	23.9	22.5	21.0	20.6
85°	14.2	15.6	16.6	17.0	16.6	14.9	13.3	12.4	11.2	10.5	10.3
87.5°	7.9	7.7	7.4	7.5	6.6	6.2	5.0	4.1	4.3	4.5	4.5
90°	11.9	10.6	9.3	7.8	6.1	4.2	2.5	0.7	2.5	4.2	6.1
92.5°	15.5	14.8	14.2	13.9	14.1	14.2	14.4	14.5	14.4	14.2	14.1
95°	26.0	24.8	23.6	25.8	31.1	36.4	41.7	47.0	41.7	36.4	31.1
97.5°	32.5	29.9	27.3	33.4	48.4	63.3	78.3	93.2	78.3	63.3	48.4
100°	35.7	33.0	30.3	39.9	61.9	83.9	105.8	127.8	105.8	83.9	61.9
102.5°	88.0	110.8	133.6	147.3	152.1	156.7	161.4	166.0	161.4	156.7	152.1
105°	131.7	175.5	219.3	238.8	234.1	229.2	224.4	219.6	224.4	229.2	234.1
107.5°	166.8	219.3	272.0	296.3	292.4	288.5	284.6	280.7	284.6	288.5	292.4
110°	219.2	265.6	311.9	333.5	330.1	326.8	323.4	320.0	323.4	326.8	330.1





TEST NUMBER: P331258-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	341.7	353.3	364.7	368.9	366.0	362.9	360.0	357.0	360.0	362.9	366.0
115°	437.7	433.6	429.7	426.3	423.5	420.8	418.1	415.4	418.1	420.8	423.5
117.5°	488.2	485.4	482.6	479.7	476.7	473.6	470.6	467.6	470.6	473.6	476.7
120°	523.7	520.9	518.0	515.3	512.9	510.5	508.1	505.6	508.1	510.5	512.9
122.5°	557.3	554.2	551.0	548.2	545.6	543.1	540.6	538.1	540.6	543.1	545.6
125°	604.3	601.3	598.2	595.6	593.6	591.5	589.4	587.3	589.4	591.5	593.6
127.5°	648.0	645.8	643.5	641.2	638.8	636.6	634.3	632.0	634.3	636.6	638.8
130°	676.2	674.5	672.7	670.6	667.9	665.4	662.9	660.2	662.9	665.4	667.9
132.5°	703.4	701.7	699.8	697.9	695.7	693.6	691.4	689.1	691.4	693.6	695.7
135°	741.8	740.4	739.0	737.0	734.5	731.8	729.3	726.7	729.3	731.8	734.5
137.5°	776.9	775.3	773.7	771.9	770.1	768.3	766.5	764.8	766.5	768.3	770.1
140°	799.8	798.0	796.3	794.7	793.5	792.1	790.8	789.6	790.8	792.1	793.5
142.5°	820.6	818.6	816.6	815.0	813.9	812.7	811.5	810.4	811.5	812.7	813.9
145°	849.1	846.4	843.6	842.4	842.5	842.7	842.8	843.0	842.8	842.7	842.5
147.5°	875.5	872.8	870.1	869.1	869.7	870.3	870.9	871.5	870.9	870.3	869.7
150°	891.3	888.8	886.3	885.4	886.7	887.8	888.9	890.0	888.9	887.8	886.7
152.5°	906.1	903.6	901.2	900.6	901.8	903.1	904.3	905.5	904.3	903.1	901.8
155°	926.6	924.6	922.7	922.5	923.9	925.3	926.9	928.3	926.9	925.3	923.9
157.5°	943.9	942.6	941.2	941.2	942.4	943.6	944.8	946.0	944.8	943.6	942.4
160°	954.5	953.5	952.6	952.6	953.5	954.5	955.4	956.4	955.4	954.5	953.5
162.5°	963.4	962.6	961.8	961.8	962.8	963.8	964.7	965.7	964.7	963.8	962.8
165°	975.0	974.5	974.0	974.2	975.2	976.2	977.1	978.2	977.1	976.2	975.2
167.5°	984.1	983.7	983.2	983.5	984.5	985.4	986.4	987.3	986.4	985.4	984.5
170°	989.1	988.8	988.4	988.8	989.7	990.7	991.6	992.6	991.6	990.7	989.7
172.5°	992.5	992.2	991.9	992.2	993.1	994.1	995.0	996.0	995.0	994.1	993.1
175°	996.2	995.9	995.6	996.0	997.1	998.3	999.4	1000.5	999.4	998.3	997.1
177.5°	997.5	997.3	997.2	997.6	998.6	999.5	1000.4	1001.3	1000.4	999.5	998.6
180°	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4



TEST NUMBER: P331258-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9
2.5°	589.1	587.9	584.1	582.1	578.8	575.6	573.6	574.5	575.2	574.9	574.3
5°	572.1	567.7	561.1	555.4	551.3	543.7	540.5	538.9	537.5	535.9	534.3
7.5°	552.0	545.1	535.6	527.5	519.8	510.3	504.9	501.8	498.5	494.8	491.6
10°	537.8	528.1	518.0	506.5	497.4	488.9	481.3	476.3	471.6	467.3	464.1
12.5°	522.7	511.6	499.1	483.4	473.3	461.1	460.0	451.1	443.9	441.2	437.5
15°	498.8	483.1	467.3	448.7	440.7	429.7	422.8	415.9	409.7	405.4	404.2
17.5°	471.5	451.3	435.6	422.2	409.1	397.8	391.4	386.0	380.8	375.1	374.3
20°	450.8	433.3	416.2	404.5	390.9	379.4	371.6	366.2	361.7	358.3	355.4
22.5°	431.1	412.0	396.3	383.5	370.2	360.9	354.8	349.4	345.8	342.0	339.2
25°	399.6	384.8	367.5	353.0	342.0	336.1	331.0	326.5	324.2	321.6	318.4
27.5°	372.0	355.5	339.4	328.2	318.5	313.3	309.6	306.5	304.4	302.9	301.0
30°	352.6	335.9	323.3	312.3	304.2	298.9	296.6	294.8	292.3	291.3	290.4
32.5°	333.9	318.8	308.0	298.4	290.8	287.3	285.3	283.6	281.7	280.7	278.8
35°	307.4	294.8	284.3	278.9	272.8	269.7	268.2	265.9	264.1	263.2	262.9
37.5°	282.5	271.6	264.6	257.8	255.2	253.4	251.2	249.6	249.0	248.9	248.6
40°	266.3	257.4	251.2	245.7	244.6	241.8	239.9	238.6	238.6	238.8	238.6
42.5°	251.7	243.6	238.1	233.4	232.1	230.5	228.5	228.5	228.8	229.6	228.8
45°	229.4	223.7	219.7	217.5	215.0	213.4	213.1	213.8	214.0	214.3	215.0
47.5°	208.9	205.1	201.6	199.0	197.9	197.7	197.4	198.6	199.8	200.2	201.2
50°	196.8	192.5	189.5	187.8	186.9	186.5	186.9	188.3	189.2	190.4	191.1
52.5°	183.3	180.2	178.1	176.8	176.5	176.8	176.8	178.4	179.9	180.4	180.7
55°	164.5	162.2	161.8	159.7	160.6	160.4	161.5	162.4	163.8	165.2	165.4
57.5°	145.7	143.9	142.7	142.9	143.2	144.2	145.1	146.7	148.1	149.7	149.8
60°	133.3	132.4	131.7	131.7	132.1	133.5	134.6	136.2	137.1	138.1	138.8
62.5°	121.9	121.0	120.3	120.7	121.9	122.7	124.0	124.9	125.8	126.7	127.0
65°	103.9	103.5	104.1	104.6	104.8	105.9	107.6	108.3	109.2	109.7	111.3
67.5°	87.4	87.5	87.4	88.0	89.4	89.6	91.1	92.7	92.9	93.8	94.8
70°	76.1	76.6	77.1	77.6	78.7	79.2	80.3	81.0	81.9	82.6	83.3
72.5°	65.8	65.9	66.4	66.3	67.4	68.3	69.3	70.0	70.9	71.8	72.4
75°	50.7	50.7	51.2	51.4	52.5	53.7	53.4	53.9	54.8	55.7	56.2
77.5°	37.1	36.6	37.1	37.3	37.7	38.6	38.8	39.4	40.5	40.2	40.7
80°	28.2	27.6	28.2	28.5	28.5	29.6	29.6	30.1	30.7	30.1	30.7
82.5°	20.1	19.8	20.3	20.4	20.7	20.8	21.1	21.2	21.9	21.6	21.9
85°	10.1	9.9	10.1	9.9	10.1	10.3	10.3	10.1	10.1	10.5	9.9
87.5°	4.6	4.8	4.8	5.2	5.3	5.3	5.3	5.5	5.6	5.4	5.5
90°	7.8	9.3	10.6	11.9	13.1	14.4	15.2	16.1	16.9	17.7	18.2
92.5°	13.9	14.2	14.8	15.5	16.2	16.8	17.2	17.6	18.0	18.4	18.8
95°	25.8	23.6	24.8	26.0	27.1	28.2	29.0	29.8	30.6	31.4	31.7
97.5°	33.4	27.3	29.9	32.5	35.1	37.7	38.4	39.0	39.6	40.3	40.7
100°	39.9	30.3	33.0	35.7	38.5	41.2	42.4	43.7	45.0	46.4	47.2
102.5°	147.3	133.6	110.8	88.0	65.1	42.3	44.0	45.6	47.4	49.0	50.1
105°	238.8	219.3	175.5	131.7	87.9	44.0	45.8	47.6	49.4	51.1	52.3
107.5°	296.3	272.0	219.3	166.8	114.2	61.7	59.9	58.1	56.2	54.5	53.9
110°	333.5	311.9	265.6	219.2	172.8	126.4	110.4	94.3	78.3	62.2	54.5



TEST NUMBER: P331258-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	368.9	364.7	353.3	341.7	330.3	318.8	260.3	201.8	143.2	84.6	55.5
115°	426.3	429.7	433.6	437.7	441.7	445.8	371.4	297.1	222.8	148.5	105.4
117.5°	479.7	482.6	485.4	488.2	490.9	493.7	475.7	457.8	439.7	421.7	393.7
120°	515.3	518.0	520.9	523.7	526.6	529.5	531.4	533.4	535.3	537.2	527.4
122.5°	548.2	551.0	554.2	557.3	560.5	563.6	564.7	565.9	567.0	568.3	566.7
125°	595.6	598.2	601.3	604.3	607.3	610.5	611.6	612.7	613.8	614.9	615.7
127.5°	641.2	643.5	645.8	648.0	650.4	652.6	654.3	655.9	657.5	659.1	660.0
130°	670.6	672.7	674.5	676.2	678.0	679.7	681.6	683.3	685.1	686.8	687.6
132.5°	697.9	699.8	701.7	703.4	705.2	706.9	708.4	709.9	711.4	713.0	713.7
135°	737.0	739.0	740.4	741.8	743.4	744.8	746.4	748.0	749.6	751.2	751.8
137.5°	771.9	773.7	775.3	776.9	778.5	780.2	781.7	783.4	784.9	786.5	787.0
140°	794.7	796.3	798.0	799.8	801.5	803.3	804.8	806.2	807.6	809.1	809.4
142.5°	815.0	816.6	818.6	820.6	822.6	824.7	826.0	827.3	828.6	829.9	830.2
145°	842.4	843.6	846.4	849.1	851.8	854.5	855.8	856.9	858.0	859.1	859.2
147.5°	869.1	870.1	872.8	875.5	878.2	880.9	881.7	882.5	883.4	884.2	884.3
150°	885.4	886.3	888.8	891.3	893.9	896.5	897.5	898.4	899.4	900.3	900.4
152.5°	900.6	901.2	903.6	906.1	908.5	910.9	911.9	912.8	913.8	914.8	914.7
155°	922.5	922.7	924.6	926.6	928.5	930.4	931.4	932.4	933.3	934.3	934.1
157.5°	941.2	941.2	942.6	943.9	945.2	946.6	947.8	948.8	949.9	951.0	950.9
160°	952.6	952.6	953.5	954.5	955.4	956.4	957.5	958.4	959.4	960.3	960.2
162.5°	961.8	961.8	962.6	963.4	964.3	965.1	966.2	967.2	968.4	969.5	969.4
165°	974.2	974.0	974.5	975.0	975.4	975.9	977.0	978.2	979.4	980.5	980.5
167.5°	983.5	983.2	983.7	984.1	984.6	985.0	986.1	987.3	988.5	989.6	989.4
170°	988.8	988.4	988.8	989.1	989.4	989.7	990.8	991.9	993.0	994.2	994.0
172.5°	992.2	991.9	992.2	992.5	992.8	993.1	994.3	995.4	996.5	997.6	997.4
175°	996.0	995.6	995.9	996.2	996.5	996.9	998.0	999.2	1000.3	1001.4	1001.2
177.5°	997.6	997.2	997.3	997.5	997.6	997.7	998.7	999.6	1000.5	1001.4	1001.3
180°	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4



TEST NUMBER: P331258-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9
2.5°	572.5	572.1	572.1	570.5	572.1	572.1	572.5	574.3	574.9	575.2	574.5
5°	531.1	530.4	529.3	530.4	529.3	530.4	531.1	534.3	535.9	537.5	538.9
7.5°	490.1	487.4	487.0	484.2	487.0	487.4	490.1	491.6	494.8	498.5	501.8
10°	460.2	458.4	458.1	453.7	458.1	458.4	460.2	464.1	467.3	471.6	476.3
12.5°	437.5	433.0	433.9	431.4	433.9	433.0	437.5	437.5	441.2	443.9	451.1
15°	398.0	398.0	397.1	393.2	397.1	398.0	398.0	404.2	405.4	409.7	415.9
17.5°	369.7	369.2	367.1	368.2	367.1	369.2	369.7	374.3	375.1	380.8	386.0
20°	352.8	351.4	348.7	348.7	348.7	351.4	352.8	355.4	358.3	361.7	366.2
22.5°	336.9	336.8	333.9	334.8	333.9	336.8	336.9	339.2	342.0	345.8	349.4
25°	318.2	316.4	315.0	315.7	315.0	316.4	318.2	318.4	321.6	324.2	326.5
27.5°	300.4	299.4	299.3	297.5	299.3	299.4	300.4	301.0	302.9	304.4	306.5
30°	290.2	287.9	288.3	287.2	288.3	287.9	290.2	290.4	291.3	292.3	294.8
32.5°	278.4	277.6	277.2	276.2	277.2	277.6	278.4	278.8	280.7	281.7	283.6
35°	262.5	262.7	261.6	262.0	261.6	262.7	262.5	262.9	263.2	264.1	265.9
37.5°	248.4	249.1	248.6	248.7	248.6	249.1	248.4	248.6	248.9	249.0	249.6
40°	239.2	239.2	239.2	239.9	239.2	239.2	239.2	238.6	238.8	238.6	238.6
42.5°	230.5	230.0	229.7	229.6	229.7	230.0	230.5	228.8	229.6	228.8	228.5
45°	215.4	216.1	216.3	215.2	216.3	216.1	215.4	215.0	214.3	214.0	213.8
47.5°	201.8	201.9	201.8	202.8	201.8	201.9	201.8	201.2	200.2	199.8	198.6
50°	192.3	191.8	192.3	191.8	192.3	191.8	192.3	191.1	190.4	189.2	188.3
52.5°	182.2	182.3	182.0	181.9	182.0	182.3	182.2	180.7	180.4	179.9	178.4
55°	166.3	166.7	166.5	166.5	166.5	166.7	166.3	165.4	165.2	163.8	162.4
57.5°	150.0	150.4	150.7	149.7	150.7	150.4	150.0	149.8	149.7	148.1	146.7
60°	138.6	139.7	139.5	139.1	139.5	139.7	138.6	138.8	138.1	137.1	136.2
62.5°	128.1	128.6	128.5	128.4	128.5	128.6	128.1	127.0	126.7	125.8	124.9
65°	112.0	112.4	111.7	112.4	111.7	112.4	112.0	111.3	109.7	109.2	108.3
67.5°	94.5	94.7	95.2	95.5	95.2	94.7	94.5	94.8	93.8	92.9	92.7
70°	83.7	83.5	84.2	84.9	84.2	83.5	83.7	83.3	82.6	81.9	81.0
72.5°	72.3	72.8	72.6	73.1	72.6	72.8	72.3	72.4	71.8	70.9	70.0
75°	55.7	56.5	56.2	56.9	56.2	56.5	55.7	56.2	55.7	54.8	53.9
77.5°	40.3	40.4	40.3	40.7	40.3	40.4	40.3	40.7	40.2	40.5	39.4
80°	30.7	30.3	29.8	30.7	29.8	30.3	30.7	30.7	30.1	30.7	30.1
82.5°	21.4	21.6	21.2	21.2	21.2	21.6	21.4	21.9	21.6	21.9	21.2
85°	9.9	9.6	9.2	9.2	9.2	9.6	9.9	9.9	10.5	10.1	10.1
87.5°	5.6	5.5	5.5	5.4	5.5	5.5	5.6	5.5	5.4	5.6	5.5
90°	18.6	18.9	19.2	19.5	19.2	18.9	18.6	18.2	17.7	16.9	16.1
92.5°	18.9	19.1	19.3	19.5	19.3	19.1	18.9	18.8	18.4	18.0	17.6
95°	31.5	31.4	31.2	31.1	31.2	31.4	31.5	31.7	31.4	30.6	29.8
97.5°	40.9	41.1	41.3	41.5	41.3	41.1	40.9	40.7	40.3	39.6	39.0
100°	47.5	47.8	48.1	48.4	48.1	47.8	47.5	47.2	46.4	45.0	43.7
102.5°	50.5	51.0	51.4	51.9	51.4	51.0	50.5	50.1	49.0	47.4	45.6
105°	53.0	53.6	54.2	54.9	54.2	53.6	53.0	52.3	51.1	49.4	47.6
107.5°	54.5	55.2	55.8	56.5	55.8	55.2	54.5	53.9	54.5	56.2	58.1
110°	55.1	55.7	56.5	57.1	56.5	55.7	55.1	54.5	62.2	78.3	94.3



TEST NUMBER: P331258-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	56.1	56.7	57.2	57.7	57.2	56.7	56.1	55.5	84.6	143.2	201.8
115°	93.9	82.3	70.8	59.3	70.8	82.3	93.9	105.4	148.5	222.8	297.1
117.5°	355.8	317.8	279.8	241.9	279.8	317.8	355.8	393.7	421.7	439.7	457.8
120°	505.6	484.0	462.3	440.7	462.3	484.0	505.6	527.4	537.2	535.3	533.4
122.5°	562.5	558.3	554.1	549.9	554.1	558.3	562.5	566.7	568.3	567.0	565.9
125°	616.2	616.7	617.1	617.6	617.1	616.7	616.2	615.7	614.9	613.8	612.7
127.5°	660.1	660.2	660.4	660.5	660.4	660.2	660.1	660.0	659.1	657.5	655.9
130°	687.5	687.3	687.1	687.0	687.1	687.3	687.5	687.6	686.8	685.1	683.3
132.5°	713.5	713.4	713.2	713.0	713.2	713.4	713.5	713.7	713.0	711.4	709.9
135°	751.5	751.2	750.8	750.5	750.8	751.2	751.5	751.8	751.2	749.6	748.0
137.5°	786.5	785.9	785.4	784.8	785.4	785.9	786.5	787.0	786.5	784.9	783.4
140°	808.6	807.8	807.0	806.2	807.0	807.8	808.6	809.4	809.1	807.6	806.2
142.5°	829.4	828.6	827.8	827.0	827.8	828.6	829.4	830.2	829.9	828.6	827.3
145°	858.5	857.7	856.9	856.1	856.9	857.7	858.5	859.2	859.1	858.0	856.9
147.5°	883.6	882.9	882.3	881.6	882.3	882.9	883.6	884.3	884.2	883.4	882.5
150°	899.6	898.8	898.0	897.2	898.0	898.8	899.6	900.4	900.3	899.4	898.4
152.5°	913.7	912.6	911.6	910.5	911.6	912.6	913.7	914.7	914.8	913.8	912.8
155°	932.8	931.6	930.3	929.0	930.3	931.6	932.8	934.1	934.3	933.3	932.4
157.5°	949.7	948.4	947.2	945.9	947.2	948.4	949.7	950.9	951.0	949.9	948.8
160°	959.1	958.0	956.8	955.7	956.8	958.0	959.1	960.2	960.3	959.4	958.4
162.5°	968.0	966.5	965.2	963.8	965.2	966.5	968.0	969.4	969.5	968.4	967.2
165°	979.4	978.2	977.0	975.9	977.0	978.2	979.4	980.5	980.5	979.4	978.2
167.5°	988.0	986.5	985.0	983.6	985.0	986.5	988.0	989.4	989.6	988.5	987.3
170°	992.6	991.1	989.7	988.3	989.7	991.1	992.6	994.0	994.2	993.0	991.9
172.5°	996.0	994.6	993.1	991.7	993.1	994.6	996.0	997.4	997.6	996.5	995.4
175°	999.6	997.9	996.3	994.7	996.3	997.9	999.6	1001.2	1001.4	1000.3	999.2
177.5°	1000.1	999.0	997.7	996.6	997.7	999.0	1000.1	1001.3	1001.4	1000.5	999.6
180°	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4



TEST NUMBER: P331258-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9
2.5°	573.6	575.6	578.8	582.1	584.1	587.9	589.1	590.9	592.5	596.3	600.4
5°	540.5	543.7	551.3	555.4	561.1	567.7	572.1	576.7	581.8	590.5	598.5
7.5°	504.9	510.3	519.8	527.5	535.6	545.1	552.0	561.1	568.7	581.0	592.7
10°	481.3	488.9	497.4	506.5	518.0	528.1	537.8	549.2	558.4	573.1	586.8
12.5°	460.0	461.1	473.3	483.4	499.1	511.6	522.7	537.5	546.4	563.9	578.3
15°	422.8	429.7	440.7	448.7	467.3	483.1	498.8	514.1	524.4	546.0	565.0
17.5°	391.4	397.8	409.1	422.2	435.6	451.3	471.5	487.8	501.8	526.4	549.0
20°	371.6	379.4	390.9	404.5	416.2	433.3	450.8	469.4	484.5	512.3	538.7
22.5°	354.8	360.9	370.2	383.5	396.3	412.0	431.1	451.4	467.3	497.3	523.9
25°	331.0	336.1	342.0	353.0	367.5	384.8	399.6	421.9	445.0	473.0	505.3
27.5°	309.6	313.3	318.5	328.2	339.4	355.5	372.0	393.1	416.5	446.9	481.0
30°	296.6	298.9	304.2	312.3	323.3	335.9	352.6	372.7	396.7	427.4	461.3
32.5°	285.3	287.3	290.8	298.4	308.0	318.8	333.9	354.1	376.8	407.0	444.6
35°	268.2	269.7	272.8	278.9	284.3	294.8	307.4	325.8	347.1	376.0	415.0
37.5°	251.2	253.4	255.2	257.8	264.6	271.6	282.5	298.0	318.9	348.1	385.3
40°	239.9	241.8	244.6	245.7	251.2	257.4	266.3	280.5	301.6	328.3	364.6
42.5°	228.5	230.5	232.1	233.4	238.1	243.6	251.7	263.9	282.6	308.4	344.4
45°	213.1	213.4	215.0	217.5	219.7	223.7	229.4	239.9	254.4	278.7	311.3
47.5°	197.4	197.7	197.9	199.0	201.6	205.1	208.9	217.5	230.5	249.8	281.6
50°	186.9	186.5	186.9	187.8	189.5	192.5	196.8	203.0	213.6	231.7	260.8
52.5°	176.8	176.8	176.5	176.8	178.1	180.2	183.3	188.5	197.9	214.6	240.2
55°	161.5	160.4	160.6	159.7	161.8	162.2	164.5	168.8	177.1	188.5	212.7
57.5°	145.1	144.2	143.2	142.9	142.7	143.9	145.7	149.2	155.5	165.6	185.1
60°	134.6	133.5	132.1	131.7	131.7	132.4	133.3	135.8	141.8	150.7	166.7
62.5°	124.0	122.7	121.9	120.7	120.3	121.0	121.9	123.7	128.1	136.4	150.3
65°	107.6	105.9	104.8	104.6	104.1	103.5	103.9	105.7	109.2	115.8	126.8
67.5°	91.1	89.6	89.4	88.0	87.4	87.5	87.4	88.9	91.0	96.7	104.9
70°	80.3	79.2	78.7	77.6	77.1	76.6	76.1	77.6	79.6	84.4	91.5
72.5°	69.3	68.3	67.4	66.3	66.4	65.9	65.8	66.8	68.4	72.8	78.4
75°	53.4	53.7	52.5	51.4	51.2	50.7	50.7	51.4	52.1	55.5	59.9
77.5°	38.8	38.6	37.7	37.3	37.1	36.6	37.1	37.5	37.9	40.2	43.3
80°	29.6	29.6	28.5	28.5	28.2	27.6	28.2	27.8	28.7	31.0	33.2
82.5°	21.1	20.8	20.7	20.4	20.3	19.8	20.1	20.6	21.0	22.5	23.9
85°	10.3	10.3	10.1	9.9	10.1	9.9	10.1	10.3	10.5	11.2	12.4
87.5°	5.3	5.3	5.3	5.2	4.8	4.8	4.6	4.5	4.5	4.3	4.1
90°	15.2	14.4	13.1	11.9	10.6	9.3	7.8	6.1	4.2	2.5	0.7
92.5°	17.2	16.8	16.2	15.5	14.8	14.2	13.9	14.1	14.2	14.4	14.5
95°	29.0	28.2	27.1	26.0	24.8	23.6	25.8	31.1	36.4	41.7	47.0
97.5°	38.4	37.7	35.1	32.5	29.9	27.3	33.4	48.4	63.3	78.3	93.2
100°	42.4	41.2	38.5	35.7	33.0	30.3	39.9	61.9	83.9	105.8	127.8
102.5°	44.0	42.3	65.1	88.0	110.8	133.6	147.3	152.1	156.7	161.4	166.0
105°	45.8	44.0	87.9	131.7	175.5	219.3	238.8	234.1	229.2	224.4	219.6
107.5°	59.9	61.7	114.2	166.8	219.3	272.0	296.3	292.4	288.5	284.6	280.7
110°	110.4	126.4	172.8	219.2	265.6	311.9	333.5	330.1	326.8	323.4	320.0



TEST NUMBER: P331258-840  
 CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	260.3	318.8	330.3	341.7	353.3	364.7	368.9	366.0	362.9	360.0	357.0
115°	371.4	445.8	441.7	437.7	433.6	429.7	426.3	423.5	420.8	418.1	415.4
117.5°	475.7	493.7	490.9	488.2	485.4	482.6	479.7	476.7	473.6	470.6	467.6
120°	531.4	529.5	526.6	523.7	520.9	518.0	515.3	512.9	510.5	508.1	505.6
122.5°	564.7	563.6	560.5	557.3	554.2	551.0	548.2	545.6	543.1	540.6	538.1
125°	611.6	610.5	607.3	604.3	601.3	598.2	595.6	593.6	591.5	589.4	587.3
127.5°	654.3	652.6	650.4	648.0	645.8	643.5	641.2	638.8	636.6	634.3	632.0
130°	681.6	679.7	678.0	676.2	674.5	672.7	670.6	667.9	665.4	662.9	660.2
132.5°	708.4	706.9	705.2	703.4	701.7	699.8	697.9	695.7	693.6	691.4	689.1
135°	746.4	744.8	743.4	741.8	740.4	739.0	737.0	734.5	731.8	729.3	726.7
137.5°	781.7	780.2	778.5	776.9	775.3	773.7	771.9	770.1	768.3	766.5	764.8
140°	804.8	803.3	801.5	799.8	798.0	796.3	794.7	793.5	792.1	790.8	789.6
142.5°	826.0	824.7	822.6	820.6	818.6	816.6	815.0	813.9	812.7	811.5	810.4
145°	855.8	854.5	851.8	849.1	846.4	843.6	842.4	842.5	842.7	842.8	843.0
147.5°	881.7	880.9	878.2	875.5	872.8	870.1	869.1	869.7	870.3	870.9	871.5
150°	897.5	896.5	893.9	891.3	888.8	886.3	885.4	886.7	887.8	888.9	890.0
152.5°	911.9	910.9	908.5	906.1	903.6	901.2	900.6	901.8	903.1	904.3	905.5
155°	931.4	930.4	928.5	926.6	924.6	922.7	922.5	923.9	925.3	926.9	928.3
157.5°	947.8	946.6	945.2	943.9	942.6	941.2	941.2	942.4	943.6	944.8	946.0
160°	957.5	956.4	955.4	954.5	953.5	952.6	952.6	953.5	954.5	955.4	956.4
162.5°	966.2	965.1	964.3	963.4	962.6	961.8	961.8	962.8	963.8	964.7	965.7
165°	977.0	975.9	975.4	975.0	974.5	974.0	974.2	975.2	976.2	977.1	978.2
167.5°	986.1	985.0	984.6	984.1	983.7	983.2	983.5	984.5	985.4	986.4	987.3
170°	990.8	989.7	989.4	989.1	988.8	988.4	988.8	989.7	990.7	991.6	992.6
172.5°	994.3	993.1	992.8	992.5	992.2	991.9	992.2	993.1	994.1	995.0	996.0
175°	998.0	996.9	996.5	996.2	995.9	995.6	996.0	997.1	998.3	999.4	1000.5
177.5°	998.7	997.7	997.6	997.5	997.3	997.2	997.6	998.6	999.5	1000.4	1001.3
180°	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4



TEST NUMBER: P331258-840  
 CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9	596.9
2.5°	600.1	601.0	603.9	606.8	610.2	611.1	612.5	611.3	610.9	614.3	616.9
5°	601.8	605.8	613.9	621.3	627.4	631.8	636.4	638.2	641.7	646.4	652.5
7.5°	599.8	607.8	620.5	631.2	642.8	651.2	657.7	663.4	670.1	679.2	689.2
10°	597.6	608.3	623.8	636.8	651.1	661.9	670.8	679.5	689.6	702.3	715.3
12.5°	593.6	606.3	625.6	641.1	659.3	669.9	682.0	700.7	711.7	729.2	747.6
15°	585.4	599.7	626.5	645.5	666.2	686.4	708.6	726.5	744.4	754.8	780.6
17.5°	573.4	594.2	624.0	646.2	672.5	704.2	729.2	749.5	770.1	786.9	799.9
20°	563.6	586.3	620.4	646.9	678.1	712.3	740.9	761.6	779.5	793.6	801.5
22.5°	551.4	580.0	613.0	644.2	684.0	717.8	747.9	764.2	779.1	786.0	789.1
25°	532.0	566.4	603.8	641.9	686.8	722.7	750.1	760.0	764.4	757.7	746.7
27.5°	511.1	549.5	593.2	637.5	685.1	719.5	739.2	737.7	730.3	708.7	691.6
30°	495.5	537.8	584.7	633.2	680.9	714.4	725.8	714.4	697.6	673.6	648.9
32.5°	479.2	522.9	575.7	626.9	673.2	702.7	705.1	685.4	659.4	632.1	601.5
35°	454.4	501.7	558.9	613.0	656.8	675.4	664.4	629.4	598.7	561.4	519.6
37.5°	426.5	478.7	535.9	592.6	632.3	637.1	609.8	573.1	529.7	485.7	436.6
40°	405.6	460.9	519.9	576.9	612.1	607.0	572.1	531.8	480.2	426.5	380.8
42.5°	386.9	442.1	502.2	558.3	586.3	572.5	531.8	482.2	426.8	376.2	334.4
45°	354.5	411.3	472.8	526.9	543.0	518.0	464.1	409.0	354.5	312.3	279.2
47.5°	323.0	379.2	440.1	487.7	493.3	459.7	400.8	344.2	297.2	262.9	239.5
50°	299.8	356.3	416.6	459.1	457.2	416.6	356.1	302.2	262.9	235.1	219.5
52.5°	279.1	332.4	390.3	429.0	419.2	375.0	317.1	269.2	237.0	215.3	201.2
55°	246.8	296.2	351.2	382.2	364.3	315.2	266.3	227.8	203.9	187.6	176.6
57.5°	214.8	261.1	308.2	327.3	307.5	262.2	221.5	193.5	175.5	163.5	156.3
60°	195.0	235.4	277.3	293.9	270.2	229.8	197.7	172.8	158.2	148.5	142.0
62.5°	175.2	211.4	251.0	259.9	238.3	204.2	175.7	154.9	143.1	134.3	128.3
65°	148.1	177.8	207.8	213.8	193.9	167.4	145.0	131.5	120.9	114.5	109.7
67.5°	121.6	145.3	166.6	171.4	153.9	135.6	119.4	107.6	100.5	95.1	91.0
70°	105.7	124.6	142.0	145.9	131.9	115.6	103.2	93.8	87.4	82.8	78.9
72.5°	89.1	104.7	119.3	121.9	110.5	98.0	87.9	80.4	74.7	71.8	68.1
75°	68.2	77.4	88.6	89.3	81.7	74.1	66.3	61.5	58.5	54.8	53.0
77.5°	48.1	55.2	61.7	62.9	58.5	53.3	49.0	45.1	42.6	40.9	39.2
80°	36.7	42.4	45.2	46.8	43.6	39.9	37.4	34.8	33.2	32.1	31.0
82.5°	26.3	29.8	32.3	33.6	31.8	29.6	27.2	25.7	24.4	23.5	23.1
85°	13.3	14.9	16.6	17.0	16.6	15.6	14.2	14.2	13.5	13.3	13.3
87.5°	5.0	6.2	6.6	7.5	7.4	7.7	7.9	8.0	8.0	8.0	8.0
90°	2.5	4.2	6.1	7.8	9.3	10.6	11.9	13.1	14.4	15.2	16.1
92.5°	14.4	14.2	14.1	13.9	14.2	14.8	15.5	16.2	16.8	17.2	17.6
95°	41.7	36.4	31.1	25.8	23.6	24.8	26.0	27.1	28.2	29.0	29.8
97.5°	78.3	63.3	48.4	33.4	27.3	29.9	32.5	35.1	37.7	38.4	39.0
100°	105.8	83.9	61.9	39.9	30.3	33.0	35.7	38.5	41.2	42.4	43.7
102.5°	161.4	156.7	152.1	147.3	133.6	110.8	88.0	65.1	42.3	44.0	45.6
105°	224.4	229.2	234.1	238.8	219.3	175.5	131.7	87.9	44.0	45.8	47.6
107.5°	284.6	288.5	292.4	296.3	272.0	219.3	166.8	114.2	61.7	59.9	58.1
110°	323.4	326.8	330.1	333.5	311.9	265.6	219.2	172.8	126.4	110.4	94.3





TEST NUMBER: P331258-840  
 CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	360.0	362.9	366.0	368.9	364.7	353.3	341.7	330.3	318.8	260.3	201.8
115°	418.1	420.8	423.5	426.3	429.7	433.6	437.7	441.7	445.8	371.4	297.1
117.5°	470.6	473.6	476.7	479.7	482.6	485.4	488.2	490.9	493.7	475.7	457.8
120°	508.1	510.5	512.9	515.3	518.0	520.9	523.7	526.6	529.5	531.4	533.4
122.5°	540.6	543.1	545.6	548.2	551.0	554.2	557.3	560.5	563.6	564.7	565.9
125°	589.4	591.5	593.6	595.6	598.2	601.3	604.3	607.3	610.5	611.6	612.7
127.5°	634.3	636.6	638.8	641.2	643.5	645.8	648.0	650.4	652.6	654.3	655.9
130°	662.9	665.4	667.9	670.6	672.7	674.5	676.2	678.0	679.7	681.6	683.3
132.5°	691.4	693.6	695.7	697.9	699.8	701.7	703.4	705.2	706.9	708.4	709.9
135°	729.3	731.8	734.5	737.0	739.0	740.4	741.8	743.4	744.8	746.4	748.0
137.5°	766.5	768.3	770.1	771.9	773.7	775.3	776.9	778.5	780.2	781.7	783.4
140°	790.8	792.1	793.5	794.7	796.3	798.0	799.8	801.5	803.3	804.8	806.2
142.5°	811.5	812.7	813.9	815.0	816.6	818.6	820.6	822.6	824.7	826.0	827.3
145°	842.8	842.7	842.5	842.4	843.6	846.4	849.1	851.8	854.5	855.8	856.9
147.5°	870.9	870.3	869.7	869.1	870.1	872.8	875.5	878.2	880.9	881.7	882.5
150°	888.9	887.8	886.7	885.4	886.3	888.8	891.3	893.9	896.5	897.5	898.4
152.5°	904.3	903.1	901.8	900.6	901.2	903.6	906.1	908.5	910.9	911.9	912.8
155°	926.9	925.3	923.9	922.5	922.7	924.6	926.6	928.5	930.4	931.4	932.4
157.5°	944.8	943.6	942.4	941.2	941.2	942.6	943.9	945.2	946.6	947.8	948.8
160°	955.4	954.5	953.5	952.6	952.6	953.5	954.5	955.4	956.4	957.5	958.4
162.5°	964.7	963.8	962.8	961.8	961.8	962.6	963.4	964.3	965.1	966.2	967.2
165°	977.1	976.2	975.2	974.2	974.0	974.5	975.0	975.4	975.9	977.0	978.2
167.5°	986.4	985.4	984.5	983.5	983.2	983.7	984.1	984.6	985.0	986.1	987.3
170°	991.6	990.7	989.7	988.8	988.4	988.8	989.1	989.4	989.7	990.8	991.9
172.5°	995.0	994.1	993.1	992.2	991.9	992.2	992.5	992.8	993.1	994.3	995.4
175°	999.4	998.3	997.1	996.0	995.6	995.9	996.2	996.5	996.9	998.0	999.2
177.5°	1000.4	999.5	998.6	997.6	997.2	997.3	997.5	997.6	997.7	998.7	999.6
180°	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4	998.4



TEST NUMBER: P331258-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	596.9	596.9	596.9	596.9	596.9	596.9	596.9
2.5°	619.1	621.7	621.7	622.1	625.0	624.6	624.4
5°	658.8	662.8	663.2	667.3	670.0	669.1	666.6
7.5°	696.3	703.6	709.1	712.2	715.8	718.0	717.0
10°	726.1	736.6	743.1	747.4	752.7	756.6	755.2
12.5°	753.1	765.6	774.5	781.9	782.5	787.6	784.2
15°	795.2	808.4	809.8	815.3	819.7	819.2	819.4
17.5°	809.0	813.2	814.2	814.3	814.4	812.7	809.2
20°	804.1	802.4	798.6	795.6	790.3	789.6	785.1
22.5°	780.5	775.5	765.7	759.2	751.0	748.9	747.6
25°	734.4	723.1	707.5	692.6	688.4	680.4	682.7
27.5°	670.9	653.4	636.4	624.4	613.4	601.4	604.8
30°	626.3	606.5	582.7	564.3	552.6	541.2	539.1
32.5°	573.1	544.1	517.6	501.4	483.4	476.2	468.3
35°	481.3	453.0	426.7	403.9	390.9	380.8	371.6
37.5°	398.8	366.3	345.0	326.6	317.1	311.3	312.9
40°	347.6	319.1	303.5	289.5	280.7	276.7	277.6
42.5°	306.1	284.8	272.0	262.4	256.2	253.9	253.4
45°	259.0	247.1	236.5	231.1	228.0	225.5	223.9
47.5°	226.9	217.1	211.2	207.9	205.3	202.8	202.7
50°	207.6	201.2	197.0	193.6	191.6	189.8	191.4
52.5°	192.9	187.0	182.9	179.9	179.0	177.4	177.3
55°	171.2	166.5	163.6	160.8	159.5	158.5	157.3
57.5°	151.3	146.9	144.2	142.5	139.9	139.0	138.6
60°	137.1	133.7	131.0	128.7	127.5	125.7	125.7
62.5°	124.1	120.7	118.2	116.4	114.5	113.8	114.0
65°	105.3	102.5	100.0	98.2	97.8	96.3	96.8
67.5°	88.0	86.1	83.4	82.4	81.6	80.9	80.3
70°	76.3	74.5	73.2	71.8	71.1	71.1	71.1
72.5°	66.7	64.4	63.6	61.9	62.3	61.6	60.8
75°	51.6	50.2	49.6	48.9	47.8	47.8	47.8
77.5°	38.0	37.6	36.8	36.1	35.7	35.5	35.6
80°	29.4	29.1	28.7	28.7	28.2	28.0	27.6
82.5°	22.6	22.0	21.7	21.5	21.4	21.4	21.3
85°	12.8	12.4	12.4	12.6	12.1	12.1	12.4
87.5°	8.3	8.5	8.4	8.5	8.7	8.6	8.7
90°	16.9	17.7	18.2	18.6	18.9	19.2	19.5
92.5°	18.0	18.4	18.8	18.9	19.1	19.3	19.5
95°	30.6	31.4	31.7	31.5	31.4	31.2	31.1
97.5°	39.6	40.3	40.7	40.9	41.1	41.3	41.5
100°	45.0	46.4	47.2	47.5	47.8	48.1	48.4
102.5°	47.4	49.0	50.1	50.5	51.0	51.4	51.9
105°	49.4	51.1	52.3	53.0	53.6	54.2	54.9
107.5°	56.2	54.5	53.9	54.5	55.2	55.8	56.5
110°	78.3	62.2	54.5	55.1	55.7	56.5	57.1



TEST NUMBER: P331258-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	143.2	84.6	55.5	56.1	56.7	57.2	57.7
115°	222.8	148.5	105.4	93.9	82.3	70.8	59.3
117.5°	439.7	421.7	393.7	355.8	317.8	279.8	241.9
120°	535.3	537.2	527.4	505.6	484.0	462.3	440.7
122.5°	567.0	568.3	566.7	562.5	558.3	554.1	549.9
125°	613.8	614.9	615.7	616.2	616.7	617.1	617.6
127.5°	657.5	659.1	660.0	660.1	660.2	660.4	660.5
130°	685.1	686.8	687.6	687.5	687.3	687.1	687.0
132.5°	711.4	713.0	713.7	713.5	713.4	713.2	713.0
135°	749.6	751.2	751.8	751.5	751.2	750.8	750.5
137.5°	784.9	786.5	787.0	786.5	785.9	785.4	784.8
140°	807.6	809.1	809.4	808.6	807.8	807.0	806.2
142.5°	828.6	829.9	830.2	829.4	828.6	827.8	827.0
145°	858.0	859.1	859.2	858.5	857.7	856.9	856.1
147.5°	883.4	884.2	884.3	883.6	882.9	882.3	881.6
150°	899.4	900.3	900.4	899.6	898.8	898.0	897.2
152.5°	913.8	914.8	914.7	913.7	912.6	911.6	910.5
155°	933.3	934.3	934.1	932.8	931.6	930.3	929.0
157.5°	949.9	951.0	950.9	949.7	948.4	947.2	945.9
160°	959.4	960.3	960.2	959.1	958.0	956.8	955.7
162.5°	968.4	969.5	969.4	968.0	966.5	965.2	963.8
165°	979.4	980.5	980.5	979.4	978.2	977.0	975.9
167.5°	988.5	989.6	989.4	988.0	986.5	985.0	983.6
170°	993.0	994.2	994.0	992.6	991.1	989.7	988.3
172.5°	996.5	997.6	997.4	996.0	994.6	993.1	991.7
175°	1000.3	1001.4	1001.2	999.6	997.9	996.3	994.7
177.5°	1000.5	1001.4	1001.3	1000.1	999.0	997.7	996.6
180°	998.4	998.4	998.4	998.4	998.4	998.4	998.4

(END OF REPORT)