

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331266-840

Luminaire Tested: **SA2XXDIP-C290D725U840-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P331266-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA2XXDIP-C290D725U840-4F0-1E-UDD-F4  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 725 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4074.0 lumens  
Efficiency: N/A  
Efficacy: 130.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect

Input Watts (W): 31.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331266-840  
CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

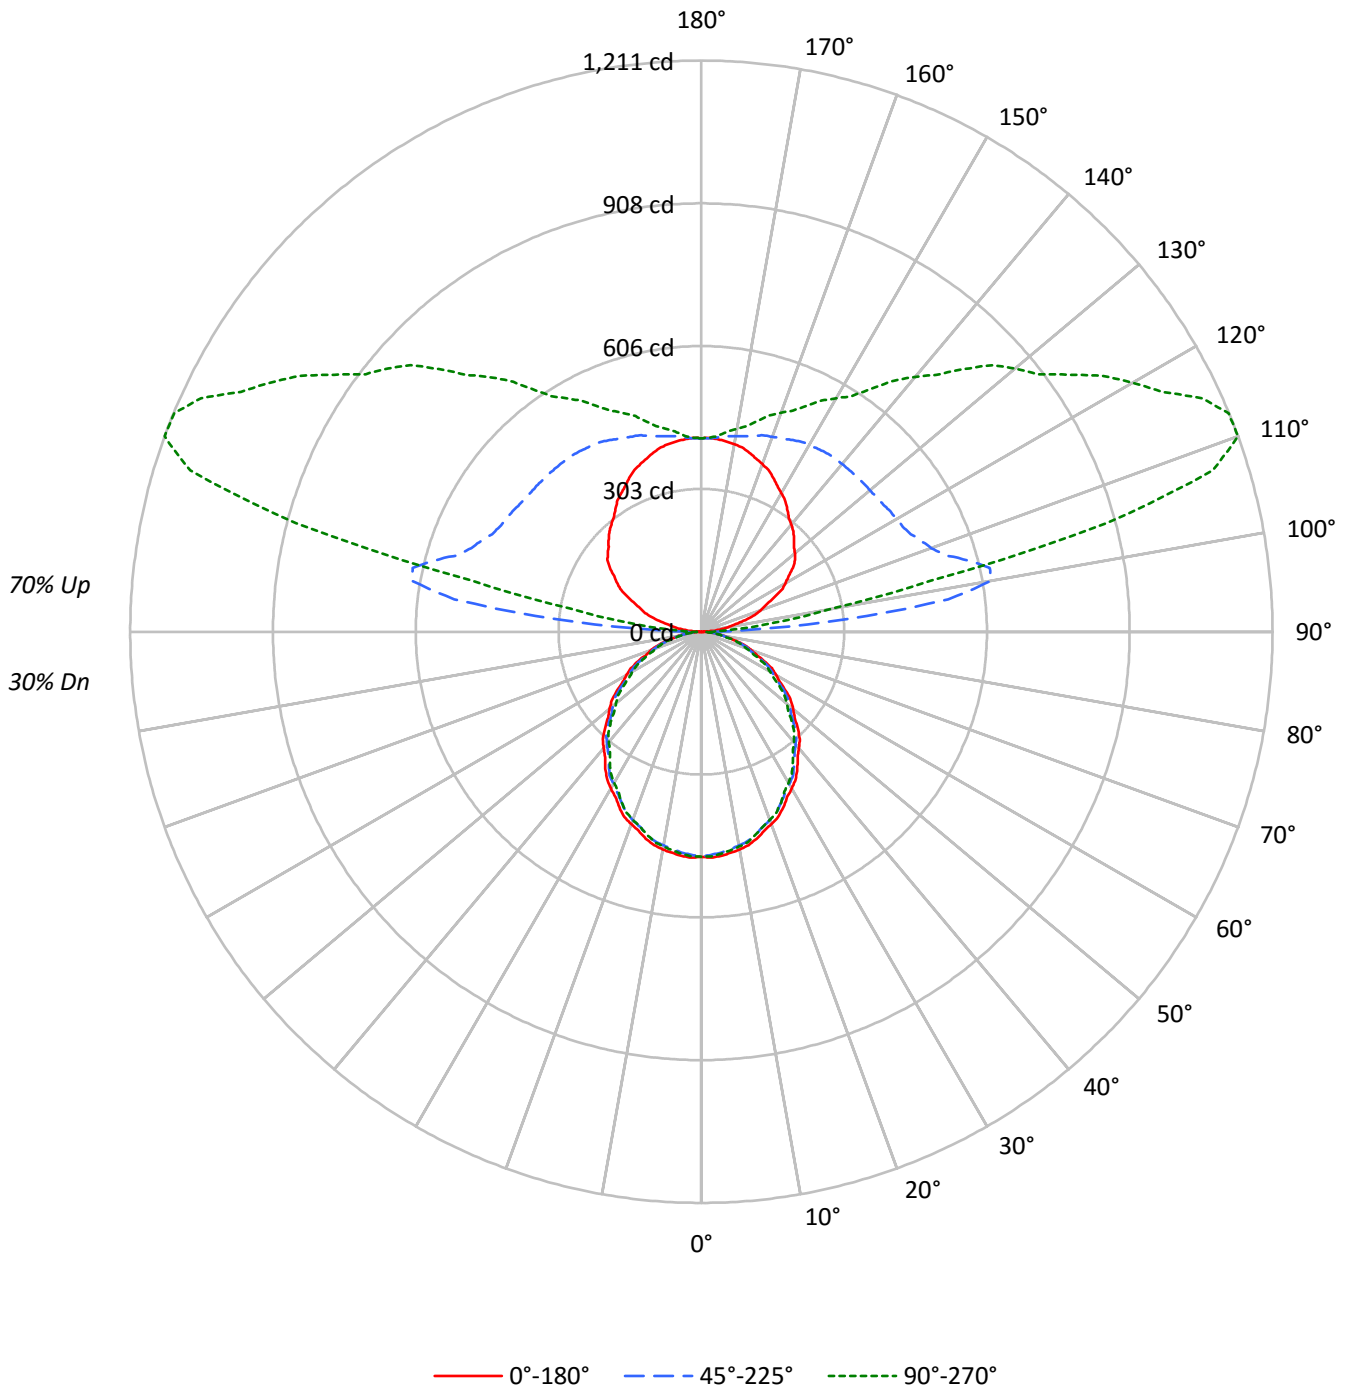



TEST NUMBER: P331266-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	38	38	38	30
1	93	89	85	82	84	80	77	74	63	61	59	48	46	45	33	32	32	25
2	85	78	72	67	76	70	65	61	55	52	49	42	39	37	29	28	27	21
3	77	68	61	56	69	61	55	51	49	44	41	37	34	32	26	24	23	18
4	71	60	53	47	63	54	48	43	43	39	35	33	30	27	23	21	20	15
5	65	54	46	40	58	48	42	37	39	34	30	29	26	23	21	19	17	13
6	60	48	40	34	53	43	37	32	35	30	26	26	23	20	19	17	15	12
7	55	43	35	30	49	39	32	28	31	26	23	24	21	18	17	15	13	10
8	51	39	32	26	46	35	29	24	28	24	20	22	18	16	16	14	12	9
9	47	36	28	23	42	32	26	22	26	21	18	20	17	14	15	12	11	8
10	44	32	25	21	40	29	23	19	24	19	16	19	15	13	13	11	10	8

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	7703	7703	7703
5°	7733	7621	7666
10°	7688	7543	7581
15°	7590	7447	7438
20°	7455	7301	7290
25°	7322	7119	7119
30°	7150	6952	6893
35°	6991	6753	6654
40°	6787	6555	6431
45°	6588	6357	6202
50°	6373	6154	5935
55°	6145	5917	5695
60°	5896	5628	5422
65°	5624	5349	5100
70°	5282	4999	4763
75°	4810	4604	4492
80°	4258	4138	3924
85°	3483	3316	2983



TEST NUMBER: P331266-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	44.9	1.1
10°-20°	126.2	3.1
20°-30°	185.5	4.6
30°-40°	215.5	5.3
40°-50°	215.3	5.3
50°-60°	187.7	4.6
60°-70°	138.8	3.4
70°-80°	78.6	1.9
80°-90°	24.8	0.6
90°-100°	164.1	4.0
100°-110°	557.0	13.7
110°-120°	591.7	14.5
120°-130°	487.1	12.0
130°-140°	391.2	9.6
140°-150°	295.6	7.3
150°-160°	207.7	5.1
160°-170°	122.3	3.0
170°-180°	39.8	1.0
0°-30°	356.6	8.8
0°-40°	572.2	14.0
0°-60°	975.2	23.9
0°-90°	1217.5	29.9
90°-120°	1312.8	32.2
90°-150°	2486.7	61.0
90°-180°	2856.0	70.1
0°-180°	4074.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	477	477	477	477	477	
5°	477	475	470	474	473	45
15°	454	451	446	447	445	128
25°	411	407	400	400	400	189
35°	355	350	343	340	338	221
45°	288	285	278	274	272	223
55°	218	215	210	205	202	195
65°	147	144	140	136	134	146
75°	77	76	74	71	72	82
85°	19	18	18	17	16	22
90°	1	11	27	26	26	2
95°	28	68	309	117	90	29
105°	96	145	585	1046	890	102
115°	170	214	490	1010	1171	168
125°	237	280	470	818	950	210
135°	278	332	465	688	787	215
145°	317	365	463	574	628	199
155°	361	390	449	508	528	166
165°	393	405	430	456	463	111
175°	410	410	414	419	418	39
180°	410	410	410	410	410	



TEST NUMBER: P331266-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1
2.5°	479.3	478.9	478.5	478.1	477.7	477.1	476.2	475.2	474.3	473.4	474.2
5°	477.1	476.7	476.3	475.8	475.4	474.7	473.6	472.5	471.3	470.2	471.0
7.5°	472.9	472.2	471.6	471.0	470.4	469.5	468.4	467.2	466.1	464.9	465.7
10°	468.9	468.2	467.5	466.8	466.0	465.0	463.8	462.6	461.4	460.1	460.9
12.5°	463.3	462.7	462.1	461.4	460.8	459.9	458.7	457.5	456.3	455.0	455.6
15°	454.1	453.5	452.9	452.3	451.7	450.8	449.4	448.1	446.8	445.5	445.9
17.5°	442.4	441.8	441.2	440.6	440.0	439.0	437.7	436.3	434.9	433.6	434.0
20°	433.9	433.3	432.7	432.1	431.5	430.5	429.1	427.7	426.3	424.9	425.2
22.5°	425.6	424.6	423.8	422.9	422.1	421.0	419.7	418.3	417.0	415.7	415.7
25°	411.0	410.2	409.4	408.6	407.8	406.5	404.8	403.0	401.3	399.6	399.8
27.5°	394.6	393.8	393.0	392.3	391.6	390.5	389.2	387.8	386.5	385.1	384.8
30°	383.5	382.7	381.9	381.1	380.2	379.1	377.6	376.1	374.5	372.9	372.6
32.5°	371.7	371.1	370.5	369.8	369.2	368.0	366.4	364.9	363.2	361.6	361.0
35°	354.7	353.6	352.5	351.5	350.5	349.2	347.6	346.0	344.4	342.6	342.0
37.5°	335.3	334.4	333.5	332.5	331.6	330.4	328.8	327.2	325.5	323.9	323.2
40°	322.0	321.2	320.4	319.6	318.8	317.6	315.9	314.3	312.7	311.0	310.1
42.5°	309.2	308.4	307.6	306.8	306.0	304.7	303.1	301.4	299.8	298.2	297.2
45°	288.5	287.8	287.1	286.4	285.7	284.6	283.1	281.6	280.0	278.4	277.3
47.5°	268.0	267.3	266.7	266.0	265.3	264.2	262.6	261.1	259.4	257.8	256.6
50°	253.7	253.2	252.7	252.2	251.7	250.6	249.2	247.8	246.4	245.0	243.6
52.5°	239.7	239.0	238.4	237.7	237.0	236.0	234.7	233.4	232.0	230.7	229.4
55°	218.3	217.7	217.1	216.5	215.9	215.0	213.8	212.6	211.4	210.2	208.8
57.5°	196.9	196.4	195.9	195.4	194.9	194.0	192.7	191.4	190.0	188.6	187.4
60°	182.6	182.2	181.8	181.4	181.0	180.1	178.6	177.2	175.7	174.3	173.2
62.5°	168.6	167.9	167.3	166.7	166.0	165.1	164.0	163.0	161.9	160.8	159.7
65°	147.2	146.6	146.0	145.4	144.8	144.0	143.0	142.0	141.0	140.0	139.0
67.5°	125.5	125.0	124.5	124.0	123.6	122.9	121.9	121.0	120.1	119.2	118.5
70°	111.9	111.5	111.1	110.7	110.3	109.7	108.8	107.9	106.8	105.9	105.2
72.5°	98.0	97.6	97.1	96.7	96.3	95.8	95.2	94.7	94.1	93.5	92.8
75°	77.1	76.9	76.6	76.4	76.2	75.9	75.4	74.8	74.3	73.8	73.2
77.5°	58.4	58.0	57.7	57.4	57.0	56.7	56.5	56.2	56.0	55.8	55.5
80°	45.8	45.7	45.6	45.5	45.4	45.3	45.1	44.9	44.7	44.5	44.2
82.5°	34.1	34.1	34.1	34.0	34.0	33.9	33.8	33.7	33.6	33.5	33.1
85°	18.8	18.7	18.6	18.5	18.4	18.3	18.2	18.1	18.0	17.9	17.6
87.5°	6.8	7.1	7.6	7.7	7.9	8.2	8.8	9.7	10.5	10.5	10.1
90°	0.8	3.1	6.4	7.9	9.5	11.8	15.8	21.3	26.1	26.9	26.1
92.5°	9.6	13.9	19.6	23.0	28.4	35.9	53.7	78.8	101.2	102.6	86.6
95°	27.7	30.8	38.7	45.7	58.4	77.4	113.7	182.4	274.0	309.4	270.7
97.5°	45.0	49.3	57.7	68.4	82.9	104.3	150.0	245.7	397.9	528.3	554.2
100°	60.8	63.1	70.3	82.9	98.7	120.8	162.6	258.9	429.4	623.6	737.3
102.5°	75.3	77.1	84.1	96.7	113.2	135.3	174.0	259.5	417.5	626.8	805.5
105°	96.3	99.5	105.0	116.8	134.2	156.3	193.4	263.7	393.9	584.9	795.0
107.5°	119.1	121.6	126.9	137.8	155.0	177.3	213.3	274.6	382.2	540.1	725.6
110°	134.2	137.3	142.1	152.4	169.0	191.9	226.5	283.4	379.7	518.7	682.1



TEST NUMBER: P331266-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	148.0	151.3	156.6	166.2	182.2	205.7	239.2	292.9	380.3	504.7	651.8
115°	169.8	173.7	178.4	187.8	203.7	225.0	258.9	307.1	383.6	489.5	614.2
117.5°	192.2	195.3	200.1	208.4	223.6	245.7	277.1	322.2	389.3	482.0	590.5
120°	206.0	209.2	213.9	221.1	236.8	258.9	289.7	332.3	393.1	477.6	577.8
122.5°	219.3	221.9	226.5	234.3	250.0	272.9	301.7	341.2	397.6	475.0	567.1
125°	236.8	239.2	243.9	253.4	269.2	291.2	319.7	355.3	404.1	470.5	551.8
127.5°	250.7	253.9	260.5	270.9	286.1	308.8	336.5	368.3	411.0	467.8	537.6
130°	258.9	262.1	269.9	281.0	296.8	318.9	346.6	376.6	416.1	466.6	528.2
132.5°	266.5	270.3	278.8	290.5	306.9	329.0	355.4	384.8	421.1	466.0	520.6
135°	277.9	281.0	290.5	302.4	320.5	342.6	367.9	395.5	427.1	464.9	510.0
137.5°	288.6	292.4	301.8	314.5	332.5	353.0	378.0	403.7	432.4	464.8	502.5
140°	296.8	299.9	309.4	322.0	339.4	360.0	383.6	408.1	434.9	464.1	498.2
142.5°	305.0	307.6	316.4	329.0	345.8	365.1	388.1	411.9	436.9	464.1	493.7
145°	317.3	320.5	328.4	340.2	356.0	373.3	394.8	416.8	438.9	462.6	487.9
147.5°	330.6	333.0	340.5	351.4	364.6	380.0	400.1	419.5	439.6	459.8	481.9
150°	339.4	341.8	348.1	358.4	370.2	384.5	402.6	420.7	438.9	457.9	476.8
152.5°	348.3	349.4	355.7	364.7	375.9	388.9	405.2	421.4	437.7	454.7	472.4
155°	360.7	361.5	366.3	375.0	383.6	395.5	408.9	422.3	435.8	449.2	464.1
157.5°	371.2	371.9	375.8	383.3	390.3	400.2	411.6	422.3	432.1	443.5	456.5
160°	378.1	378.9	382.0	388.4	394.8	403.3	412.8	422.3	430.2	439.7	450.8
162.5°	385.1	384.6	387.8	392.8	398.5	405.3	413.5	421.7	428.4	436.6	445.7
165°	393.1	392.3	393.9	398.7	402.6	407.4	414.4	420.0	424.7	430.2	437.4
167.5°	399.8	398.8	400.2	403.2	406.1	409.1	414.2	418.9	421.1	424.7	429.1
170°	404.1	402.6	403.3	405.8	407.4	409.7	413.6	417.6	419.2	421.5	424.7
172.5°	406.7	405.8	405.3	407.7	408.6	410.3	413.0	415.7	416.7	417.8	420.3
175°	409.7	408.9	408.1	409.7	409.7	410.5	412.0	413.6	412.8	413.6	414.4
177.5°	411.1	409.9	409.2	410.5	410.5	410.5	411.1	412.4	411.1	410.5	411.1
180°	410.5	410.5	410.5	410.5	410.5	410.5	410.5	410.5	410.5	410.5	410.5



TEST NUMBER: P331266-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1
2.5°	475.0	475.8	476.7	477.1	476.9	476.7	476.6	476.4
5°	471.9	472.7	473.5	473.8	473.6	473.4	473.2	473.0
7.5°	466.6	467.4	468.2	468.5	468.3	468.0	467.8	467.6
10°	461.8	462.6	463.4	463.6	463.3	463.0	462.7	462.4
12.5°	456.2	456.7	457.3	457.5	457.3	457.0	456.8	456.6
15°	446.3	446.7	447.1	447.1	446.6	446.1	445.6	445.0
17.5°	434.5	435.0	435.5	435.5	434.9	434.5	434.0	433.5
20°	425.5	425.8	426.1	426.0	425.6	425.2	424.7	424.3
22.5°	415.8	415.9	415.9	415.8	415.6	415.3	415.1	414.9
25°	400.0	400.2	400.4	400.4	400.2	400.0	399.8	399.6
27.5°	384.5	384.2	383.8	383.4	382.9	382.4	382.0	381.5
30°	372.3	372.0	371.7	371.4	371.0	370.6	370.2	369.7
32.5°	360.5	359.9	359.4	358.9	358.5	358.1	357.7	357.3
35°	341.4	340.8	340.2	339.7	339.2	338.7	338.2	337.6
37.5°	322.3	321.6	320.8	320.2	319.7	319.2	318.8	318.3
40°	309.2	308.3	307.4	306.7	306.3	305.9	305.5	305.1
42.5°	296.2	295.2	294.2	293.4	292.9	292.3	291.8	291.1
45°	276.2	275.1	274.0	273.2	272.8	272.4	272.0	271.6
47.5°	255.5	254.3	253.1	252.2	251.7	251.1	250.4	249.8
50°	242.2	240.7	239.2	238.3	237.8	237.3	236.8	236.3
52.5°	228.3	227.1	225.9	225.0	224.3	223.7	223.0	222.3
55°	207.6	206.4	205.2	204.4	203.9	203.3	202.8	202.3
57.5°	186.2	185.0	183.8	183.0	182.7	182.3	181.9	181.5
60°	172.1	171.0	169.9	169.2	168.8	168.5	168.2	167.9
62.5°	158.6	157.6	156.6	155.9	155.5	155.1	154.7	154.3
65°	138.0	137.1	136.2	135.5	135.0	134.5	134.0	133.5
67.5°	117.8	117.0	116.3	115.7	115.3	114.9	114.5	114.1
70°	104.5	103.8	103.1	102.6	102.2	101.7	101.3	100.9
72.5°	92.1	91.4	90.7	90.1	89.8	89.5	89.2	88.8
75°	72.6	72.0	71.4	71.2	71.4	71.6	71.8	72.0
77.5°	55.2	54.9	54.6	54.3	54.0	53.8	53.5	53.2
80°	43.9	43.6	43.3	43.0	42.8	42.6	42.4	42.2
82.5°	32.7	32.3	31.9	31.7	31.7	31.6	31.6	31.6
85°	17.3	17.0	16.7	16.5	16.4	16.3	16.2	16.1
87.5°	9.7	9.2	9.2	9.2	9.1	9.1	9.0	8.9
90°	25.2	23.7	25.2	26.1	26.1	26.1	26.1	26.1
92.5°	68.9	59.1	52.4	47.6	46.9	44.3	45.0	43.7
95°	206.8	158.6	125.5	108.2	97.9	91.6	89.2	90.0
97.5°	482.6	394.9	309.4	252.5	214.7	195.3	183.8	177.1
100°	720.7	622.9	514.7	419.2	353.7	319.7	296.8	282.6
102.5°	876.8	854.6	775.5	674.3	603.1	545.1	516.5	497.4
105°	959.2	1048.3	1058.6	1032.6	983.6	934.6	900.7	889.7
107.5°	899.8	1034.1	1116.2	1154.5	1160.6	1157.9	1151.1	1136.4
110°	848.6	990.0	1091.0	1155.7	1189.6	1204.7	1211.7	1210.9





TEST NUMBER: P331266-840

CATALOG NUMBER: SA2XXDIP-C290D725U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	801.9	937.5	1045.5	1119.7	1166.9	1192.0	1205.5	1209.7
115°	744.4	866.0	969.4	1050.7	1106.7	1143.1	1163.6	1170.7
117.5°	701.1	807.9	901.7	978.0	1035.1	1073.5	1095.1	1101.1
120°	679.6	777.6	861.2	933.1	988.4	1025.4	1048.3	1056.2
122.5°	662.7	752.3	831.5	896.5	946.0	982.5	1002.9	1009.5
125°	637.8	719.1	788.6	847.8	893.6	923.6	943.3	949.7
127.5°	613.4	686.9	752.5	807.1	847.1	875.1	892.2	897.3
130°	597.5	665.5	727.8	779.9	818.6	845.5	861.2	867.6
132.5°	582.4	645.3	702.6	751.5	789.6	816.4	830.9	836.6
135°	561.3	613.4	665.5	709.6	743.7	769.7	783.9	787.1
137.5°	544.4	587.9	629.3	667.8	698.8	721.2	733.7	738.4
140°	533.6	571.6	607.8	642.6	667.8	688.3	700.2	705.0
142.5°	524.8	557.0	588.2	617.3	641.4	659.9	670.6	671.5
145°	512.3	538.4	562.9	585.7	604.7	618.1	626.0	628.3
147.5°	502.7	523.2	542.3	559.1	574.7	585.4	590.8	592.2
150°	495.7	513.1	529.7	543.9	555.7	565.2	570.0	570.8
152.5°	488.8	504.9	519.0	531.3	540.6	548.8	552.3	552.4
155°	479.2	491.8	503.6	512.3	521.0	526.5	529.7	528.2
157.5°	468.0	478.6	488.5	495.2	501.4	506.0	507.5	507.5
160°	461.0	469.7	478.4	483.9	489.5	493.4	494.1	494.1
162.5°	454.0	461.5	468.9	473.2	478.7	481.4	482.2	481.5
165°	443.6	449.2	454.7	457.9	461.0	464.1	464.1	463.4
167.5°	433.7	438.0	441.7	444.6	446.1	447.8	447.6	446.7
170°	428.7	431.0	434.1	435.8	436.6	438.9	438.1	436.6
172.5°	422.9	424.7	427.3	428.2	429.0	430.1	429.3	428.4
175°	416.8	417.6	418.4	419.2	419.2	420.0	419.2	417.6
177.5°	412.4	412.4	413.0	413.0	413.0	413.0	412.4	411.1
180°	410.5	410.5	410.5	410.5	410.5	410.5	410.5	410.5

(END OF REPORT)