

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331275-840

Luminaire Tested: **SA2XXDIP-C290D925U840-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331275-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C290D925U840-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 290 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 925 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4865.5 lumens
Efficiency: N/A
Efficacy: 130.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 37.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331275-840

CATALOG NUMBER: SA2XXDIP-C290D925U840-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

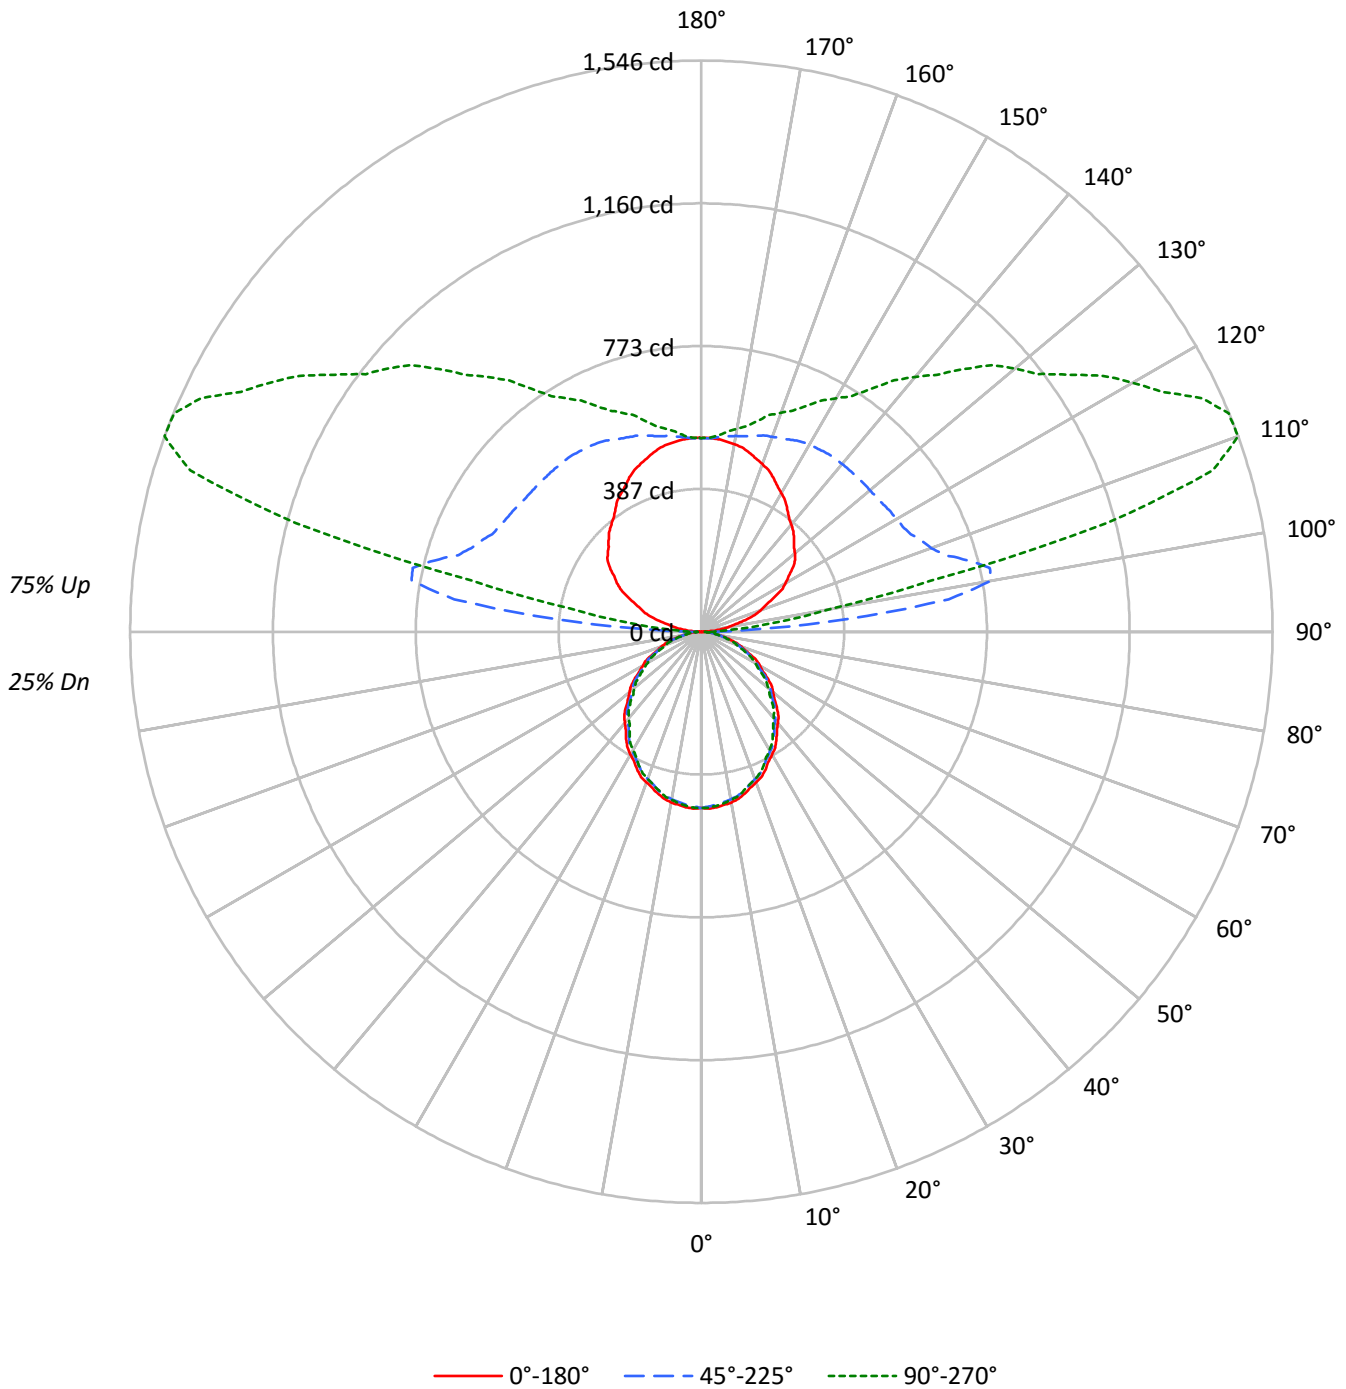



TEST NUMBER: P331275-840

CATALOG NUMBER: SA2XXDIP-C290D925U840-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	101	101	101	101	90	90	90	90	69	69	69	51	51	51	33	33	33	25				
1	92	88	84	81	82	78	75	73	61	59	57	44	43	42	29	29	28	21				
2	84	77	71	66	74	69	64	59	53	50	47	39	37	35	26	25	23	18				
3	76	67	60	55	68	60	54	50	47	43	39	34	32	29	23	21	20	15				
4	70	60	52	46	62	53	47	42	41	37	33	31	28	25	20	19	17	13				
5	64	53	45	39	57	47	41	36	37	32	29	27	24	22	18	16	15	11				
6	59	47	39	34	52	42	36	31	33	28	25	25	21	19	17	15	13	10				
7	54	43	35	30	48	38	32	27	30	25	22	22	19	17	15	13	12	9				
8	50	38	31	26	45	35	28	24	27	23	19	20	17	15	14	12	10	8				
9	47	35	28	23	41	31	25	21	25	20	17	19	15	13	13	11	9	7				
10	43	32	25	20	39	29	23	19	23	18	15	17	14	12	12	10	8	6				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7703	7703	7703
5°	7733	7621	7666
10°	7688	7543	7581
15°	7590	7447	7438
20°	7455	7301	7290
25°	7322	7119	7119
30°	7150	6952	6893
35°	6991	6753	6654
40°	6787	6555	6431
45°	6588	6357	6202
50°	6373	6154	5935
55°	6145	5917	5695
60°	5896	5628	5422
65°	5624	5349	5100
70°	5282	4999	4763
75°	4810	4604	4492
80°	4258	4138	3924
85°	3483	3316	2983



TEST NUMBER: P331275-840

CATALOG NUMBER: SA2XXDIP-C290D925U840-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.9	0.9
10°-20°	126.2	2.6
20°-30°	185.5	3.8
30°-40°	215.5	4.4
40°-50°	215.3	4.4
50°-60°	187.7	3.9
60°-70°	138.8	2.9
70°-80°	78.6	1.6
80°-90°	25.9	0.5
90°-100°	209.6	4.3
100°-110°	711.1	14.6
110°-120°	755.5	15.5
120°-130°	621.9	12.8
130°-140°	499.4	10.3
140°-150°	377.4	7.8
150°-160°	265.2	5.5
160°-170°	156.1	3.2
170°-180°	50.8	1.0
0°-30°	356.6	7.3
0°-40°	572.2	11.8
0°-60°	975.2	20.0
0°-90°	1218.5	25.0
90°-120°	1676.1	34.4
90°-150°	3174.8	65.3
90°-180°	3647.0	75.0
0°-180°	4865.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	477	477	477	477	477	
5°	477	475	470	474	473	45
15°	454	451	446	447	445	128
25°	411	407	400	400	400	189
35°	355	350	343	340	338	221
45°	288	285	278	274	272	223
55°	218	215	210	205	202	195
65°	147	144	140	136	134	146
75°	77	76	74	71	72	82
85°	19	18	18	17	16	22
90°	1	14	34	33	33	3
95°	35	87	395	149	115	37
105°	123	185	747	1335	1136	131
115°	217	274	625	1290	1495	215
125°	302	358	601	1045	1212	268
135°	355	423	594	878	1005	274
145°	405	466	591	733	802	254
155°	461	497	574	649	674	212
165°	502	517	549	583	592	141
175°	523	524	528	535	533	50
180°	524	524	524	524	524	



TEST NUMBER: P331275-840

CATALOG NUMBER: SA2XXDIP-C290D925U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1
2.5°	479.3	478.9	478.5	478.1	477.7	477.1	476.2	475.2	474.3	473.4	474.2
5°	477.1	476.7	476.3	475.8	475.4	474.7	473.6	472.5	471.3	470.2	471.0
7.5°	472.9	472.2	471.6	471.0	470.4	469.5	468.4	467.2	466.1	464.9	465.7
10°	468.9	468.2	467.5	466.8	466.0	465.0	463.8	462.6	461.4	460.1	460.9
12.5°	463.3	462.7	462.1	461.4	460.8	459.9	458.7	457.5	456.3	455.0	455.6
15°	454.1	453.5	452.9	452.3	451.7	450.8	449.4	448.1	446.8	445.5	445.9
17.5°	442.4	441.8	441.2	440.6	440.0	439.0	437.7	436.3	434.9	433.6	434.0
20°	433.9	433.3	432.7	432.1	431.5	430.5	429.1	427.7	426.3	424.9	425.2
22.5°	425.6	424.6	423.8	422.9	422.1	421.0	419.7	418.3	417.0	415.7	415.7
25°	411.0	410.2	409.4	408.6	407.8	406.5	404.8	403.0	401.3	399.6	399.8
27.5°	394.6	393.8	393.0	392.3	391.6	390.5	389.2	387.8	386.5	385.1	384.8
30°	383.5	382.7	381.9	381.1	380.2	379.1	377.6	376.1	374.5	372.9	372.6
32.5°	371.7	371.1	370.5	369.8	369.2	368.0	366.4	364.9	363.2	361.6	361.0
35°	354.7	353.6	352.5	351.5	350.5	349.2	347.6	346.0	344.4	342.6	342.0
37.5°	335.3	334.4	333.5	332.5	331.6	330.4	328.8	327.2	325.5	323.9	323.2
40°	322.0	321.2	320.4	319.6	318.8	317.6	315.9	314.3	312.7	311.0	310.1
42.5°	309.2	308.4	307.6	306.8	306.0	304.7	303.1	301.4	299.8	298.2	297.2
45°	288.5	287.8	287.1	286.4	285.7	284.6	283.1	281.6	280.0	278.4	277.3
47.5°	268.0	267.3	266.7	266.0	265.3	264.2	262.6	261.1	259.4	257.8	256.6
50°	253.7	253.2	252.7	252.2	251.7	250.6	249.2	247.8	246.4	245.0	243.6
52.5°	239.7	239.0	238.4	237.7	237.0	236.0	234.7	233.4	232.0	230.7	229.4
55°	218.3	217.7	217.1	216.5	215.9	215.0	213.8	212.6	211.4	210.2	208.8
57.5°	196.9	196.4	195.9	195.4	194.9	194.0	192.7	191.4	190.0	188.6	187.4
60°	182.6	182.2	181.8	181.4	181.0	180.1	178.6	177.2	175.7	174.3	173.2
62.5°	168.6	167.9	167.3	166.7	166.0	165.1	164.0	163.0	161.9	160.8	159.7
65°	147.2	146.6	146.0	145.4	144.8	144.0	143.0	142.0	141.0	140.0	139.0
67.5°	125.5	125.0	124.5	124.0	123.6	122.9	121.9	121.0	120.1	119.2	118.5
70°	111.9	111.5	111.1	110.7	110.3	109.7	108.8	107.9	106.8	105.9	105.2
72.5°	98.0	97.6	97.1	96.7	96.3	95.8	95.2	94.7	94.1	93.5	92.8
75°	77.1	76.9	76.6	76.4	76.2	75.9	75.4	74.8	74.3	73.8	73.2
77.5°	58.4	58.0	57.7	57.4	57.0	56.7	56.5	56.2	56.0	55.8	55.5
80°	45.8	45.7	45.6	45.5	45.4	45.3	45.1	44.9	44.7	44.5	44.2
82.5°	34.1	34.1	34.1	34.0	34.0	33.9	33.8	33.7	33.6	33.5	33.1
85°	18.8	18.7	18.6	18.5	18.4	18.3	18.2	18.1	18.0	17.9	17.6
87.5°	6.8	7.3	7.9	8.2	8.4	8.8	9.7	10.9	11.9	12.0	11.5
90°	1.0	4.0	8.1	10.1	12.1	15.1	20.2	27.2	33.2	34.2	33.2
92.5°	12.3	17.8	25.0	29.4	36.3	45.7	68.6	100.6	129.2	131.0	110.7
95°	35.2	39.3	49.4	58.5	74.6	98.8	145.1	232.8	349.7	395.1	345.7
97.5°	57.5	62.9	73.6	87.3	105.8	133.2	191.5	313.7	508.0	674.5	707.5
100°	77.6	80.6	89.7	105.8	126.0	154.2	207.6	330.6	548.3	796.2	941.4
102.5°	96.1	98.4	107.4	123.6	144.5	172.8	222.2	331.4	533.0	800.2	1028.4
105°	123.0	127.0	134.0	149.2	171.4	199.5	246.9	336.6	502.9	746.8	1014.9
107.5°	152.0	155.2	162.1	176.0	197.9	226.4	272.4	350.5	488.0	689.6	926.5
110°	171.4	175.4	181.4	194.5	215.7	244.9	289.2	361.8	484.8	662.2	870.8



TEST NUMBER: P331275-840

CATALOG NUMBER: SA2XXDIP-C290D925U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	189.0	193.1	200.0	212.3	232.6	262.7	305.4	374.0	485.5	644.4	832.1
115°	216.7	221.8	227.8	239.8	260.0	287.2	330.6	392.0	489.8	624.9	784.2
117.5°	245.3	249.3	255.4	266.1	285.4	313.7	353.8	411.4	497.1	615.4	753.9
120°	263.1	267.1	273.2	282.2	302.4	330.6	369.9	424.3	501.9	609.8	737.8
122.5°	280.0	283.2	289.2	299.1	319.3	348.3	385.2	435.6	507.6	606.5	724.1
125°	302.4	305.4	311.4	323.6	343.7	371.9	408.2	453.5	516.0	600.7	704.5
127.5°	320.1	324.2	332.5	345.9	365.3	394.3	429.6	470.3	524.7	597.2	686.4
130°	330.6	334.6	344.7	358.8	379.0	407.2	442.4	480.8	531.2	595.6	674.3
132.5°	340.2	345.1	356.0	370.9	391.8	420.1	453.7	491.2	537.6	594.8	664.6
135°	354.8	358.8	370.9	386.0	409.2	437.4	469.7	504.9	545.2	593.6	651.1
137.5°	368.5	373.3	385.4	401.5	424.5	450.7	482.6	515.4	552.1	593.4	641.6
140°	379.0	383.0	395.1	411.2	433.4	459.6	489.8	521.1	555.3	592.6	636.0
142.5°	389.4	392.6	403.9	420.1	441.4	466.1	495.4	525.9	557.7	592.6	630.4
145°	405.2	409.2	419.3	434.4	454.5	476.8	503.9	532.2	560.4	590.6	622.9
147.5°	422.1	425.2	434.7	448.7	465.4	485.2	510.8	535.6	561.2	587.0	615.2
150°	433.4	436.4	444.4	457.6	472.7	490.8	514.0	537.1	560.4	584.6	608.7
152.5°	444.6	446.1	454.1	465.6	480.0	496.4	517.3	538.0	558.8	580.6	603.1
155°	460.6	461.6	467.7	478.8	489.8	504.9	522.1	539.2	556.3	573.5	592.6
157.5°	473.9	474.9	479.8	489.4	498.3	511.0	525.5	539.2	551.7	566.2	582.8
160°	482.8	483.8	487.8	495.8	503.9	515.0	527.1	539.2	549.3	561.4	575.5
162.5°	491.6	491.0	495.0	501.5	508.8	517.5	528.0	538.4	546.8	557.3	569.1
165°	501.9	500.9	502.9	509.0	514.0	520.1	529.2	536.2	542.2	549.3	558.4
167.5°	510.4	509.2	511.0	514.8	518.5	522.3	529.0	534.8	537.6	542.2	547.9
170°	516.0	514.0	515.0	518.1	520.1	523.1	528.2	533.2	535.2	538.2	542.2
172.5°	519.3	518.1	517.5	520.5	521.7	523.9	527.4	530.8	532.0	533.4	536.6
175°	523.1	522.1	521.1	523.1	523.1	524.1	526.1	528.2	527.1	528.2	529.2
177.5°	524.9	523.3	522.5	524.1	524.1	524.1	524.9	526.5	524.9	524.1	524.9
180°	524.1	524.1	524.1	524.1	524.1	524.1	524.1	524.1	524.1	524.1	524.1



TEST NUMBER: P331275-840

CATALOG NUMBER: SA2XXDIP-C290D925U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	477.1	477.1	477.1	477.1	477.1	477.1	477.1	477.1
2.5°	475.0	475.8	476.7	477.1	476.9	476.7	476.6	476.4
5°	471.9	472.7	473.5	473.8	473.6	473.4	473.2	473.0
7.5°	466.6	467.4	468.2	468.5	468.3	468.0	467.8	467.6
10°	461.8	462.6	463.4	463.6	463.3	463.0	462.7	462.4
12.5°	456.2	456.7	457.3	457.5	457.3	457.0	456.8	456.6
15°	446.3	446.7	447.1	447.1	446.6	446.1	445.6	445.0
17.5°	434.5	435.0	435.5	435.5	434.9	434.5	434.0	433.5
20°	425.5	425.8	426.1	426.0	425.6	425.2	424.7	424.3
22.5°	415.8	415.9	415.9	415.8	415.6	415.3	415.1	414.9
25°	400.0	400.2	400.4	400.4	400.2	400.0	399.8	399.6
27.5°	384.5	384.2	383.8	383.4	382.9	382.4	382.0	381.5
30°	372.3	372.0	371.7	371.4	371.0	370.6	370.2	369.7
32.5°	360.5	359.9	359.4	358.9	358.5	358.1	357.7	357.3
35°	341.4	340.8	340.2	339.7	339.2	338.7	338.2	337.6
37.5°	322.3	321.6	320.8	320.2	319.7	319.2	318.8	318.3
40°	309.2	308.3	307.4	306.7	306.3	305.9	305.5	305.1
42.5°	296.2	295.2	294.2	293.4	292.9	292.3	291.8	291.1
45°	276.2	275.1	274.0	273.2	272.8	272.4	272.0	271.6
47.5°	255.5	254.3	253.1	252.2	251.7	251.1	250.4	249.8
50°	242.2	240.7	239.2	238.3	237.8	237.3	236.8	236.3
52.5°	228.3	227.1	225.9	225.0	224.3	223.7	223.0	222.3
55°	207.6	206.4	205.2	204.4	203.9	203.3	202.8	202.3
57.5°	186.2	185.0	183.8	183.0	182.7	182.3	181.9	181.5
60°	172.1	171.0	169.9	169.2	168.8	168.5	168.2	167.9
62.5°	158.6	157.6	156.6	155.9	155.5	155.1	154.7	154.3
65°	138.0	137.1	136.2	135.5	135.0	134.5	134.0	133.5
67.5°	117.8	117.0	116.3	115.7	115.3	114.9	114.5	114.1
70°	104.5	103.8	103.1	102.6	102.2	101.7	101.3	100.9
72.5°	92.1	91.4	90.7	90.1	89.8	89.5	89.2	88.8
75°	72.6	72.0	71.4	71.2	71.4	71.6	71.8	72.0
77.5°	55.2	54.9	54.6	54.3	54.0	53.8	53.5	53.2
80°	43.9	43.6	43.3	43.0	42.8	42.6	42.4	42.2
82.5°	32.7	32.3	31.9	31.7	31.7	31.6	31.6	31.6
85°	17.3	17.0	16.7	16.5	16.4	16.3	16.2	16.1
87.5°	11.1	10.4	10.6	10.6	10.6	10.5	10.4	10.3
90°	32.2	30.2	32.2	33.2	33.2	33.2	33.2	33.2
92.5°	87.9	75.4	67.0	60.7	59.9	56.7	57.5	55.8
95°	264.1	202.6	160.3	138.0	125.0	116.9	113.9	114.9
97.5°	616.2	504.1	395.1	322.3	274.2	249.3	234.6	226.2
100°	920.2	795.2	657.1	535.2	451.5	408.2	379.0	360.8
102.5°	1119.3	1091.2	990.2	860.9	770.0	696.0	659.5	635.0
105°	1224.6	1338.5	1351.6	1318.3	1255.8	1193.4	1149.9	1135.9
107.5°	1148.8	1320.3	1425.1	1473.9	1481.8	1478.3	1469.7	1451.0
110°	1083.5	1263.8	1392.9	1475.5	1518.8	1538.0	1547.1	1546.1



TEST NUMBER: P331275-840

CATALOG NUMBER: SA2XXDIP-C290D925U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1023.8	1197.0	1334.8	1429.6	1489.9	1521.9	1539.0	1544.5
115°	950.4	1105.6	1237.7	1341.5	1413.0	1459.4	1485.6	1494.7
117.5°	895.1	1031.5	1151.1	1248.6	1321.5	1370.5	1398.2	1405.7
120°	867.8	992.8	1099.5	1191.3	1261.8	1309.2	1338.5	1348.6
122.5°	846.0	960.5	1061.7	1144.6	1207.8	1254.4	1280.4	1288.9
125°	814.4	918.2	1006.8	1082.5	1140.9	1179.2	1204.4	1212.4
127.5°	783.2	877.1	960.7	1030.5	1081.5	1117.3	1139.1	1145.6
130°	763.0	849.6	929.3	995.8	1045.2	1079.4	1099.5	1107.6
132.5°	743.6	823.8	897.0	959.5	1008.0	1042.4	1060.9	1068.1
135°	716.6	783.2	849.6	906.1	949.4	982.7	1000.8	1004.8
137.5°	695.0	750.6	803.4	852.6	892.2	920.8	936.8	942.8
140°	681.4	729.7	776.1	820.4	852.6	878.9	894.0	900.0
142.5°	670.0	711.1	751.0	788.2	818.8	842.6	856.1	857.3
145°	654.1	687.4	718.6	747.8	772.0	789.2	799.2	802.2
147.5°	641.8	668.0	692.4	713.8	733.8	747.4	754.3	756.1
150°	633.0	655.1	676.3	694.4	709.5	721.6	727.7	728.7
152.5°	624.1	644.6	662.6	678.3	690.1	700.6	705.1	705.3
155°	611.8	627.9	643.0	654.1	665.2	672.3	676.3	674.3
157.5°	597.4	611.0	623.7	632.4	640.2	646.0	647.8	647.8
160°	588.5	599.7	610.8	617.8	624.9	630.0	631.0	631.0
162.5°	579.8	589.2	598.6	604.1	611.2	614.6	615.6	614.8
165°	566.4	573.5	580.6	584.6	588.5	592.6	592.6	591.6
167.5°	553.7	559.2	564.0	567.6	569.5	571.7	571.5	570.3
170°	547.2	550.3	554.3	556.3	557.3	560.4	559.4	557.3
172.5°	540.0	542.2	545.4	546.6	547.6	549.1	548.1	546.8
175°	532.2	533.2	534.2	535.2	535.2	536.2	535.2	533.2
177.5°	526.5	526.5	527.4	527.4	527.4	527.4	526.5	524.9
180°	524.1	524.1	524.1	524.1	524.1	524.1	524.1	524.1

(END OF REPORT)