

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331323-840

Luminaire Tested: **SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331323-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6415.5 lumens
Efficiency: N/A
Efficacy: 129.9 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 49.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331323-840
CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

Luminous Intensity Polar Plot

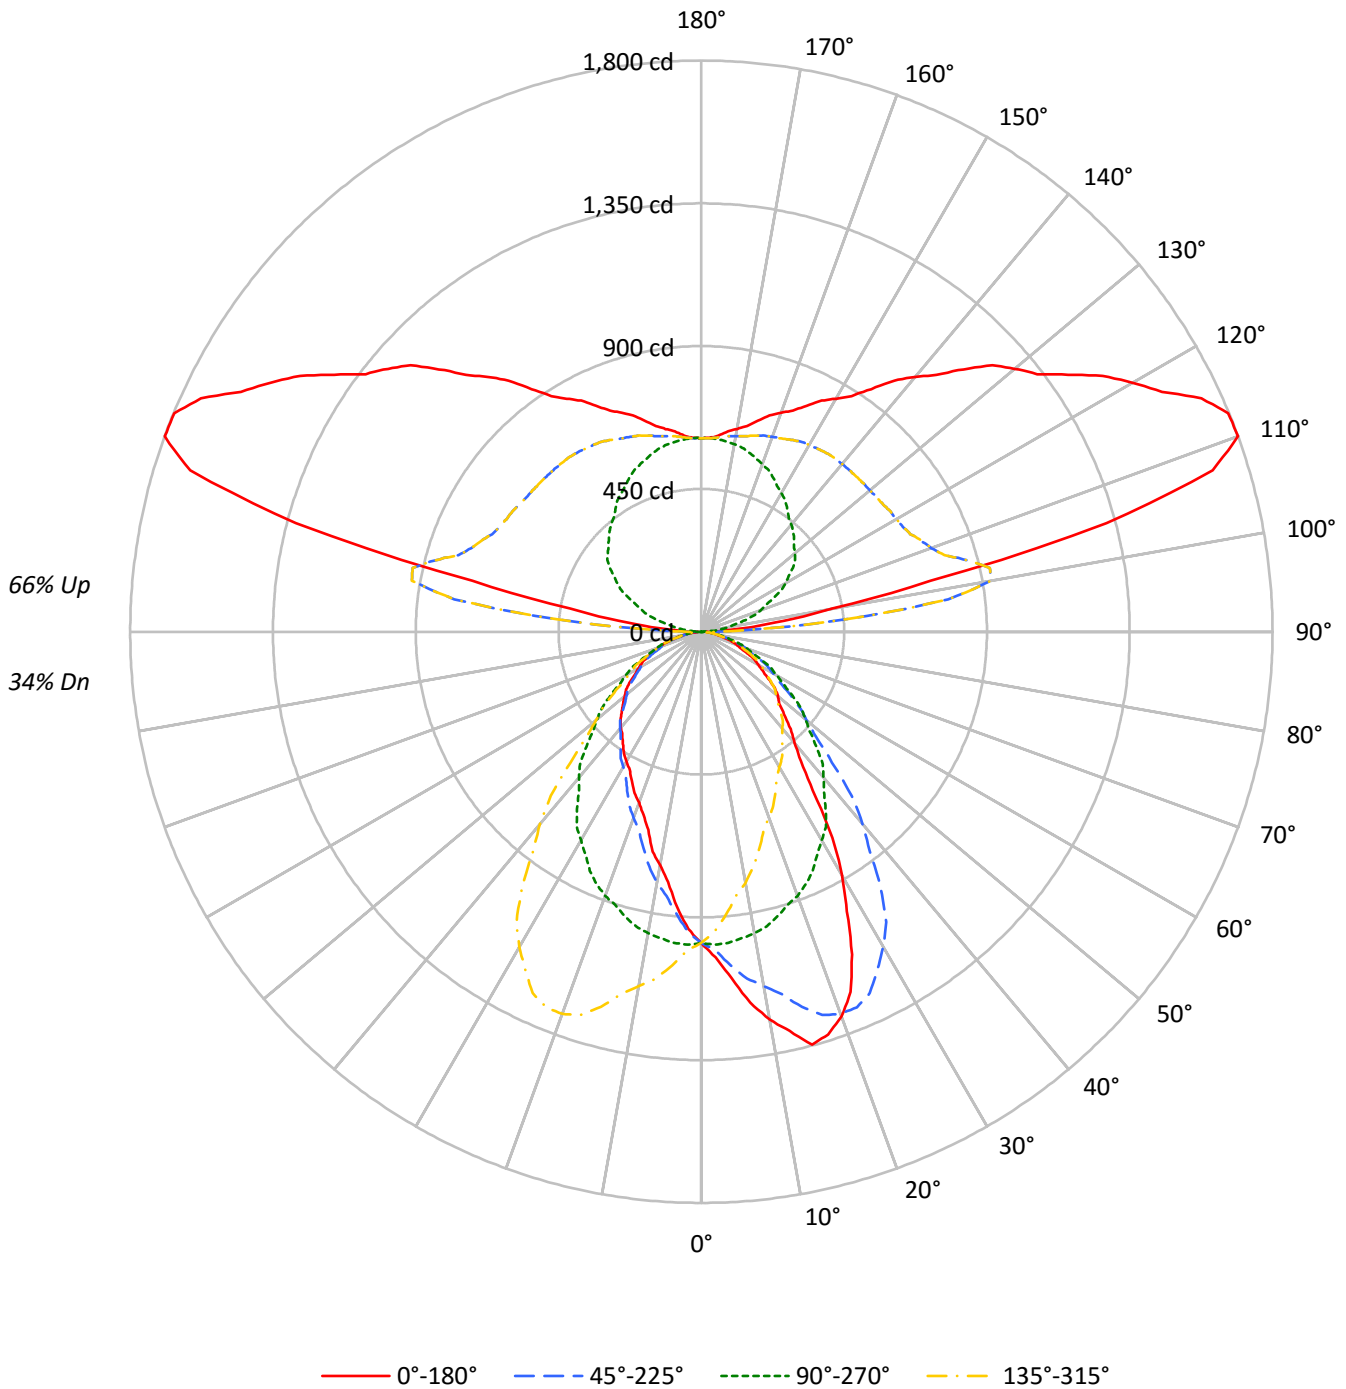



TEST NUMBER: P331323-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	34
1	94	90	87	83	85	82	79	76	66	63	62	51	49	48	37	36	35	29
2	86	79	73	69	78	72	67	63	58	54	51	45	43	41	33	32	30	25
3	79	70	63	57	71	63	57	53	51	47	44	40	37	35	29	28	26	21
4	72	62	54	49	65	56	50	45	46	41	37	36	33	30	26	24	23	19
5	66	55	48	42	60	50	44	39	41	36	32	32	29	26	24	22	20	16
6	61	50	42	36	55	45	39	34	37	32	28	29	26	23	22	20	18	15
7	57	45	37	32	51	41	34	30	33	29	25	27	23	20	20	18	16	13
8	52	41	33	28	47	37	31	26	31	26	22	24	21	18	18	16	14	12
9	49	37	30	25	44	34	28	23	28	23	20	22	19	16	17	15	13	11
10	46	34	27	22	41	31	25	21	26	21	18	21	17	15	16	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	15844	15844	15844	15844
5°	17763	15948	14131	15948
10°	20354	15816	12231	15816
15°	22519	15527	10805	15527
20°	22175	15216	9850	15216
25°	19996	14801	9246	14801
30°	16524	14139	8804	14139
35°	12043	13448	8489	13448
40°	9619	12631	8315	12631
45°	8405	11686	8079	11686
50°	7902	10771	7920	10771
55°	7282	9841	7707	9841
60°	6675	8854	7379	8854
65°	6082	7966	7060	7966
70°	5519	7105	6590	7105
75°	4897	6145	5833	6145
80°	4203	5086	4695	5086
85°	3779	3779	2779	3779



TEST NUMBER: P331323-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	93.5	1.5
10°-20°	271.7	4.2
20°-30°	394.3	6.1
30°-40°	416.1	6.5
40°-50°	368.4	5.7
50°-60°	294.0	4.6
60°-70°	199.8	3.1
70°-80°	102.5	1.6
80°-90°	30.2	0.5
90°-100°	243.9	3.8
100°-110°	827.7	12.9
110°-120°	879.3	13.7
120°-130°	723.9	11.3
130°-140°	581.3	9.1
140°-150°	439.3	6.8
150°-160°	308.7	4.8
160°-170°	181.7	2.8
170°-180°	59.1	0.9
0°-30°	759.5	11.8
0°-40°	1175.6	18.3
0°-60°	1838.0	28.6
0°-90°	2170.5	33.8
90°-120°	1951.0	30.4
90°-150°	3695.4	57.6
90°-180°	4245.0	66.2
0°-180°	6415.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	981	981	981	981	981	
5°	1096	984	872	984	1096	109
15°	1347	929	646	929	1347	372
25°	1122	831	519	831	1122	507
35°	611	682	431	682	611	397
45°	368	512	354	512	368	289
55°	259	350	274	350	259	232
65°	159	208	185	208	159	158
75°	78	98	94	98	78	84
85°	20	20	15	20	20	23
90°	39	1	39	1	39	22
95°	134	41	134	41	134	174
105°	1322	143	1322	143	1322	1279
115°	1740	252	1740	252	1740	1704
125°	1411	352	1411	352	1411	1275
135°	1170	413	1170	413	1170	909
145°	934	472	934	472	934	593
155°	785	536	785	536	785	366
165°	689	584	689	584	689	197
175°	621	609	621	609	621	60
180°	610	610	610	610	610	



TEST NUMBER: P331323-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3
2.5°	1026.6	1026.9	1027.4	1022.7	1022.1	1022.1	1017.8	1014.2	1010.0	1004.2	1004.8
5°	1096.0	1100.1	1101.7	1097.1	1090.4	1089.5	1083.2	1072.6	1062.8	1054.9	1049.2
7.5°	1178.8	1180.4	1176.8	1170.8	1165.8	1156.7	1144.8	1133.1	1116.7	1101.7	1090.6
10°	1241.5	1243.9	1237.4	1228.7	1221.5	1211.0	1193.7	1175.9	1154.5	1133.7	1117.1
12.5°	1289.2	1294.8	1286.6	1285.5	1273.1	1258.7	1238.0	1229.0	1198.8	1169.9	1152.1
15°	1347.2	1346.8	1347.6	1340.4	1331.3	1329.1	1307.2	1283.4	1240.8	1223.9	1194.4
17.5°	1330.4	1336.2	1338.8	1338.7	1338.5	1337.1	1330.0	1315.0	1293.6	1266.2	1232.2
20°	1290.6	1298.1	1299.3	1308.0	1312.8	1319.3	1321.9	1317.8	1304.5	1281.5	1252.1
22.5°	1229.0	1231.1	1234.7	1248.2	1258.8	1274.9	1283.2	1297.2	1292.1	1280.9	1256.4
25°	1122.4	1118.6	1131.8	1138.6	1163.1	1188.7	1207.2	1227.6	1245.7	1256.7	1249.5
27.5°	994.3	988.7	1008.5	1026.4	1046.3	1074.1	1102.9	1136.9	1165.2	1200.6	1212.7
30°	886.3	889.7	908.6	927.8	958.0	997.1	1029.6	1066.9	1107.3	1146.9	1174.4
32.5°	769.8	782.8	794.8	824.3	850.8	894.5	942.1	988.8	1039.2	1084.1	1126.7
35°	611.0	626.0	642.7	664.2	701.5	744.9	791.2	854.2	922.9	984.3	1034.9
37.5°	514.2	511.9	521.4	536.9	567.1	602.2	655.5	717.8	798.6	870.8	942.1
40°	456.4	454.8	461.6	475.9	499.0	524.6	571.4	626.0	701.1	789.3	874.2
42.5°	416.5	417.4	421.2	431.3	447.1	468.2	503.2	549.8	618.4	701.6	792.7
45°	368.1	370.7	374.9	379.8	388.8	406.2	425.8	459.0	513.3	582.7	672.5
47.5°	333.3	333.4	337.5	341.8	347.2	357.0	373.0	393.8	432.1	488.7	565.8
50°	314.6	311.8	314.9	318.3	324.0	330.7	341.3	360.9	386.6	432.2	496.7
52.5°	291.6	291.6	294.4	295.7	300.7	307.5	317.2	330.7	354.0	389.7	442.7
55°	258.7	260.6	262.2	264.4	268.9	273.8	281.3	290.4	308.5	335.3	374.5
57.5°	227.8	228.4	229.9	234.2	237.1	241.6	248.7	257.0	268.7	288.6	318.1
60°	206.7	206.7	209.6	211.6	215.3	219.8	225.5	233.5	244.0	260.2	284.0
62.5°	187.3	187.0	188.2	191.4	194.2	198.4	204.1	210.9	220.8	235.2	254.7
65°	159.2	158.4	160.7	161.4	164.4	168.5	173.1	180.3	188.2	198.7	216.1
67.5°	132.0	132.9	134.1	135.5	137.2	141.6	144.6	149.7	156.3	165.1	176.9
70°	116.9	116.9	116.9	118.1	120.3	122.6	125.6	129.8	136.1	143.7	154.2
72.5°	100.0	101.2	102.4	101.8	104.6	105.9	109.6	111.9	118.1	122.9	132.2
75°	78.5	78.5	78.5	80.3	81.5	82.6	84.8	87.2	90.2	96.1	101.1
77.5°	58.6	58.4	58.8	59.2	60.4	61.8	62.4	64.5	67.3	70.1	74.2
80°	45.2	46.0	46.4	47.2	47.2	47.9	48.3	50.9	52.8	54.7	57.4
82.5°	35.0	35.1	35.2	35.3	35.6	36.2	37.1	38.0	38.6	40.2	42.2
85°	20.4	20.0	20.0	20.7	20.4	20.4	21.1	21.9	21.9	22.2	23.4
87.5°	15.6	15.6	15.9	15.6	15.6	15.7	15.1	15.3	15.9	16.5	16.5
90°	38.7	38.7	38.7	38.7	38.7	37.6	35.2	37.6	38.7	39.9	38.7
92.5°	65.0	66.9	65.9	69.7	70.6	77.9	87.8	102.3	128.9	152.5	150.4
95°	133.7	132.6	136.1	145.4	160.7	186.5	235.8	307.4	402.4	459.9	407.1
97.5°	263.3	273.1	290.2	319.1	375.2	459.9	586.8	717.2	823.5	785.1	591.3
100°	420.0	441.1	475.1	525.5	622.9	764.9	925.6	1071.1	1095.7	926.8	638.1
102.5°	739.1	767.7	810.2	896.3	1002.1	1152.5	1270.0	1302.9	1197.1	931.5	620.4
105°	1322.1	1338.6	1389.0	1461.7	1534.5	1573.2	1557.9	1425.3	1181.3	869.3	585.4
107.5°	1688.8	1710.6	1720.7	1724.7	1715.6	1658.8	1536.8	1337.2	1078.3	802.6	568.0
110°	1799.6	1800.8	1790.2	1767.9	1717.5	1621.2	1471.1	1261.1	1013.6	770.7	564.3



TEST NUMBER: P331323-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	1797.7	1791.4	1771.4	1734.1	1664.0	1553.7	1393.2	1191.6	968.6	750.1	565.2
115°	1739.8	1729.2	1698.7	1644.8	1561.5	1440.6	1287.0	1106.3	912.7	727.3	570.2
117.5°	1636.3	1627.4	1595.2	1538.2	1453.3	1340.0	1200.6	1042.0	877.5	716.3	578.6
120°	1569.6	1557.9	1523.9	1468.7	1386.6	1279.9	1155.5	1010.1	858.7	709.7	584.2
122.5°	1500.2	1490.4	1460.1	1405.8	1332.2	1235.8	1118.0	984.7	842.7	706.0	590.8
125°	1411.3	1401.9	1372.6	1328.0	1259.9	1171.9	1068.7	947.9	820.0	699.2	600.7
127.5°	1333.4	1325.9	1300.5	1258.8	1199.4	1118.2	1020.9	911.5	798.9	695.2	610.8
130°	1289.3	1279.9	1256.5	1216.6	1159.0	1081.7	989.0	888.1	784.9	693.3	618.2
132.5°	1243.2	1234.9	1213.3	1173.4	1116.8	1044.1	959.0	865.6	773.6	692.4	625.7
135°	1169.6	1164.9	1143.8	1105.1	1054.6	989.0	911.5	834.0	757.8	690.9	634.7
137.5°	1097.3	1090.4	1071.8	1038.4	992.5	935.2	873.7	809.0	746.8	690.7	642.7
140°	1047.6	1040.6	1023.0	992.5	954.9	903.3	849.4	793.0	740.2	689.8	646.4
142.5°	997.8	996.4	980.8	953.0	917.4	874.2	827.8	779.9	733.7	689.8	649.2
145°	933.8	930.3	918.6	898.6	870.5	836.5	800.1	761.3	725.0	687.4	652.3
147.5°	880.1	878.0	870.0	854.0	830.8	806.0	777.6	747.1	716.1	683.3	653.2
150°	848.2	847.0	840.0	825.9	808.3	787.2	762.5	736.7	708.5	680.4	652.3
152.5°	820.9	820.7	815.6	803.3	789.5	771.2	750.3	726.4	702.0	675.7	650.4
155°	784.9	787.2	782.4	774.3	761.3	748.4	730.8	712.1	689.8	667.5	647.5
157.5°	754.1	754.1	751.9	745.2	736.0	725.9	711.1	695.4	678.3	659.0	642.2
160°	734.4	734.4	733.2	727.3	719.1	710.9	698.0	685.1	669.8	653.5	639.3
162.5°	715.6	716.5	715.4	711.3	703.2	696.8	685.8	674.8	662.4	648.7	636.5
165°	688.6	689.8	689.8	685.1	680.4	675.7	667.5	659.3	649.9	639.3	631.2
167.5°	663.8	665.2	665.4	662.8	660.8	656.5	650.9	644.5	637.7	631.2	625.7
170°	648.7	651.1	652.3	648.7	647.5	645.2	640.6	637.0	631.2	626.4	622.9
172.5°	636.5	637.9	639.1	637.5	636.3	634.9	631.2	628.5	624.6	620.9	619.1
175°	620.6	622.9	624.1	622.9	622.9	621.8	620.6	619.5	615.9	614.7	613.6
177.5°	611.0	612.9	613.8	613.8	613.8	613.8	612.9	612.9	611.0	610.1	611.0
180°	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1



TEST NUMBER: P331323-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3
2.5°	1006.9	1004.5	1003.0	997.6	992.8	988.0	986.4	987.0	980.4	974.1	971.4
5°	1046.2	1038.6	1031.5	1021.3	1009.3	996.0	989.3	984.0	970.8	956.4	948.2
7.5°	1081.4	1070.6	1056.7	1037.6	1020.1	999.3	986.0	974.4	955.0	934.8	922.5
10°	1102.8	1088.0	1070.4	1046.9	1025.4	1000.2	982.5	964.7	942.1	918.0	902.9
12.5°	1121.2	1101.4	1083.9	1053.9	1028.4	996.8	975.8	950.9	927.1	898.4	883.5
15°	1165.0	1128.4	1095.2	1061.3	1030.0	985.8	962.5	928.9	897.6	862.1	845.2
17.5°	1198.8	1157.7	1105.5	1062.4	1025.8	976.9	942.6	902.4	865.4	824.9	801.8
20°	1218.2	1171.0	1114.8	1063.6	1019.8	964.0	926.7	885.6	842.1	796.5	771.6
22.5°	1229.6	1180.1	1124.5	1059.0	1007.7	953.4	906.5	861.4	817.4	768.2	742.0
25°	1233.2	1188.0	1129.1	1055.2	992.6	931.2	874.5	830.8	777.7	731.6	693.6
27.5°	1215.3	1182.9	1126.3	1048.1	975.2	903.3	840.3	790.7	734.6	684.7	646.3
30°	1193.3	1174.4	1119.3	1040.9	961.3	884.0	814.7	758.4	702.7	652.1	612.9
32.5°	1159.2	1155.1	1106.7	1030.7	946.5	859.6	787.8	730.9	669.1	619.5	582.1
35°	1092.2	1110.3	1079.7	1007.7	918.7	824.9	747.1	682.3	618.1	570.6	535.5
37.5°	1002.5	1047.4	1039.5	974.1	881.1	787.0	701.1	633.4	572.3	524.3	489.9
40°	940.6	997.9	1006.2	948.5	854.6	757.7	666.8	599.3	539.7	495.9	461.2
42.5°	874.2	941.2	964.0	917.8	825.7	726.9	636.0	566.1	507.2	464.5	433.8
45°	763.0	851.6	892.7	866.3	777.3	676.2	582.7	511.8	458.3	418.3	394.5
47.5°	658.9	755.8	811.1	801.7	723.5	623.4	531.0	462.9	410.8	378.9	357.6
50°	585.3	684.9	751.6	754.7	684.9	585.7	492.9	428.8	380.9	351.1	333.8
52.5°	521.4	616.4	689.2	705.2	641.8	546.4	458.8	395.1	352.8	325.5	309.9
55°	437.9	518.2	599.0	628.3	577.4	486.9	405.8	349.6	310.0	291.1	277.6
57.5°	364.1	431.0	505.5	538.1	506.6	429.2	353.1	304.4	272.3	255.7	245.3
60°	325.1	377.9	444.2	483.1	456.0	387.0	320.5	274.2	247.8	233.1	223.3
62.5°	288.9	335.7	391.7	427.3	412.5	347.4	288.0	247.0	224.3	210.5	203.4
65°	238.3	275.3	318.7	351.5	341.7	292.3	243.7	208.5	190.5	179.6	173.9
67.5°	196.2	223.0	253.1	281.8	273.9	238.8	199.9	172.5	159.0	149.6	146.2
70°	169.8	190.1	216.8	239.8	233.5	204.8	173.9	150.5	138.8	130.9	127.4
72.5°	144.4	161.1	181.6	200.4	196.0	172.2	146.4	128.8	119.8	112.5	109.7
75°	109.0	121.8	134.3	146.7	145.6	127.1	112.0	98.5	91.3	85.6	84.5
77.5°	80.5	87.7	96.1	103.5	101.5	90.9	79.1	71.3	66.0	62.2	61.6
80°	61.5	65.6	71.7	77.0	74.3	69.8	60.4	54.7	50.9	47.2	45.6
82.5°	44.5	48.8	52.3	55.2	53.2	49.0	43.1	39.3	37.1	34.4	33.8
85°	23.4	25.7	27.2	27.9	27.2	24.5	21.9	20.4	18.5	17.4	17.0
87.5°	15.3	13.7	12.5	12.4	11.1	10.6	8.5	6.9	7.3	7.9	7.8
90°	31.7	23.4	17.6	14.0	11.7	9.4	4.6	1.2	4.6	9.4	11.7
92.5°	117.0	79.8	53.2	42.2	34.2	29.1	20.6	14.3	20.6	29.1	34.2
95°	270.9	169.0	114.9	86.8	68.1	57.5	45.7	41.1	45.7	57.5	68.1
97.5°	365.1	222.9	155.1	123.2	101.6	85.6	73.2	66.9	73.2	85.6	101.6
100°	384.8	241.7	179.5	146.6	123.2	104.4	93.8	90.3	93.8	104.4	123.2
102.5°	385.8	258.5	201.1	168.2	143.8	125.0	114.5	111.9	114.5	125.0	143.8
105°	391.8	287.4	232.3	199.4	173.6	156.0	147.8	143.1	147.8	156.0	173.6
107.5°	408.0	317.0	263.5	230.5	204.8	188.6	180.7	176.9	180.7	188.6	204.8
110°	421.1	336.7	285.1	251.1	226.4	211.2	204.1	199.4	204.1	211.2	226.4



TEST NUMBER: P331323-840
 CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	435.3	355.5	305.7	270.7	247.0	232.8	224.8	220.0	224.8	232.8	247.0
115°	456.4	384.8	334.4	302.7	279.2	265.1	258.1	252.3	258.1	265.1	279.2
117.5°	478.9	411.7	365.1	332.2	309.7	297.3	290.2	285.6	290.2	297.3	309.7
120°	493.9	430.5	384.8	351.9	328.5	317.9	310.8	306.2	310.8	317.9	328.5
122.5°	507.1	448.4	405.5	371.6	348.2	336.7	329.6	325.9	329.6	336.7	348.2
125°	528.0	475.1	432.9	400.0	376.6	362.5	355.5	351.9	355.5	362.5	376.6
127.5°	547.3	500.0	458.9	425.2	402.6	387.2	377.3	372.5	377.3	387.2	402.6
130°	559.6	515.0	473.9	441.1	417.7	401.2	389.5	384.8	389.5	401.2	417.7
132.5°	571.8	528.2	489.0	456.2	431.7	414.3	401.7	396.1	401.7	414.3	431.7
135°	587.7	546.6	509.2	476.3	449.3	431.7	417.7	412.9	417.7	431.7	449.3
137.5°	600.0	561.7	524.6	494.1	467.4	448.6	434.5	428.9	434.5	448.6	467.4
140°	606.5	570.2	534.9	504.4	478.7	459.9	445.8	441.1	445.8	459.9	478.7
142.5°	612.2	576.7	542.5	513.8	489.0	470.2	457.1	453.3	457.1	470.2	489.0
145°	619.5	586.5	554.9	529.1	505.6	488.1	476.3	471.6	476.3	488.1	505.6
147.5°	623.4	594.5	564.7	541.8	522.3	506.0	494.8	491.3	494.8	506.0	522.3
150°	625.3	598.3	571.3	550.2	532.6	517.4	508.0	504.4	508.0	517.4	532.6
152.5°	626.2	602.1	577.8	558.7	542.0	528.6	519.3	517.6	519.3	528.6	542.0
155°	627.6	607.6	587.7	570.2	557.2	544.3	537.2	536.1	537.2	544.3	557.2
157.5°	627.6	611.7	594.8	580.0	569.7	558.5	552.8	551.6	552.8	558.5	569.7
160°	627.6	613.6	599.5	586.5	577.1	567.7	563.1	561.9	563.1	567.7	577.1
162.5°	626.7	614.5	602.3	592.2	583.7	576.2	571.6	572.3	571.6	576.2	583.7
165°	624.1	615.9	605.3	598.3	592.4	585.4	583.1	584.2	583.1	585.4	592.4
167.5°	622.5	615.6	607.9	603.5	599.3	594.8	592.7	594.1	592.7	594.8	599.3
170°	620.6	614.7	608.8	605.3	603.0	599.5	598.3	600.7	598.3	599.5	603.0
172.5°	617.7	613.8	609.8	607.2	605.8	602.3	603.0	604.4	603.0	602.3	605.8
175°	614.7	612.4	610.1	608.8	608.8	606.5	607.6	608.8	607.6	606.5	608.8
177.5°	612.9	611.0	610.1	610.1	610.1	608.1	609.0	611.0	609.0	608.1	610.1
180°	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1



TEST NUMBER: P331323-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3
2.5°	968.4	966.5	960.2	956.8	951.5	946.3	943.0	944.5	945.7	945.1	944.2
5°	940.6	933.4	922.5	913.0	906.3	893.8	888.6	886.0	883.6	881.0	878.4
7.5°	907.6	896.3	880.6	867.2	854.4	839.0	830.2	824.9	819.4	813.4	808.2
10°	884.0	868.2	851.6	832.7	817.7	803.7	791.2	782.9	775.4	768.2	763.0
12.5°	859.3	841.0	820.5	794.8	778.1	758.1	756.3	741.6	729.8	725.4	719.2
15°	819.9	794.3	768.2	737.7	724.5	706.4	695.1	683.8	673.6	666.4	664.5
17.5°	775.2	741.9	716.1	694.2	672.6	654.0	643.6	634.5	626.1	616.5	615.3
20°	741.0	712.5	684.2	664.9	642.7	623.8	611.0	601.9	594.7	589.1	584.2
22.5°	708.8	677.4	651.6	630.5	608.5	593.3	583.2	574.5	568.6	562.3	557.6
25°	657.0	632.5	604.2	580.5	562.3	552.5	544.2	536.6	532.9	528.8	523.5
27.5°	611.7	584.4	558.0	539.6	523.6	514.9	509.1	503.9	500.4	498.0	494.9
30°	579.7	552.1	531.4	513.3	500.1	491.4	487.7	484.6	480.5	479.0	477.5
32.5°	548.9	524.1	506.3	490.7	478.1	472.4	469.0	466.3	463.0	461.5	458.5
35°	505.3	484.6	467.3	458.6	448.4	443.5	440.9	437.1	434.1	432.6	432.2
37.5°	464.4	446.4	434.9	423.8	419.5	416.5	412.9	410.3	409.4	409.2	408.8
40°	437.9	423.1	412.9	403.9	402.0	397.5	394.5	392.2	392.2	392.6	392.2
42.5°	413.7	400.5	391.5	383.7	381.5	378.8	375.8	375.7	376.3	377.5	376.3
45°	377.2	367.7	361.3	357.5	353.4	350.7	350.3	351.5	351.8	352.2	353.4
47.5°	343.5	337.2	331.4	327.3	325.5	325.0	324.6	326.5	328.3	329.0	330.7
50°	323.6	316.4	311.5	308.9	307.4	306.6	307.4	309.6	311.1	313.1	314.2
52.5°	301.2	296.2	292.9	290.7	290.1	290.6	290.7	293.4	295.8	296.4	297.0
55°	270.4	266.6	265.9	262.5	264.0	263.6	265.5	267.0	269.2	271.6	272.0
57.5°	239.6	236.6	234.6	234.9	235.3	237.0	238.5	241.3	243.7	246.0	246.3
60°	219.1	217.6	216.5	216.5	217.2	219.5	221.4	224.0	225.5	227.0	228.1
62.5°	200.5	198.9	197.7	198.3	200.4	201.7	203.9	205.3	206.8	208.3	208.8
65°	170.9	170.1	171.3	172.0	172.4	174.2	176.9	178.0	179.6	180.3	182.9
67.5°	143.6	143.8	143.6	144.7	146.8	147.3	149.8	152.5	152.8	154.2	155.9
70°	125.2	125.9	126.7	127.4	129.4	130.1	132.0	133.1	134.6	135.7	136.9
72.5°	108.4	108.5	109.3	109.1	110.7	112.3	113.9	115.0	116.5	118.0	119.1
75°	83.3	83.3	84.1	84.5	86.3	88.3	87.9	88.7	90.2	91.7	92.4
77.5°	60.9	60.1	60.9	61.2	61.8	63.4	63.7	64.8	66.6	66.0	66.9
80°	46.4	45.2	46.4	46.8	46.8	48.7	48.7	49.4	50.5	49.4	50.5
82.5°	33.1	32.6	33.4	33.5	34.1	34.1	34.7	34.9	36.1	35.5	36.1
85°	16.6	16.3	16.6	16.3	16.6	17.0	17.0	16.6	16.6	17.4	16.3
87.5°	8.0	8.4	9.2	10.9	11.9	11.9	11.4	11.1	10.7	10.5	10.8
90°	14.0	17.6	23.4	31.7	38.7	39.9	38.7	37.6	35.2	37.6	38.7
92.5°	42.2	53.2	79.8	117.0	150.4	152.5	128.9	102.3	87.8	77.9	70.6
95°	86.8	114.9	169.0	270.9	407.1	459.9	402.4	307.4	235.8	186.5	160.7
97.5°	123.2	155.1	222.9	365.1	591.3	785.1	823.5	717.2	586.8	459.9	375.2
100°	146.6	179.5	241.7	384.8	638.1	926.8	1095.7	1071.1	925.6	764.9	622.9
102.5°	168.2	201.1	258.5	385.8	620.4	931.5	1197.1	1302.9	1270.0	1152.5	1002.1
105°	199.4	232.3	287.4	391.8	585.4	869.3	1181.3	1425.3	1557.9	1573.2	1534.5
107.5°	230.5	263.5	317.0	408.0	568.0	802.6	1078.3	1337.2	1536.8	1658.8	1715.6
110°	251.1	285.1	336.7	421.1	564.3	770.7	1013.6	1261.1	1471.1	1621.2	1717.5



TEST NUMBER: P331323-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	270.7	305.7	355.5	435.3	565.2	750.1	968.6	1191.6	1393.2	1553.7	1664.0
115°	302.7	334.4	384.8	456.4	570.2	727.3	912.7	1106.3	1287.0	1440.6	1561.5
117.5°	332.2	365.1	411.7	478.9	578.6	716.3	877.5	1042.0	1200.6	1340.0	1453.3
120°	351.9	384.8	430.5	493.9	584.2	709.7	858.7	1010.1	1155.5	1279.9	1386.6
122.5°	371.6	405.5	448.4	507.1	590.8	706.0	842.7	984.7	1118.0	1235.8	1332.2
125°	400.0	432.9	475.1	528.0	600.7	699.2	820.0	947.9	1068.7	1171.9	1259.9
127.5°	425.2	458.9	500.0	547.3	610.8	695.2	798.9	911.5	1020.9	1118.2	1199.4
130°	441.1	473.9	515.0	559.6	618.2	693.3	784.9	888.1	989.0	1081.7	1159.0
132.5°	456.2	489.0	528.2	571.8	625.7	692.4	773.6	865.6	959.0	1044.1	1116.8
135°	476.3	509.2	546.6	587.7	634.7	690.9	757.8	834.0	911.5	989.0	1054.6
137.5°	494.1	524.6	561.7	600.0	642.7	690.7	746.8	809.0	873.7	935.2	992.5
140°	504.4	534.9	570.2	606.5	646.4	689.8	740.2	793.0	849.4	903.3	954.9
142.5°	513.8	542.5	576.7	612.2	649.2	689.8	733.7	779.9	827.8	874.2	917.4
145°	529.1	554.9	586.5	619.5	652.3	687.4	725.0	761.3	800.1	836.5	870.5
147.5°	541.8	564.7	594.5	623.4	653.2	683.3	716.1	747.1	777.6	806.0	830.8
150°	550.2	571.3	598.3	625.3	652.3	680.4	708.5	736.7	762.5	787.2	808.3
152.5°	558.7	577.8	602.1	626.2	650.4	675.7	702.0	726.4	750.3	771.2	789.5
155°	570.2	587.7	607.6	627.6	647.5	667.5	689.8	712.1	730.8	748.4	761.3
157.5°	580.0	594.8	611.7	627.6	642.2	659.0	678.3	695.4	711.1	725.9	736.0
160°	586.5	599.5	613.6	627.6	639.3	653.5	669.8	685.1	698.0	710.9	719.1
162.5°	592.2	602.3	614.5	626.7	636.5	648.7	662.4	674.8	685.8	696.8	703.2
165°	598.3	605.3	615.9	624.1	631.2	639.3	649.9	659.3	667.5	675.7	680.4
167.5°	603.5	607.9	615.6	622.5	625.7	631.2	637.7	644.5	650.9	656.5	660.8
170°	605.3	608.8	614.7	620.6	622.9	626.4	631.2	637.0	640.6	645.2	647.5
172.5°	607.2	609.8	613.8	617.7	619.1	620.9	624.6	628.5	631.2	634.9	636.3
175°	608.8	610.1	612.4	614.7	613.6	614.7	615.9	619.5	620.6	621.8	622.9
177.5°	610.1	610.1	611.0	612.9	611.0	610.1	611.0	612.9	612.9	613.8	613.8
180°	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1



TEST NUMBER: P331323-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3
2.5°	941.2	940.6	940.6	937.9	940.6	940.6	941.2	944.2	945.1	945.7	944.5
5°	873.1	871.9	870.1	871.9	870.1	871.9	873.1	878.4	881.0	883.6	886.0
7.5°	805.8	801.2	800.5	796.1	800.5	801.2	805.8	808.2	813.4	819.4	824.9
10°	756.6	753.6	753.2	746.0	753.2	753.6	756.6	763.0	768.2	775.4	782.9
12.5°	719.1	711.9	713.4	709.2	713.4	711.9	719.1	719.2	725.4	729.8	741.6
15°	654.3	654.3	652.9	646.4	652.9	654.3	654.3	664.5	666.4	673.6	683.8
17.5°	607.8	607.0	603.4	605.2	603.4	607.0	607.8	615.3	616.5	626.1	634.5
20°	580.1	577.7	573.3	573.3	573.3	577.7	580.1	584.2	589.1	594.7	601.9
22.5°	553.8	553.6	548.9	550.4	548.9	553.6	553.8	557.6	562.3	568.6	574.5
25°	523.1	520.1	517.9	519.0	517.9	520.1	523.1	523.5	528.8	532.9	536.6
27.5°	494.0	492.3	492.2	489.1	492.2	492.3	494.0	494.9	498.0	500.4	503.9
30°	477.1	473.3	474.0	472.2	474.0	473.3	477.1	477.5	479.0	480.5	484.6
32.5°	457.8	456.5	455.7	454.0	455.7	456.5	457.8	458.5	461.5	463.0	466.3
35°	431.4	431.8	429.9	430.7	429.9	431.8	431.4	432.2	432.6	434.1	437.1
37.5°	408.5	409.7	408.8	409.0	408.8	409.7	408.5	408.8	409.2	409.4	410.3
40°	393.3	393.3	393.3	394.5	393.3	393.3	393.3	392.2	392.6	392.2	392.2
42.5°	378.9	378.3	377.7	377.6	377.7	378.3	378.9	376.3	377.5	376.3	375.7
45°	354.2	355.3	355.7	353.8	355.7	355.3	354.2	353.4	352.2	351.8	351.5
47.5°	331.7	331.8	331.7	333.4	331.7	331.8	331.7	330.7	329.0	328.3	326.5
50°	316.1	315.3	316.1	315.3	316.1	315.3	316.1	314.2	313.1	311.1	309.6
52.5°	299.4	299.6	299.1	299.0	299.1	299.6	299.4	297.0	296.4	295.8	293.4
55°	273.5	274.2	273.8	273.8	273.8	274.2	273.5	272.0	271.6	269.2	267.0
57.5°	246.5	247.2	247.7	246.0	247.7	247.2	246.5	246.3	246.0	243.7	241.3
60°	227.8	229.6	229.3	228.5	229.3	229.6	227.8	228.1	227.0	225.5	224.0
62.5°	210.6	211.3	211.2	211.1	211.2	211.3	210.6	208.8	208.3	206.8	205.3
65°	184.0	184.8	183.7	184.8	183.7	184.8	184.0	182.9	180.3	179.6	178.0
67.5°	155.4	155.7	156.5	157.0	156.5	155.7	155.4	155.9	154.2	152.8	152.5
70°	137.6	137.2	138.5	139.6	138.5	137.2	137.6	136.9	135.7	134.6	133.1
72.5°	119.0	119.8	119.4	120.3	119.4	119.8	119.0	119.1	118.0	116.5	115.0
75°	91.7	92.8	92.4	93.5	92.4	92.8	91.7	92.4	91.7	90.2	88.7
77.5°	66.2	66.3	66.2	66.9	66.2	66.3	66.2	66.9	66.0	66.6	64.8
80°	50.5	49.8	49.0	50.5	49.0	49.8	50.5	50.5	49.4	50.5	49.4
82.5°	35.1	35.6	34.8	34.8	34.8	35.6	35.1	36.1	35.5	36.1	34.9
85°	16.3	15.9	15.0	15.0	15.0	15.9	16.3	16.3	17.4	16.6	16.6
87.5°	10.8	10.5	10.5	10.2	10.5	10.5	10.8	10.8	10.5	10.7	11.1
90°	38.7	38.7	38.7	38.7	38.7	38.7	38.7	38.7	37.6	35.2	37.6
92.5°	69.7	65.9	66.9	65.0	66.9	65.9	69.7	70.6	77.9	87.8	102.3
95°	145.4	136.1	132.6	133.7	132.6	136.1	145.4	160.7	186.5	235.8	307.4
97.5°	319.1	290.2	273.1	263.3	273.1	290.2	319.1	375.2	459.9	586.8	717.2
100°	525.5	475.1	441.1	420.0	441.1	475.1	525.5	622.9	764.9	925.6	1071.1
102.5°	896.3	810.2	767.7	739.1	767.7	810.2	896.3	1002.1	1152.5	1270.0	1302.9
105°	1461.7	1389.0	1338.6	1322.1	1338.6	1389.0	1461.7	1534.5	1573.2	1557.9	1425.3
107.5°	1724.7	1720.7	1710.6	1688.8	1710.6	1720.7	1724.7	1715.6	1658.8	1536.8	1337.2
110°	1767.9	1790.2	1800.8	1799.6	1800.8	1790.2	1767.9	1717.5	1621.2	1471.1	1261.1



TEST NUMBER: P331323-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	1734.1	1771.4	1791.4	1797.7	1791.4	1771.4	1734.1	1664.0	1553.7	1393.2	1191.6
115°	1644.8	1698.7	1729.2	1739.8	1729.2	1698.7	1644.8	1561.5	1440.6	1287.0	1106.3
117.5°	1538.2	1595.2	1627.4	1636.3	1627.4	1595.2	1538.2	1453.3	1340.0	1200.6	1042.0
120°	1468.7	1523.9	1557.9	1569.6	1557.9	1523.9	1468.7	1386.6	1279.9	1155.5	1010.1
122.5°	1405.8	1460.1	1490.4	1500.2	1490.4	1460.1	1405.8	1332.2	1235.8	1118.0	984.7
125°	1328.0	1372.6	1401.9	1411.3	1401.9	1372.6	1328.0	1259.9	1171.9	1068.7	947.9
127.5°	1258.8	1300.5	1325.9	1333.4	1325.9	1300.5	1258.8	1199.4	1118.2	1020.9	911.5
130°	1216.6	1256.5	1279.9	1289.3	1279.9	1256.5	1216.6	1159.0	1081.7	989.0	888.1
132.5°	1173.4	1213.3	1234.9	1243.2	1234.9	1213.3	1173.4	1116.8	1044.1	959.0	865.6
135°	1105.1	1143.8	1164.9	1169.6	1164.9	1143.8	1105.1	1054.6	989.0	911.5	834.0
137.5°	1038.4	1071.8	1090.4	1097.3	1090.4	1071.8	1038.4	992.5	935.2	873.7	809.0
140°	992.5	1023.0	1040.6	1047.6	1040.6	1023.0	992.5	954.9	903.3	849.4	793.0
142.5°	953.0	980.8	996.4	997.8	996.4	980.8	953.0	917.4	874.2	827.8	779.9
145°	898.6	918.6	930.3	933.8	930.3	918.6	898.6	870.5	836.5	800.1	761.3
147.5°	854.0	870.0	878.0	880.1	878.0	870.0	854.0	830.8	806.0	777.6	747.1
150°	825.9	840.0	847.0	848.2	847.0	840.0	825.9	808.3	787.2	762.5	736.7
152.5°	803.3	815.6	820.7	820.9	820.7	815.6	803.3	789.5	771.2	750.3	726.4
155°	774.3	782.4	787.2	784.9	787.2	782.4	774.3	761.3	748.4	730.8	712.1
157.5°	745.2	751.9	754.1	754.1	754.1	751.9	745.2	736.0	725.9	711.1	695.4
160°	727.3	733.2	734.4	734.4	734.4	733.2	727.3	719.1	710.9	698.0	685.1
162.5°	711.3	715.4	716.5	715.6	716.5	715.4	711.3	703.2	696.8	685.8	674.8
165°	685.1	689.8	689.8	688.6	689.8	689.8	685.1	680.4	675.7	667.5	659.3
167.5°	662.8	665.4	665.2	663.8	665.2	665.4	662.8	660.8	656.5	650.9	644.5
170°	648.7	652.3	651.1	648.7	651.1	652.3	648.7	647.5	645.2	640.6	637.0
172.5°	637.5	639.1	637.9	636.5	637.9	639.1	637.5	636.3	634.9	631.2	628.5
175°	622.9	624.1	622.9	620.6	622.9	624.1	622.9	622.9	621.8	620.6	619.5
177.5°	613.8	613.8	612.9	611.0	612.9	613.8	613.8	613.8	613.8	612.9	612.9
180°	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1



TEST NUMBER: P331323-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3
2.5°	943.0	946.3	951.5	956.8	960.2	966.5	968.4	971.4	974.1	980.4	987.0
5°	888.6	893.8	906.3	913.0	922.5	933.4	940.6	948.2	956.4	970.8	984.0
7.5°	830.2	839.0	854.4	867.2	880.6	896.3	907.6	922.5	934.8	955.0	974.4
10°	791.2	803.7	817.7	832.7	851.6	868.2	884.0	902.9	918.0	942.1	964.7
12.5°	756.3	758.1	778.1	794.8	820.5	841.0	859.3	883.5	898.4	927.1	950.9
15°	695.1	706.4	724.5	737.7	768.2	794.3	819.9	845.2	862.1	897.6	928.9
17.5°	643.6	654.0	672.6	694.2	716.1	741.9	775.2	801.8	824.9	865.4	902.4
20°	611.0	623.8	642.7	664.9	684.2	712.5	741.0	771.6	796.5	842.1	885.6
22.5°	583.2	593.3	608.5	630.5	651.6	677.4	708.8	742.0	768.2	817.4	861.4
25°	544.2	552.5	562.3	580.5	604.2	632.5	657.0	693.6	731.6	777.7	830.8
27.5°	509.1	514.9	523.6	539.6	558.0	584.4	611.7	646.3	684.7	734.6	790.7
30°	487.7	491.4	500.1	513.3	531.4	552.1	579.7	612.9	652.1	702.7	758.4
32.5°	469.0	472.4	478.1	490.7	506.3	524.1	548.9	582.1	619.5	669.1	730.9
35°	440.9	443.5	448.4	458.6	467.3	484.6	505.3	535.5	570.6	618.1	682.3
37.5°	412.9	416.5	419.5	423.8	434.9	446.4	464.4	489.9	524.3	572.3	633.4
40°	394.5	397.5	402.0	403.9	412.9	423.1	437.9	461.2	495.9	539.7	599.3
42.5°	375.8	378.8	381.5	383.7	391.5	400.5	413.7	433.8	464.5	507.2	566.1
45°	350.3	350.7	353.4	357.5	361.3	367.7	377.2	394.5	418.3	458.3	511.8
47.5°	324.6	325.0	325.5	327.3	331.4	337.2	343.5	357.6	378.9	410.8	462.9
50°	307.4	306.6	307.4	308.9	311.5	316.4	323.6	333.8	351.1	380.9	428.8
52.5°	290.7	290.6	290.1	290.7	292.9	296.2	301.2	309.9	325.5	352.8	395.1
55°	265.5	263.6	264.0	262.5	265.9	266.6	270.4	277.6	291.1	310.0	349.6
57.5°	238.5	237.0	235.3	234.9	234.6	236.6	239.6	245.3	255.7	272.3	304.4
60°	221.4	219.5	217.2	216.5	216.5	217.6	219.1	223.3	233.1	247.8	274.2
62.5°	203.9	201.7	200.4	198.3	197.7	198.9	200.5	203.4	210.5	224.3	247.0
65°	176.9	174.2	172.4	172.0	171.3	170.1	170.9	173.9	179.6	190.5	208.5
67.5°	149.8	147.3	146.8	144.7	143.6	143.8	143.6	146.2	149.6	159.0	172.5
70°	132.0	130.1	129.4	127.4	126.7	125.9	125.2	127.4	130.9	138.8	150.5
72.5°	113.9	112.3	110.7	109.1	109.3	108.5	108.4	109.7	112.5	119.8	128.8
75°	87.9	88.3	86.3	84.5	84.1	83.3	83.3	84.5	85.6	91.3	98.5
77.5°	63.7	63.4	61.8	61.2	60.9	60.1	60.9	61.6	62.2	66.0	71.3
80°	48.7	48.7	46.8	46.8	46.4	45.2	46.4	45.6	47.2	50.9	54.7
82.5°	34.7	34.1	34.1	33.5	33.4	32.6	33.1	33.8	34.4	37.1	39.3
85°	17.0	17.0	16.6	16.3	16.6	16.3	16.6	17.0	17.4	18.5	20.4
87.5°	11.4	11.9	11.9	10.9	9.2	8.4	8.0	7.8	7.9	7.3	6.9
90°	38.7	39.9	38.7	31.7	23.4	17.6	14.0	11.7	9.4	4.6	1.2
92.5°	128.9	152.5	150.4	117.0	79.8	53.2	42.2	34.2	29.1	20.6	14.3
95°	402.4	459.9	407.1	270.9	169.0	114.9	86.8	68.1	57.5	45.7	41.1
97.5°	823.5	785.1	591.3	365.1	222.9	155.1	123.2	101.6	85.6	73.2	66.9
100°	1095.7	926.8	638.1	384.8	241.7	179.5	146.6	123.2	104.4	93.8	90.3
102.5°	1197.1	931.5	620.4	385.8	258.5	201.1	168.2	143.8	125.0	114.5	111.9
105°	1181.3	869.3	585.4	391.8	287.4	232.3	199.4	173.6	156.0	147.8	143.1
107.5°	1078.3	802.6	568.0	408.0	317.0	263.5	230.5	204.8	188.6	180.7	176.9
110°	1013.6	770.7	564.3	421.1	336.7	285.1	251.1	226.4	211.2	204.1	199.4



TEST NUMBER: P331323-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	968.6	750.1	565.2	435.3	355.5	305.7	270.7	247.0	232.8	224.8	220.0
115°	912.7	727.3	570.2	456.4	384.8	334.4	302.7	279.2	265.1	258.1	252.3
117.5°	877.5	716.3	578.6	478.9	411.7	365.1	332.2	309.7	297.3	290.2	285.6
120°	858.7	709.7	584.2	493.9	430.5	384.8	351.9	328.5	317.9	310.8	306.2
122.5°	842.7	706.0	590.8	507.1	448.4	405.5	371.6	348.2	336.7	329.6	325.9
125°	820.0	699.2	600.7	528.0	475.1	432.9	400.0	376.6	362.5	355.5	351.9
127.5°	798.9	695.2	610.8	547.3	500.0	458.9	425.2	402.6	387.2	377.3	372.5
130°	784.9	693.3	618.2	559.6	515.0	473.9	441.1	417.7	401.2	389.5	384.8
132.5°	773.6	692.4	625.7	571.8	528.2	489.0	456.2	431.7	414.3	401.7	396.1
135°	757.8	690.9	634.7	587.7	546.6	509.2	476.3	449.3	431.7	417.7	412.9
137.5°	746.8	690.7	642.7	600.0	561.7	524.6	494.1	467.4	448.6	434.5	428.9
140°	740.2	689.8	646.4	606.5	570.2	534.9	504.4	478.7	459.9	445.8	441.1
142.5°	733.7	689.8	649.2	612.2	576.7	542.5	513.8	489.0	470.2	457.1	453.3
145°	725.0	687.4	652.3	619.5	586.5	554.9	529.1	505.6	488.1	476.3	471.6
147.5°	716.1	683.3	653.2	623.4	594.5	564.7	541.8	522.3	506.0	494.8	491.3
150°	708.5	680.4	652.3	625.3	598.3	571.3	550.2	532.6	517.4	508.0	504.4
152.5°	702.0	675.7	650.4	626.2	602.1	577.8	558.7	542.0	528.6	519.3	517.6
155°	689.8	667.5	647.5	627.6	607.6	587.7	570.2	557.2	544.3	537.2	536.1
157.5°	678.3	659.0	642.2	627.6	611.7	594.8	580.0	569.7	558.5	552.8	551.6
160°	669.8	653.5	639.3	627.6	613.6	599.5	586.5	577.1	567.7	563.1	561.9
162.5°	662.4	648.7	636.5	626.7	614.5	602.3	592.2	583.7	576.2	571.6	572.3
165°	649.9	639.3	631.2	624.1	615.9	605.3	598.3	592.4	585.4	583.1	584.2
167.5°	637.7	631.2	625.7	622.5	615.6	607.9	603.5	599.3	594.8	592.7	594.1
170°	631.2	626.4	622.9	620.6	614.7	608.8	605.3	603.0	599.5	598.3	600.7
172.5°	624.6	620.9	619.1	617.7	613.8	609.8	607.2	605.8	602.3	603.0	604.4
175°	615.9	614.7	613.6	614.7	612.4	610.1	608.8	608.8	606.5	607.6	608.8
177.5°	611.0	610.1	611.0	612.9	611.0	610.1	610.1	610.1	608.1	609.0	611.0
180°	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1



TEST NUMBER: P331323-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3	981.3
2.5°	986.4	988.0	992.8	997.6	1003.0	1004.5	1006.9	1004.8	1004.2	1010.0	1014.2
5°	989.3	996.0	1009.3	1021.3	1031.5	1038.6	1046.2	1049.2	1054.9	1062.8	1072.6
7.5°	986.0	999.3	1020.1	1037.6	1056.7	1070.6	1081.4	1090.6	1101.7	1116.7	1133.1
10°	982.5	1000.2	1025.4	1046.9	1070.4	1088.0	1102.8	1117.1	1133.7	1154.5	1175.9
12.5°	975.8	996.8	1028.4	1053.9	1083.9	1101.4	1121.2	1152.1	1169.9	1198.8	1229.0
15°	962.5	985.8	1030.0	1061.3	1095.2	1128.4	1165.0	1194.4	1223.9	1240.8	1283.4
17.5°	942.6	976.9	1025.8	1062.4	1105.5	1157.7	1198.8	1232.2	1266.2	1293.6	1315.0
20°	926.7	964.0	1019.8	1063.6	1114.8	1171.0	1218.2	1252.1	1281.5	1304.5	1317.8
22.5°	906.5	953.4	1007.7	1059.0	1124.5	1180.1	1229.6	1256.4	1280.9	1292.1	1297.2
25°	874.5	931.2	992.6	1055.2	1129.1	1188.0	1233.2	1249.5	1256.7	1245.7	1227.6
27.5°	840.3	903.3	975.2	1048.1	1126.3	1182.9	1215.3	1212.7	1200.6	1165.2	1136.9
30°	814.7	884.0	961.3	1040.9	1119.3	1174.4	1193.3	1174.4	1146.9	1107.3	1066.9
32.5°	787.8	859.6	946.5	1030.7	1106.7	1155.1	1159.2	1126.7	1084.1	1039.2	988.8
35°	747.1	824.9	918.7	1007.7	1079.7	1110.3	1092.2	1034.9	984.3	922.9	854.2
37.5°	701.1	787.0	881.1	974.1	1039.5	1047.4	1002.5	942.1	870.8	798.6	717.8
40°	666.8	757.7	854.6	948.5	1006.2	997.9	940.6	874.2	789.3	701.1	626.0
42.5°	636.0	726.9	825.7	917.8	964.0	941.2	874.2	792.7	701.6	618.4	549.8
45°	582.7	676.2	777.3	866.3	892.7	851.6	763.0	672.5	582.7	513.3	459.0
47.5°	531.0	623.4	723.5	801.7	811.1	755.8	658.9	565.8	488.7	432.1	393.8
50°	492.9	585.7	684.9	754.7	751.6	684.9	585.3	496.7	432.2	386.6	360.9
52.5°	458.8	546.4	641.8	705.2	689.2	616.4	521.4	442.7	389.7	354.0	330.7
55°	405.8	486.9	577.4	628.3	599.0	518.2	437.9	374.5	335.3	308.5	290.4
57.5°	353.1	429.2	506.6	538.1	505.5	431.0	364.1	318.1	288.6	268.7	257.0
60°	320.5	387.0	456.0	483.1	444.2	377.9	325.1	284.0	260.2	244.0	233.5
62.5°	288.0	347.4	412.5	427.3	391.7	335.7	288.9	254.7	235.2	220.8	210.9
65°	243.7	292.3	341.7	351.5	318.7	275.3	238.3	216.1	198.7	188.2	180.3
67.5°	199.9	238.8	273.9	281.8	253.1	223.0	196.2	176.9	165.1	156.3	149.7
70°	173.9	204.8	233.5	239.8	216.8	190.1	169.8	154.2	143.7	136.1	129.8
72.5°	146.4	172.2	196.0	200.4	181.6	161.1	144.4	132.2	122.9	118.1	111.9
75°	112.0	127.1	145.6	146.7	134.3	121.8	109.0	101.1	96.1	90.2	87.2
77.5°	79.1	90.9	101.5	103.5	96.1	87.7	80.5	74.2	70.1	67.3	64.5
80°	60.4	69.8	74.3	77.0	71.7	65.6	61.5	57.4	54.7	52.8	50.9
82.5°	43.1	49.0	53.2	55.2	52.3	48.8	44.5	42.2	40.2	38.6	38.0
85°	21.9	24.5	27.2	27.9	27.2	25.7	23.4	23.4	22.2	21.9	21.9
87.5°	8.5	10.6	11.1	12.4	12.5	13.7	15.3	16.5	16.5	15.9	15.3
90°	4.6	9.4	11.7	14.0	17.6	23.4	31.7	38.7	39.9	38.7	37.6
92.5°	20.6	29.1	34.2	42.2	53.2	79.8	117.0	150.4	152.5	128.9	102.3
95°	45.7	57.5	68.1	86.8	114.9	169.0	270.9	407.1	459.9	402.4	307.4
97.5°	73.2	85.6	101.6	123.2	155.1	222.9	365.1	591.3	785.1	823.5	717.2
100°	93.8	104.4	123.2	146.6	179.5	241.7	384.8	638.1	926.8	1095.7	1071.1
102.5°	114.5	125.0	143.8	168.2	201.1	258.5	385.8	620.4	931.5	1197.1	1302.9
105°	147.8	156.0	173.6	199.4	232.3	287.4	391.8	585.4	869.3	1181.3	1425.3
107.5°	180.7	188.6	204.8	230.5	263.5	317.0	408.0	568.0	802.6	1078.3	1337.2
110°	204.1	211.2	226.4	251.1	285.1	336.7	421.1	564.3	770.7	1013.6	1261.1



TEST NUMBER: P331323-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	224.8	232.8	247.0	270.7	305.7	355.5	435.3	565.2	750.1	968.6	1191.6
115°	258.1	265.1	279.2	302.7	334.4	384.8	456.4	570.2	727.3	912.7	1106.3
117.5°	290.2	297.3	309.7	332.2	365.1	411.7	478.9	578.6	716.3	877.5	1042.0
120°	310.8	317.9	328.5	351.9	384.8	430.5	493.9	584.2	709.7	858.7	1010.1
122.5°	329.6	336.7	348.2	371.6	405.5	448.4	507.1	590.8	706.0	842.7	984.7
125°	355.5	362.5	376.6	400.0	432.9	475.1	528.0	600.7	699.2	820.0	947.9
127.5°	377.3	387.2	402.6	425.2	458.9	500.0	547.3	610.8	695.2	798.9	911.5
130°	389.5	401.2	417.7	441.1	473.9	515.0	559.6	618.2	693.3	784.9	888.1
132.5°	401.7	414.3	431.7	456.2	489.0	528.2	571.8	625.7	692.4	773.6	865.6
135°	417.7	431.7	449.3	476.3	509.2	546.6	587.7	634.7	690.9	757.8	834.0
137.5°	434.5	448.6	467.4	494.1	524.6	561.7	600.0	642.7	690.7	746.8	809.0
140°	445.8	459.9	478.7	504.4	534.9	570.2	606.5	646.4	689.8	740.2	793.0
142.5°	457.1	470.2	489.0	513.8	542.5	576.7	612.2	649.2	689.8	733.7	779.9
145°	476.3	488.1	505.6	529.1	554.9	586.5	619.5	652.3	687.4	725.0	761.3
147.5°	494.8	506.0	522.3	541.8	564.7	594.5	623.4	653.2	683.3	716.1	747.1
150°	508.0	517.4	532.6	550.2	571.3	598.3	625.3	652.3	680.4	708.5	736.7
152.5°	519.3	528.6	542.0	558.7	577.8	602.1	626.2	650.4	675.7	702.0	726.4
155°	537.2	544.3	557.2	570.2	587.7	607.6	627.6	647.5	667.5	689.8	712.1
157.5°	552.8	558.5	569.7	580.0	594.8	611.7	627.6	642.2	659.0	678.3	695.4
160°	563.1	567.7	577.1	586.5	599.5	613.6	627.6	639.3	653.5	669.8	685.1
162.5°	571.6	576.2	583.7	592.2	602.3	614.5	626.7	636.5	648.7	662.4	674.8
165°	583.1	585.4	592.4	598.3	605.3	615.9	624.1	631.2	639.3	649.9	659.3
167.5°	592.7	594.8	599.3	603.5	607.9	615.6	622.5	625.7	631.2	637.7	644.5
170°	598.3	599.5	603.0	605.3	608.8	614.7	620.6	622.9	626.4	631.2	637.0
172.5°	603.0	602.3	605.8	607.2	609.8	613.8	617.7	619.1	620.9	624.6	628.5
175°	607.6	606.5	608.8	608.8	610.1	612.4	614.7	613.6	614.7	615.9	619.5
177.5°	609.0	608.1	610.1	610.1	610.1	611.0	612.9	611.0	610.1	611.0	612.9
180°	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1	610.1



TEST NUMBER: P331323-840
 CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	981.3	981.3	981.3	981.3	981.3	981.3	981.3
2.5°	1017.8	1022.1	1022.1	1022.7	1027.4	1026.9	1026.6
5°	1083.2	1089.5	1090.4	1097.1	1101.7	1100.1	1096.0
7.5°	1144.8	1156.7	1165.8	1170.8	1176.8	1180.4	1178.8
10°	1193.7	1211.0	1221.5	1228.7	1237.4	1243.9	1241.5
12.5°	1238.0	1258.7	1273.1	1285.5	1286.6	1294.8	1289.2
15°	1307.2	1329.1	1331.3	1340.4	1347.6	1346.8	1347.2
17.5°	1330.0	1337.1	1338.5	1338.7	1338.8	1336.2	1330.4
20°	1321.9	1319.3	1312.8	1308.0	1299.3	1298.1	1290.6
22.5°	1283.2	1274.9	1258.8	1248.2	1234.7	1231.1	1229.0
25°	1207.2	1188.7	1163.1	1138.6	1131.8	1118.6	1122.4
27.5°	1102.9	1074.1	1046.3	1026.4	1008.5	988.7	994.3
30°	1029.6	997.1	958.0	927.8	908.6	889.7	886.3
32.5°	942.1	894.5	850.8	824.3	794.8	782.8	769.8
35°	791.2	744.9	701.5	664.2	642.7	626.0	611.0
37.5°	655.5	602.2	567.1	536.9	521.4	511.9	514.2
40°	571.4	524.6	499.0	475.9	461.6	454.8	456.4
42.5°	503.2	468.2	447.1	431.3	421.2	417.4	416.5
45°	425.8	406.2	388.8	379.8	374.9	370.7	368.1
47.5°	373.0	357.0	347.2	341.8	337.5	333.4	333.3
50°	341.3	330.7	324.0	318.3	314.9	311.8	314.6
52.5°	317.2	307.5	300.7	295.7	294.4	291.6	291.6
55°	281.3	273.8	268.9	264.4	262.2	260.6	258.7
57.5°	248.7	241.6	237.1	234.2	229.9	228.4	227.8
60°	225.5	219.8	215.3	211.6	209.6	206.7	206.7
62.5°	204.1	198.4	194.2	191.4	188.2	187.0	187.3
65°	173.1	168.5	164.4	161.4	160.7	158.4	159.2
67.5°	144.6	141.6	137.2	135.5	134.1	132.9	132.0
70°	125.6	122.6	120.3	118.1	116.9	116.9	116.9
72.5°	109.6	105.9	104.6	101.8	102.4	101.2	100.0
75°	84.8	82.6	81.5	80.3	78.5	78.5	78.5
77.5°	62.4	61.8	60.4	59.2	58.8	58.4	58.6
80°	48.3	47.9	47.2	47.2	46.4	46.0	45.2
82.5°	37.1	36.2	35.6	35.3	35.2	35.1	35.0
85°	21.1	20.4	20.4	20.7	20.0	20.0	20.4
87.5°	15.1	15.7	15.6	15.6	15.9	15.6	15.6
90°	35.2	37.6	38.7	38.7	38.7	38.7	38.7
92.5°	87.8	77.9	70.6	69.7	65.9	66.9	65.0
95°	235.8	186.5	160.7	145.4	136.1	132.6	133.7
97.5°	586.8	459.9	375.2	319.1	290.2	273.1	263.3
100°	925.6	764.9	622.9	525.5	475.1	441.1	420.0
102.5°	1270.0	1152.5	1002.1	896.3	810.2	767.7	739.1
105°	1557.9	1573.2	1534.5	1461.7	1389.0	1338.6	1322.1
107.5°	1536.8	1658.8	1715.6	1724.7	1720.7	1710.6	1688.8
110°	1471.1	1621.2	1717.5	1767.9	1790.2	1800.8	1799.6



TEST NUMBER: P331323-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	1393.2	1553.7	1664.0	1734.1	1771.4	1791.4	1797.7
115°	1287.0	1440.6	1561.5	1644.8	1698.7	1729.2	1739.8
117.5°	1200.6	1340.0	1453.3	1538.2	1595.2	1627.4	1636.3
120°	1155.5	1279.9	1386.6	1468.7	1523.9	1557.9	1569.6
122.5°	1118.0	1235.8	1332.2	1405.8	1460.1	1490.4	1500.2
125°	1068.7	1171.9	1259.9	1328.0	1372.6	1401.9	1411.3
127.5°	1020.9	1118.2	1199.4	1258.8	1300.5	1325.9	1333.4
130°	989.0	1081.7	1159.0	1216.6	1256.5	1279.9	1289.3
132.5°	959.0	1044.1	1116.8	1173.4	1213.3	1234.9	1243.2
135°	911.5	989.0	1054.6	1105.1	1143.8	1164.9	1169.6
137.5°	873.7	935.2	992.5	1038.4	1071.8	1090.4	1097.3
140°	849.4	903.3	954.9	992.5	1023.0	1040.6	1047.6
142.5°	827.8	874.2	917.4	953.0	980.8	996.4	997.8
145°	800.1	836.5	870.5	898.6	918.6	930.3	933.8
147.5°	777.6	806.0	830.8	854.0	870.0	878.0	880.1
150°	762.5	787.2	808.3	825.9	840.0	847.0	848.2
152.5°	750.3	771.2	789.5	803.3	815.6	820.7	820.9
155°	730.8	748.4	761.3	774.3	782.4	787.2	784.9
157.5°	711.1	725.9	736.0	745.2	751.9	754.1	754.1
160°	698.0	710.9	719.1	727.3	733.2	734.4	734.4
162.5°	685.8	696.8	703.2	711.3	715.4	716.5	715.6
165°	667.5	675.7	680.4	685.1	689.8	689.8	688.6
167.5°	650.9	656.5	660.8	662.8	665.4	665.2	663.8
170°	640.6	645.2	647.5	648.7	652.3	651.1	648.7
172.5°	631.2	634.9	636.3	637.5	639.1	637.9	636.5
175°	620.6	621.8	622.9	622.9	624.1	622.9	620.6
177.5°	612.9	613.8	613.8	613.8	613.8	612.9	611.0
180°	610.1	610.1	610.1	610.1	610.1	610.1	610.1

(END OF REPORT)