

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331324-840

Luminaire Tested: **SA2XXDIP-C485D1080U840-4F0-1E-UDD-D**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331324-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C485D1080U840-4F0-1E-UDD-D
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, DROP SATIN WHITE DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6336.8 lumens
Efficiency: N/A
Efficacy: 128.3 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.32 / 1.42
Luminous Opening: Rectangular w/ Sides (W: 0.17' x L: 4' x H: 0.08')
CIE Type: Semi-Indirect

Input Watts (W): 49.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331324-840
CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-D

Luminous Intensity Polar Plot

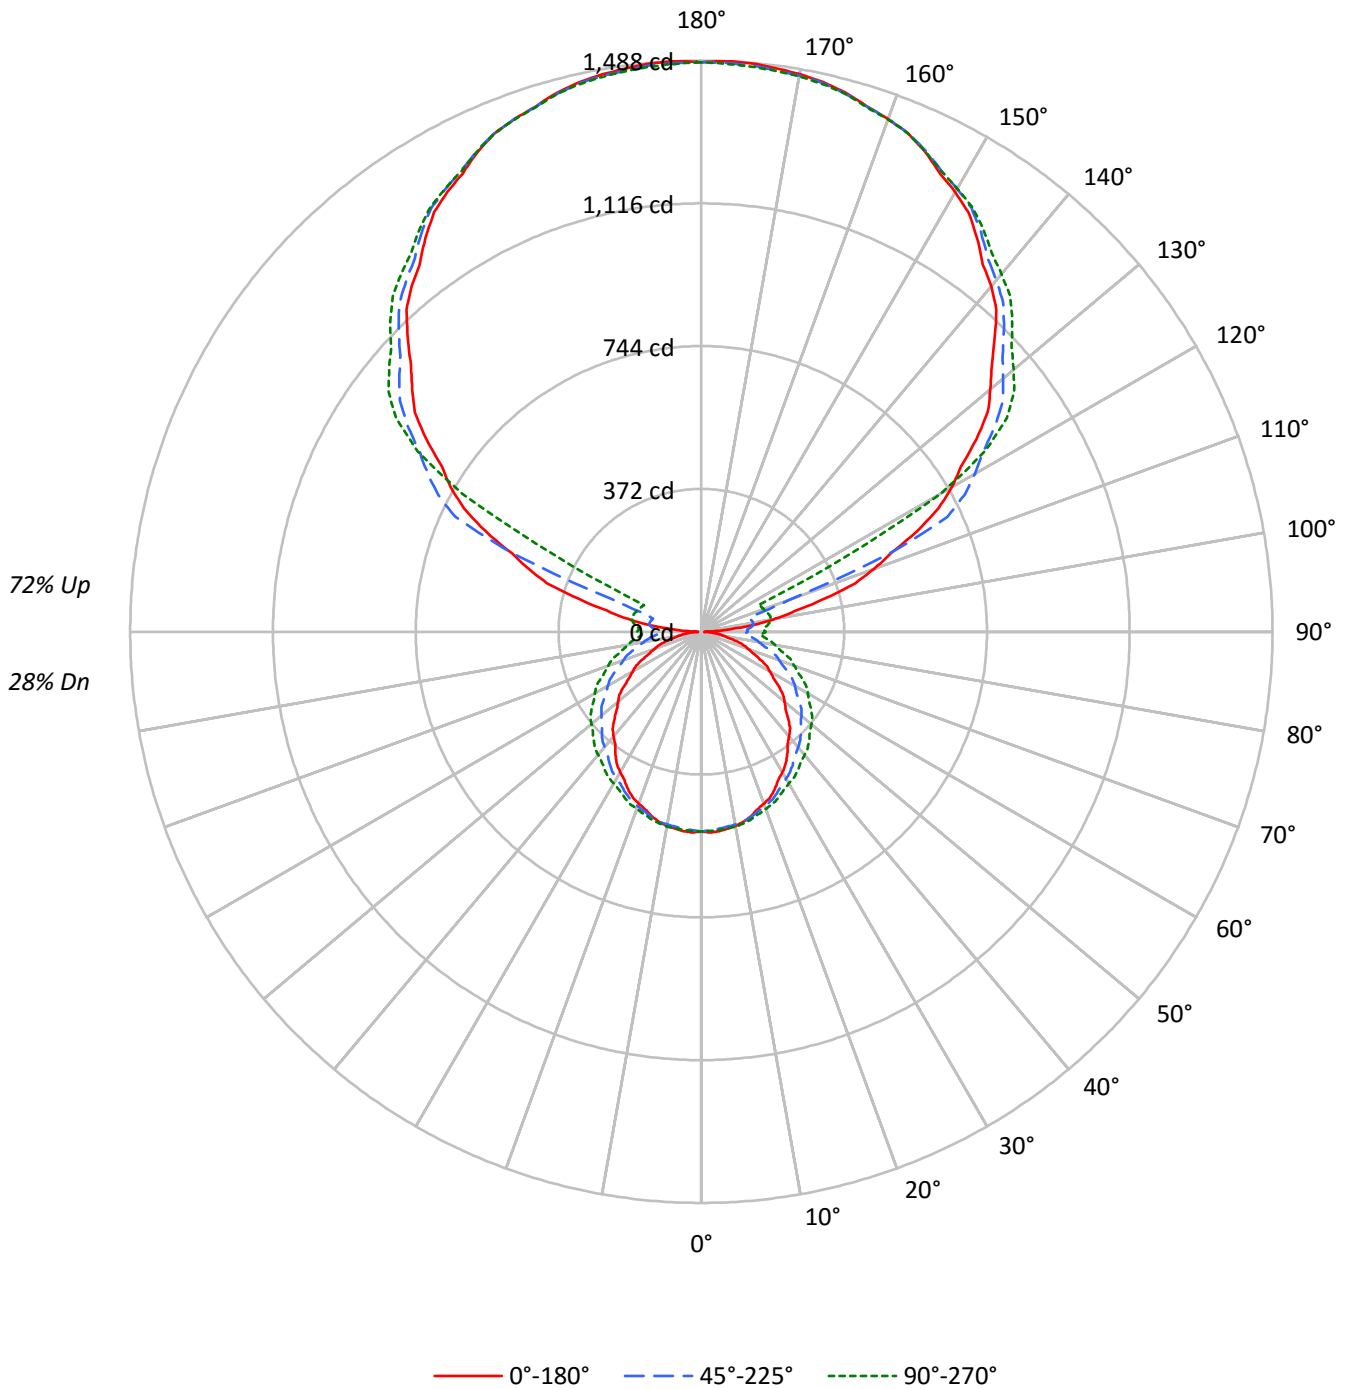



TEST NUMBER: P331324-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-D

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36	28
1	92	87	83	80	82	78	75	72	61	59	56	45	43	42	30	29	28	22
2	83	76	70	64	74	68	63	58	53	49	46	39	37	34	26	25	23	18
3	76	66	59	53	67	59	53	48	46	42	38	34	31	29	23	21	19	14
4	69	58	51	45	61	52	46	40	41	36	32	30	27	24	20	18	17	12
5	63	52	44	38	56	46	39	34	36	31	27	27	23	21	18	16	14	10
6	58	46	38	32	52	41	35	29	33	27	24	24	21	18	16	14	12	9
7	54	41	34	28	48	37	30	26	29	24	21	22	18	16	15	13	11	8
8	50	37	30	25	44	34	27	22	27	22	18	20	16	14	14	11	10	7
9	46	34	27	22	41	31	24	20	24	19	16	18	15	12	13	10	9	6
10	43	31	24	19	38	28	22	18	22	18	14	17	13	11	12	9	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8402	8402	8402
5°	8443	8088	8058
10°	8390	7850	7761
15°	8275	7596	7448
20°	8129	7324	7148
25°	7984	7062	6875
30°	7780	6794	6601
35°	7575	6536	6409
40°	7360	6315	6215
45°	7153	6118	6051
50°	6934	5937	5888
55°	6700	5744	5722
60°	6417	5546	5546
65°	6122	5313	5339
70°	5796	5061	5115
75°	5371	4816	4908
80°	4707	4564	4698
85°	4070	4346	4535



TEST NUMBER: P331324-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-D

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	49.3	0.8
10°-20°	141.4	2.2
20°-30°	214.3	3.4
30°-40°	261.0	4.1
40°-50°	280.8	4.4
50°-60°	272.7	4.3
60°-70°	238.1	3.8
70°-80°	183.3	2.9
80°-90°	126.7	2.0
90°-100°	134.2	2.1
100°-110°	243.4	3.8
110°-120°	526.0	8.3
120°-130°	823.6	13.0
130°-140°	861.2	13.6
140°-150°	793.2	12.5
150°-160°	636.4	10.0
160°-170°	410.1	6.5
170°-180°	141.2	2.2
0°-30°	405.0	6.4
0°-40°	666.0	10.5
0°-60°	1219.4	19.2
0°-90°	1767.5	27.9
90°-120°	903.6	14.3
90°-150°	3381.6	53.4
90°-180°	4569.0	72.1
0°-180°	6336.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	520	520	520	520	520	
5°	522	520	515	519	519	49
15°	498	499	499	506	505	140
25°	452	458	464	473	476	208
35°	390	403	417	433	439	244
45°	320	340	367	389	398	247
55°	245	273	311	338	348	219
65°	167	205	249	279	290	166
75°	93	135	183	214	226	98
85°	27	74	122	153	164	29
90°	9	64	121	155	168	8
95°	76	79	129	161	171	90
105°	330	367	130	167	181	353
115°	620	649	708	256	164	610
125°	874	890	933	960	971	779
135°	1081	1098	1115	1140	1146	835
145°	1253	1253	1270	1281	1280	784
155°	1380	1371	1383	1388	1381	635
165°	1454	1448	1450	1457	1450	410
175°	1487	1480	1482	1488	1478	141
180°	1484	1484	1484	1484	1484	



TEST NUMBER: P331324-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-D

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	520.4	520.4	520.4	520.4	520.4	520.4	520.4	520.4	520.4	520.4	520.4
2.5°	523.4	523.0	522.6	522.2	521.8	521.1	520.2	519.3	518.4	517.4	518.1
5°	521.9	521.4	520.9	520.4	519.9	519.2	518.2	517.2	516.1	515.1	516.1
7.5°	517.3	516.8	516.5	516.2	515.9	515.3	514.5	513.8	513.0	512.2	513.4
10°	513.6	513.3	512.9	512.6	512.3	511.9	511.4	510.9	510.4	509.9	511.2
12.5°	507.6	507.7	507.8	507.8	507.9	507.7	507.4	507.0	506.5	506.2	507.6
15°	497.8	498.1	498.5	498.8	499.1	499.3	499.3	499.3	499.3	499.3	500.8
17.5°	485.1	485.8	486.6	487.3	488.0	488.6	489.1	489.6	490.2	490.7	492.2
20°	476.7	477.5	478.4	479.2	480.0	480.8	481.4	482.1	482.8	483.4	485.2
22.5°	467.6	468.6	469.6	470.5	471.5	472.4	473.4	474.3	475.2	476.3	478.1
25°	452.5	453.7	454.8	456.1	457.2	458.6	460.1	461.6	463.1	464.5	466.6
27.5°	434.4	436.4	438.3	440.2	442.0	443.9	445.7	447.5	449.2	451.0	453.5
30°	422.3	424.5	426.7	428.9	431.1	433.2	435.5	437.6	439.8	441.9	444.6
32.5°	409.1	411.5	413.9	416.5	418.9	421.4	423.9	426.6	429.1	431.7	434.7
35°	389.9	392.7	395.7	398.5	401.3	404.3	407.5	410.7	413.8	417.1	420.7
37.5°	369.1	372.4	375.7	379.0	382.2	386.0	390.1	394.2	398.3	402.4	406.6
40°	355.3	358.9	362.6	366.3	370.0	374.1	378.6	383.1	387.7	392.2	396.6
42.5°	341.9	345.7	349.3	353.0	356.7	361.1	366.4	371.5	376.8	381.9	386.7
45°	319.8	324.3	328.8	333.4	337.9	343.1	348.9	354.8	360.7	366.6	371.7
47.5°	297.9	302.9	307.8	312.7	317.6	323.6	330.4	337.3	344.2	351.0	356.5
50°	282.9	288.0	293.3	298.4	303.6	309.9	317.5	325.1	332.6	340.1	345.9
52.5°	268.3	273.8	279.2	284.8	290.2	296.9	304.9	312.8	320.7	328.7	334.5
55°	245.1	251.2	257.2	263.2	269.2	276.6	285.4	294.1	302.8	311.4	317.5
57.5°	222.2	229.0	235.8	242.6	249.4	257.2	266.1	275.0	283.9	292.8	299.3
60°	205.9	213.1	220.4	227.5	234.7	243.1	252.7	262.2	271.8	281.3	287.7
62.5°	191.4	198.8	206.4	213.9	221.4	229.8	239.3	248.9	258.5	268.0	274.8
65°	167.4	175.6	183.9	192.1	200.3	209.3	219.2	229.1	239.0	248.9	255.8
67.5°	145.4	154.0	162.6	171.2	179.8	189.0	199.2	209.3	219.4	229.5	236.5
70°	129.8	138.5	147.1	155.8	164.6	174.1	184.5	194.9	205.3	215.7	222.9
72.5°	115.2	124.2	133.2	142.2	151.2	161.0	171.5	182.0	192.5	203.0	210.2
75°	92.8	102.2	111.5	120.9	130.3	140.4	151.1	161.8	172.6	183.3	190.5
77.5°	71.1	80.9	90.7	100.5	110.4	120.7	131.6	142.5	153.4	164.3	171.5
80°	56.6	66.8	77.1	87.3	97.5	108.1	119.0	129.8	140.7	151.6	158.6
82.5°	44.5	54.6	64.6	74.7	84.8	95.4	106.4	117.4	128.5	139.6	146.5
85°	27.2	37.6	48.0	58.4	68.7	79.3	90.0	100.7	111.5	122.2	129.3
87.5°	15.0	25.5	36.1	46.6	57.1	67.9	79.0	90.1	101.2	112.3	119.4
90°	8.6	21.0	33.3	45.6	58.0	70.5	83.1	95.7	108.4	121.0	129.0
92.5°	28.6	37.5	46.3	55.0	63.8	73.9	85.2	96.4	107.8	119.1	126.2
95°	75.8	75.8	75.8	75.8	75.8	81.7	93.4	105.1	116.8	128.6	136.1
97.5°	143.8	128.6	113.4	98.3	83.0	82.2	95.7	109.3	122.8	136.3	143.4
100°	195.3	168.8	142.3	115.8	89.4	82.8	96.2	109.8	123.2	136.6	144.7
102.5°	251.4	250.1	248.8	247.6	246.4	233.4	208.5	183.7	159.0	134.1	142.7
105°	330.1	342.1	354.2	366.2	378.2	356.0	299.6	243.2	186.7	130.4	138.9
107.5°	420.8	430.5	440.1	449.8	459.5	429.4	359.6	289.8	220.2	150.4	153.3
110°	478.6	487.0	495.3	503.7	512.0	485.8	425.2	364.4	303.7	243.0	224.4



TEST NUMBER: P331324-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-D

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	533.5	540.8	548.1	555.3	562.6	561.6	552.4	543.1	533.9	524.7	443.0
115°	620.3	626.2	632.1	638.0	643.9	653.6	667.1	680.6	694.1	707.6	602.2
117.5°	697.0	702.8	708.5	714.3	720.0	728.4	739.5	750.5	761.6	772.7	750.9
120°	753.8	758.0	762.2	766.5	770.7	778.3	789.3	800.3	811.3	822.3	829.9
122.5°	801.8	805.9	809.9	814.0	818.0	825.5	836.5	847.5	858.4	869.4	875.7
125°	874.2	877.4	880.5	883.6	886.7	893.2	903.1	913.0	922.9	932.8	939.0
127.5°	940.6	943.9	947.2	950.5	953.7	959.2	966.9	974.6	982.3	990.1	996.6
130°	982.7	986.3	990.0	993.7	997.3	1002.2	1008.4	1014.5	1020.7	1026.8	1033.4
132.5°	1025.6	1028.7	1031.8	1034.9	1037.9	1042.2	1047.5	1052.9	1058.2	1063.5	1069.6
135°	1080.8	1084.5	1088.3	1092.2	1096.0	1099.8	1103.7	1107.4	1111.3	1115.1	1121.1
137.5°	1137.2	1139.8	1142.5	1145.1	1147.7	1150.6	1153.9	1157.0	1160.1	1163.4	1168.7
140°	1174.2	1175.9	1177.6	1179.3	1181.0	1183.5	1186.4	1189.3	1192.3	1195.3	1200.1
142.5°	1205.1	1206.6	1208.1	1209.7	1211.2	1213.6	1216.6	1219.7	1222.7	1225.9	1229.9
145°	1252.8	1252.5	1252.3	1252.1	1251.8	1253.7	1257.8	1261.8	1266.0	1270.0	1272.6
147.5°	1295.2	1294.2	1293.3	1292.4	1291.5	1293.0	1297.1	1301.0	1305.0	1309.1	1310.4
150°	1322.6	1320.9	1319.3	1317.6	1316.0	1317.0	1320.8	1324.6	1328.5	1332.2	1333.7
152.5°	1345.7	1343.9	1342.0	1340.2	1338.4	1339.2	1342.8	1346.5	1350.1	1353.7	1355.1
155°	1379.5	1377.4	1375.2	1373.0	1370.9	1371.3	1374.1	1377.0	1379.9	1382.7	1384.1
157.5°	1405.9	1404.1	1402.3	1400.5	1398.7	1398.8	1400.8	1402.7	1404.7	1406.7	1408.4
160°	1421.4	1420.0	1418.5	1417.0	1415.6	1415.6	1417.0	1418.5	1420.0	1421.4	1422.8
162.5°	1435.1	1433.7	1432.2	1430.8	1429.4	1429.3	1430.5	1431.8	1433.0	1434.2	1435.8
165°	1453.6	1452.1	1450.7	1449.3	1447.8	1447.4	1448.1	1449.0	1449.7	1450.4	1452.0
167.5°	1467.3	1465.9	1464.4	1463.0	1461.6	1461.2	1461.9	1462.5	1463.2	1463.9	1465.5
170°	1475.0	1473.6	1472.2	1470.8	1469.4	1468.8	1469.4	1469.8	1470.3	1470.8	1472.4
172.5°	1480.2	1478.7	1477.3	1475.9	1474.5	1474.0	1474.5	1474.9	1475.4	1475.9	1477.5
175°	1486.8	1485.2	1483.5	1481.9	1480.2	1479.6	1480.1	1480.6	1481.0	1481.5	1483.2
177.5°	1487.9	1486.6	1485.2	1483.9	1482.6	1482.0	1482.2	1482.4	1482.6	1482.8	1484.1
180°	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6



TEST NUMBER: P331324-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-D

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	520.4	520.4	520.4	520.4	520.4	520.4	520.4	520.4
2.5°	518.8	519.4	520.1	520.3	520.0	519.8	519.5	519.2
5°	517.2	518.2	519.2	519.6	519.4	519.3	519.1	518.9
7.5°	514.6	515.8	517.1	517.6	517.5	517.3	517.1	516.9
10°	512.5	513.8	515.2	515.8	515.6	515.4	515.3	515.1
12.5°	508.9	510.3	511.6	512.2	512.0	511.8	511.7	511.5
15°	502.3	503.8	505.3	505.9	505.8	505.6	505.4	505.3
17.5°	493.8	495.4	497.0	497.8	497.8	497.8	497.8	497.8
20°	487.2	489.0	490.8	491.7	491.7	491.7	491.7	491.7
22.5°	479.9	481.7	483.6	484.6	484.9	485.1	485.4	485.7
25°	468.6	470.6	472.6	473.9	474.4	474.9	475.4	475.9
27.5°	456.2	458.7	461.2	462.6	463.0	463.4	463.7	464.1
30°	447.4	450.0	452.7	454.2	454.7	455.2	455.8	456.3
32.5°	437.9	440.9	444.0	446.1	447.0	447.9	448.8	449.7
35°	424.4	428.2	431.8	434.2	435.5	436.6	437.8	439.0
37.5°	410.6	414.8	418.8	421.4	422.7	423.9	425.2	426.5
40°	400.9	405.3	409.6	412.5	414.0	415.6	417.1	418.6
42.5°	391.4	396.2	400.9	404.1	405.6	407.1	408.6	410.1
45°	377.0	382.1	387.3	390.7	392.4	394.2	395.8	397.5
47.5°	361.8	367.3	372.7	376.4	378.2	380.0	381.9	383.7
50°	351.5	357.2	362.9	366.7	368.6	370.4	372.2	374.1
52.5°	340.3	346.2	352.0	355.9	357.9	359.9	361.8	363.9
55°	323.6	329.6	335.6	339.7	341.9	344.1	346.3	348.4
57.5°	305.8	312.3	318.8	323.2	325.4	327.6	329.8	332.0
60°	294.1	300.4	306.8	311.1	313.5	315.9	318.2	320.5
62.5°	281.6	288.3	295.1	299.6	301.8	304.1	306.3	308.5
65°	262.7	269.5	276.4	280.9	283.1	285.3	287.4	289.6
67.5°	243.5	250.3	257.3	262.0	264.2	266.5	268.8	271.0
70°	230.1	237.3	244.5	249.1	251.2	253.2	255.2	257.2
72.5°	217.2	224.3	231.4	236.1	238.4	240.9	243.3	245.7
75°	197.7	204.9	212.1	216.8	218.9	221.2	223.3	225.5
77.5°	178.6	185.8	193.0	197.7	200.1	202.4	204.8	207.1
80°	165.7	172.7	179.8	184.4	186.8	189.1	191.5	193.8
82.5°	153.6	160.7	167.6	172.3	174.5	176.7	178.9	181.2
85°	136.2	143.3	150.4	155.0	157.3	159.8	162.1	164.4
87.5°	126.4	133.5	140.6	145.2	147.5	149.8	152.0	154.2
90°	136.8	144.7	152.6	157.8	160.3	162.8	165.3	167.7
92.5°	133.4	140.6	147.7	152.5	154.8	157.1	159.5	161.7
95°	143.7	151.3	158.9	163.5	165.3	167.0	168.8	170.6
97.5°	150.6	157.7	164.9	169.7	171.9	174.1	176.4	178.6
100°	152.8	161.0	169.1	174.3	176.6	178.9	181.3	183.6
102.5°	151.2	159.8	168.3	173.8	176.3	178.8	181.4	183.9
105°	147.3	155.8	164.3	170.0	172.8	175.5	178.3	181.2
107.5°	156.2	159.3	162.2	165.1	167.8	170.7	173.5	176.2
110°	205.9	187.4	169.0	161.1	163.9	166.7	169.5	172.3



TEST NUMBER: P331324-840

CATALOG NUMBER: SA2XXDIP-C485D1080U840-4F0-1E-UDD-D

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	361.3	279.7	198.0	158.5	161.1	163.7	166.3	169.0
115°	496.8	391.3	285.9	225.5	210.2	194.9	179.6	164.2
117.5°	729.2	707.4	685.7	647.4	592.7	538.0	483.2	428.5
120°	837.5	845.1	852.5	841.1	810.8	780.4	750.1	719.7
122.5°	881.9	888.2	894.5	895.3	890.6	886.0	881.3	876.6
125°	945.1	951.4	957.6	961.8	964.0	966.2	968.5	970.7
127.5°	1003.2	1009.8	1016.4	1020.5	1022.1	1023.7	1025.3	1026.9
130°	1040.1	1046.7	1053.4	1057.2	1058.3	1059.4	1060.6	1061.7
132.5°	1075.8	1082.0	1088.0	1091.7	1092.8	1093.9	1095.0	1096.1
135°	1126.9	1132.9	1138.7	1142.2	1143.0	1143.9	1144.7	1145.6
137.5°	1174.2	1179.6	1185.0	1187.9	1188.2	1188.5	1188.9	1189.2
140°	1205.0	1209.7	1214.6	1216.9	1216.7	1216.6	1216.4	1216.2
142.5°	1234.1	1238.2	1242.2	1244.2	1243.9	1243.5	1243.1	1242.8
145°	1275.4	1278.0	1280.7	1281.8	1281.5	1281.1	1280.8	1280.4
147.5°	1311.8	1313.2	1314.5	1314.9	1314.3	1313.7	1313.1	1312.5
150°	1335.1	1336.6	1338.0	1338.1	1336.9	1335.7	1334.5	1333.3
152.5°	1356.6	1358.1	1359.5	1359.4	1357.8	1356.2	1354.6	1353.1
155°	1385.5	1387.0	1388.5	1388.2	1386.2	1384.4	1382.5	1380.6
157.5°	1410.0	1411.6	1413.2	1413.1	1411.3	1409.4	1407.5	1405.6
160°	1424.2	1425.6	1427.0	1426.9	1425.3	1423.6	1422.0	1420.3
162.5°	1437.4	1439.1	1440.8	1440.5	1438.5	1436.4	1434.3	1432.3
165°	1453.7	1455.3	1457.0	1457.0	1455.3	1453.7	1452.0	1450.4
167.5°	1467.2	1468.8	1470.6	1470.3	1468.1	1466.0	1463.9	1461.7
170°	1474.1	1475.7	1477.4	1477.1	1475.0	1472.9	1470.8	1468.5
172.5°	1479.3	1480.9	1482.6	1482.4	1480.2	1478.0	1475.9	1473.7
175°	1484.8	1486.5	1488.1	1487.8	1485.4	1483.0	1480.7	1478.2
177.5°	1485.4	1486.7	1488.1	1487.9	1486.2	1484.5	1482.8	1481.1
180°	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6

(END OF REPORT)