

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331366-840

Luminaire Tested: **SA2XXDIP-C675D1080U840-4F0-1E-UDD-A**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331366-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7310.8 lumens
Efficiency: N/A
Efficacy: 128.5 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 56.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331366-840
CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

Luminous Intensity Polar Plot

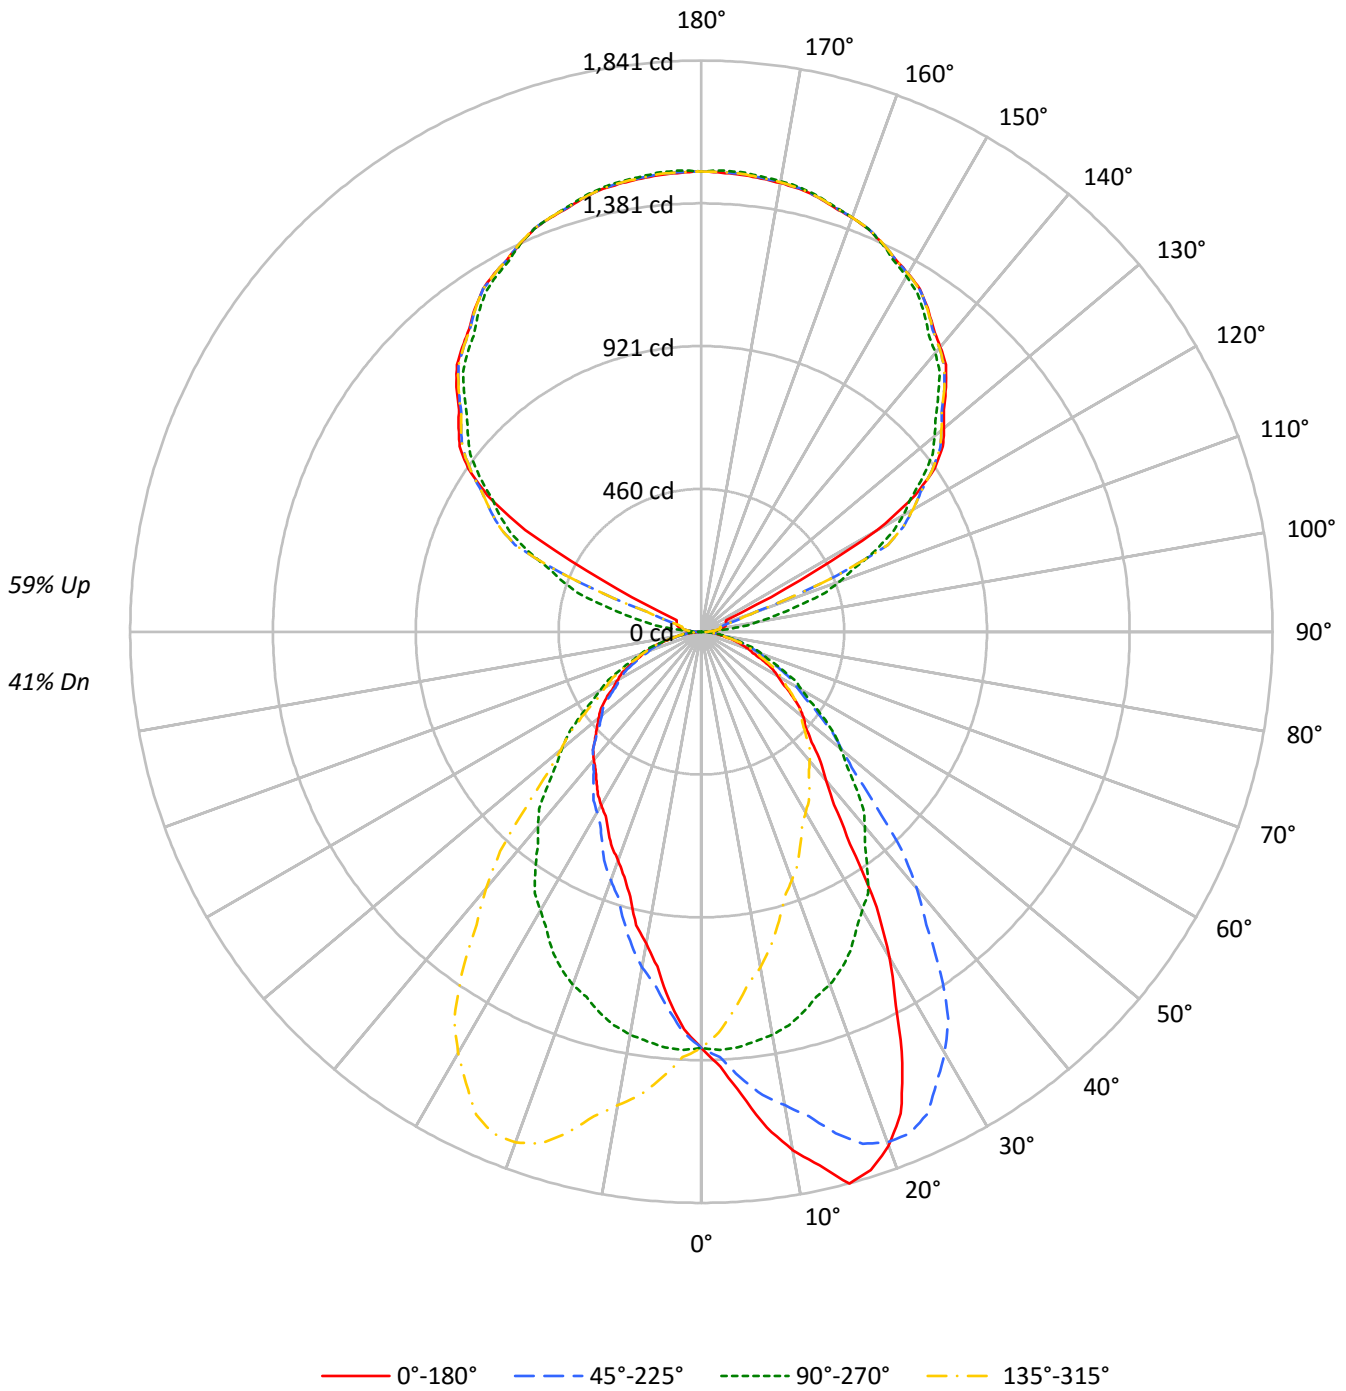



TEST NUMBER: P331366-840

CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	47	47	47	41				41
1	96	92	88	85	87	84	81	78	69	67	65	55	54	52	42	42	41				35	
2	88	81	75	70	80	74	69	65	61	57	54	49	46	44	38	36	35				30	
3	80	71	64	59	73	65	59	54	54	50	46	44	41	38	34	32	30				26	
4	74	63	56	50	67	58	51	46	48	43	40	39	36	33	31	28	26				22	
5	68	57	49	43	61	52	45	40	43	38	34	35	32	29	28	25	23				20	
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	25	23	21				18	
7	58	46	38	33	53	42	36	31	36	30	27	29	25	22	23	20	18				16	
8	54	42	34	29	49	39	32	27	32	27	24	27	23	20	21	19	17				14	
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15				13	
10	47	35	28	23	43	32	26	22	27	23	19	23	19	16	18	16	14				12	

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	21658	21658	21658	21658
5°	24280	21797	19316	21797
10°	27824	21620	16718	21620
15°	30780	21224	14770	21224
20°	30311	20797	13464	20797
25°	27332	20232	12636	20232
30°	22585	19328	12033	19328
35°	16462	18382	11606	18382
40°	13148	17266	11367	17266
45°	11488	15972	11040	15972
50°	10798	14722	10826	14722
55°	9956	13453	10536	13453
60°	9122	12103	10091	12103
65°	8309	10892	9650	10892
70°	7544	9711	9007	9711
75°	6687	8390	7973	8390
80°	5755	6946	6425	6946
85°	5169	5169	3816	5169



TEST NUMBER: P331366-840

CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.7	1.7
10°-20°	371.4	5.1
20°-30°	539.0	7.4
30°-40°	568.8	7.8
40°-50°	503.6	6.9
50°-60°	401.9	5.5
60°-70°	273.2	3.7
70°-80°	140.0	1.9
80°-90°	37.4	0.5
90°-100°	49.5	0.7
100°-110°	181.5	2.5
110°-120°	485.1	6.6
120°-130°	800.8	11.0
130°-140°	851.6	11.6
140°-150°	791.6	10.8
150°-160°	636.4	8.7
160°-170°	410.1	5.6
170°-180°	141.2	1.9
0°-30°	1038.1	14.2
0°-40°	1606.9	22.0
0°-60°	2512.4	34.4
0°-90°	2963.0	40.5
90°-120°	716.1	9.8
90°-150°	3160.1	43.2
90°-180°	4348.0	59.5
0°-180°	7310.8	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1341	1341	1341	1341	1341	
5°	1498	1345	1192	1345	1498	150
15°	1841	1270	884	1270	1841	508
25°	1534	1136	709	1136	1534	693
35°	835	933	589	933	835	543
45°	503	700	484	700	503	396
55°	354	478	374	478	354	317
65°	218	285	253	285	218	216
75°	107	134	128	134	107	115
85°	28	28	21	28	28	31
90°	29	1	29	1	29	14
95°	46	70	46	70	46	43
105°	82	326	82	326	82	85
115°	88	617	88	617	88	220
125°	918	873	918	873	918	794
135°	1115	1080	1115	1080	1115	860
145°	1272	1253	1272	1253	1272	796
155°	1381	1380	1381	1380	1381	637
165°	1450	1454	1450	1454	1450	409
175°	1478	1487	1478	1487	1478	141
180°	1484	1484	1484	1484	1484	



TEST NUMBER: P331366-840

CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4
2.5°	1403.2	1403.6	1404.5	1397.9	1397.0	1397.0	1391.3	1386.3	1380.6	1372.7	1373.5
5°	1498.1	1503.8	1505.8	1499.6	1490.4	1489.3	1480.6	1466.1	1452.7	1441.9	1434.2
7.5°	1611.3	1613.6	1608.5	1600.3	1593.5	1581.1	1564.8	1548.8	1526.4	1505.9	1490.7
10°	1697.1	1700.2	1691.4	1679.6	1669.8	1655.4	1631.6	1607.4	1578.0	1549.6	1526.9
12.5°	1762.2	1769.9	1758.7	1757.1	1740.3	1720.5	1692.2	1680.0	1638.6	1599.1	1574.8
15°	1841.4	1840.9	1842.0	1832.2	1819.8	1816.6	1786.8	1754.3	1696.1	1672.8	1632.6
17.5°	1818.6	1826.3	1830.0	1829.9	1829.6	1827.7	1818.1	1797.6	1768.4	1730.7	1684.3
20°	1764.1	1774.4	1775.9	1787.9	1794.5	1803.3	1806.9	1801.2	1783.2	1751.7	1711.5
22.5°	1680.0	1682.8	1687.7	1706.2	1720.7	1742.6	1754.1	1773.2	1766.3	1750.9	1717.3
25°	1534.2	1529.0	1547.1	1556.3	1589.8	1624.9	1650.2	1678.0	1702.7	1717.7	1707.9
27.5°	1359.1	1351.4	1378.4	1403.0	1430.3	1468.2	1507.6	1554.1	1592.8	1641.1	1657.7
30°	1211.4	1216.1	1241.9	1268.2	1309.4	1363.0	1407.3	1458.4	1513.6	1567.7	1605.3
32.5°	1052.3	1070.2	1086.4	1126.7	1163.0	1222.8	1287.8	1351.6	1420.4	1481.9	1540.1
35°	835.2	855.8	878.5	907.9	958.9	1018.1	1081.6	1167.6	1261.5	1345.5	1414.6
37.5°	703.0	699.6	712.7	733.9	775.3	823.0	896.1	981.2	1091.6	1190.3	1287.8
40°	623.8	621.7	631.0	650.6	682.1	717.1	781.0	855.8	958.4	1078.9	1195.0
42.5°	569.4	570.6	575.7	589.6	611.1	640.0	687.8	751.4	845.4	959.0	1083.6
45°	503.1	506.8	512.4	519.2	531.5	555.2	582.0	627.4	701.7	796.5	919.2
47.5°	455.6	455.7	461.4	467.3	474.6	488.0	509.9	538.3	590.7	667.9	773.4
50°	429.9	426.4	430.5	435.0	442.8	452.1	466.6	493.3	528.4	590.8	678.9
52.5°	398.6	398.7	402.4	404.1	411.1	420.3	433.5	452.1	483.8	532.6	605.1
55°	353.7	356.2	358.3	361.3	367.6	374.3	384.6	397.0	421.7	458.3	511.9
57.5°	311.3	312.1	314.3	320.1	324.1	330.2	340.0	351.2	367.4	394.5	434.7
60°	282.5	282.5	286.6	289.2	294.4	300.5	308.3	319.1	333.6	355.7	388.2
62.5°	256.1	255.7	257.3	261.6	265.5	271.2	279.0	288.2	301.7	321.4	348.2
65°	217.5	216.5	219.6	220.7	224.8	230.5	236.6	246.4	257.2	271.7	295.4
67.5°	180.5	181.7	183.3	185.3	187.5	193.5	197.6	204.6	213.7	225.7	241.8
70°	159.8	159.8	159.8	161.4	164.4	167.5	171.7	177.3	186.1	196.4	210.9
72.5°	136.7	138.4	140.0	139.1	143.0	144.8	149.8	153.0	161.4	167.9	180.8
75°	107.2	107.2	107.2	109.8	111.4	112.9	116.0	119.1	123.2	131.5	138.1
77.5°	80.0	79.8	80.3	80.9	82.6	84.4	85.3	88.2	92.0	95.7	101.5
80°	61.9	62.9	63.4	64.4	64.4	65.4	65.9	69.6	72.2	74.7	78.4
82.5°	47.9	48.1	48.2	48.4	48.8	49.4	50.7	51.9	52.8	54.9	57.8
85°	27.9	27.4	27.4	28.4	27.9	27.9	28.9	29.9	29.9	30.4	31.9
87.5°	16.6	16.5	16.8	16.3	16.2	16.4	16.2	15.5	15.7	15.9	15.9
90°	29.0	28.5	28.1	27.6	27.1	26.3	25.0	23.8	22.6	21.5	19.6
92.5°	29.0	28.7	28.4	28.2	27.9	27.4	26.8	26.2	25.5	24.9	23.9
95°	46.2	46.4	46.7	46.9	47.2	46.7	45.4	44.2	43.0	41.9	40.2
97.5°	61.6	61.3	61.1	60.8	60.5	59.9	58.9	58.0	57.0	56.0	52.2
100°	71.9	71.5	71.0	70.5	70.0	68.9	67.0	65.0	63.1	61.2	57.2
102.5°	77.1	76.4	75.7	75.0	74.4	72.8	70.4	67.9	65.4	62.9	96.8
105°	81.6	80.6	79.7	78.8	77.8	75.9	73.3	70.7	68.1	65.4	130.6
107.5°	83.9	83.0	82.0	81.1	80.2	81.0	83.6	86.3	89.0	91.7	169.8
110°	84.8	83.8	82.9	81.9	81.0	92.4	116.3	140.2	164.0	187.8	256.8



TEST NUMBER: P331366-840

CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	85.6	84.9	84.1	83.4	82.6	125.7	212.8	299.8	386.9	473.8	490.9
115°	88.1	105.2	122.4	139.6	156.7	220.6	331.0	441.4	551.9	662.4	656.4
117.5°	359.4	415.9	472.3	528.8	585.2	626.8	653.5	680.2	706.9	733.7	729.5
120°	654.9	687.0	719.2	751.4	783.7	798.4	795.5	792.6	789.7	786.9	782.6
122.5°	817.2	823.4	829.7	836.0	842.1	844.4	842.7	841.0	839.3	837.6	832.9
125°	917.9	917.2	916.5	915.7	915.0	913.8	912.1	910.5	908.8	907.2	902.6
127.5°	981.4	981.3	981.2	981.0	980.9	979.6	977.1	974.7	972.3	969.9	966.4
130°	1021.0	1021.2	1021.4	1021.7	1021.9	1020.7	1018.0	1015.4	1012.8	1010.2	1007.5
132.5°	1059.6	1059.9	1060.1	1060.3	1060.6	1059.6	1057.3	1055.0	1052.8	1050.6	1047.9
135°	1115.4	1115.9	1116.3	1116.8	1117.3	1116.3	1114.0	1111.6	1109.2	1106.8	1104.7
137.5°	1166.3	1167.1	1167.9	1168.7	1169.5	1168.7	1166.4	1164.1	1161.7	1159.4	1157.0
140°	1198.1	1199.2	1200.4	1201.6	1202.9	1202.3	1200.2	1198.1	1195.9	1193.8	1191.1
142.5°	1229.0	1230.2	1231.3	1232.5	1233.8	1233.3	1231.4	1229.4	1227.5	1225.6	1222.5
145°	1272.1	1273.3	1274.6	1275.8	1276.9	1276.7	1275.0	1273.3	1271.6	1270.0	1266.0
147.5°	1310.1	1311.1	1312.1	1313.1	1314.1	1314.0	1312.8	1311.5	1310.3	1309.1	1305.0
150°	1333.3	1334.5	1335.7	1336.9	1338.1	1338.0	1336.6	1335.1	1333.7	1332.2	1328.5
152.5°	1353.1	1354.6	1356.2	1357.8	1359.4	1359.5	1358.1	1356.6	1355.1	1353.7	1350.1
155°	1380.6	1382.5	1384.4	1386.2	1388.2	1388.5	1387.0	1385.5	1384.1	1382.7	1379.9
157.5°	1405.6	1407.5	1409.4	1411.3	1413.1	1413.2	1411.6	1410.0	1408.4	1406.7	1404.7
160°	1420.3	1422.0	1423.6	1425.3	1426.9	1427.0	1425.6	1424.2	1422.8	1421.4	1420.0
162.5°	1432.3	1434.3	1436.4	1438.5	1440.5	1440.8	1439.1	1437.4	1435.8	1434.2	1433.0
165°	1450.4	1452.0	1453.7	1455.3	1457.0	1457.0	1455.3	1453.7	1452.0	1450.4	1449.7
167.5°	1461.7	1463.9	1466.0	1468.1	1470.3	1470.6	1468.8	1467.2	1465.5	1463.9	1463.2
170°	1468.5	1470.8	1472.9	1475.0	1477.1	1477.4	1475.7	1474.1	1472.4	1470.8	1470.3
172.5°	1473.7	1475.9	1478.0	1480.2	1482.4	1482.6	1480.9	1479.3	1477.5	1475.9	1475.4
175°	1478.2	1480.7	1483.0	1485.4	1487.8	1488.1	1486.5	1484.8	1483.2	1481.5	1481.0
177.5°	1481.1	1482.8	1484.5	1486.2	1487.9	1488.1	1486.7	1485.4	1484.1	1482.8	1482.6
180°	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6



TEST NUMBER: P331366-840

CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4
2.5°	1376.4	1373.1	1371.1	1363.6	1357.1	1350.5	1348.4	1349.2	1340.2	1331.5	1327.8
5°	1430.1	1419.8	1410.0	1396.0	1379.6	1361.5	1352.2	1344.9	1327.0	1307.4	1296.1
7.5°	1478.1	1463.4	1444.5	1418.3	1394.3	1365.9	1347.9	1331.9	1305.5	1277.9	1260.9
10°	1507.4	1487.2	1463.0	1431.1	1401.7	1367.2	1342.9	1318.7	1287.8	1254.8	1234.2
12.5°	1532.6	1505.4	1481.6	1440.6	1405.8	1362.6	1333.8	1299.7	1267.2	1228.0	1207.8
15°	1592.5	1542.5	1497.0	1450.7	1407.9	1347.6	1315.7	1269.7	1226.9	1178.5	1155.3
17.5°	1638.7	1582.6	1511.1	1452.1	1402.2	1335.4	1288.5	1233.6	1183.0	1127.5	1096.0
20°	1665.2	1600.6	1523.9	1453.8	1393.9	1317.7	1266.7	1210.4	1151.1	1088.7	1054.7
22.5°	1680.8	1613.1	1537.1	1447.5	1377.5	1303.2	1239.0	1177.4	1117.3	1050.1	1014.3
25°	1685.8	1623.9	1543.5	1442.4	1356.9	1272.8	1195.5	1135.7	1063.0	1000.1	948.1
27.5°	1661.2	1616.9	1539.5	1432.7	1333.0	1234.8	1148.6	1080.9	1004.1	935.8	883.5
30°	1631.1	1605.3	1530.0	1422.8	1314.0	1208.4	1113.5	1036.7	960.4	891.3	837.7
32.5°	1584.5	1578.9	1512.8	1408.8	1293.8	1175.0	1076.8	999.2	914.6	846.8	795.7
35°	1493.0	1517.7	1475.9	1377.5	1255.8	1127.4	1021.3	932.6	845.0	780.0	732.1
37.5°	1370.3	1431.7	1420.8	1331.6	1204.5	1075.7	958.5	865.8	782.2	716.7	669.6
40°	1285.7	1364.0	1375.4	1296.6	1168.2	1035.7	911.4	819.2	737.7	677.9	630.5
42.5°	1195.0	1286.6	1317.7	1254.5	1128.5	993.6	869.4	773.8	693.2	635.0	593.0
45°	1042.9	1164.1	1220.2	1184.2	1062.5	924.3	796.5	699.5	626.3	571.7	539.3
47.5°	900.7	1033.1	1108.6	1095.9	989.0	852.1	725.8	632.8	561.5	517.9	488.8
50°	800.1	936.1	1027.4	1031.6	936.1	800.6	673.8	586.1	520.7	480.0	456.3
52.5°	712.7	842.5	942.1	963.9	877.2	747.0	627.2	540.0	482.3	444.8	423.6
55°	598.5	708.3	818.6	858.9	789.2	665.5	554.7	477.9	423.7	398.0	379.4
57.5°	497.6	589.2	691.1	735.5	692.6	586.6	482.7	416.1	372.1	349.5	335.3
60°	444.3	516.5	607.2	660.4	623.3	529.0	438.2	374.8	338.7	318.6	305.2
62.5°	394.9	458.8	535.5	584.1	563.9	474.9	393.6	337.7	306.5	287.6	278.0
65°	325.8	376.4	435.7	480.5	467.1	399.5	333.1	285.1	260.3	245.4	237.6
67.5°	268.3	304.8	345.9	385.2	374.4	326.5	273.2	235.8	217.3	204.5	199.9
70°	232.0	259.8	296.4	327.9	319.1	279.9	237.6	205.7	189.8	178.8	174.2
72.5°	197.3	220.3	248.1	273.9	267.9	235.4	200.2	176.0	163.7	153.7	149.9
75°	149.0	166.5	183.5	200.6	198.9	173.7	153.1	134.5	124.7	117.0	115.4
77.5°	110.0	119.8	131.4	141.5	138.7	124.2	108.1	97.5	90.2	85.0	84.2
80°	84.0	89.7	98.0	105.1	101.6	95.3	82.5	74.7	69.6	64.4	62.4
82.5°	60.9	66.7	71.6	75.4	72.7	67.0	59.0	53.7	50.6	47.2	46.3
85°	31.9	35.0	37.2	38.2	37.2	33.5	29.9	27.9	25.2	23.7	23.2
87.5°	15.9	15.6	15.1	15.6	13.7	13.2	11.0	9.3	9.4	9.5	9.2
90°	17.7	15.8	13.8	11.6	9.0	6.4	3.7	1.1	3.7	6.4	9.0
92.5°	23.0	22.0	21.1	20.7	21.0	21.2	21.4	21.7	21.4	21.2	21.0
95°	38.6	36.9	35.1	38.3	46.2	54.0	61.9	69.8	61.9	54.0	46.2
97.5°	48.3	44.4	40.6	49.8	71.9	94.1	116.3	138.5	116.3	94.1	71.9
100°	53.1	49.0	44.9	59.3	92.0	124.6	157.3	190.1	157.3	124.6	92.0
102.5°	130.8	164.7	198.6	219.0	225.9	232.9	239.7	246.7	239.7	232.9	225.9
105°	195.7	260.8	326.0	355.0	347.8	340.6	333.6	326.4	333.6	340.6	347.8
107.5°	247.9	326.0	404.1	440.3	434.4	428.7	422.9	417.2	422.9	428.7	434.4
110°	325.8	394.7	463.6	495.6	490.6	485.6	480.6	475.5	480.6	485.6	490.6



TEST NUMBER: P331366-840

CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	508.0	524.9	542.0	548.3	543.8	539.4	535.0	530.6	535.0	539.4	543.8
115°	650.5	644.5	638.5	633.5	629.4	625.4	621.4	617.3	621.4	625.4	629.4
117.5°	725.5	721.3	717.2	713.0	708.4	703.9	699.3	694.8	699.3	703.9	708.4
120°	778.3	774.1	769.7	765.8	762.2	758.6	755.1	751.4	755.1	758.6	762.2
122.5°	828.2	823.5	818.9	814.7	810.9	807.1	803.3	799.6	803.3	807.1	810.9
125°	898.1	893.5	889.0	885.1	882.1	879.0	875.9	872.8	875.9	879.0	882.1
127.5°	963.0	959.7	956.2	952.9	949.5	946.0	942.6	939.2	942.6	946.0	949.5
130°	1004.9	1002.3	999.7	996.4	992.7	988.9	985.0	981.2	985.0	988.9	992.7
132.5°	1045.3	1042.7	1040.1	1037.1	1033.9	1030.7	1027.4	1024.1	1027.4	1030.7	1033.9
135°	1102.5	1100.3	1098.2	1095.2	1091.5	1087.6	1083.8	1079.9	1083.8	1087.6	1091.5
137.5°	1154.6	1152.2	1149.6	1147.1	1144.5	1141.8	1139.1	1136.4	1139.1	1141.8	1144.5
140°	1188.5	1185.9	1183.3	1181.0	1179.1	1177.2	1175.3	1173.4	1175.3	1177.2	1179.1
142.5°	1219.5	1216.5	1213.6	1211.1	1209.4	1207.7	1206.0	1204.3	1206.0	1207.7	1209.4
145°	1261.8	1257.8	1253.7	1251.8	1252.1	1252.3	1252.5	1252.8	1252.5	1252.3	1252.1
147.5°	1301.0	1297.1	1293.0	1291.5	1292.4	1293.3	1294.2	1295.2	1294.2	1293.3	1292.4
150°	1324.6	1320.8	1317.0	1316.0	1317.6	1319.3	1320.9	1322.6	1320.9	1319.3	1317.6
152.5°	1346.5	1342.8	1339.2	1338.4	1340.2	1342.0	1343.9	1345.7	1343.9	1342.0	1340.2
155°	1377.0	1374.1	1371.3	1370.9	1373.0	1375.2	1377.4	1379.5	1377.4	1375.2	1373.0
157.5°	1402.7	1400.8	1398.8	1398.7	1400.5	1402.3	1404.1	1405.9	1404.1	1402.3	1400.5
160°	1418.5	1417.0	1415.6	1415.6	1417.0	1418.5	1420.0	1421.4	1420.0	1418.5	1417.0
162.5°	1431.8	1430.5	1429.3	1429.4	1430.8	1432.2	1433.7	1435.1	1433.7	1432.2	1430.8
165°	1449.0	1448.1	1447.4	1447.8	1449.3	1450.7	1452.1	1453.6	1452.1	1450.7	1449.3
167.5°	1462.5	1461.9	1461.2	1461.6	1463.0	1464.4	1465.9	1467.3	1465.9	1464.4	1463.0
170°	1469.8	1469.4	1468.8	1469.4	1470.8	1472.2	1473.6	1475.0	1473.6	1472.2	1470.8
172.5°	1474.9	1474.5	1474.0	1474.5	1475.9	1477.3	1478.7	1480.2	1478.7	1477.3	1475.9
175°	1480.6	1480.1	1479.6	1480.2	1481.9	1483.5	1485.2	1486.8	1485.2	1483.5	1481.9
177.5°	1482.4	1482.2	1482.0	1482.6	1483.9	1485.2	1486.6	1487.9	1486.6	1485.2	1483.9
180°	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6



TEST NUMBER: P331366-840

CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4
2.5°	1323.6	1321.2	1312.5	1308.0	1300.5	1293.5	1289.0	1291.1	1292.7	1291.9	1290.6
5°	1285.7	1275.9	1260.9	1248.1	1238.8	1221.7	1214.6	1210.9	1207.9	1204.3	1200.6
7.5°	1240.5	1225.1	1203.7	1185.3	1167.9	1146.8	1134.8	1127.5	1120.1	1112.0	1104.8
10°	1208.4	1186.7	1164.1	1138.2	1117.6	1098.5	1081.6	1070.3	1060.0	1050.2	1042.9
12.5°	1174.6	1149.6	1121.6	1086.3	1063.6	1036.3	1033.7	1013.7	997.6	991.6	983.1
15°	1120.7	1085.7	1050.2	1008.4	990.3	965.5	950.1	934.6	920.7	910.9	908.4
17.5°	1059.6	1014.2	978.9	948.9	919.3	893.9	879.7	867.3	855.9	842.7	841.0
20°	1013.0	973.8	935.1	908.9	878.5	852.6	835.2	822.7	812.9	805.3	798.5
22.5°	968.9	925.9	890.6	861.8	831.8	811.0	797.2	785.3	777.1	768.5	762.2
25°	898.1	864.5	825.9	793.3	768.6	755.3	743.9	733.6	728.4	722.8	715.6
27.5°	836.1	798.8	762.7	737.5	715.8	703.9	695.8	688.8	684.0	680.6	676.6
30°	792.3	754.7	726.4	701.7	683.6	671.8	666.6	662.5	656.8	654.7	652.7
32.5°	750.3	716.4	692.2	670.7	653.5	645.7	641.0	637.3	632.9	630.8	626.6
35°	690.7	662.5	638.7	626.8	613.0	606.2	602.7	597.4	593.4	591.3	590.8
37.5°	634.8	610.2	594.6	579.4	573.5	569.4	564.4	560.9	559.7	559.4	558.9
40°	598.5	578.5	564.5	552.1	549.6	543.3	539.3	536.1	536.1	536.6	536.1
42.5°	565.5	547.4	535.2	524.5	521.5	517.8	513.6	513.4	514.3	516.0	514.3
45°	515.5	502.6	493.8	488.7	483.0	479.4	478.9	480.5	481.0	481.5	483.0
47.5°	469.5	461.0	453.0	447.4	444.8	444.2	443.6	446.4	448.8	449.7	452.1
50°	442.3	432.5	425.9	422.2	420.1	419.1	420.1	423.2	425.3	427.9	429.4
52.5°	411.8	404.9	400.2	397.5	396.7	397.3	397.5	401.0	404.2	405.2	406.0
55°	369.6	364.5	363.5	358.8	360.8	360.3	362.9	365.0	368.1	371.1	371.7
57.5°	327.6	323.5	320.6	321.0	321.6	324.0	326.1	329.7	333.1	336.3	336.6
60°	299.5	297.4	295.9	295.9	296.9	300.0	302.7	306.2	308.3	310.3	311.8
62.5°	274.0	271.9	270.3	271.1	273.9	275.7	278.7	280.6	282.7	284.8	285.5
65°	233.5	232.5	234.1	235.1	235.6	238.1	241.8	243.3	245.4	246.4	250.0
67.5°	196.3	196.5	196.3	197.7	200.8	201.4	204.8	208.3	208.7	210.8	213.1
70°	171.2	172.2	173.2	174.2	176.8	177.8	180.5	182.0	184.0	185.6	187.1
72.5°	148.0	148.2	149.3	149.1	151.3	153.5	155.7	157.2	159.3	161.3	162.8
75°	113.9	113.9	114.9	115.4	118.1	120.7	120.1	121.2	123.2	125.2	126.3
77.5°	83.2	82.1	83.2	83.7	84.5	86.7	87.2	88.6	90.9	90.2	91.4
80°	63.4	61.9	63.4	63.9	63.9	66.6	66.6	67.6	69.1	67.6	69.1
82.5°	45.2	44.5	45.6	45.7	46.6	46.7	47.6	47.8	49.3	48.6	49.3
85°	22.7	22.2	22.7	22.2	22.7	23.2	23.2	22.7	22.7	23.7	22.2
87.5°	9.3	9.4	9.3	9.7	9.7	9.7	9.5	9.7	10.0	9.4	9.5
90°	11.6	13.8	15.8	17.7	19.6	21.5	22.6	23.8	25.0	26.3	27.1
92.5°	20.7	21.1	22.0	23.0	23.9	24.9	25.5	26.2	26.8	27.4	27.9
95°	38.3	35.1	36.9	38.6	40.2	41.9	43.0	44.2	45.4	46.7	47.2
97.5°	49.8	40.6	44.4	48.3	52.2	56.0	57.0	58.0	58.9	59.9	60.5
100°	59.3	44.9	49.0	53.1	57.2	61.2	63.1	65.0	67.0	68.9	70.0
102.5°	219.0	198.6	164.7	130.8	96.8	62.9	65.4	67.9	70.4	72.8	74.4
105°	355.0	326.0	260.8	195.7	130.6	65.4	68.1	70.7	73.3	75.9	77.8
107.5°	440.3	404.1	326.0	247.9	169.8	91.7	89.0	86.3	83.6	81.0	80.2
110°	495.6	463.6	394.7	325.8	256.8	187.8	164.0	140.2	116.3	92.4	81.0



TEST NUMBER: P331366-840

CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	548.3	542.0	524.9	508.0	490.9	473.8	386.9	299.8	212.8	125.7	82.6
115°	633.5	638.5	644.5	650.5	656.4	662.4	551.9	441.4	331.0	220.6	156.7
117.5°	713.0	717.2	721.3	725.5	729.5	733.7	706.9	680.2	653.5	626.8	585.2
120°	765.8	769.7	774.1	778.3	782.6	786.9	789.7	792.6	795.5	798.4	783.7
122.5°	814.7	818.9	823.5	828.2	832.9	837.6	839.3	841.0	842.7	844.4	842.1
125°	885.1	889.0	893.5	898.1	902.6	907.2	908.8	910.5	912.1	913.8	915.0
127.5°	952.9	956.2	959.7	963.0	966.4	969.9	972.3	974.7	977.1	979.6	980.9
130°	996.4	999.7	1002.3	1004.9	1007.5	1010.2	1012.8	1015.4	1018.0	1020.7	1021.9
132.5°	1037.1	1040.1	1042.7	1045.3	1047.9	1050.6	1052.8	1055.0	1057.3	1059.6	1060.6
135°	1095.2	1098.2	1100.3	1102.5	1104.7	1106.8	1109.2	1111.6	1114.0	1116.3	1117.3
137.5°	1147.1	1149.6	1152.2	1154.6	1157.0	1159.4	1161.7	1164.1	1166.4	1168.7	1169.5
140°	1181.0	1183.3	1185.9	1188.5	1191.1	1193.8	1195.9	1198.1	1200.2	1202.3	1202.9
142.5°	1211.1	1213.6	1216.5	1219.5	1222.5	1225.6	1227.5	1229.4	1231.4	1233.3	1233.8
145°	1251.8	1253.7	1257.8	1261.8	1266.0	1270.0	1271.6	1273.3	1275.0	1276.7	1276.9
147.5°	1291.5	1293.0	1297.1	1301.0	1305.0	1309.1	1310.3	1311.5	1312.8	1314.0	1314.1
150°	1316.0	1317.0	1320.8	1324.6	1328.5	1332.2	1333.7	1335.1	1336.6	1338.0	1338.1
152.5°	1338.4	1339.2	1342.8	1346.5	1350.1	1353.7	1355.1	1356.6	1358.1	1359.5	1359.4
155°	1370.9	1371.3	1374.1	1377.0	1379.9	1382.7	1384.1	1385.5	1387.0	1388.5	1388.2
157.5°	1398.7	1398.8	1400.8	1402.7	1404.7	1406.7	1408.4	1410.0	1411.6	1413.2	1413.1
160°	1415.6	1415.6	1417.0	1418.5	1420.0	1421.4	1422.8	1424.2	1425.6	1427.0	1426.9
162.5°	1429.4	1429.3	1430.5	1431.8	1433.0	1434.2	1435.8	1437.4	1439.1	1440.8	1440.5
165°	1447.8	1447.4	1448.1	1449.0	1449.7	1450.4	1452.0	1453.7	1455.3	1457.0	1457.0
167.5°	1461.6	1461.2	1461.9	1462.5	1463.2	1463.9	1465.5	1467.2	1468.8	1470.6	1470.3
170°	1469.4	1468.8	1469.4	1469.8	1470.3	1470.8	1472.4	1474.1	1475.7	1477.4	1477.1
172.5°	1474.5	1474.0	1474.5	1474.9	1475.4	1475.9	1477.5	1479.3	1480.9	1482.6	1482.4
175°	1480.2	1479.6	1480.1	1480.6	1481.0	1481.5	1483.2	1484.8	1486.5	1488.1	1487.8
177.5°	1482.6	1482.0	1482.2	1482.4	1482.6	1482.8	1484.1	1485.4	1486.7	1488.1	1487.9
180°	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6



TEST NUMBER: P331366-840

CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4
2.5°	1286.6	1285.7	1285.7	1282.0	1285.7	1285.7	1286.6	1290.6	1291.9	1292.7	1291.1
5°	1193.5	1191.8	1189.3	1191.8	1189.3	1191.8	1193.5	1200.6	1204.3	1207.9	1210.9
7.5°	1101.4	1095.2	1094.3	1088.1	1094.3	1095.2	1101.4	1104.8	1112.0	1120.1	1127.5
10°	1034.1	1030.0	1029.5	1019.7	1029.5	1030.0	1034.1	1042.9	1050.2	1060.0	1070.3
12.5°	983.0	973.1	975.0	969.4	975.0	973.1	983.0	983.1	991.6	997.6	1013.7
15°	894.4	894.4	892.3	883.6	892.3	894.4	894.4	908.4	910.9	920.7	934.6
17.5°	830.8	829.8	824.9	827.3	824.9	829.8	830.8	841.0	842.7	855.9	867.3
20°	792.8	789.8	783.6	783.6	783.6	789.8	792.8	798.5	805.3	812.9	822.7
22.5°	757.0	756.8	750.2	752.2	750.2	756.8	757.0	762.2	768.5	777.1	785.3
25°	715.0	710.9	707.8	709.3	707.8	710.9	715.0	715.6	722.8	728.4	733.6
27.5°	675.2	673.0	672.8	668.5	672.8	673.0	675.2	676.6	680.6	684.0	688.8
30°	652.2	647.0	648.0	645.4	648.0	647.0	652.2	652.7	654.7	656.8	662.5
32.5°	625.7	623.9	622.9	620.7	622.9	623.9	625.7	626.6	630.8	632.9	637.3
35°	589.8	590.3	587.7	588.8	587.7	590.3	589.8	590.8	591.3	593.4	597.4
37.5°	558.4	560.0	558.8	559.1	558.8	560.0	558.4	558.9	559.4	559.7	560.9
40°	537.7	537.7	537.7	539.3	537.7	537.7	537.7	536.1	536.6	536.1	536.1
42.5°	517.9	517.1	516.2	516.1	516.2	517.1	517.9	514.3	516.0	514.3	513.4
45°	484.0	485.6	486.1	483.5	486.1	485.6	484.0	483.0	481.5	481.0	480.5
47.5°	453.4	453.6	453.4	455.8	453.4	453.6	453.4	452.1	449.7	448.8	446.4
50°	432.0	431.0	432.0	431.0	432.0	431.0	432.0	429.4	427.9	425.3	423.2
52.5°	409.3	409.5	408.9	408.7	408.9	409.5	409.3	406.0	405.2	404.2	401.0
55°	373.8	374.8	374.3	374.3	374.3	374.8	373.8	371.7	371.1	368.1	365.0
57.5°	337.0	337.9	338.6	336.3	338.6	337.9	337.0	336.6	336.3	333.1	329.7
60°	311.3	314.0	313.5	312.5	313.5	314.0	311.3	311.8	310.3	308.3	306.2
62.5°	287.9	288.8	288.7	288.5	288.7	288.8	287.9	285.5	284.8	282.7	280.6
65°	251.6	252.6	251.1	252.6	251.1	252.6	251.6	250.0	246.4	245.4	243.3
67.5°	212.5	212.8	214.0	214.7	214.0	212.8	212.5	213.1	210.8	208.7	208.3
70°	188.1	187.6	189.1	190.8	189.1	187.6	188.1	187.1	185.6	184.0	182.0
72.5°	162.6	163.7	163.2	164.3	163.2	163.7	162.6	162.8	161.3	159.3	157.2
75°	125.2	126.8	126.3	127.8	126.3	126.8	125.2	126.3	125.2	123.2	121.2
77.5°	90.5	90.7	90.5	91.4	90.5	90.7	90.5	91.4	90.2	90.9	88.6
80°	69.1	68.1	67.1	69.1	67.1	68.1	69.1	69.1	67.6	69.1	67.6
82.5°	48.1	48.7	47.7	47.7	47.7	48.7	48.1	49.3	48.6	49.3	47.8
85°	22.2	21.6	20.6	20.6	20.6	21.6	22.2	22.2	23.7	22.7	22.7
87.5°	9.6	9.3	9.4	9.1	9.4	9.3	9.6	9.5	9.4	10.0	9.7
90°	27.6	28.1	28.5	29.0	28.5	28.1	27.6	27.1	26.3	25.0	23.8
92.5°	28.2	28.4	28.7	29.0	28.7	28.4	28.2	27.9	27.4	26.8	26.2
95°	46.9	46.7	46.4	46.2	46.4	46.7	46.9	47.2	46.7	45.4	44.2
97.5°	60.8	61.1	61.3	61.6	61.3	61.1	60.8	60.5	59.9	58.9	58.0
100°	70.5	71.0	71.5	71.9	71.5	71.0	70.5	70.0	68.9	67.0	65.0
102.5°	75.0	75.7	76.4	77.1	76.4	75.7	75.0	74.4	72.8	70.4	67.9
105°	78.8	79.7	80.6	81.6	80.6	79.7	78.8	77.8	75.9	73.3	70.7
107.5°	81.1	82.0	83.0	83.9	83.0	82.0	81.1	80.2	81.0	83.6	86.3
110°	81.9	82.9	83.8	84.8	83.8	82.9	81.9	81.0	92.4	116.3	140.2



TEST NUMBER: P331366-840

CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	83.4	84.1	84.9	85.6	84.9	84.1	83.4	82.6	125.7	212.8	299.8
115°	139.6	122.4	105.2	88.1	105.2	122.4	139.6	156.7	220.6	331.0	441.4
117.5°	528.8	472.3	415.9	359.4	415.9	472.3	528.8	585.2	626.8	653.5	680.2
120°	751.4	719.2	687.0	654.9	687.0	719.2	751.4	783.7	798.4	795.5	792.6
122.5°	836.0	829.7	823.4	817.2	823.4	829.7	836.0	842.1	844.4	842.7	841.0
125°	915.7	916.5	917.2	917.9	917.2	916.5	915.7	915.0	913.8	912.1	910.5
127.5°	981.0	981.2	981.3	981.4	981.3	981.2	981.0	980.9	979.6	977.1	974.7
130°	1021.7	1021.4	1021.2	1021.0	1021.2	1021.4	1021.7	1021.9	1020.7	1018.0	1015.4
132.5°	1060.3	1060.1	1059.9	1059.6	1059.9	1060.1	1060.3	1060.6	1059.6	1057.3	1055.0
135°	1116.8	1116.3	1115.9	1115.4	1115.9	1116.3	1116.8	1117.3	1116.3	1114.0	1111.6
137.5°	1168.7	1167.9	1167.1	1166.3	1167.1	1167.9	1168.7	1169.5	1168.7	1166.4	1164.1
140°	1201.6	1200.4	1199.2	1198.1	1199.2	1200.4	1201.6	1202.9	1202.3	1200.2	1198.1
142.5°	1232.5	1231.3	1230.2	1229.0	1230.2	1231.3	1232.5	1233.8	1233.3	1231.4	1229.4
145°	1275.8	1274.6	1273.3	1272.1	1273.3	1274.6	1275.8	1276.9	1276.7	1275.0	1273.3
147.5°	1313.1	1312.1	1311.1	1310.1	1311.1	1312.1	1313.1	1314.1	1314.0	1312.8	1311.5
150°	1336.9	1335.7	1334.5	1333.3	1334.5	1335.7	1336.9	1338.1	1338.0	1336.6	1335.1
152.5°	1357.8	1356.2	1354.6	1353.1	1354.6	1356.2	1357.8	1359.4	1359.5	1358.1	1356.6
155°	1386.2	1384.4	1382.5	1380.6	1382.5	1384.4	1386.2	1388.2	1388.5	1387.0	1385.5
157.5°	1411.3	1409.4	1407.5	1405.6	1407.5	1409.4	1411.3	1413.1	1413.2	1411.6	1410.0
160°	1425.3	1423.6	1422.0	1420.3	1422.0	1423.6	1425.3	1426.9	1427.0	1425.6	1424.2
162.5°	1438.5	1436.4	1434.3	1432.3	1434.3	1436.4	1438.5	1440.5	1440.8	1439.1	1437.4
165°	1455.3	1453.7	1452.0	1450.4	1452.0	1453.7	1455.3	1457.0	1457.0	1455.3	1453.7
167.5°	1468.1	1466.0	1463.9	1461.7	1463.9	1466.0	1468.1	1470.3	1470.6	1468.8	1467.2
170°	1475.0	1472.9	1470.8	1468.5	1470.8	1472.9	1475.0	1477.1	1477.4	1475.7	1474.1
172.5°	1480.2	1478.0	1475.9	1473.7	1475.9	1478.0	1480.2	1482.4	1482.6	1480.9	1479.3
175°	1485.4	1483.0	1480.7	1478.2	1480.7	1483.0	1485.4	1487.8	1488.1	1486.5	1484.8
177.5°	1486.2	1484.5	1482.8	1481.1	1482.8	1484.5	1486.2	1487.9	1488.1	1486.7	1485.4
180°	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6



TEST NUMBER: P331366-840

CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4
2.5°	1289.0	1293.5	1300.5	1308.0	1312.5	1321.2	1323.6	1327.8	1331.5	1340.2	1349.2
5°	1214.6	1221.7	1238.8	1248.1	1260.9	1275.9	1285.7	1296.1	1307.4	1327.0	1344.9
7.5°	1134.8	1146.8	1167.9	1185.3	1203.7	1225.1	1240.5	1260.9	1277.9	1305.5	1331.9
10°	1081.6	1098.5	1117.6	1138.2	1164.1	1186.7	1208.4	1234.2	1254.8	1287.8	1318.7
12.5°	1033.7	1036.3	1063.6	1086.3	1121.6	1149.6	1174.6	1207.8	1228.0	1267.2	1299.7
15°	950.1	965.5	990.3	1008.4	1050.2	1085.7	1120.7	1155.3	1178.5	1226.9	1269.7
17.5°	879.7	893.9	919.3	948.9	978.9	1014.2	1059.6	1096.0	1127.5	1183.0	1233.6
20°	835.2	852.6	878.5	908.9	935.1	973.8	1013.0	1054.7	1088.7	1151.1	1210.4
22.5°	797.2	811.0	831.8	861.8	890.6	925.9	968.9	1014.3	1050.1	1117.3	1177.4
25°	743.9	755.3	768.6	793.3	825.9	864.5	898.1	948.1	1000.1	1063.0	1135.7
27.5°	695.8	703.9	715.8	737.5	762.7	798.8	836.1	883.5	935.8	1004.1	1080.9
30°	666.6	671.8	683.6	701.7	726.4	754.7	792.3	837.7	891.3	960.4	1036.7
32.5°	641.0	645.7	653.5	670.7	692.2	716.4	750.3	795.7	846.8	914.6	999.2
35°	602.7	606.2	613.0	626.8	638.7	662.5	690.7	732.1	780.0	845.0	932.6
37.5°	564.4	569.4	573.5	579.4	594.6	610.2	634.8	669.6	716.7	782.2	865.8
40°	539.3	543.3	549.6	552.1	564.5	578.5	598.5	630.5	677.9	737.7	819.2
42.5°	513.6	517.8	521.5	524.5	535.2	547.4	565.5	593.0	635.0	693.2	773.8
45°	478.9	479.4	483.0	488.7	493.8	502.6	515.5	539.3	571.7	626.3	699.5
47.5°	443.6	444.2	444.8	447.4	453.0	461.0	469.5	488.8	517.9	561.5	632.8
50°	420.1	419.1	420.1	422.2	425.9	432.5	442.3	456.3	480.0	520.7	586.1
52.5°	397.5	397.3	396.7	397.5	400.2	404.9	411.8	423.6	444.8	482.3	540.0
55°	362.9	360.3	360.8	358.8	363.5	364.5	369.6	379.4	398.0	423.7	477.9
57.5°	326.1	324.0	321.6	321.0	320.6	323.5	327.6	335.3	349.5	372.1	416.1
60°	302.7	300.0	296.9	295.9	295.9	297.4	299.5	305.2	318.6	338.7	374.8
62.5°	278.7	275.7	273.9	271.1	270.3	271.9	274.0	278.0	287.6	306.5	337.7
65°	241.8	238.1	235.6	235.1	234.1	232.5	233.5	237.6	245.4	260.3	285.1
67.5°	204.8	201.4	200.8	197.7	196.3	196.5	196.3	199.9	204.5	217.3	235.8
70°	180.5	177.8	176.8	174.2	173.2	172.2	171.2	174.2	178.8	189.8	205.7
72.5°	155.7	153.5	151.3	149.1	149.3	148.2	148.0	149.9	153.7	163.7	176.0
75°	120.1	120.7	118.1	115.4	114.9	113.9	113.9	115.4	117.0	124.7	134.5
77.5°	87.2	86.7	84.5	83.7	83.2	82.1	83.2	84.2	85.0	90.2	97.5
80°	66.6	66.6	63.9	63.9	63.4	61.9	63.4	62.4	64.4	69.6	74.7
82.5°	47.6	46.7	46.6	45.7	45.6	44.5	45.2	46.3	47.2	50.6	53.7
85°	23.2	23.2	22.7	22.2	22.7	22.2	22.7	23.2	23.7	25.2	27.9
87.5°	9.5	9.7	9.7	9.7	9.3	9.4	9.3	9.2	9.5	9.4	9.3
90°	22.6	21.5	19.6	17.7	15.8	13.8	11.6	9.0	6.4	3.7	1.1
92.5°	25.5	24.9	23.9	23.0	22.0	21.1	20.7	21.0	21.2	21.4	21.7
95°	43.0	41.9	40.2	38.6	36.9	35.1	38.3	46.2	54.0	61.9	69.8
97.5°	57.0	56.0	52.2	48.3	44.4	40.6	49.8	71.9	94.1	116.3	138.5
100°	63.1	61.2	57.2	53.1	49.0	44.9	59.3	92.0	124.6	157.3	190.1
102.5°	65.4	62.9	96.8	130.8	164.7	198.6	219.0	225.9	232.9	239.7	246.7
105°	68.1	65.4	130.6	195.7	260.8	326.0	355.0	347.8	340.6	333.6	326.4
107.5°	89.0	91.7	169.8	247.9	326.0	404.1	440.3	434.4	428.7	422.9	417.2
110°	164.0	187.8	256.8	325.8	394.7	463.6	495.6	490.6	485.6	480.6	475.5



TEST NUMBER: P331366-840

CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	386.9	473.8	490.9	508.0	524.9	542.0	548.3	543.8	539.4	535.0	530.6
115°	551.9	662.4	656.4	650.5	644.5	638.5	633.5	629.4	625.4	621.4	617.3
117.5°	706.9	733.7	729.5	725.5	721.3	717.2	713.0	708.4	703.9	699.3	694.8
120°	789.7	786.9	782.6	778.3	774.1	769.7	765.8	762.2	758.6	755.1	751.4
122.5°	839.3	837.6	832.9	828.2	823.5	818.9	814.7	810.9	807.1	803.3	799.6
125°	908.8	907.2	902.6	898.1	893.5	889.0	885.1	882.1	879.0	875.9	872.8
127.5°	972.3	969.9	966.4	963.0	959.7	956.2	952.9	949.5	946.0	942.6	939.2
130°	1012.8	1010.2	1007.5	1004.9	1002.3	999.7	996.4	992.7	988.9	985.0	981.2
132.5°	1052.8	1050.6	1047.9	1045.3	1042.7	1040.1	1037.1	1033.9	1030.7	1027.4	1024.1
135°	1109.2	1106.8	1104.7	1102.5	1100.3	1098.2	1095.2	1091.5	1087.6	1083.8	1079.9
137.5°	1161.7	1159.4	1157.0	1154.6	1152.2	1149.6	1147.1	1144.5	1141.8	1139.1	1136.4
140°	1195.9	1193.8	1191.1	1188.5	1185.9	1183.3	1181.0	1179.1	1177.2	1175.3	1173.4
142.5°	1227.5	1225.6	1222.5	1219.5	1216.5	1213.6	1211.1	1209.4	1207.7	1206.0	1204.3
145°	1271.6	1270.0	1266.0	1261.8	1257.8	1253.7	1251.8	1252.1	1252.3	1252.5	1252.8
147.5°	1310.3	1309.1	1305.0	1301.0	1297.1	1293.0	1291.5	1292.4	1293.3	1294.2	1295.2
150°	1333.7	1332.2	1328.5	1324.6	1320.8	1317.0	1316.0	1317.6	1319.3	1320.9	1322.6
152.5°	1355.1	1353.7	1350.1	1346.5	1342.8	1339.2	1338.4	1340.2	1342.0	1343.9	1345.7
155°	1384.1	1382.7	1379.9	1377.0	1374.1	1371.3	1370.9	1373.0	1375.2	1377.4	1379.5
157.5°	1408.4	1406.7	1404.7	1402.7	1400.8	1398.8	1398.7	1400.5	1402.3	1404.1	1405.9
160°	1422.8	1421.4	1420.0	1418.5	1417.0	1415.6	1415.6	1417.0	1418.5	1420.0	1421.4
162.5°	1435.8	1434.2	1433.0	1431.8	1430.5	1429.3	1429.4	1430.8	1432.2	1433.7	1435.1
165°	1452.0	1450.4	1449.7	1449.0	1448.1	1447.4	1447.8	1449.3	1450.7	1452.1	1453.6
167.5°	1465.5	1463.9	1463.2	1462.5	1461.9	1461.2	1461.6	1463.0	1464.4	1465.9	1467.3
170°	1472.4	1470.8	1470.3	1469.8	1469.4	1468.8	1469.4	1470.8	1472.2	1473.6	1475.0
172.5°	1477.5	1475.9	1475.4	1474.9	1474.5	1474.0	1474.5	1475.9	1477.3	1478.7	1480.2
175°	1483.2	1481.5	1481.0	1480.6	1480.1	1479.6	1480.2	1481.9	1483.5	1485.2	1486.8
177.5°	1484.1	1482.8	1482.6	1482.4	1482.2	1482.0	1482.6	1483.9	1485.2	1486.6	1487.9
180°	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6



TEST NUMBER: P331366-840
 CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4
2.5°	1348.4	1350.5	1357.1	1363.6	1371.1	1373.1	1376.4	1373.5	1372.7	1380.6	1386.3
5°	1352.2	1361.5	1379.6	1396.0	1410.0	1419.8	1430.1	1434.2	1441.9	1452.7	1466.1
7.5°	1347.9	1365.9	1394.3	1418.3	1444.5	1463.4	1478.1	1490.7	1505.9	1526.4	1548.8
10°	1342.9	1367.2	1401.7	1431.1	1463.0	1487.2	1507.4	1526.9	1549.6	1578.0	1607.4
12.5°	1333.8	1362.6	1405.8	1440.6	1481.6	1505.4	1532.6	1574.8	1599.1	1638.6	1680.0
15°	1315.7	1347.6	1407.9	1450.7	1497.0	1542.5	1592.5	1632.6	1672.8	1696.1	1754.3
17.5°	1288.5	1335.4	1402.2	1452.1	1511.1	1582.6	1638.7	1684.3	1730.7	1768.4	1797.6
20°	1266.7	1317.7	1393.9	1453.8	1523.9	1600.6	1665.2	1711.5	1751.7	1783.2	1801.2
22.5°	1239.0	1303.2	1377.5	1447.5	1537.1	1613.1	1680.8	1717.3	1750.9	1766.3	1773.2
25°	1195.5	1272.8	1356.9	1442.4	1543.5	1623.9	1685.8	1707.9	1717.7	1702.7	1678.0
27.5°	1148.6	1234.8	1333.0	1432.7	1539.5	1616.9	1661.2	1657.7	1641.1	1592.8	1554.1
30°	1113.5	1208.4	1314.0	1422.8	1530.0	1605.3	1631.1	1605.3	1567.7	1513.6	1458.4
32.5°	1076.8	1175.0	1293.8	1408.8	1512.8	1578.9	1584.5	1540.1	1481.9	1420.4	1351.6
35°	1021.3	1127.4	1255.8	1377.5	1475.9	1517.7	1493.0	1414.6	1345.5	1261.5	1167.6
37.5°	958.5	1075.7	1204.5	1331.6	1420.8	1431.7	1370.3	1287.8	1190.3	1091.6	981.2
40°	911.4	1035.7	1168.2	1296.6	1375.4	1364.0	1285.7	1195.0	1078.9	958.4	855.8
42.5°	869.4	993.6	1128.5	1254.5	1317.7	1286.6	1195.0	1083.6	959.0	845.4	751.4
45°	796.5	924.3	1062.5	1184.2	1220.2	1164.1	1042.9	919.2	796.5	701.7	627.4
47.5°	725.8	852.1	989.0	1095.9	1108.6	1033.1	900.7	773.4	667.9	590.7	538.3
50°	673.8	800.6	936.1	1031.6	1027.4	936.1	800.1	678.9	590.8	528.4	493.3
52.5°	627.2	747.0	877.2	963.9	942.1	842.5	712.7	605.1	532.6	483.8	452.1
55°	554.7	665.5	789.2	858.9	818.6	708.3	598.5	511.9	458.3	421.7	397.0
57.5°	482.7	586.6	692.6	735.5	691.1	589.2	497.6	434.7	394.5	367.4	351.2
60°	438.2	529.0	623.3	660.4	607.2	516.5	444.3	388.2	355.7	333.6	319.1
62.5°	393.6	474.9	563.9	584.1	535.5	458.8	394.9	348.2	321.4	301.7	288.2
65°	333.1	399.5	467.1	480.5	435.7	376.4	325.8	295.4	271.7	257.2	246.4
67.5°	273.2	326.5	374.4	385.2	345.9	304.8	268.3	241.8	225.7	213.7	204.6
70°	237.6	279.9	319.1	327.9	296.4	259.8	232.0	210.9	196.4	186.1	177.3
72.5°	200.2	235.4	267.9	273.9	248.1	220.3	197.3	180.8	167.9	161.4	153.0
75°	153.1	173.7	198.9	200.6	183.5	166.5	149.0	138.1	131.5	123.2	119.1
77.5°	108.1	124.2	138.7	141.5	131.4	119.8	110.0	101.5	95.7	92.0	88.2
80°	82.5	95.3	101.6	105.1	98.0	89.7	84.0	78.4	74.7	72.2	69.6
82.5°	59.0	67.0	72.7	75.4	71.6	66.7	60.9	57.8	54.9	52.8	51.9
85°	29.9	33.5	37.2	38.2	37.2	35.0	31.9	31.9	30.4	29.9	29.9
87.5°	11.0	13.2	13.7	15.6	15.1	15.6	15.9	15.9	15.9	15.7	15.5
90°	3.7	6.4	9.0	11.6	13.8	15.8	17.7	19.6	21.5	22.6	23.8
92.5°	21.4	21.2	21.0	20.7	21.1	22.0	23.0	23.9	24.9	25.5	26.2
95°	61.9	54.0	46.2	38.3	35.1	36.9	38.6	40.2	41.9	43.0	44.2
97.5°	116.3	94.1	71.9	49.8	40.6	44.4	48.3	52.2	56.0	57.0	58.0
100°	157.3	124.6	92.0	59.3	44.9	49.0	53.1	57.2	61.2	63.1	65.0
102.5°	239.7	232.9	225.9	219.0	198.6	164.7	130.8	96.8	62.9	65.4	67.9
105°	333.6	340.6	347.8	355.0	326.0	260.8	195.7	130.6	65.4	68.1	70.7
107.5°	422.9	428.7	434.4	440.3	404.1	326.0	247.9	169.8	91.7	89.0	86.3
110°	480.6	485.6	490.6	495.6	463.6	394.7	325.8	256.8	187.8	164.0	140.2



TEST NUMBER: P331366-840

CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	535.0	539.4	543.8	548.3	542.0	524.9	508.0	490.9	473.8	386.9	299.8
115°	621.4	625.4	629.4	633.5	638.5	644.5	650.5	656.4	662.4	551.9	441.4
117.5°	699.3	703.9	708.4	713.0	717.2	721.3	725.5	729.5	733.7	706.9	680.2
120°	755.1	758.6	762.2	765.8	769.7	774.1	778.3	782.6	786.9	789.7	792.6
122.5°	803.3	807.1	810.9	814.7	818.9	823.5	828.2	832.9	837.6	839.3	841.0
125°	875.9	879.0	882.1	885.1	889.0	893.5	898.1	902.6	907.2	908.8	910.5
127.5°	942.6	946.0	949.5	952.9	956.2	959.7	963.0	966.4	969.9	972.3	974.7
130°	985.0	988.9	992.7	996.4	999.7	1002.3	1004.9	1007.5	1010.2	1012.8	1015.4
132.5°	1027.4	1030.7	1033.9	1037.1	1040.1	1042.7	1045.3	1047.9	1050.6	1052.8	1055.0
135°	1083.8	1087.6	1091.5	1095.2	1098.2	1100.3	1102.5	1104.7	1106.8	1109.2	1111.6
137.5°	1139.1	1141.8	1144.5	1147.1	1149.6	1152.2	1154.6	1157.0	1159.4	1161.7	1164.1
140°	1175.3	1177.2	1179.1	1181.0	1183.3	1185.9	1188.5	1191.1	1193.8	1195.9	1198.1
142.5°	1206.0	1207.7	1209.4	1211.1	1213.6	1216.5	1219.5	1222.5	1225.6	1227.5	1229.4
145°	1252.5	1252.3	1252.1	1251.8	1253.7	1257.8	1261.8	1266.0	1270.0	1271.6	1273.3
147.5°	1294.2	1293.3	1292.4	1291.5	1293.0	1297.1	1301.0	1305.0	1309.1	1310.3	1311.5
150°	1320.9	1319.3	1317.6	1316.0	1317.0	1320.8	1324.6	1328.5	1332.2	1333.7	1335.1
152.5°	1343.9	1342.0	1340.2	1338.4	1339.2	1342.8	1346.5	1350.1	1353.7	1355.1	1356.6
155°	1377.4	1375.2	1373.0	1370.9	1371.3	1374.1	1377.0	1379.9	1382.7	1384.1	1385.5
157.5°	1404.1	1402.3	1400.5	1398.7	1398.8	1400.8	1402.7	1404.7	1406.7	1408.4	1410.0
160°	1420.0	1418.5	1417.0	1415.6	1415.6	1417.0	1418.5	1420.0	1421.4	1422.8	1424.2
162.5°	1433.7	1432.2	1430.8	1429.4	1429.3	1430.5	1431.8	1433.0	1434.2	1435.8	1437.4
165°	1452.1	1450.7	1449.3	1447.8	1447.4	1448.1	1449.0	1449.7	1450.4	1452.0	1453.7
167.5°	1465.9	1464.4	1463.0	1461.6	1461.2	1461.9	1462.5	1463.2	1463.9	1465.5	1467.2
170°	1473.6	1472.2	1470.8	1469.4	1468.8	1469.4	1469.8	1470.3	1470.8	1472.4	1474.1
172.5°	1478.7	1477.3	1475.9	1474.5	1474.0	1474.5	1474.9	1475.4	1475.9	1477.5	1479.3
175°	1485.2	1483.5	1481.9	1480.2	1479.6	1480.1	1480.6	1481.0	1481.5	1483.2	1484.8
177.5°	1486.6	1485.2	1483.9	1482.6	1482.0	1482.2	1482.4	1482.6	1482.8	1484.1	1485.4
180°	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6



TEST NUMBER: P331366-840

CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4	1341.4
2.5°	1391.3	1397.0	1397.0	1397.9	1404.5	1403.6	1403.2
5°	1480.6	1489.3	1490.4	1499.6	1505.8	1503.8	1498.1
7.5°	1564.8	1581.1	1593.5	1600.3	1608.5	1613.6	1611.3
10°	1631.6	1655.4	1669.8	1679.6	1691.4	1700.2	1697.1
12.5°	1692.2	1720.5	1740.3	1757.1	1758.7	1769.9	1762.2
15°	1786.8	1816.6	1819.8	1832.2	1842.0	1840.9	1841.4
17.5°	1818.1	1827.7	1829.6	1829.9	1830.0	1826.3	1818.6
20°	1806.9	1803.3	1794.5	1787.9	1775.9	1774.4	1764.1
22.5°	1754.1	1742.6	1720.7	1706.2	1687.7	1682.8	1680.0
25°	1650.2	1624.9	1589.8	1556.3	1547.1	1529.0	1534.2
27.5°	1507.6	1468.2	1430.3	1403.0	1378.4	1351.4	1359.1
30°	1407.3	1363.0	1309.4	1268.2	1241.9	1216.1	1211.4
32.5°	1287.8	1222.8	1163.0	1126.7	1086.4	1070.2	1052.3
35°	1081.6	1018.1	958.9	907.9	878.5	855.8	835.2
37.5°	896.1	823.0	775.3	733.9	712.7	699.6	703.0
40°	781.0	717.1	682.1	650.6	631.0	621.7	623.8
42.5°	687.8	640.0	611.1	589.6	575.7	570.6	569.4
45°	582.0	555.2	531.5	519.2	512.4	506.8	503.1
47.5°	509.9	488.0	474.6	467.3	461.4	455.7	455.6
50°	466.6	452.1	442.8	435.0	430.5	426.4	429.9
52.5°	433.5	420.3	411.1	404.1	402.4	398.7	398.6
55°	384.6	374.3	367.6	361.3	358.3	356.2	353.7
57.5°	340.0	330.2	324.1	320.1	314.3	312.1	311.3
60°	308.3	300.5	294.4	289.2	286.6	282.5	282.5
62.5°	279.0	271.2	265.5	261.6	257.3	255.7	256.1
65°	236.6	230.5	224.8	220.7	219.6	216.5	217.5
67.5°	197.6	193.5	187.5	185.3	183.3	181.7	180.5
70°	171.7	167.5	164.4	161.4	159.8	159.8	159.8
72.5°	149.8	144.8	143.0	139.1	140.0	138.4	136.7
75°	116.0	112.9	111.4	109.8	107.2	107.2	107.2
77.5°	85.3	84.4	82.6	80.9	80.3	79.8	80.0
80°	65.9	65.4	64.4	64.4	63.4	62.9	61.9
82.5°	50.7	49.4	48.8	48.4	48.2	48.1	47.9
85°	28.9	27.9	27.9	28.4	27.4	27.4	27.9
87.5°	16.2	16.4	16.2	16.3	16.8	16.5	16.6
90°	25.0	26.3	27.1	27.6	28.1	28.5	29.0
92.5°	26.8	27.4	27.9	28.2	28.4	28.7	29.0
95°	45.4	46.7	47.2	46.9	46.7	46.4	46.2
97.5°	58.9	59.9	60.5	60.8	61.1	61.3	61.6
100°	67.0	68.9	70.0	70.5	71.0	71.5	71.9
102.5°	70.4	72.8	74.4	75.0	75.7	76.4	77.1
105°	73.3	75.9	77.8	78.8	79.7	80.6	81.6
107.5°	83.6	81.0	80.2	81.1	82.0	83.0	83.9
110°	116.3	92.4	81.0	81.9	82.9	83.8	84.8



TEST NUMBER: P331366-840

CATALOG NUMBER: SA2XXDIP-C675D1080U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	212.8	125.7	82.6	83.4	84.1	84.9	85.6
115°	331.0	220.6	156.7	139.6	122.4	105.2	88.1
117.5°	653.5	626.8	585.2	528.8	472.3	415.9	359.4
120°	795.5	798.4	783.7	751.4	719.2	687.0	654.9
122.5°	842.7	844.4	842.1	836.0	829.7	823.4	817.2
125°	912.1	913.8	915.0	915.7	916.5	917.2	917.9
127.5°	977.1	979.6	980.9	981.0	981.2	981.3	981.4
130°	1018.0	1020.7	1021.9	1021.7	1021.4	1021.2	1021.0
132.5°	1057.3	1059.6	1060.6	1060.3	1060.1	1059.9	1059.6
135°	1114.0	1116.3	1117.3	1116.8	1116.3	1115.9	1115.4
137.5°	1166.4	1168.7	1169.5	1168.7	1167.9	1167.1	1166.3
140°	1200.2	1202.3	1202.9	1201.6	1200.4	1199.2	1198.1
142.5°	1231.4	1233.3	1233.8	1232.5	1231.3	1230.2	1229.0
145°	1275.0	1276.7	1276.9	1275.8	1274.6	1273.3	1272.1
147.5°	1312.8	1314.0	1314.1	1313.1	1312.1	1311.1	1310.1
150°	1336.6	1338.0	1338.1	1336.9	1335.7	1334.5	1333.3
152.5°	1358.1	1359.5	1359.4	1357.8	1356.2	1354.6	1353.1
155°	1387.0	1388.5	1388.2	1386.2	1384.4	1382.5	1380.6
157.5°	1411.6	1413.2	1413.1	1411.3	1409.4	1407.5	1405.6
160°	1425.6	1427.0	1426.9	1425.3	1423.6	1422.0	1420.3
162.5°	1439.1	1440.8	1440.5	1438.5	1436.4	1434.3	1432.3
165°	1455.3	1457.0	1457.0	1455.3	1453.7	1452.0	1450.4
167.5°	1468.8	1470.6	1470.3	1468.1	1466.0	1463.9	1461.7
170°	1475.7	1477.4	1477.1	1475.0	1472.9	1470.8	1468.5
172.5°	1480.9	1482.6	1482.4	1480.2	1478.0	1475.9	1473.7
175°	1486.5	1488.1	1487.8	1485.4	1483.0	1480.7	1478.2
177.5°	1486.7	1488.1	1487.9	1486.2	1484.5	1482.8	1481.1
180°	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6	1483.6

(END OF REPORT)