

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331364-840

Luminaire Tested: **SA2XXDIP-C675D925U840-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331364-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C675D925U840-4F0-1E-UDD-F1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 925 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6071.8 lumens
Efficiency: N/A
Efficacy: 116.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331364-840

CATALOG NUMBER: SA2XXDIP-C675D925U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

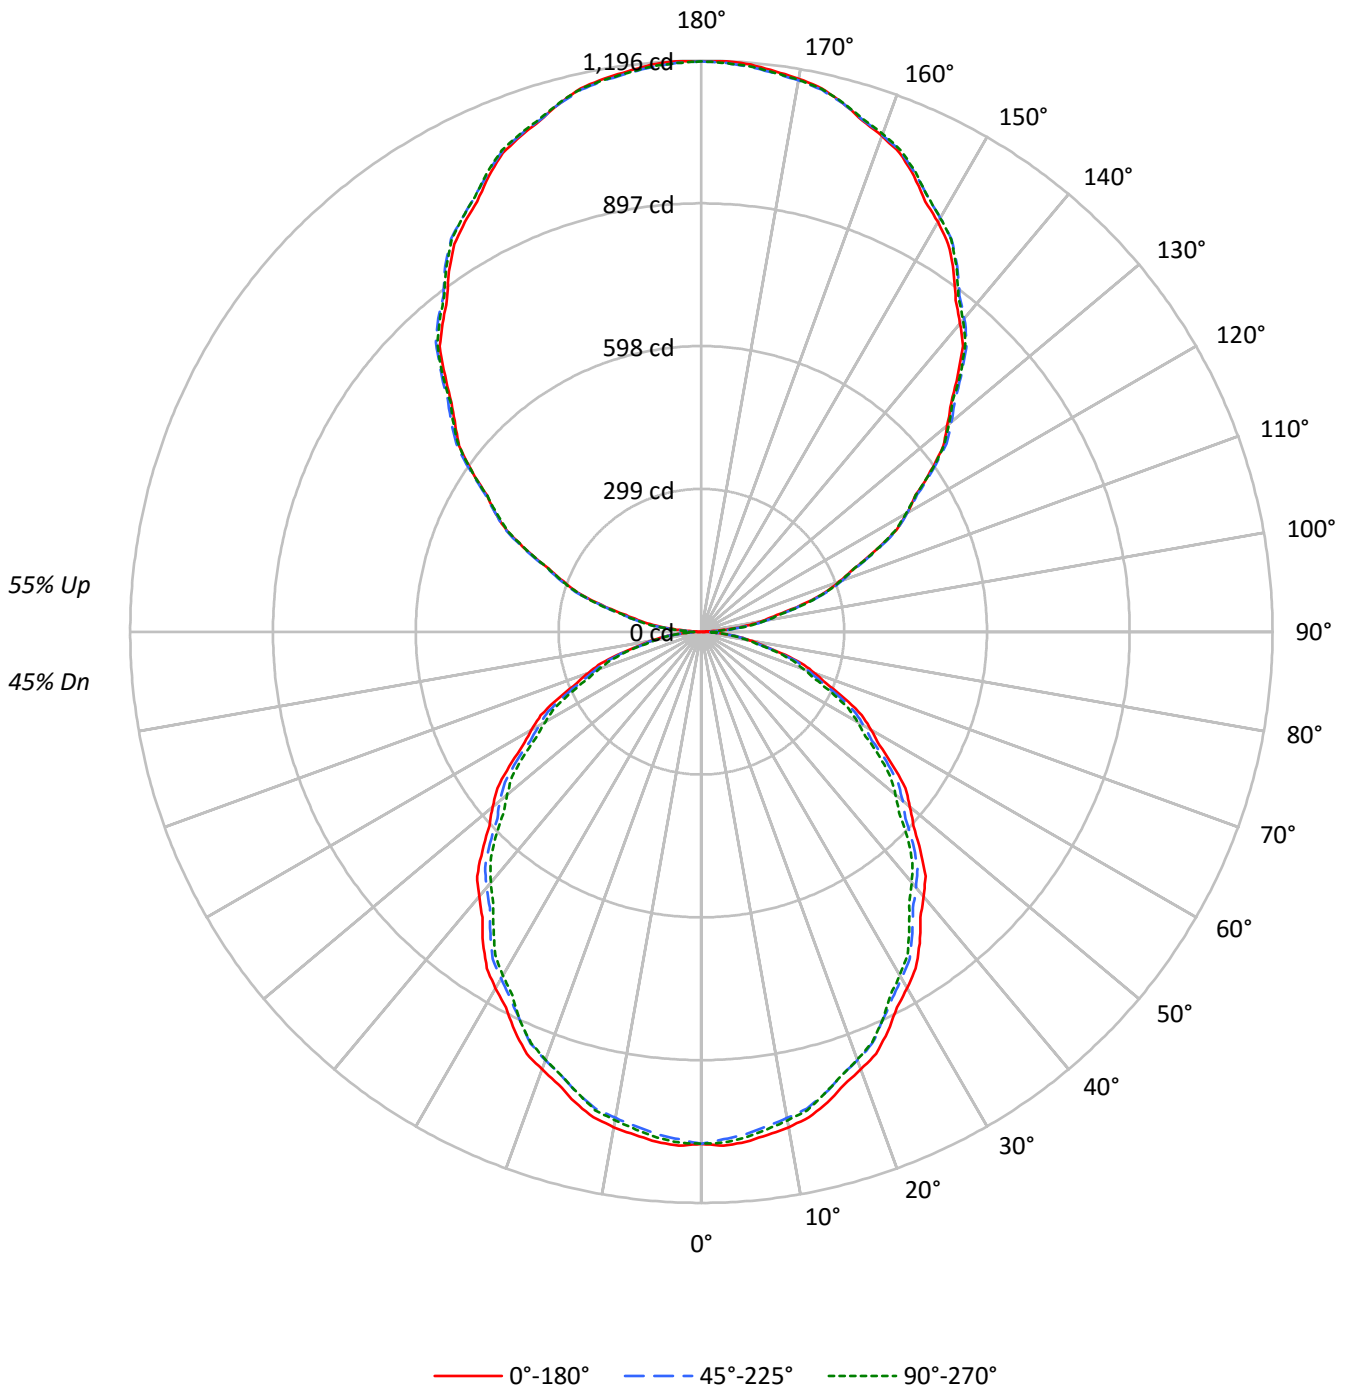



TEST NUMBER: P331364-840

CATALOG NUMBER: SA2XXDIP-C675D925U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	65	65	65	52	52	52	45
1	97	92	88	85	88	85	81	78	71	68	66	58	56	54	45	44	43	38
2	88	81	75	69	80	74	69	64	62	58	55	51	48	45	40	38	37	32
3	80	71	64	58	73	65	59	54	55	50	46	45	41	38	35	33	31	27
4	73	63	55	49	67	58	51	46	48	43	39	40	36	33	32	29	27	23
5	67	56	48	42	61	51	44	39	43	38	34	36	32	29	29	26	23	20
6	62	50	42	36	57	46	39	34	39	33	29	32	28	25	26	23	21	18
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	24	21	18	16
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16	14
9	49	37	30	25	45	35	28	23	30	24	21	25	21	18	20	17	15	13
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	19	16	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17312	17312	17312
5°	17378	17126	17227
10°	17274	16952	17038
15°	17060	16732	16715
20°	16756	16402	16385
25°	16456	15998	15998
30°	16067	15627	15491
35°	15707	15179	14954
40°	15253	14731	14450
45°	14805	14289	13935
50°	14320	13828	13335
55°	13813	13292	12797
60°	13249	12649	12184
65°	12642	12015	11461
70°	11877	11240	10707
75°	10805	10356	10100
80°	9586	9298	8815
85°	7836	7447	6688



TEST NUMBER: P331364-840

CATALOG NUMBER: SA2XXDIP-C675D925U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	100.8	1.7
10°-20°	283.7	4.7
20°-30°	417.0	6.9
30°-40°	484.3	8.0
40°-50°	483.8	8.0
50°-60°	421.9	6.9
60°-70°	312.0	5.1
70°-80°	176.7	2.9
80°-90°	52.3	0.9
90°-100°	75.7	1.2
100°-110°	235.0	3.9
110°-120°	401.8	6.6
120°-130°	528.3	8.7
130°-140°	593.0	9.8
140°-150°	581.4	9.6
150°-160°	487.7	8.0
160°-170°	323.5	5.3
170°-180°	113.0	1.9
0°-30°	801.5	13.2
0°-40°	1285.8	21.2
0°-60°	2191.5	36.1
0°-90°	2732.5	45.0
90°-120°	712.5	11.7
90°-150°	2415.2	39.8
90°-180°	3339.0	55.0
0°-180°	6071.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1072	1072	1072	1072	1072	
5°	1072	1068	1057	1064	1063	102
15°	1021	1014	1001	1005	1000	287
25°	924	915	898	900	898	425
35°	797	786	770	764	759	497
45°	648	641	626	615	610	500
55°	491	484	472	460	455	439
65°	331	324	314	305	300	327
75°	173	171	166	160	162	185
85°	42	41	40	37	36	48
90°	1	14	35	33	34	5
95°	52	62	64	64	62	60
105°	217	220	222	224	224	229
115°	403	409	407	406	403	399
125°	586	595	593	590	588	524
135°	759	769	772	771	768	586
145°	921	928	934	935	931	575
155°	1053	1056	1059	1064	1061	485
165°	1146	1145	1145	1151	1147	323
175°	1192	1189	1187	1194	1188	113
180°	1194	1194	1194	1194	1194	



TEST NUMBER: P331364-840

CATALOG NUMBER: SA2XXDIP-C675D925U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2
2.5°	1077.1	1076.2	1075.3	1074.4	1073.5	1072.0	1070.0	1067.9	1065.9	1063.9	1065.7
5°	1072.2	1071.3	1070.4	1069.4	1068.5	1066.8	1064.3	1061.8	1059.2	1056.7	1058.5
7.5°	1062.7	1061.3	1059.9	1058.4	1057.0	1055.0	1052.5	1049.9	1047.3	1044.7	1046.5
10°	1053.6	1052.0	1050.4	1048.7	1047.2	1045.0	1042.3	1039.6	1036.7	1034.0	1035.8
12.5°	1041.3	1039.9	1038.3	1036.9	1035.5	1033.5	1030.7	1027.9	1025.2	1022.5	1023.8
15°	1020.6	1019.3	1017.8	1016.5	1015.1	1012.9	1010.0	1006.9	1004.0	1001.0	1002.0
17.5°	994.2	992.8	991.5	990.1	988.8	986.5	983.5	980.5	977.4	974.4	975.5
20°	975.2	973.9	972.5	971.1	969.8	967.5	964.2	961.1	957.9	954.6	955.3
22.5°	956.2	954.3	952.4	950.5	948.6	946.1	943.1	940.1	937.1	934.0	934.1
25°	923.7	921.9	920.1	918.2	916.4	913.5	909.6	905.7	901.8	898.0	898.4
27.5°	886.6	884.9	883.3	881.6	880.0	877.7	874.5	871.5	868.4	865.4	864.6
30°	861.8	860.0	858.2	856.4	854.5	851.9	848.5	845.1	841.6	838.2	837.5
32.5°	835.5	833.9	832.5	831.0	829.6	827.1	823.4	819.8	816.2	812.5	811.3
35°	796.9	794.7	792.3	790.0	787.7	784.8	781.1	777.4	773.8	770.1	768.7
37.5°	753.4	751.3	749.3	747.3	745.4	742.5	738.8	735.2	731.5	727.8	726.1
40°	723.7	721.9	720.0	718.2	716.4	713.7	709.9	706.3	702.7	698.9	696.9
42.5°	694.9	693.0	691.2	689.3	687.5	684.8	681.1	677.4	673.8	670.1	667.8
45°	648.4	646.8	645.2	643.7	642.1	639.5	636.1	632.7	629.2	625.8	623.3
47.5°	602.3	600.8	599.3	597.7	596.2	593.7	590.1	586.5	583.0	579.4	576.7
50°	570.1	569.0	567.8	566.6	565.5	563.3	560.2	556.9	553.7	550.5	547.3
52.5°	538.8	537.2	535.7	534.2	532.7	530.5	527.5	524.4	521.4	518.4	515.7
55°	490.7	489.4	488.0	486.6	485.2	483.1	480.4	477.7	474.9	472.2	469.4
57.5°	442.4	441.4	440.3	439.2	438.1	436.1	433.0	430.0	427.0	423.9	421.2
60°	410.3	409.4	408.5	407.6	406.7	404.6	401.4	398.2	395.0	391.7	389.2
62.5°	379.0	377.5	376.1	374.6	373.1	371.1	368.7	366.2	363.8	361.2	358.9
65°	330.9	329.5	328.2	326.8	325.4	323.6	321.3	319.0	316.7	314.5	312.4
67.5°	282.1	280.9	279.8	278.7	277.6	276.1	274.0	272.0	269.9	267.8	266.2
70°	251.6	250.6	249.7	248.8	247.9	246.4	244.3	242.3	240.2	238.1	236.5
72.5°	220.3	219.2	218.3	217.4	216.5	215.4	214.1	212.8	211.5	210.1	208.5
75°	173.2	172.7	172.3	171.8	171.4	170.6	169.5	168.2	167.1	166.0	164.6
77.5°	131.2	130.4	129.6	128.8	128.1	127.4	126.9	126.4	126.0	125.5	124.9
80°	103.1	102.9	102.6	102.4	102.2	101.8	101.4	100.9	100.5	100.0	99.3
82.5°	76.7	76.6	76.6	76.5	76.5	76.3	76.0	75.8	75.5	75.2	74.4
85°	42.3	42.0	41.8	41.6	41.3	41.1	40.9	40.7	40.4	40.2	39.5
87.5°	15.0	15.2	15.3	15.6	15.8	16.2	16.8	17.4	18.0	18.6	18.0
90°	1.0	3.7	6.4	9.1	11.7	15.6	20.5	25.4	30.3	35.2	34.8
92.5°	18.0	19.9	21.9	23.8	25.9	27.4	28.6	29.7	30.9	32.0	32.1
95°	52.4	54.6	56.9	59.1	61.4	62.7	63.1	63.6	64.0	64.5	64.5
97.5°	95.7	97.8	99.7	101.7	103.6	105.0	105.9	106.7	107.6	108.5	108.5
100°	127.9	129.8	131.6	133.4	135.1	136.4	137.0	137.7	138.5	139.1	139.1
102.5°	161.9	163.3	164.7	166.1	167.5	168.7	169.6	170.5	171.3	172.2	172.3
105°	216.7	217.3	218.0	218.7	219.3	219.9	220.4	220.9	221.3	221.7	222.2
107.5°	271.9	272.9	273.9	274.9	275.9	276.3	276.3	276.3	276.3	276.3	276.5
110°	307.4	308.7	310.0	311.4	312.8	313.5	313.5	313.5	313.5	313.5	313.5



TEST NUMBER: P331364-840

CATALOG NUMBER: SA2XXDIP-C675D925U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	346.1	347.4	348.8	350.1	351.4	352.0	351.8	351.6	351.5	351.3	350.8
115°	403.1	404.5	405.8	407.2	408.5	408.9	408.5	408.1	407.6	407.2	407.0
117.5°	460.0	461.7	463.5	465.3	467.2	467.4	466.2	464.8	463.6	462.4	461.8
120°	497.9	499.7	501.4	503.2	505.0	505.0	503.2	501.4	499.7	497.9	497.9
122.5°	532.5	534.6	536.8	539.0	541.1	541.6	540.3	539.1	537.9	536.5	536.0
125°	586.5	588.5	590.6	592.6	594.6	595.3	594.6	593.9	593.3	592.6	591.9
127.5°	639.1	641.7	644.3	646.8	649.3	650.3	649.4	648.6	647.8	647.0	646.2
130°	672.2	675.1	678.0	681.0	683.9	685.1	684.6	684.2	683.8	683.3	682.9
132.5°	709.3	711.7	714.1	716.4	718.8	720.0	720.1	720.2	720.2	720.3	719.4
135°	758.9	761.3	763.8	766.3	768.7	770.2	770.6	771.0	771.5	771.9	771.7
137.5°	811.1	813.0	815.1	817.1	819.1	820.4	821.0	821.6	822.2	822.7	822.6
140°	842.5	844.6	846.6	848.6	850.6	852.1	853.2	854.3	855.6	856.7	856.7
142.5°	874.7	876.8	878.8	880.8	882.8	884.2	884.9	885.8	886.5	887.3	887.5
145°	921.1	922.7	924.2	925.8	927.4	928.9	930.2	931.5	932.9	934.2	934.4
147.5°	962.4	964.3	966.2	968.1	970.0	971.4	972.3	973.1	974.0	974.9	975.4
150°	990.7	992.0	993.3	994.7	996.0	997.1	998.0	999.0	999.9	1000.8	1001.4
152.5°	1015.6	1017.0	1018.3	1019.7	1021.1	1022.3	1023.3	1024.4	1025.4	1026.5	1027.4
155°	1053.2	1053.8	1054.5	1055.2	1055.8	1056.5	1057.2	1057.8	1058.5	1059.1	1060.4
157.5°	1085.2	1085.6	1086.1	1086.5	1087.0	1087.4	1087.8	1088.2	1088.6	1089.0	1090.6
160°	1104.6	1105.0	1105.4	1105.9	1106.3	1106.7	1106.9	1107.1	1107.3	1107.5	1108.9
162.5°	1122.3	1122.4	1122.5	1122.6	1122.7	1122.8	1123.1	1123.3	1123.5	1123.7	1125.2
165°	1145.9	1145.7	1145.4	1145.2	1145.0	1144.9	1144.9	1144.9	1144.9	1144.9	1146.4
167.5°	1165.6	1165.0	1164.3	1163.6	1163.0	1162.6	1162.6	1162.5	1162.5	1162.4	1164.0
170°	1176.1	1175.4	1174.8	1174.1	1173.4	1173.0	1172.8	1172.6	1172.3	1172.0	1173.7
172.5°	1183.4	1182.7	1182.0	1181.3	1180.6	1180.2	1180.0	1179.7	1179.5	1179.3	1180.9
175°	1192.2	1191.5	1190.8	1190.2	1189.5	1189.0	1188.5	1188.1	1187.6	1187.2	1188.7
177.5°	1195.9	1195.3	1194.8	1194.3	1193.7	1193.3	1192.9	1192.5	1192.1	1191.8	1192.9
180°	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3



TEST NUMBER: P331364-840

CATALOG NUMBER: SA2XXDIP-C675D925U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2	1072.2
2.5°	1067.5	1069.4	1071.3	1072.0	1071.6	1071.3	1070.9	1070.6
5°	1060.4	1062.2	1064.0	1064.7	1064.3	1063.8	1063.4	1062.9
7.5°	1048.4	1050.3	1052.1	1052.7	1052.2	1051.8	1051.3	1050.8
10°	1037.6	1039.6	1041.4	1041.9	1041.3	1040.6	1039.9	1039.2
12.5°	1025.0	1026.3	1027.6	1027.9	1027.4	1027.0	1026.5	1026.0
15°	1002.9	1003.8	1004.7	1004.6	1003.4	1002.3	1001.2	1000.0
17.5°	976.5	977.5	978.7	978.7	977.5	976.4	975.3	974.2
20°	956.0	956.7	957.4	957.3	956.3	955.4	954.5	953.6
22.5°	934.3	934.4	934.5	934.3	933.8	933.2	932.7	932.2
25°	898.9	899.3	899.8	899.8	899.3	898.9	898.4	898.0
27.5°	863.9	863.3	862.6	861.7	860.6	859.5	858.4	857.3
30°	836.8	836.1	835.4	834.6	833.6	832.7	831.8	830.9
32.5°	810.1	808.9	807.6	806.6	805.7	804.8	803.8	802.8
35°	767.4	766.0	764.6	763.4	762.2	761.0	759.9	758.7
37.5°	724.5	722.8	721.0	719.6	718.5	717.4	716.4	715.3
40°	694.9	692.8	690.7	689.2	688.3	687.4	686.5	685.6
42.5°	665.6	663.4	661.2	659.3	658.0	656.8	655.5	654.2
45°	620.8	618.2	615.7	614.0	613.1	612.2	611.3	610.3
47.5°	574.1	571.4	568.8	566.7	565.4	564.1	562.8	561.5
50°	544.1	540.9	537.7	535.5	534.3	533.2	532.1	530.9
52.5°	513.0	510.4	507.8	505.6	504.1	502.6	501.1	499.6
55°	466.7	463.9	461.2	459.2	458.1	457.0	455.8	454.6
57.5°	418.5	415.8	413.1	411.3	410.4	409.6	408.7	407.8
60°	386.7	384.2	381.6	380.1	379.4	378.7	378.0	377.3
62.5°	356.6	354.3	351.9	350.3	349.4	348.5	347.7	346.8
65°	310.3	308.2	306.2	304.6	303.5	302.3	301.1	300.0
67.5°	264.6	263.1	261.5	260.1	259.2	258.3	257.4	256.5
70°	234.9	233.4	231.8	230.5	229.5	228.6	227.7	226.8
72.5°	206.9	205.3	203.7	202.5	201.8	201.1	200.4	199.5
75°	163.2	161.9	160.5	160.1	160.5	161.0	161.4	161.9
77.5°	124.2	123.5	122.8	122.2	121.5	120.9	120.3	119.6
80°	98.7	98.0	97.3	96.6	96.2	95.7	95.3	94.8
82.5°	73.5	72.6	71.8	71.3	71.2	71.1	71.0	70.9
85°	38.9	38.2	37.5	37.0	36.8	36.6	36.4	36.1
87.5°	17.4	16.7	16.1	15.7	15.6	15.3	15.2	15.1
90°	34.3	33.9	33.5	33.3	33.6	33.8	34.0	34.2
92.5°	32.2	32.3	32.4	32.5	32.5	32.5	32.6	32.6
95°	64.5	64.5	64.5	64.2	63.8	63.4	62.9	62.5
97.5°	108.5	108.5	108.5	108.5	108.4	108.4	108.3	108.3
100°	139.1	139.1	139.1	139.0	138.8	138.6	138.3	138.0
102.5°	172.5	172.7	172.9	172.8	172.6	172.4	172.2	172.0
105°	222.6	223.1	223.5	223.7	223.7	223.7	223.7	223.7
107.5°	276.7	276.9	277.0	276.6	275.6	274.6	273.6	272.5
110°	313.5	313.5	313.5	313.1	312.5	311.7	311.0	310.4



TEST NUMBER: P331364-840

CATALOG NUMBER: SA2XXDIP-C675D925U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	350.2	349.7	349.2	348.6	348.2	347.7	347.2	346.7
115°	406.7	406.5	406.3	405.8	405.2	404.5	403.7	403.1
117.5°	461.3	460.8	460.2	459.6	459.0	458.3	457.6	457.0
120°	497.9	497.9	497.9	497.6	496.9	496.1	495.5	494.8
122.5°	535.4	534.9	534.4	533.9	533.4	532.9	532.4	531.9
125°	591.3	590.6	589.9	589.5	589.3	589.0	588.8	588.5
127.5°	645.4	644.6	643.8	643.0	642.3	641.6	640.9	640.2
130°	682.4	682.0	681.5	680.9	679.9	679.0	678.1	677.2
132.5°	718.4	717.4	716.4	715.6	714.9	714.2	713.5	712.8
135°	771.5	771.3	771.0	770.6	769.9	769.3	768.6	767.9
137.5°	822.4	822.2	822.0	821.5	820.6	819.7	818.8	817.9
140°	856.7	856.7	856.7	856.2	855.3	854.3	853.5	852.6
142.5°	887.7	887.8	888.0	887.7	886.8	885.9	884.9	884.0
145°	934.6	934.9	935.1	934.8	933.9	933.0	932.1	931.2
147.5°	975.9	976.4	976.9	976.7	975.9	975.0	974.2	973.3
150°	1002.1	1002.8	1003.4	1003.4	1002.8	1002.1	1001.4	1000.8
152.5°	1028.2	1029.1	1030.0	1030.0	1029.1	1028.2	1027.4	1026.5
155°	1061.5	1062.6	1063.7	1063.9	1063.2	1062.6	1061.9	1061.2
157.5°	1092.1	1093.6	1095.1	1095.3	1094.3	1093.2	1092.1	1091.1
160°	1110.2	1111.6	1113.0	1113.2	1112.3	1111.4	1110.4	1109.5
162.5°	1126.7	1128.2	1129.7	1130.0	1128.9	1127.8	1126.8	1125.7
165°	1148.0	1149.5	1151.1	1151.3	1150.2	1149.1	1148.0	1146.9
167.5°	1165.5	1167.1	1168.6	1168.8	1167.7	1166.5	1165.4	1164.2
170°	1175.2	1176.8	1178.3	1178.4	1177.1	1175.8	1174.4	1173.1
172.5°	1182.5	1184.1	1185.6	1185.7	1184.4	1183.1	1181.6	1180.3
175°	1190.3	1191.8	1193.5	1193.6	1192.2	1190.8	1189.5	1188.2
177.5°	1194.0	1195.1	1196.1	1196.1	1195.1	1194.0	1192.9	1191.8
180°	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3	1194.3

(END OF REPORT)