

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331382-840

Luminaire Tested: **SA2XXDIP-C865D330U840-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P331382-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA2XXDIP-C865D330U840-4F0-1E-UDD-F1  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 330 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4729.5 lumens  
Efficiency: N/A  
Efficacy: 108.7 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 43.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331382-840

CATALOG NUMBER: SA2XXDIP-C865D330U840-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

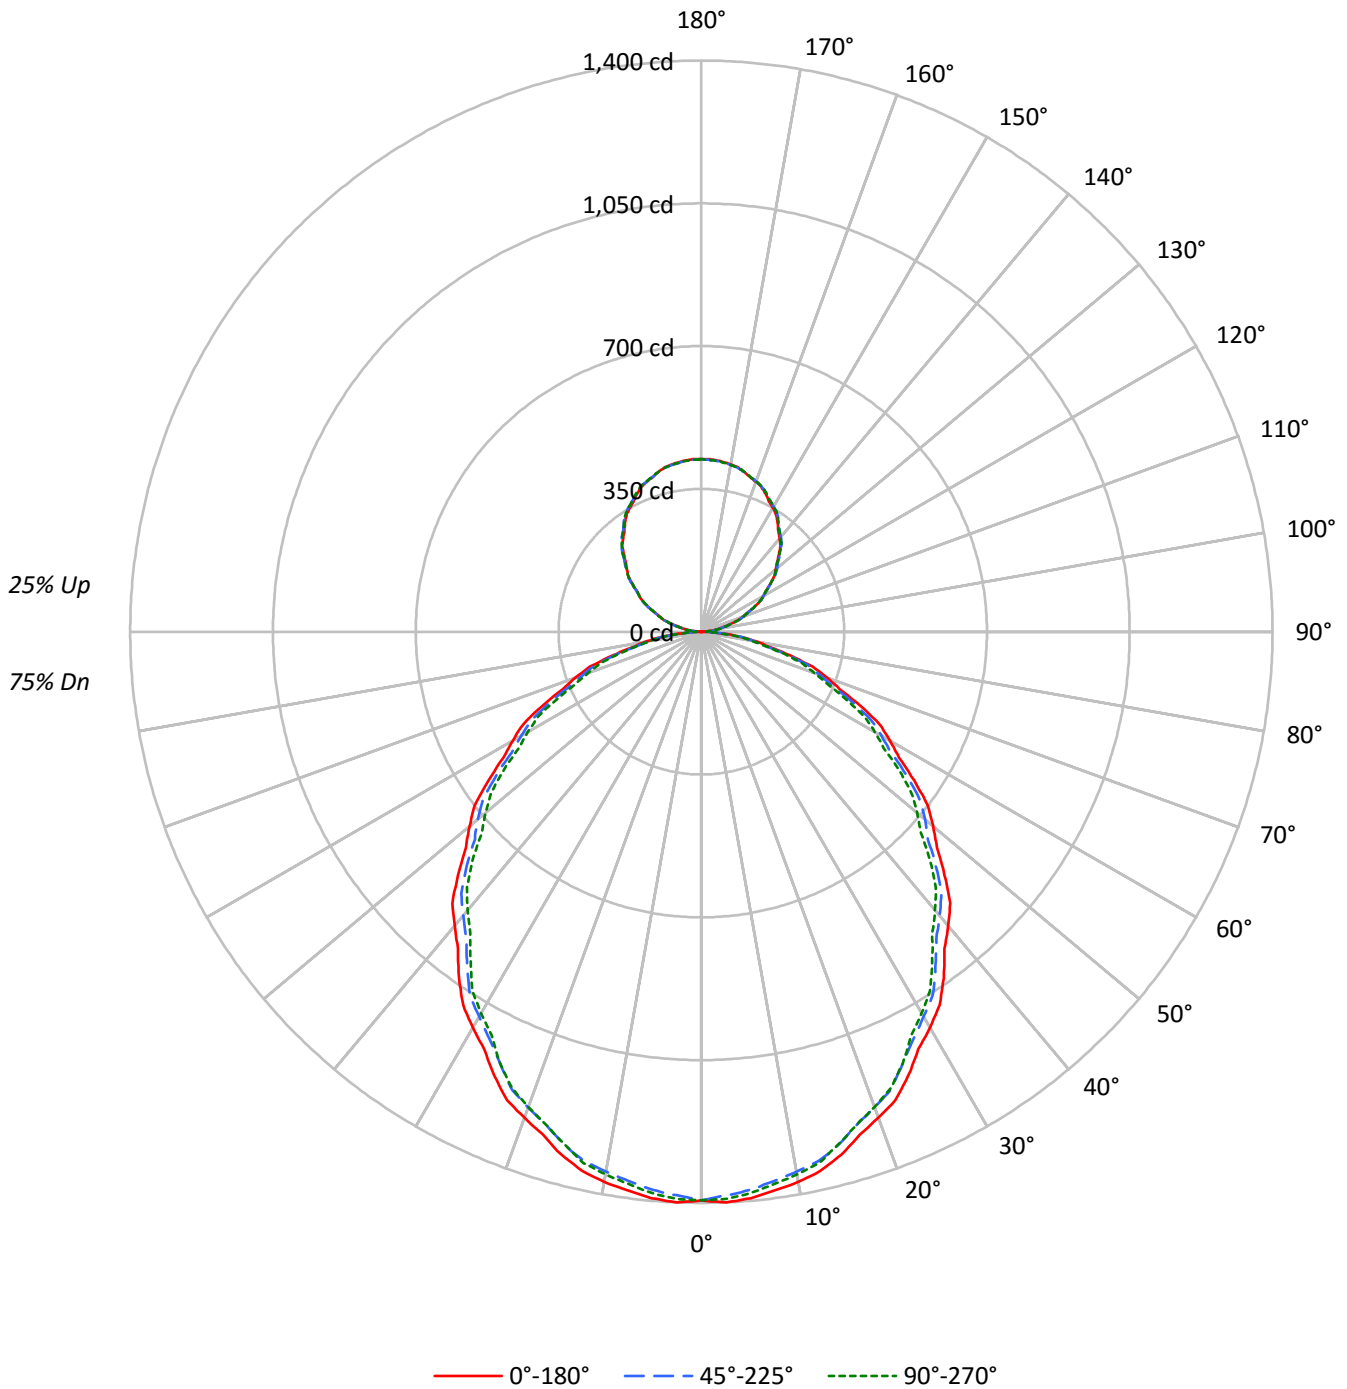



TEST NUMBER: P331382-840

CATALOG NUMBER: SA2XXDIP-C865D330U840-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	113	113	113	113	108	108	108	108	97	97	97	88	88	88	79	79	79	75
1	103	99	95	91	98	94	91	87	85	83	80	77	75	73	70	68	67	63
2	94	86	80	75	89	82	77	72	75	70	66	68	64	61	62	59	56	53
3	86	76	68	62	81	73	66	60	66	61	56	60	56	52	55	51	48	45
4	79	67	59	53	75	64	57	51	59	53	48	54	49	45	49	45	41	38
5	72	60	52	45	69	58	50	44	53	46	41	48	43	39	44	40	36	33
6	67	54	46	40	63	52	44	39	48	41	36	44	38	34	40	35	32	29
7	62	49	41	35	59	47	39	34	43	37	32	40	34	30	37	32	28	26
8	58	45	37	31	55	43	36	30	40	33	29	37	31	27	34	29	25	23
9	54	41	33	28	51	39	32	27	36	30	26	34	28	24	31	26	23	21
10	50	38	30	25	48	36	29	25	34	28	23	31	26	22	29	24	21	19

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	22501	22501	22501
5°	22587	22261	22392
10°	22453	22035	22146
15°	22176	21750	21727
20°	21782	21321	21297
25°	21389	20794	20794
30°	20885	20310	20137
35°	20416	19730	19438
40°	19827	19150	18782
45°	19244	18573	18114
50°	18613	17975	17334
55°	17954	17275	16636
60°	17221	16443	15839
65°	16435	15614	14896
70°	15437	14611	13917
75°	14042	13456	13125
80°	12459	12087	11464
85°	10170	9689	8688



TEST NUMBER: P331382-840

CATALOG NUMBER: SA2XXDIP-C865D330U840-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	131.0	2.8
10°-20°	368.7	7.8
20°-30°	542.0	11.5
30°-40°	629.6	13.3
40°-50°	628.9	13.3
50°-60°	548.4	11.6
60°-70°	405.5	8.6
70°-80°	229.7	4.9
80°-90°	63.5	1.3
90°-100°	26.8	0.6
100°-110°	83.2	1.8
110°-120°	142.2	3.0
120°-130°	187.0	4.0
130°-140°	209.9	4.4
140°-150°	205.8	4.4
150°-160°	172.7	3.7
160°-170°	114.5	2.4
170°-180°	40.0	0.8
0°-30°	1041.8	22.0
0°-40°	1671.3	35.3
0°-60°	2848.6	60.2
0°-90°	3547.3	75.0
90°-120°	252.2	5.3
90°-150°	855.0	18.1
90°-180°	1182.0	25.0
0°-180°	4729.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1394	1394	1394	1394	1394	
5°	1394	1388	1374	1384	1382	132
15°	1327	1318	1301	1306	1300	373
25°	1201	1189	1167	1170	1167	552
35°	1036	1022	1001	993	986	646
45°	843	833	813	799	793	650
55°	638	629	614	598	591	570
65°	430	422	409	397	390	425
75°	225	222	216	208	210	240
85°	55	54	52	48	47	63
90°	0	5	12	12	12	4
95°	19	22	23	23	22	21
105°	77	78	78	79	79	81
115°	143	145	144	144	143	141
125°	208	211	210	209	208	185
135°	269	272	273	273	272	207
145°	326	329	331	331	330	204
155°	373	374	375	377	376	172
165°	406	405	405	408	406	114
175°	422	421	420	422	421	40
180°	423	423	423	423	423	



TEST NUMBER: P331382-840

CATALOG NUMBER: SA2XXDIP-C865D330U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6
2.5°	1400.1	1398.9	1397.7	1396.5	1395.3	1393.4	1390.8	1388.2	1385.5	1382.9	1385.3
5°	1393.6	1392.4	1391.3	1390.1	1388.9	1386.6	1383.4	1380.1	1376.8	1373.5	1375.9
7.5°	1381.3	1379.5	1377.7	1375.7	1373.9	1371.3	1368.0	1364.6	1361.3	1358.0	1360.4
10°	1369.5	1367.5	1365.3	1363.2	1361.2	1358.4	1354.7	1351.2	1347.7	1344.0	1346.5
12.5°	1353.4	1351.6	1349.8	1347.9	1346.0	1343.3	1339.8	1336.2	1332.6	1329.1	1330.7
15°	1326.7	1324.8	1323.0	1321.3	1319.5	1316.7	1312.8	1308.9	1305.0	1301.2	1302.3
17.5°	1292.3	1290.5	1288.8	1287.0	1285.2	1282.3	1278.4	1274.4	1270.5	1266.6	1268.0
20°	1267.7	1265.9	1264.1	1262.3	1260.5	1257.6	1253.3	1249.2	1245.1	1240.9	1241.7
22.5°	1243.0	1240.5	1238.0	1235.5	1233.0	1229.8	1225.9	1221.9	1218.0	1214.1	1214.3
25°	1200.6	1198.3	1195.9	1193.6	1191.1	1187.4	1182.3	1177.3	1172.3	1167.2	1167.8
27.5°	1152.5	1150.3	1148.1	1146.0	1143.9	1140.7	1136.8	1132.8	1128.8	1124.8	1124.0
30°	1120.2	1117.9	1115.5	1113.2	1110.8	1107.3	1102.9	1098.4	1093.9	1089.4	1088.5
32.5°	1086.0	1084.1	1082.2	1080.3	1078.3	1075.0	1070.4	1065.6	1061.0	1056.2	1054.6
35°	1035.8	1032.9	1029.9	1026.9	1023.9	1020.1	1015.3	1010.6	1005.7	1001.0	999.3
37.5°	979.3	976.6	974.0	971.4	968.9	965.1	960.4	955.6	950.8	946.0	943.8
40°	940.7	938.4	935.9	933.5	931.2	927.6	922.8	918.1	913.3	908.6	905.8
42.5°	903.2	900.8	898.4	896.1	893.6	890.1	885.3	880.6	875.8	871.0	868.1
45°	842.8	840.8	838.7	836.7	834.6	831.2	826.8	822.3	817.9	813.4	810.1
47.5°	782.8	780.9	778.9	777.0	775.0	771.6	767.0	762.3	757.7	753.1	749.6
50°	741.0	739.5	738.1	736.6	735.1	732.3	728.1	723.9	719.7	715.6	711.4
52.5°	700.3	698.3	696.4	694.4	692.5	689.5	685.6	681.7	677.7	673.8	670.3
55°	637.8	636.1	634.3	632.5	630.7	628.0	624.5	620.9	617.3	613.7	610.2
57.5°	575.1	573.7	572.3	570.9	569.5	566.7	562.8	558.9	554.9	551.0	547.5
60°	533.3	532.1	531.0	529.8	528.6	525.9	521.7	517.6	513.4	509.2	505.9
62.5°	492.6	490.7	488.8	486.9	484.9	482.4	479.2	475.9	472.7	469.6	466.6
65°	430.2	428.4	426.6	424.7	423.0	420.6	417.7	414.7	411.7	408.7	406.1
67.5°	366.7	365.2	363.8	362.3	360.9	358.9	356.2	353.5	350.8	348.1	346.1
70°	327.0	325.8	324.6	323.4	322.2	320.2	317.6	314.9	312.3	309.5	307.5
72.5°	286.2	285.1	283.9	282.7	281.4	280.0	278.3	276.6	274.8	273.1	271.0
75°	225.1	224.5	223.9	223.4	222.8	221.7	220.3	218.7	217.2	215.7	214.0
77.5°	170.5	169.5	168.4	167.4	166.4	165.6	165.0	164.4	163.8	163.2	162.3
80°	134.0	133.7	133.4	133.1	132.8	132.4	131.8	131.2	130.6	130.0	129.1
82.5°	99.7	99.7	99.6	99.5	99.5	99.3	98.9	98.6	98.2	97.9	96.6
85°	54.9	54.6	54.3	54.0	53.7	53.4	53.1	52.8	52.5	52.3	51.4
87.5°	19.4	19.1	18.8	18.5	18.2	18.0	17.9	17.8	17.7	17.5	16.8
90°	0.4	1.3	2.2	3.2	4.1	5.6	7.3	9.0	10.7	12.5	12.3
92.5°	6.4	7.1	7.8	8.5	9.2	9.7	10.1	10.5	10.9	11.3	11.4
95°	18.6	19.4	20.1	20.9	21.7	22.2	22.3	22.5	22.7	22.8	22.8
97.5°	33.9	34.6	35.2	36.0	36.7	37.2	37.5	37.8	38.1	38.4	38.4
100°	45.3	45.9	46.6	47.3	47.9	48.3	48.5	48.8	49.0	49.3	49.3
102.5°	57.3	57.8	58.3	58.8	59.3	59.8	60.0	60.3	60.6	60.9	61.0
105°	76.7	77.0	77.2	77.5	77.7	77.9	78.1	78.2	78.4	78.5	78.7
107.5°	96.2	96.6	96.9	97.4	97.7	97.9	97.9	97.9	97.9	97.9	97.9
110°	108.9	109.3	109.8	110.3	110.7	111.0	111.0	111.0	111.0	111.0	111.0



TEST NUMBER: P331382-840

CATALOG NUMBER: SA2XXDIP-C865D330U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	122.5	123.0	123.5	123.9	124.4	124.6	124.5	124.5	124.4	124.4	124.2
115°	142.7	143.2	143.7	144.1	144.6	144.8	144.6	144.4	144.3	144.1	144.1
117.5°	162.8	163.5	164.1	164.7	165.4	165.5	165.0	164.6	164.1	163.7	163.5
120°	176.2	176.9	177.5	178.1	178.7	178.7	178.1	177.5	176.9	176.2	176.2
122.5°	188.5	189.2	190.1	190.8	191.6	191.8	191.3	190.9	190.4	190.0	189.8
125°	207.6	208.3	209.0	209.7	210.5	210.8	210.5	210.3	210.1	209.7	209.5
127.5°	226.3	227.2	228.1	228.9	229.8	230.1	229.9	229.6	229.3	229.0	228.7
130°	238.0	239.0	240.0	241.1	242.1	242.6	242.4	242.3	242.1	241.9	241.8
132.5°	251.2	252.0	252.8	253.6	254.5	254.9	254.9	255.0	255.0	255.0	254.7
135°	268.6	269.5	270.4	271.2	272.2	272.7	272.9	273.0	273.2	273.3	273.2
137.5°	287.1	287.8	288.5	289.3	290.0	290.4	290.6	290.8	291.0	291.2	291.2
140°	298.3	299.0	299.7	300.4	301.1	301.6	302.1	302.5	302.9	303.3	303.3
142.5°	309.7	310.4	311.1	311.8	312.6	313.1	313.3	313.6	313.9	314.1	314.2
145°	326.1	326.7	327.2	327.8	328.3	328.8	329.3	329.8	330.2	330.7	330.8
147.5°	340.7	341.4	342.0	342.7	343.4	343.9	344.2	344.6	344.9	345.2	345.4
150°	350.7	351.2	351.6	352.1	352.6	353.0	353.4	353.7	354.0	354.3	354.6
152.5°	359.6	360.0	360.5	361.0	361.4	361.9	362.2	362.6	363.0	363.5	363.8
155°	372.8	373.0	373.3	373.5	373.8	374.1	374.3	374.5	374.8	375.0	375.4
157.5°	384.2	384.4	384.5	384.7	384.9	385.0	385.2	385.3	385.4	385.6	386.1
160°	391.0	391.2	391.3	391.5	391.6	391.8	391.8	391.9	392.0	392.1	392.5
162.5°	397.3	397.4	397.4	397.4	397.5	397.5	397.6	397.7	397.8	397.8	398.4
165°	405.7	405.6	405.5	405.5	405.4	405.3	405.3	405.3	405.3	405.3	405.9
167.5°	412.6	412.4	412.2	411.9	411.7	411.6	411.5	411.5	411.5	411.5	412.0
170°	416.4	416.2	415.9	415.7	415.5	415.3	415.2	415.1	415.1	415.0	415.5
172.5°	418.9	418.7	418.5	418.2	418.0	417.8	417.8	417.7	417.6	417.5	418.1
175°	422.1	421.8	421.6	421.3	421.1	420.9	420.8	420.6	420.4	420.3	420.8
177.5°	423.3	423.1	422.9	422.8	422.6	422.4	422.3	422.2	422.0	421.9	422.3
180°	422.8	422.8	422.8	422.8	422.8	422.8	422.8	422.8	422.8	422.8	422.8



TEST NUMBER: P331382-840

CATALOG NUMBER: SA2XXDIP-C865D330U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6
2.5°	1387.7	1390.1	1392.4	1393.4	1392.9	1392.4	1392.0	1391.5
5°	1378.3	1380.7	1383.1	1383.9	1383.4	1382.8	1382.2	1381.6
7.5°	1362.7	1365.1	1367.6	1368.4	1367.8	1367.1	1366.4	1365.7
10°	1348.8	1351.2	1353.6	1354.3	1353.4	1352.5	1351.6	1350.8
12.5°	1332.4	1334.0	1335.7	1336.3	1335.5	1334.9	1334.2	1333.6
15°	1303.5	1304.7	1306.0	1305.8	1304.3	1302.8	1301.3	1299.8
17.5°	1269.3	1270.7	1272.1	1272.0	1270.6	1269.2	1267.8	1266.4
20°	1242.6	1243.5	1244.5	1244.3	1243.1	1241.9	1240.7	1239.5
22.5°	1214.5	1214.6	1214.8	1214.6	1213.8	1213.0	1212.3	1211.6
25°	1168.4	1168.9	1169.5	1169.5	1168.9	1168.4	1167.8	1167.2
27.5°	1123.1	1122.2	1121.3	1120.1	1118.6	1117.2	1115.8	1114.4
30°	1087.6	1086.8	1085.9	1084.8	1083.7	1082.5	1081.3	1080.1
32.5°	1053.0	1051.4	1049.8	1048.3	1047.2	1046.0	1044.8	1043.6
35°	997.4	995.6	993.9	992.2	990.8	989.3	987.7	986.2
37.5°	941.7	939.5	937.3	935.4	934.0	932.6	931.2	929.7
40°	903.2	900.5	897.9	895.9	894.7	893.5	892.3	891.1
42.5°	865.2	862.2	859.4	857.1	855.4	853.7	852.0	850.4
45°	806.9	803.5	800.3	798.1	796.9	795.7	794.5	793.3
47.5°	746.2	742.8	739.3	736.7	735.0	733.3	731.5	729.8
50°	707.2	703.1	698.9	696.1	694.6	693.1	691.7	690.1
52.5°	666.8	663.4	659.9	657.2	655.3	653.3	651.4	649.3
55°	606.6	603.0	599.5	596.9	595.4	593.9	592.5	591.0
57.5°	544.0	540.5	536.9	534.6	533.5	532.4	531.3	530.1
60°	502.7	499.4	496.1	494.0	493.1	492.2	491.3	490.5
62.5°	463.4	460.4	457.4	455.3	454.1	453.0	451.9	450.8
65°	403.3	400.7	398.0	395.9	394.5	392.9	391.4	389.9
67.5°	344.0	341.8	339.8	338.2	337.0	335.8	334.6	333.4
70°	305.4	303.3	301.2	299.5	298.4	297.2	296.0	294.8
72.5°	268.9	266.8	264.8	263.3	262.3	261.4	260.3	259.4
75°	212.2	210.4	208.6	208.0	208.6	209.2	209.7	210.4
77.5°	161.5	160.6	159.7	158.8	157.9	157.1	156.3	155.4
80°	128.2	127.3	126.4	125.6	125.0	124.5	123.9	123.3
82.5°	95.5	94.4	93.3	92.7	92.5	92.4	92.3	92.2
85°	50.5	49.6	48.7	48.1	47.8	47.5	47.2	46.9
87.5°	16.1	15.2	14.5	14.0	13.8	13.6	13.3	13.1
90°	12.2	12.0	11.8	11.8	11.9	12.0	12.0	12.1
92.5°	11.4	11.4	11.5	11.5	11.5	11.5	11.5	11.5
95°	22.8	22.8	22.8	22.7	22.6	22.4	22.3	22.1
97.5°	38.4	38.4	38.4	38.4	38.4	38.4	38.4	38.3
100°	49.3	49.3	49.3	49.2	49.1	49.1	49.0	48.9
102.5°	61.1	61.1	61.2	61.2	61.1	61.0	61.0	60.9
105°	78.8	79.0	79.2	79.2	79.2	79.2	79.2	79.2
107.5°	98.0	98.1	98.1	98.0	97.6	97.3	96.8	96.4
110°	111.0	111.0	111.0	110.9	110.6	110.4	110.2	109.9





TEST NUMBER: P331382-840

CATALOG NUMBER: SA2XXDIP-C865D330U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	124.0	123.8	123.6	123.4	123.3	123.1	122.9	122.7
115°	144.0	143.9	143.8	143.7	143.4	143.2	143.0	142.7
117.5°	163.3	163.1	162.9	162.7	162.5	162.3	162.0	161.8
120°	176.2	176.2	176.2	176.1	175.9	175.6	175.4	175.2
122.5°	189.6	189.3	189.1	189.0	188.8	188.6	188.4	188.3
125°	209.3	209.0	208.8	208.6	208.6	208.5	208.4	208.3
127.5°	228.5	228.2	227.9	227.6	227.4	227.1	226.9	226.6
130°	241.6	241.5	241.3	241.1	240.8	240.3	240.0	239.7
132.5°	254.3	254.0	253.7	253.4	253.1	252.9	252.6	252.4
135°	273.2	273.1	273.0	272.9	272.6	272.4	272.2	271.9
137.5°	291.1	291.0	291.0	290.8	290.5	290.2	289.9	289.5
140°	303.3	303.3	303.3	303.1	302.8	302.5	302.2	301.8
142.5°	314.3	314.3	314.4	314.3	314.0	313.6	313.3	313.0
145°	330.9	330.9	331.0	330.9	330.6	330.3	330.0	329.6
147.5°	345.5	345.7	345.9	345.8	345.5	345.2	344.9	344.6
150°	354.8	355.0	355.3	355.3	355.0	354.8	354.6	354.3
152.5°	364.1	364.4	364.7	364.7	364.4	364.1	363.8	363.5
155°	375.8	376.2	376.6	376.7	376.4	376.2	376.0	375.7
157.5°	386.6	387.2	387.7	387.8	387.4	387.0	386.7	386.3
160°	393.0	393.5	394.0	394.0	393.7	393.4	393.1	392.8
162.5°	398.9	399.4	400.0	400.0	399.7	399.3	398.9	398.5
165°	406.4	407.0	407.5	407.6	407.2	406.8	406.4	406.1
167.5°	412.6	413.1	413.7	413.8	413.4	412.9	412.5	412.1
170°	416.1	416.6	417.2	417.2	416.8	416.3	415.8	415.3
172.5°	418.6	419.2	419.7	419.8	419.3	418.8	418.4	417.9
175°	421.4	421.9	422.5	422.5	422.1	421.6	421.1	420.6
177.5°	422.7	423.0	423.4	423.4	423.0	422.7	422.3	421.9
180°	422.8	422.8	422.8	422.8	422.8	422.8	422.8	422.8

(END OF REPORT)