

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331401-840

Luminaire Tested: **SA2XXDIP-C865D725U840-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P331401-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA2XXDIP-C865D725U840-4F0-1E-UDD-F4  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 725 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6405.8 lumens  
Efficiency: N/A  
Efficacy: 117.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 54.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331401-840  
CATALOG NUMBER: SA2XXDIP-C865D725U840-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

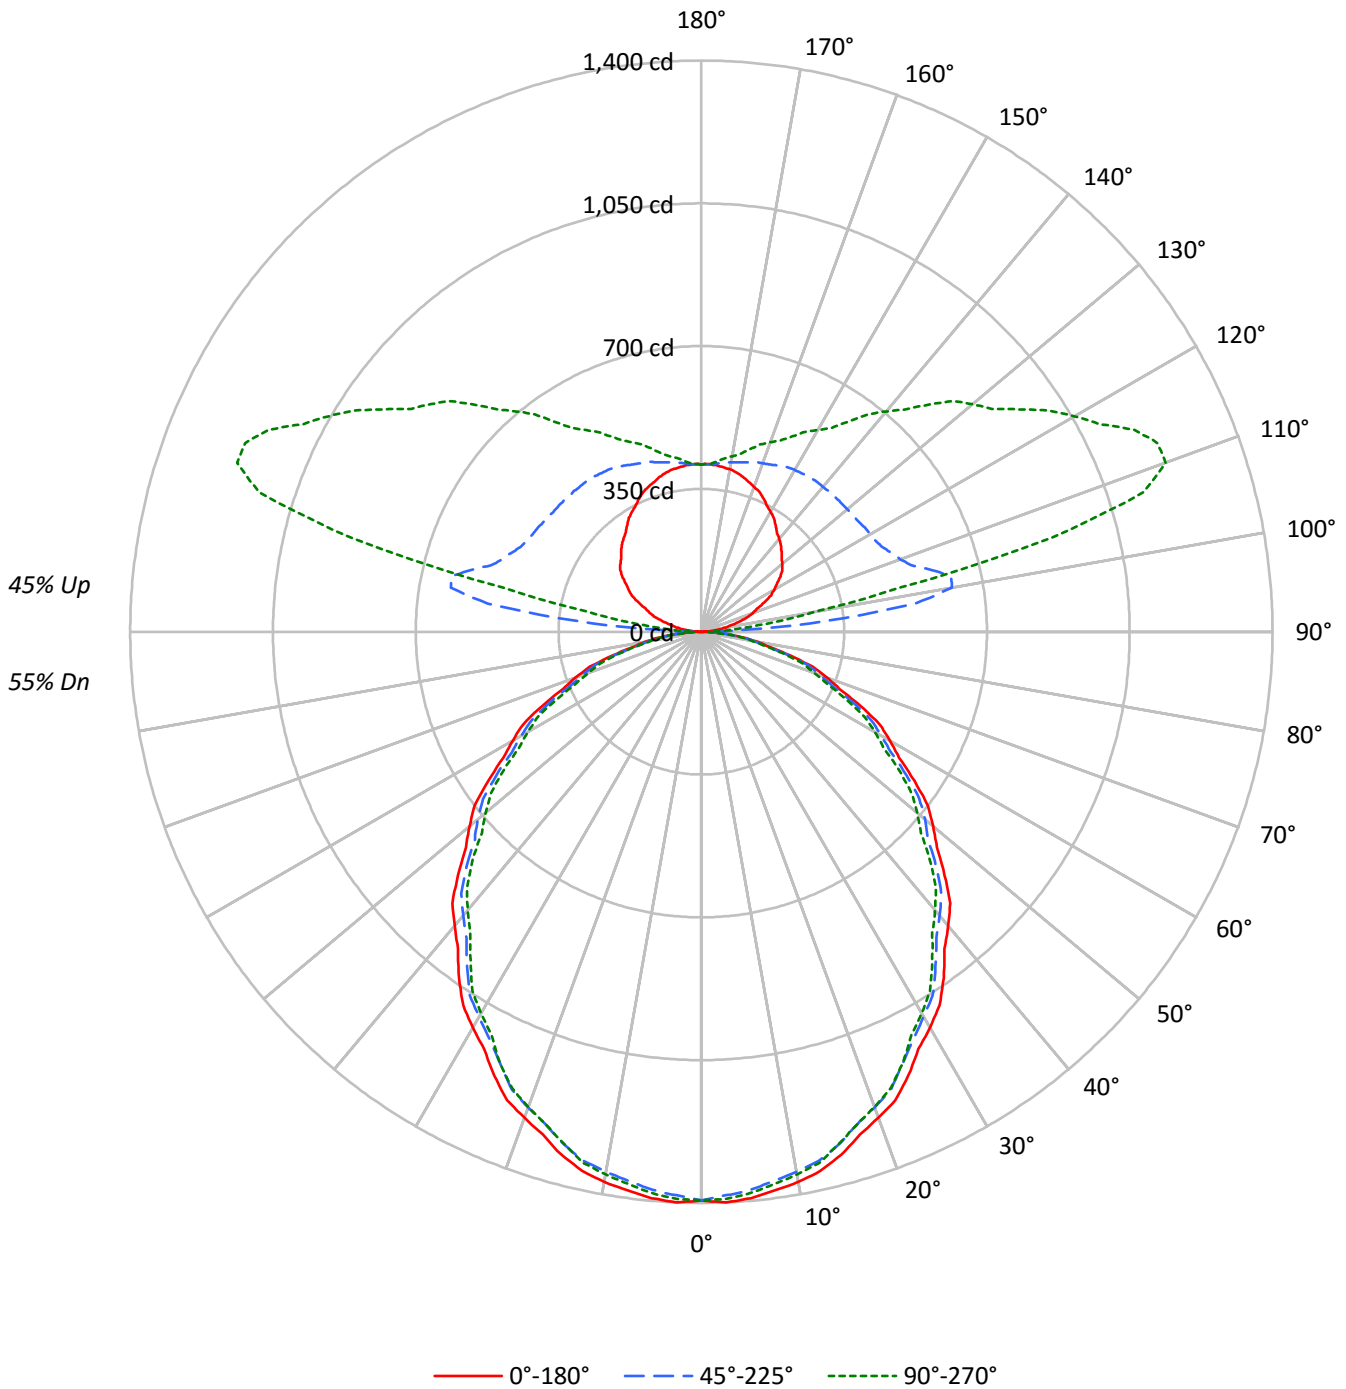



TEST NUMBER: P331401-840

CATALOG NUMBER: SA2XXDIP-C865D725U840-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	95	91	87	92	88	85	82	76	73	71	64	63	61	54	53	52	47
2	90	83	76	71	83	77	72	67	66	62	59	57	54	51	48	45	43	39
3	82	73	65	59	76	68	61	56	59	54	49	50	46	43	42	39	37	33
4	75	64	56	50	70	60	53	47	52	47	42	45	40	37	38	34	32	28
5	69	57	49	43	64	54	46	41	47	41	36	40	36	32	34	31	28	25
6	64	51	43	37	59	48	41	36	42	36	32	36	32	28	31	27	24	22
7	59	47	38	33	55	44	36	31	38	32	28	33	28	25	28	25	22	19
8	55	42	34	29	51	40	33	28	35	29	25	30	26	22	26	22	20	17
9	51	39	31	26	47	36	29	25	32	26	22	28	23	20	24	20	18	16
10	48	35	28	23	44	33	27	22	29	24	20	26	21	18	22	19	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	22501	22501	22501
5°	22587	22261	22392
10°	22453	22035	22146
15°	22176	21750	21727
20°	21782	21321	21297
25°	21389	20794	20794
30°	20885	20310	20137
35°	20416	19730	19438
40°	19827	19150	18782
45°	19244	18573	18114
50°	18613	17975	17334
55°	17954	17275	16636
60°	17221	16443	15839
65°	16435	15614	14896
70°	15437	14611	13917
75°	14042	13456	13125
80°	12459	12087	11464
85°	10170	9689	8688



TEST NUMBER: P331401-840

CATALOG NUMBER: SA2XXDIP-C865D725U840-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	131.0	2.0
10°-20°	368.7	5.8
20°-30°	542.0	8.5
30°-40°	629.6	9.8
40°-50°	628.9	9.8
50°-60°	548.4	8.6
60°-70°	405.5	6.3
70°-80°	229.7	3.6
80°-90°	65.5	1.0
90°-100°	164.1	2.6
100°-110°	557.0	8.7
110°-120°	591.7	9.2
120°-130°	487.1	7.6
130°-140°	391.2	6.1
140°-150°	295.6	4.6
150°-160°	207.7	3.2
160°-170°	122.3	1.9
170°-180°	39.8	0.6
0°-30°	1041.8	16.3
0°-40°	1671.3	26.1
0°-60°	2848.6	44.5
0°-90°	3549.3	55.4
90°-120°	1312.8	20.5
90°-150°	2486.7	38.8
90°-180°	2856.0	44.6
0°-180°	6405.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1394	1394	1394	1394	1394	
5°	1394	1388	1374	1384	1382	132
15°	1327	1318	1301	1306	1300	373
25°	1201	1189	1167	1170	1167	552
35°	1036	1022	1001	993	986	646
45°	843	833	813	799	793	650
55°	638	629	614	598	591	570
65°	430	422	409	397	390	425
75°	225	222	216	208	210	240
85°	55	54	52	48	47	63
90°	1	11	27	26	26	4
95°	28	68	309	117	90	29
105°	96	145	585	1046	890	102
115°	170	214	490	1010	1171	168
125°	237	280	470	818	950	210
135°	278	332	465	688	787	215
145°	317	365	463	574	628	199
155°	361	390	449	508	528	166
165°	393	405	430	456	463	111
175°	410	410	414	419	418	39
180°	410	410	410	410	410	



TEST NUMBER: P331401-840

CATALOG NUMBER: SA2XXDIP-C865D725U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6
2.5°	1400.1	1398.9	1397.7	1396.5	1395.3	1393.4	1390.8	1388.2	1385.5	1382.9	1385.3
5°	1393.6	1392.4	1391.3	1390.1	1388.9	1386.6	1383.4	1380.1	1376.8	1373.5	1375.9
7.5°	1381.3	1379.5	1377.7	1375.7	1373.9	1371.3	1368.0	1364.6	1361.3	1358.0	1360.4
10°	1369.5	1367.5	1365.3	1363.2	1361.2	1358.4	1354.7	1351.2	1347.7	1344.0	1346.5
12.5°	1353.4	1351.6	1349.8	1347.9	1346.0	1343.3	1339.8	1336.2	1332.6	1329.1	1330.7
15°	1326.7	1324.8	1323.0	1321.3	1319.5	1316.7	1312.8	1308.9	1305.0	1301.2	1302.3
17.5°	1292.3	1290.5	1288.8	1287.0	1285.2	1282.3	1278.4	1274.4	1270.5	1266.6	1268.0
20°	1267.7	1265.9	1264.1	1262.3	1260.5	1257.6	1253.3	1249.2	1245.1	1240.9	1241.7
22.5°	1243.0	1240.5	1238.0	1235.5	1233.0	1229.8	1225.9	1221.9	1218.0	1214.1	1214.3
25°	1200.6	1198.3	1195.9	1193.6	1191.1	1187.4	1182.3	1177.3	1172.3	1167.2	1167.8
27.5°	1152.5	1150.3	1148.1	1146.0	1143.9	1140.7	1136.8	1132.8	1128.8	1124.8	1124.0
30°	1120.2	1117.9	1115.5	1113.2	1110.8	1107.3	1102.9	1098.4	1093.9	1089.4	1088.5
32.5°	1086.0	1084.1	1082.2	1080.3	1078.3	1075.0	1070.4	1065.6	1061.0	1056.2	1054.6
35°	1035.8	1032.9	1029.9	1026.9	1023.9	1020.1	1015.3	1010.6	1005.7	1001.0	999.3
37.5°	979.3	976.6	974.0	971.4	968.9	965.1	960.4	955.6	950.8	946.0	943.8
40°	940.7	938.4	935.9	933.5	931.2	927.6	922.8	918.1	913.3	908.6	905.8
42.5°	903.2	900.8	898.4	896.1	893.6	890.1	885.3	880.6	875.8	871.0	868.1
45°	842.8	840.8	838.7	836.7	834.6	831.2	826.8	822.3	817.9	813.4	810.1
47.5°	782.8	780.9	778.9	777.0	775.0	771.6	767.0	762.3	757.7	753.1	749.6
50°	741.0	739.5	738.1	736.6	735.1	732.3	728.1	723.9	719.7	715.6	711.4
52.5°	700.3	698.3	696.4	694.4	692.5	689.5	685.6	681.7	677.7	673.8	670.3
55°	637.8	636.1	634.3	632.5	630.7	628.0	624.5	620.9	617.3	613.7	610.2
57.5°	575.1	573.7	572.3	570.9	569.5	566.7	562.8	558.9	554.9	551.0	547.5
60°	533.3	532.1	531.0	529.8	528.6	525.9	521.7	517.6	513.4	509.2	505.9
62.5°	492.6	490.7	488.8	486.9	484.9	482.4	479.2	475.9	472.7	469.6	466.6
65°	430.2	428.4	426.6	424.7	423.0	420.6	417.7	414.7	411.7	408.7	406.1
67.5°	366.7	365.2	363.8	362.3	360.9	358.9	356.2	353.5	350.8	348.1	346.1
70°	327.0	325.8	324.6	323.4	322.2	320.2	317.6	314.9	312.3	309.5	307.5
72.5°	286.2	285.1	283.9	282.7	281.4	280.0	278.3	276.6	274.8	273.1	271.0
75°	225.1	224.5	223.9	223.4	222.8	221.7	220.3	218.7	217.2	215.7	214.0
77.5°	170.5	169.5	168.4	167.4	166.4	165.6	165.0	164.4	163.8	163.2	162.3
80°	134.0	133.7	133.4	133.1	132.8	132.4	131.8	131.2	130.6	130.0	129.1
82.5°	99.7	99.7	99.6	99.5	99.5	99.3	98.9	98.6	98.2	97.9	96.6
85°	54.9	54.6	54.3	54.0	53.7	53.4	53.1	52.8	52.5	52.3	51.4
87.5°	19.5	19.5	19.6	19.5	19.3	19.3	19.6	20.2	20.7	20.4	19.5
90°	0.8	3.1	6.4	7.9	9.5	11.8	15.8	21.3	26.1	26.9	26.1
92.5°	9.6	13.9	19.6	23.0	28.4	35.9	53.7	78.8	101.2	102.6	86.6
95°	27.7	30.8	38.7	45.7	58.4	77.4	113.7	182.4	274.0	309.4	270.7
97.5°	45.0	49.3	57.7	68.4	82.9	104.3	150.0	245.7	397.9	528.3	554.2
100°	60.8	63.1	70.3	82.9	98.7	120.8	162.6	258.9	429.4	623.6	737.3
102.5°	75.3	77.1	84.1	96.7	113.2	135.3	174.0	259.5	417.5	626.8	805.5
105°	96.3	99.5	105.0	116.8	134.2	156.3	193.4	263.7	393.9	584.9	795.0
107.5°	119.1	121.6	126.9	137.8	155.0	177.3	213.3	274.6	382.2	540.1	725.6
110°	134.2	137.3	142.1	152.4	169.0	191.9	226.5	283.4	379.7	518.7	682.1



TEST NUMBER: P331401-840

CATALOG NUMBER: SA2XXDIP-C865D725U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	148.0	151.3	156.6	166.2	182.2	205.7	239.2	292.9	380.3	504.7	651.8
115°	169.8	173.7	178.4	187.8	203.7	225.0	258.9	307.1	383.6	489.5	614.2
117.5°	192.2	195.3	200.1	208.4	223.6	245.7	277.1	322.2	389.3	482.0	590.5
120°	206.0	209.2	213.9	221.1	236.8	258.9	289.7	332.3	393.1	477.6	577.8
122.5°	219.3	221.9	226.5	234.3	250.0	272.9	301.7	341.2	397.6	475.0	567.1
125°	236.8	239.2	243.9	253.4	269.2	291.2	319.7	355.3	404.1	470.5	551.8
127.5°	250.7	253.9	260.5	270.9	286.1	308.8	336.5	368.3	411.0	467.8	537.6
130°	258.9	262.1	269.9	281.0	296.8	318.9	346.6	376.6	416.1	466.6	528.2
132.5°	266.5	270.3	278.8	290.5	306.9	329.0	355.4	384.8	421.1	466.0	520.6
135°	277.9	281.0	290.5	302.4	320.5	342.6	367.9	395.5	427.1	464.9	510.0
137.5°	288.6	292.4	301.8	314.5	332.5	353.0	378.0	403.7	432.4	464.8	502.5
140°	296.8	299.9	309.4	322.0	339.4	360.0	383.6	408.1	434.9	464.1	498.2
142.5°	305.0	307.6	316.4	329.0	345.8	365.1	388.1	411.9	436.9	464.1	493.7
145°	317.3	320.5	328.4	340.2	356.0	373.3	394.8	416.8	438.9	462.6	487.9
147.5°	330.6	333.0	340.5	351.4	364.6	380.0	400.1	419.5	439.6	459.8	481.9
150°	339.4	341.8	348.1	358.4	370.2	384.5	402.6	420.7	438.9	457.9	476.8
152.5°	348.3	349.4	355.7	364.7	375.9	388.9	405.2	421.4	437.7	454.7	472.4
155°	360.7	361.5	366.3	375.0	383.6	395.5	408.9	422.3	435.8	449.2	464.1
157.5°	371.2	371.9	375.8	383.3	390.3	400.2	411.6	422.3	432.1	443.5	456.5
160°	378.1	378.9	382.0	388.4	394.8	403.3	412.8	422.3	430.2	439.7	450.8
162.5°	385.1	384.6	387.8	392.8	398.5	405.3	413.5	421.7	428.4	436.6	445.7
165°	393.1	392.3	393.9	398.7	402.6	407.4	414.4	420.0	424.7	430.2	437.4
167.5°	399.8	398.8	400.2	403.2	406.1	409.1	414.2	418.9	421.1	424.7	429.1
170°	404.1	402.6	403.3	405.8	407.4	409.7	413.6	417.6	419.2	421.5	424.7
172.5°	406.7	405.8	405.3	407.7	408.6	410.3	413.0	415.7	416.7	417.8	420.3
175°	409.7	408.9	408.1	409.7	409.7	410.5	412.0	413.6	412.8	413.6	414.4
177.5°	411.1	409.9	409.2	410.5	410.5	410.5	411.1	412.4	411.1	410.5	411.1
180°	410.5	410.5	410.5	410.5	410.5	410.5	410.5	410.5	410.5	410.5	410.5



TEST NUMBER: P331401-840

CATALOG NUMBER: SA2XXDIP-C865D725U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6	1393.6
2.5°	1387.7	1390.1	1392.4	1393.4	1392.9	1392.4	1392.0	1391.5
5°	1378.3	1380.7	1383.1	1383.9	1383.4	1382.8	1382.2	1381.6
7.5°	1362.7	1365.1	1367.6	1368.4	1367.8	1367.1	1366.4	1365.7
10°	1348.8	1351.2	1353.6	1354.3	1353.4	1352.5	1351.6	1350.8
12.5°	1332.4	1334.0	1335.7	1336.3	1335.5	1334.9	1334.2	1333.6
15°	1303.5	1304.7	1306.0	1305.8	1304.3	1302.8	1301.3	1299.8
17.5°	1269.3	1270.7	1272.1	1272.0	1270.6	1269.2	1267.8	1266.4
20°	1242.6	1243.5	1244.5	1244.3	1243.1	1241.9	1240.7	1239.5
22.5°	1214.5	1214.6	1214.8	1214.6	1213.8	1213.0	1212.3	1211.6
25°	1168.4	1168.9	1169.5	1169.5	1168.9	1168.4	1167.8	1167.2
27.5°	1123.1	1122.2	1121.3	1120.1	1118.6	1117.2	1115.8	1114.4
30°	1087.6	1086.8	1085.9	1084.8	1083.7	1082.5	1081.3	1080.1
32.5°	1053.0	1051.4	1049.8	1048.3	1047.2	1046.0	1044.8	1043.6
35°	997.4	995.6	993.9	992.2	990.8	989.3	987.7	986.2
37.5°	941.7	939.5	937.3	935.4	934.0	932.6	931.2	929.7
40°	903.2	900.5	897.9	895.9	894.7	893.5	892.3	891.1
42.5°	865.2	862.2	859.4	857.1	855.4	853.7	852.0	850.4
45°	806.9	803.5	800.3	798.1	796.9	795.7	794.5	793.3
47.5°	746.2	742.8	739.3	736.7	735.0	733.3	731.5	729.8
50°	707.2	703.1	698.9	696.1	694.6	693.1	691.7	690.1
52.5°	666.8	663.4	659.9	657.2	655.3	653.3	651.4	649.3
55°	606.6	603.0	599.5	596.9	595.4	593.9	592.5	591.0
57.5°	544.0	540.5	536.9	534.6	533.5	532.4	531.3	530.1
60°	502.7	499.4	496.1	494.0	493.1	492.2	491.3	490.5
62.5°	463.4	460.4	457.4	455.3	454.1	453.0	451.9	450.8
65°	403.3	400.7	398.0	395.9	394.5	392.9	391.4	389.9
67.5°	344.0	341.8	339.8	338.2	337.0	335.8	334.6	333.4
70°	305.4	303.3	301.2	299.5	298.4	297.2	296.0	294.8
72.5°	268.9	266.8	264.8	263.3	262.3	261.4	260.3	259.4
75°	212.2	210.4	208.6	208.0	208.6	209.2	209.7	210.4
77.5°	161.5	160.6	159.7	158.8	157.9	157.1	156.3	155.4
80°	128.2	127.3	126.4	125.6	125.0	124.5	123.9	123.3
82.5°	95.5	94.4	93.3	92.7	92.5	92.4	92.3	92.2
85°	50.5	49.6	48.7	48.1	47.8	47.5	47.2	46.9
87.5°	18.6	17.6	17.2	16.9	16.7	16.4	16.2	16.0
90°	25.2	23.7	25.2	26.1	26.1	26.1	26.1	26.1
92.5°	68.9	59.1	52.4	47.6	46.9	44.3	45.0	43.7
95°	206.8	158.6	125.5	108.2	97.9	91.6	89.2	90.0
97.5°	482.6	394.9	309.4	252.5	214.7	195.3	183.8	177.1
100°	720.7	622.9	514.7	419.2	353.7	319.7	296.8	282.6
102.5°	876.8	854.6	775.5	674.3	603.1	545.1	516.5	497.4
105°	959.2	1048.3	1058.6	1032.6	983.6	934.6	900.7	889.7
107.5°	899.8	1034.1	1116.2	1154.5	1160.6	1157.9	1151.1	1136.4
110°	848.6	990.0	1091.0	1155.7	1189.6	1204.7	1211.7	1210.9





TEST NUMBER: P331401-840

CATALOG NUMBER: SA2XXDIP-C865D725U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	801.9	937.5	1045.5	1119.7	1166.9	1192.0	1205.5	1209.7
115°	744.4	866.0	969.4	1050.7	1106.7	1143.1	1163.6	1170.7
117.5°	701.1	807.9	901.7	978.0	1035.1	1073.5	1095.1	1101.1
120°	679.6	777.6	861.2	933.1	988.4	1025.4	1048.3	1056.2
122.5°	662.7	752.3	831.5	896.5	946.0	982.5	1002.9	1009.5
125°	637.8	719.1	788.6	847.8	893.6	923.6	943.3	949.7
127.5°	613.4	686.9	752.5	807.1	847.1	875.1	892.2	897.3
130°	597.5	665.5	727.8	779.9	818.6	845.5	861.2	867.6
132.5°	582.4	645.3	702.6	751.5	789.6	816.4	830.9	836.6
135°	561.3	613.4	665.5	709.6	743.7	769.7	783.9	787.1
137.5°	544.4	587.9	629.3	667.8	698.8	721.2	733.7	738.4
140°	533.6	571.6	607.8	642.6	667.8	688.3	700.2	705.0
142.5°	524.8	557.0	588.2	617.3	641.4	659.9	670.6	671.5
145°	512.3	538.4	562.9	585.7	604.7	618.1	626.0	628.3
147.5°	502.7	523.2	542.3	559.1	574.7	585.4	590.8	592.2
150°	495.7	513.1	529.7	543.9	555.7	565.2	570.0	570.8
152.5°	488.8	504.9	519.0	531.3	540.6	548.8	552.3	552.4
155°	479.2	491.8	503.6	512.3	521.0	526.5	529.7	528.2
157.5°	468.0	478.6	488.5	495.2	501.4	506.0	507.5	507.5
160°	461.0	469.7	478.4	483.9	489.5	493.4	494.1	494.1
162.5°	454.0	461.5	468.9	473.2	478.7	481.4	482.2	481.5
165°	443.6	449.2	454.7	457.9	461.0	464.1	464.1	463.4
167.5°	433.7	438.0	441.7	444.6	446.1	447.8	447.6	446.7
170°	428.7	431.0	434.1	435.8	436.6	438.9	438.1	436.6
172.5°	422.9	424.7	427.3	428.2	429.0	430.1	429.3	428.4
175°	416.8	417.6	418.4	419.2	419.2	420.0	419.2	417.6
177.5°	412.4	412.4	413.0	413.0	413.0	413.0	412.4	411.1
180°	410.5	410.5	410.5	410.5	410.5	410.5	410.5	410.5

(END OF REPORT)