

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331740-840

Luminaire Tested: **SA2XXRDIP-C1005D330U840-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P331740-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA2XXRDIP-C1005D330U840-4F0-1E-UDD-F4  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 330 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4810.2 lumens  
Efficiency: N/A  
Efficacy: 96.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 49.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331740-840

CATALOG NUMBER: SA2XXRDIP-C1005D330U840-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

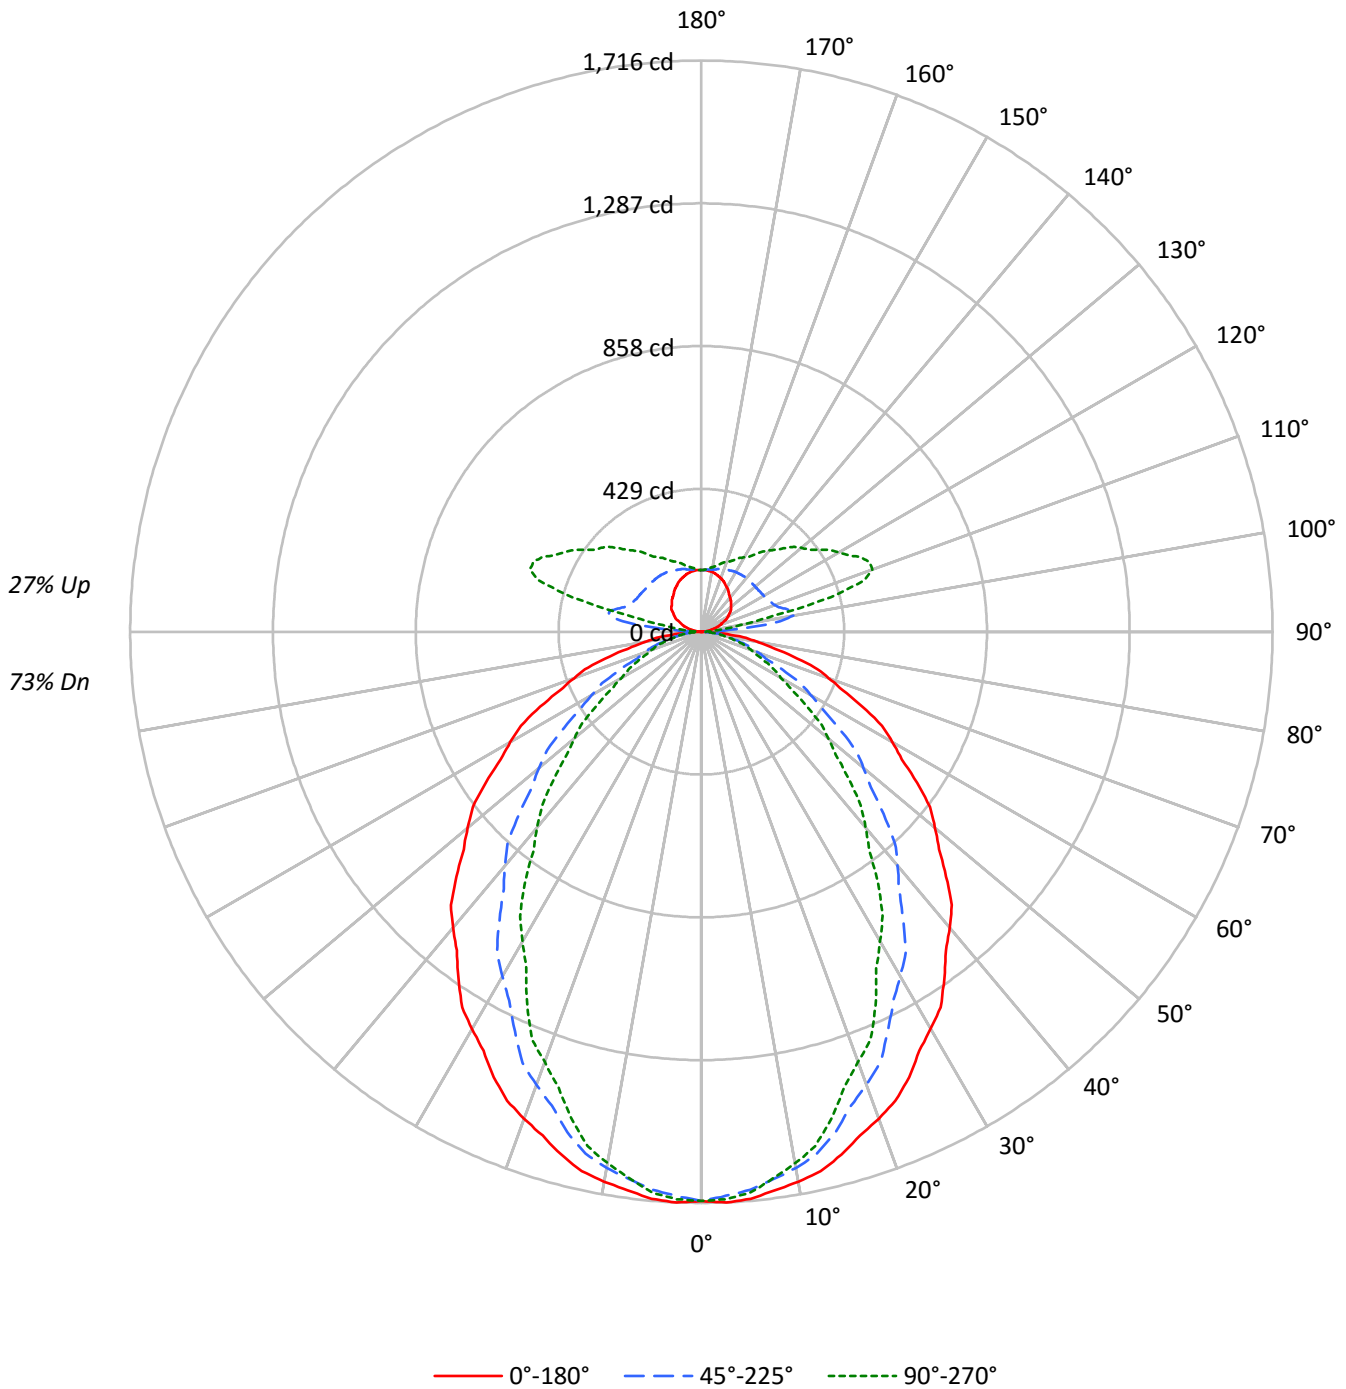



TEST NUMBER: P331740-840

CATALOG NUMBER: SA2XXRDIP-C1005D330U840-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	113	113	113	113	107	107	107	107	96	96	96	86	86	86	77	77	77	73
1	104	99	96	92	98	95	91	88	86	83	81	77	75	74	70	68	67	63
2	95	88	82	77	90	84	78	74	76	72	68	69	65	63	62	60	57	54
3	87	78	71	65	83	74	68	62	68	62	58	61	57	54	56	52	50	47
4	80	69	62	56	76	66	59	54	61	55	50	55	51	47	50	46	43	41
5	74	62	54	48	70	60	52	47	55	49	44	50	45	41	46	42	38	36
6	68	56	48	42	65	54	47	41	50	43	39	46	40	36	42	37	34	32
7	64	51	43	38	60	49	42	37	45	39	35	42	36	33	38	34	31	28
8	59	47	39	34	56	45	38	33	42	35	31	38	33	29	35	31	28	26
9	55	43	36	30	53	41	34	30	38	32	28	36	30	27	33	28	25	23
10	52	40	32	28	49	38	32	27	36	30	26	33	28	24	31	26	23	21

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	27611	27611	27611
5°	27716	27266	27417
10°	27506	26820	26591
15°	27189	26024	25275
20°	26751	24890	23639
25°	26302	23599	22057
30°	25682	22275	20025
35°	25074	20834	18242
40°	24464	19344	16179
45°	23749	17671	14312
50°	23016	15978	12479
55°	22261	14159	10716
60°	21390	12245	8896
65°	20397	10288	8103
70°	19218	8478	7449
75°	17767	7723	6949
80°	15676	6908	6332
85°	12338	5446	5446



TEST NUMBER: P331740-840

CATALOG NUMBER: SA2XXRDIP-C1005D330U840-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	160.1	3.3
10°-20°	439.5	9.1
20°-30°	617.2	12.8
30°-40°	673.0	14.0
40°-50°	618.8	12.9
50°-60°	486.0	10.1
60°-70°	316.9	6.6
70°-80°	163.4	3.4
80°-90°	44.0	0.9
90°-100°	74.2	1.5
100°-110°	251.8	5.2
110°-120°	267.5	5.6
120°-130°	220.2	4.6
130°-140°	176.8	3.7
140°-150°	133.6	2.8
150°-160°	93.9	2.0
160°-170°	55.3	1.1
170°-180°	18.0	0.4
0°-30°	1216.8	25.3
0°-40°	1889.8	39.3
0°-60°	2994.7	62.3
0°-90°	3519.0	73.2
90°-120°	593.4	12.3
90°-150°	1124.0	23.4
90°-180°	1291.0	26.8
0°-180°	4810.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1710	1710	1710	1710	1710	
5°	1710	1702	1682	1695	1692	162
15°	1627	1608	1557	1528	1512	458
25°	1476	1424	1325	1264	1238	679
35°	1272	1190	1057	963	926	796
45°	1040	933	774	668	627	803
55°	791	668	503	414	381	706
65°	534	408	269	219	212	529
75°	285	180	124	114	111	301
85°	67	36	29	29	29	78
90°	0	5	12	12	12	3
95°	12	31	140	53	41	13
105°	44	66	264	473	402	46
115°	77	97	221	457	529	76
125°	107	127	213	370	429	95
135°	126	150	210	311	356	97
145°	143	165	209	260	284	90
155°	163	176	203	230	239	75
165°	178	183	194	206	209	50
175°	185	185	187	189	189	18
180°	186	186	186	186	186	



TEST NUMBER: P331740-840

CATALOG NUMBER: SA2XXRDIP-C1005D330U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1
2.5°	1716.4	1715.0	1713.5	1712.2	1710.8	1708.6	1705.6	1702.6	1699.6	1696.6	1699.3
5°	1710.1	1708.4	1706.7	1705.0	1703.2	1700.2	1695.7	1691.2	1686.8	1682.3	1685.4
7.5°	1692.5	1690.4	1688.3	1686.1	1683.9	1680.3	1675.1	1669.8	1664.7	1659.4	1660.3
10°	1677.7	1675.3	1672.8	1670.4	1668.0	1663.3	1656.5	1649.6	1642.7	1635.9	1634.9
12.5°	1659.1	1656.1	1653.1	1650.2	1647.3	1641.3	1632.5	1623.8	1615.0	1606.2	1604.3
15°	1626.6	1622.8	1619.0	1615.2	1611.4	1603.7	1592.1	1580.3	1568.6	1556.9	1550.4
17.5°	1586.6	1580.8	1575.1	1569.3	1563.6	1553.2	1538.1	1523.2	1508.1	1493.2	1485.4
20°	1556.9	1550.0	1543.2	1536.3	1529.4	1517.4	1500.2	1483.0	1465.8	1448.6	1440.0
22.5°	1524.7	1517.0	1509.3	1501.7	1493.9	1480.4	1461.0	1441.6	1422.2	1402.8	1391.7
25°	1476.4	1465.4	1454.4	1443.4	1432.4	1415.6	1392.9	1370.2	1347.5	1324.7	1310.7
27.5°	1418.3	1406.3	1394.3	1382.4	1370.4	1351.6	1326.1	1300.4	1274.9	1249.3	1232.8
30°	1377.5	1364.3	1351.3	1338.2	1325.1	1304.8	1277.3	1249.8	1222.3	1194.8	1177.2
32.5°	1337.8	1322.5	1307.3	1292.0	1276.7	1255.1	1227.0	1198.9	1170.8	1142.8	1122.8
35°	1272.1	1254.7	1237.1	1219.5	1202.0	1178.1	1147.8	1117.6	1087.3	1057.0	1035.4
37.5°	1206.6	1187.3	1168.0	1148.7	1129.5	1103.8	1071.5	1039.3	1006.9	974.7	950.9
40°	1160.7	1140.1	1119.4	1098.8	1078.2	1051.2	1017.8	984.5	951.1	917.8	893.3
42.5°	1113.7	1092.0	1070.3	1048.4	1026.7	998.7	964.2	929.7	895.2	860.8	835.6
45°	1040.1	1016.9	993.9	970.9	947.9	918.3	882.1	846.1	809.9	773.9	749.4
47.5°	968.2	943.8	919.4	894.9	870.5	839.7	802.4	765.1	727.8	690.5	666.3
50°	916.3	891.8	867.4	842.9	818.5	787.4	749.6	711.8	673.9	636.1	612.4
52.5°	865.5	839.9	814.5	788.9	763.4	732.2	695.1	658.1	621.1	584.1	561.2
55°	790.8	764.1	737.2	710.3	683.6	651.6	614.4	577.2	540.2	503.0	482.3
57.5°	714.4	686.9	659.3	631.9	604.3	572.7	537.0	501.3	465.6	429.9	411.0
60°	662.4	634.9	607.3	579.9	552.3	520.9	485.4	450.0	414.5	379.2	361.6
62.5°	611.7	584.1	556.6	529.1	501.6	470.9	437.2	403.3	369.6	335.9	319.1
65°	533.9	506.0	478.3	450.4	422.5	393.1	362.1	331.2	300.2	269.3	257.6
67.5°	459.0	431.4	403.7	376.1	348.4	320.6	292.9	265.0	237.1	209.2	203.9
70°	407.1	380.2	353.4	326.6	299.7	274.5	250.7	227.0	203.3	179.6	176.1
72.5°	357.5	331.7	306.1	280.3	254.6	232.2	213.2	194.1	175.0	156.0	153.1
75°	284.8	260.6	236.6	212.6	188.4	170.6	158.9	147.2	135.5	123.8	121.4
77.5°	213.3	192.2	171.1	150.0	128.8	115.4	109.8	104.1	98.5	92.9	91.5
80°	168.6	151.2	133.6	116.0	98.6	88.1	84.6	81.2	77.8	74.3	72.9
82.5°	127.8	114.1	100.5	86.7	73.1	65.0	62.7	60.4	58.1	55.7	54.9
85°	66.6	59.3	52.1	44.8	37.7	33.5	32.5	31.5	30.4	29.4	29.4
87.5°	19.9	17.9	16.0	13.9	11.8	11.0	11.3	11.8	12.2	12.3	12.0
90°	0.4	1.4	2.8	3.5	4.2	5.4	7.2	9.6	11.8	12.1	11.8
92.5°	4.3	6.3	8.9	10.4	12.8	16.2	24.2	35.6	45.7	46.4	39.2
95°	12.5	13.9	17.5	20.7	26.4	34.9	51.4	82.4	123.8	139.9	122.4
97.5°	20.3	22.2	26.1	30.9	37.5	47.2	67.8	111.1	179.9	238.7	250.4
100°	27.5	28.6	31.7	37.5	44.6	54.6	73.5	117.0	194.1	281.9	333.3
102.5°	34.0	34.8	38.1	43.7	51.2	61.2	78.7	117.3	188.6	283.3	364.1
105°	43.5	44.9	47.5	52.8	60.7	70.7	87.5	119.2	178.0	264.4	359.3
107.5°	53.8	54.9	57.4	62.3	70.1	80.2	96.4	124.1	172.8	244.1	328.0
110°	60.7	62.1	64.2	68.9	76.3	86.7	102.4	128.1	171.7	234.4	308.3



TEST NUMBER: P331740-840

CATALOG NUMBER: SA2XXRDIP-C1005D330U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	67.0	68.4	70.8	75.1	82.3	93.0	108.2	132.4	171.9	228.1	294.6
115°	76.7	78.5	80.7	84.9	92.1	101.7	117.0	138.8	173.4	221.3	277.6
117.5°	86.8	88.3	90.4	94.2	101.1	111.1	125.2	145.6	176.0	217.8	266.9
120°	93.1	94.5	96.7	99.9	107.0	117.0	131.0	150.3	177.7	215.9	261.2
122.5°	99.2	100.3	102.4	105.9	113.0	123.3	136.3	154.2	179.7	214.7	256.3
125°	107.0	108.2	110.3	114.5	121.7	131.7	144.5	160.6	182.7	212.7	249.4
127.5°	113.3	114.7	117.8	122.5	129.3	139.6	152.1	166.5	185.7	211.5	243.0
130°	117.0	118.5	122.0	127.0	134.2	144.1	156.6	170.2	188.0	210.9	238.7
132.5°	120.5	122.2	126.0	131.3	138.8	148.8	160.7	173.9	190.4	210.6	235.3
135°	125.6	127.0	131.3	136.6	144.9	154.8	166.3	178.7	193.1	210.2	230.5
137.5°	130.5	132.2	136.4	142.2	150.3	159.6	170.9	182.5	195.5	210.1	227.1
140°	134.2	135.6	139.9	145.6	153.4	162.7	173.4	184.5	196.6	209.8	225.1
142.5°	137.8	139.1	143.0	148.8	156.3	165.0	175.4	186.2	197.4	209.8	223.2
145°	143.4	144.9	148.5	153.8	161.0	168.7	178.4	188.4	198.3	209.0	220.6
147.5°	149.5	150.5	153.9	158.9	164.8	171.8	180.9	189.7	198.6	207.8	217.8
150°	153.4	154.5	157.3	162.0	167.3	173.8	182.0	190.2	198.3	206.9	215.5
152.5°	157.4	157.9	160.8	164.8	170.0	175.7	183.1	190.5	197.8	205.5	213.5
155°	163.1	163.4	165.5	169.5	173.4	178.7	184.8	190.9	196.9	203.0	209.8
157.5°	167.7	168.1	169.9	173.3	176.4	180.9	186.0	190.9	195.3	200.5	206.3
160°	170.9	171.3	172.7	175.5	178.4	182.4	186.6	190.9	194.5	198.7	203.7
162.5°	174.1	173.8	175.3	177.5	180.2	183.2	186.9	190.6	193.6	197.3	201.5
165°	177.7	177.3	178.0	180.2	182.0	184.1	187.3	189.9	192.0	194.5	197.6
167.5°	180.7	180.3	180.9	182.3	183.6	184.9	187.2	189.3	190.4	192.0	194.0
170°	182.7	182.0	182.4	183.4	184.1	185.2	186.9	188.7	189.5	190.6	192.0
172.5°	183.8	183.4	183.2	184.3	184.7	185.5	186.7	187.9	188.3	188.8	190.0
175°	185.2	184.8	184.5	185.2	185.2	185.5	186.2	186.9	186.6	186.9	187.3
177.5°	185.8	185.2	185.0	185.5	185.5	185.5	185.8	186.4	185.8	185.5	185.8
180°	185.5	185.5	185.5	185.5	185.5	185.5	185.5	185.5	185.5	185.5	185.5



TEST NUMBER: P331740-840

CATALOG NUMBER: SA2XXRDIP-C1005D330U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1
2.5°	1702.0	1704.8	1707.6	1708.6	1708.1	1707.6	1707.0	1706.5
5°	1688.5	1691.6	1694.7	1695.7	1694.7	1693.6	1692.6	1691.6
7.5°	1661.1	1662.0	1662.9	1662.5	1660.7	1658.9	1657.2	1655.4
10°	1633.8	1632.7	1631.7	1630.2	1628.1	1626.1	1624.0	1621.9
12.5°	1602.5	1600.5	1598.7	1596.1	1592.7	1589.2	1585.8	1582.4
15°	1543.9	1537.3	1530.8	1525.8	1522.4	1518.9	1515.5	1512.1
17.5°	1477.6	1469.9	1462.1	1455.2	1449.4	1443.4	1437.4	1431.6
20°	1431.4	1422.8	1414.2	1406.1	1398.6	1391.0	1383.4	1375.8
22.5°	1380.7	1369.6	1358.5	1350.1	1344.5	1338.9	1333.2	1327.6
25°	1296.6	1282.5	1268.4	1258.8	1253.5	1248.4	1243.2	1238.1
27.5°	1216.4	1199.9	1183.5	1171.1	1163.0	1154.8	1146.6	1138.4
30°	1159.7	1142.2	1124.6	1111.3	1102.0	1092.7	1083.4	1074.1
32.5°	1102.8	1082.8	1062.7	1048.3	1039.7	1030.9	1022.1	1013.4
35°	1013.7	992.1	970.4	955.7	948.2	940.6	933.0	925.5
37.5°	927.0	903.1	879.2	862.9	854.3	845.7	837.0	828.3
40°	868.9	844.4	820.1	803.4	794.5	785.5	776.6	767.6
42.5°	810.3	785.1	759.8	742.9	734.2	725.5	716.9	708.2
45°	725.0	700.5	676.1	659.8	651.6	643.3	635.0	626.8
47.5°	642.0	617.7	593.4	577.5	570.1	562.6	555.0	547.5
50°	588.7	564.9	541.2	525.6	518.5	511.2	504.0	496.8
52.5°	538.3	515.3	492.5	477.7	471.0	464.3	457.7	451.0
55°	461.7	441.1	420.4	406.9	400.3	393.7	387.3	380.7
57.5°	392.1	373.1	354.3	342.0	336.6	331.0	325.6	320.0
60°	344.1	326.6	309.0	297.5	292.0	286.5	280.9	275.5
62.5°	302.5	285.7	269.0	258.9	255.7	252.4	249.0	245.8
65°	245.9	234.2	222.5	216.1	215.1	214.1	213.1	212.1
67.5°	198.5	193.2	187.7	184.5	183.5	182.4	181.3	180.2
70°	172.7	169.3	165.8	163.4	162.0	160.6	159.3	157.8
72.5°	150.3	147.3	144.4	142.6	141.8	141.0	140.1	139.3
75°	119.0	116.6	114.2	112.8	112.5	112.1	111.8	111.4
77.5°	90.1	88.8	87.4	86.3	85.8	85.3	84.7	84.2
80°	71.5	70.2	68.8	68.1	68.1	68.1	68.1	68.1
82.5°	54.0	53.2	52.4	52.0	52.0	52.0	52.0	52.0
85°	29.4	29.4	29.4	29.4	29.4	29.4	29.4	29.4
87.5°	11.6	11.2	11.1	11.0	11.0	11.0	11.0	11.0
90°	11.4	10.7	11.4	11.8	11.8	11.8	11.8	11.8
92.5°	31.1	26.7	23.7	21.5	21.2	20.1	20.3	19.8
95°	93.5	71.7	56.8	48.9	44.2	41.4	40.3	40.7
97.5°	218.1	178.4	139.9	114.1	97.0	88.3	83.1	80.1
100°	325.8	281.6	232.7	189.5	159.9	144.5	134.2	127.7
102.5°	396.3	386.3	350.5	304.8	272.6	246.4	233.5	224.8
105°	433.5	473.8	478.5	466.8	444.5	422.4	407.1	402.1
107.5°	406.7	467.5	504.5	521.8	524.6	523.4	520.3	513.7
110°	383.5	447.5	493.1	522.4	537.8	544.5	547.8	547.3





TEST NUMBER: P331740-840

CATALOG NUMBER: SA2XXRDIP-C1005D330U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	362.4	423.7	472.5	506.1	527.5	538.8	544.8	546.7
115°	336.5	391.4	438.2	474.9	500.3	516.6	525.9	529.2
117.5°	316.9	365.2	407.6	442.0	467.9	485.2	494.9	497.7
120°	307.2	351.4	389.3	421.7	446.8	463.5	473.8	477.5
122.5°	299.5	340.0	375.9	405.2	427.6	444.1	453.3	456.3
125°	288.3	325.1	356.5	383.2	403.9	417.5	426.4	429.3
127.5°	277.2	310.5	340.1	364.8	382.8	395.6	403.2	405.6
130°	270.1	300.8	329.0	352.5	370.0	382.1	389.3	392.1
132.5°	263.3	291.6	317.6	339.7	356.9	369.0	375.6	378.2
135°	253.7	277.2	300.8	320.7	336.1	347.9	354.4	355.8
137.5°	246.1	265.8	284.5	301.8	315.9	326.0	331.6	333.8
140°	241.2	258.3	274.8	290.4	301.8	311.1	316.5	318.6
142.5°	237.2	251.8	265.9	279.0	289.8	298.3	303.1	303.5
145°	231.6	243.4	254.4	264.8	273.3	279.4	283.0	284.0
147.5°	227.2	236.5	245.1	252.7	259.7	264.6	267.0	267.7
150°	224.1	232.0	239.4	245.8	251.2	255.5	257.6	258.0
152.5°	221.0	228.2	234.6	240.1	244.4	248.0	249.6	249.7
155°	216.6	222.3	227.6	231.6	235.5	238.0	239.4	238.7
157.5°	211.6	216.3	220.8	223.9	226.6	228.7	229.3	229.3
160°	208.3	212.3	216.2	218.7	221.3	223.0	223.4	223.4
162.5°	205.2	208.6	212.0	213.9	216.4	217.6	217.9	217.6
165°	200.6	203.0	205.5	206.9	208.3	209.8	209.8	209.4
167.5°	196.0	197.9	199.7	201.0	201.6	202.4	202.3	201.9
170°	193.8	194.8	196.2	196.9	197.3	198.3	198.0	197.3
172.5°	191.2	192.0	193.1	193.5	193.9	194.4	194.0	193.6
175°	188.4	188.7	189.1	189.5	189.5	189.9	189.5	188.7
177.5°	186.4	186.4	186.7	186.7	186.7	186.7	186.4	185.8
180°	185.5	185.5	185.5	185.5	185.5	185.5	185.5	185.5

(END OF REPORT)