

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331743-840

Luminaire Tested: **SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331743-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 530 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5935.7 lumens
Efficiency: N/A
Efficacy: 107.7 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 55.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

Luminous Intensity Polar Plot

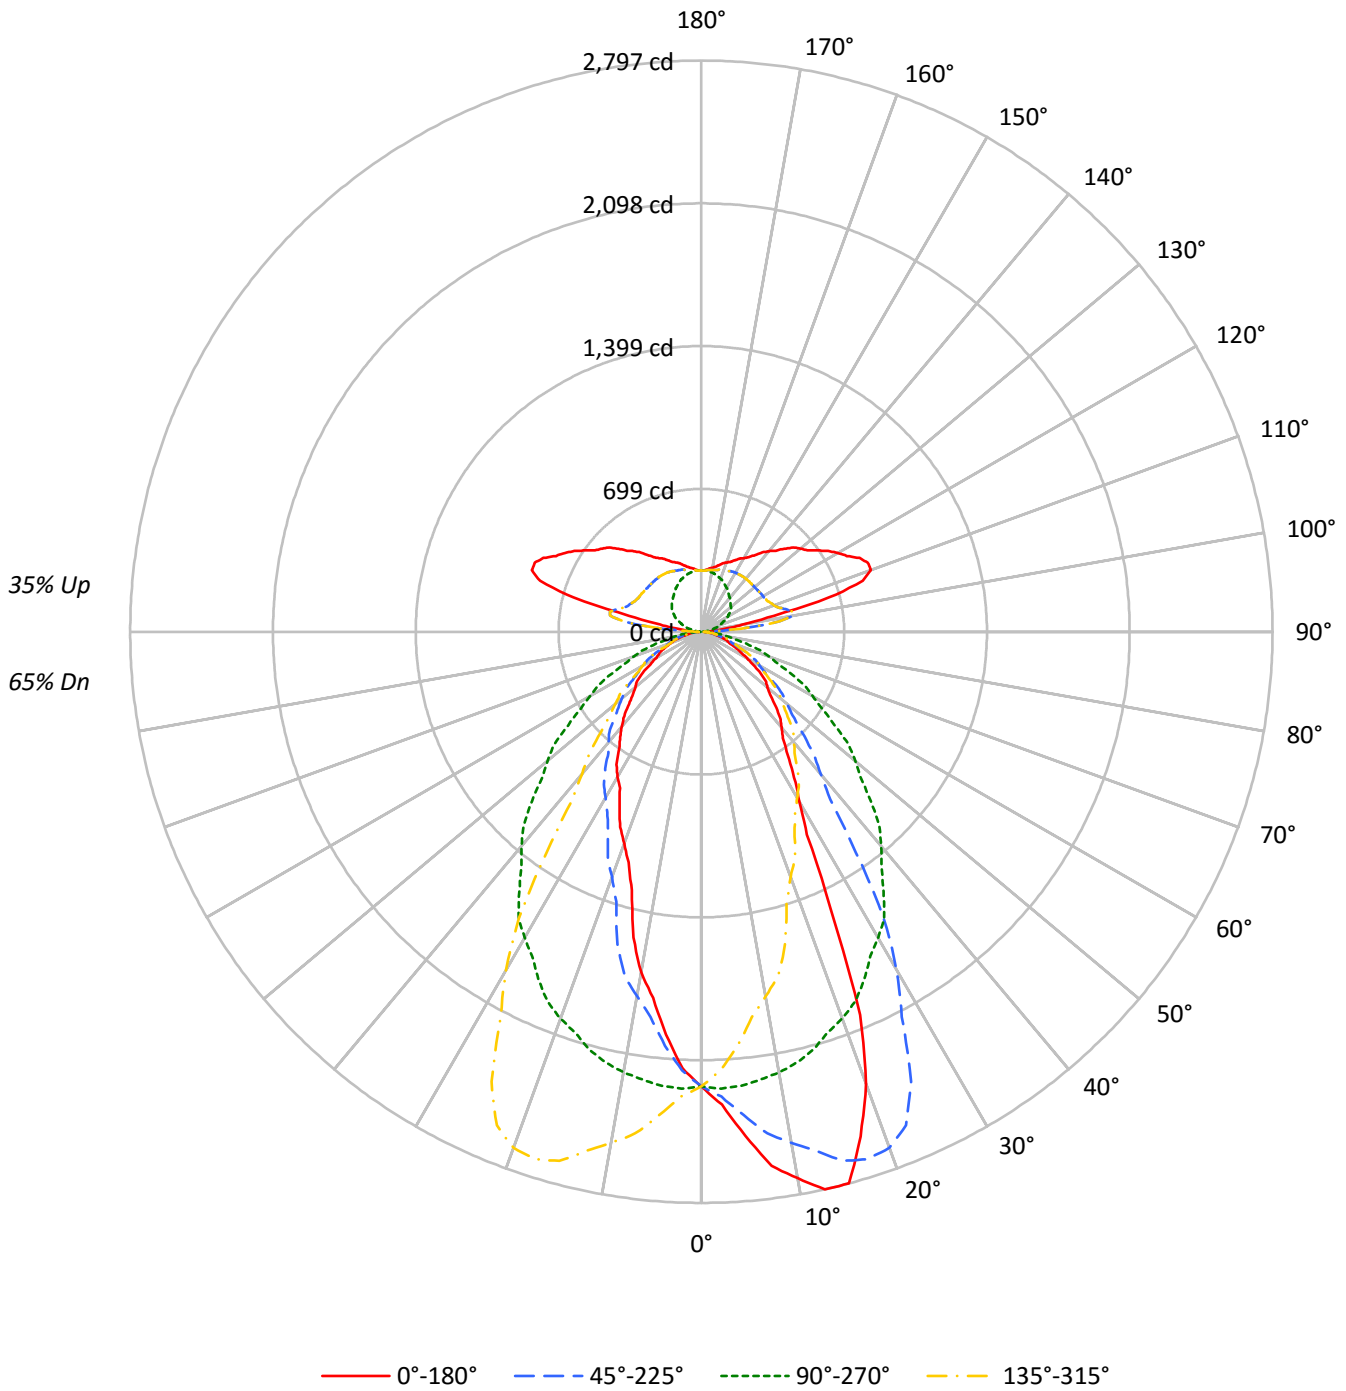



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	111	111	111	111	104	104	104	104	92	92	92	80	80	80	70	70	70	65				
1	102	98	94	91	96	92	89	86	82	80	77	72	70	69	63	62	61	57				
2	94	87	81	76	88	82	77	73	73	69	66	65	62	59	57	55	53	49				
3	86	77	70	65	81	73	67	62	65	61	57	58	55	51	52	49	46	43				
4	80	69	62	56	75	66	59	54	59	54	49	53	49	45	47	44	41	38				
5	74	63	55	49	69	59	52	47	54	48	44	48	44	40	43	39	37	34				
6	68	57	49	43	64	54	47	42	49	43	39	44	39	36	39	36	33	30				
7	64	52	44	39	60	49	42	37	45	39	35	40	36	32	36	33	30	27				
8	59	47	40	35	56	45	38	34	41	36	31	37	33	29	34	30	27	25				
9	56	44	36	32	52	42	35	31	38	33	29	35	30	27	31	28	25	23				
10	52	40	33	29	49	39	32	28	35	30	26	32	28	25	29	26	23	21				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	35960	35960	35960	35960
5°	40161	36185	32083	36185
10°	44558	35931	27811	35931
15°	46748	35405	21912	35405
20°	40527	34625	18962	34625
25°	26580	33556	16930	33556
30°	17890	32261	15321	32261
35°	14491	30628	13819	30628
40°	12886	28854	12787	28854
45°	11663	26772	11415	26772
50°	10613	24707	10575	24707
55°	9979	22415	9847	22415
60°	8344	20315	8247	20315
65°	7037	18449	7981	18449
70°	6500	16475	7530	16475
75°	6089	14336	6949	14336
80°	5616	11799	6192	11799
85°	5169	9318	5446	9318



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	211.1	3.6
10°-20°	588.3	9.9
20°-30°	758.1	12.8
30°-40°	720.4	12.1
40°-50°	617.1	10.4
50°-60°	470.0	7.9
60°-70°	297.1	5.0
70°-80°	148.4	2.5
80°-90°	41.3	0.7
90°-100°	119.7	2.0
100°-110°	406.3	6.8
110°-120°	431.7	7.3
120°-130°	355.4	6.0
130°-140°	285.4	4.8
140°-150°	215.7	3.6
150°-160°	151.6	2.6
160°-170°	89.2	1.5
170°-180°	29.0	0.5
0°-30°	1557.5	26.2
0°-40°	2277.9	38.4
0°-60°	3365.0	56.7
0°-90°	3851.8	64.9
90°-120°	957.8	16.1
90°-150°	1814.1	30.6
90°-180°	2084.0	35.1
0°-180°	5935.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2227	2227	2227	2227	2227	
5°	2478	2233	1980	2233	2478	245
15°	2797	2118	1311	2118	2797	754
25°	1492	1884	950	1884	1492	708
35°	735	1554	701	1554	735	470
45°	511	1172	500	1172	511	395
55°	354	796	350	796	354	311
65°	184	483	209	483	184	187
75°	98	230	111	230	98	103
85°	28	50	29	50	28	30
90°	19	1	19	1	19	11
95°	66	20	66	20	66	85
105°	649	70	649	70	649	628
115°	854	124	854	124	854	836
125°	693	173	693	173	693	626
135°	574	203	574	203	574	446
145°	458	232	458	232	458	291
155°	385	263	385	263	385	180
165°	338	287	338	287	338	97
175°	305	299	305	299	305	30
180°	299	299	299	299	299	



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2
2.5°	2317.5	2319.5	2321.3	2316.9	2316.9	2313.2	2305.2	2299.0	2281.7	2279.2	2279.2
5°	2477.9	2476.4	2479.4	2469.4	2455.5	2452.4	2437.7	2418.3	2398.2	2375.8	2371.2
7.5°	2637.4	2635.0	2628.8	2627.2	2616.5	2593.0	2569.4	2544.2	2510.7	2478.1	2461.6
10°	2717.8	2743.4	2727.8	2700.8	2706.2	2669.9	2650.5	2617.3	2589.4	2540.6	2529.8
12.5°	2797.0	2807.1	2802.2	2786.8	2779.9	2754.6	2728.5	2699.6	2648.2	2604.3	2566.3
15°	2796.7	2811.5	2815.3	2810.7	2814.6	2813.0	2799.0	2775.1	2730.2	2682.2	2640.4
17.5°	2590.3	2600.5	2625.9	2643.0	2664.7	2710.6	2733.1	2742.0	2735.3	2708.0	2678.5
20°	2358.7	2341.7	2412.9	2449.3	2480.2	2557.6	2624.1	2649.7	2690.7	2690.0	2682.2
22.5°	2030.6	2034.7	2102.1	2145.4	2235.7	2313.1	2388.9	2485.1	2564.5	2616.9	2647.6
25°	1492.0	1521.5	1588.7	1647.6	1748.2	1892.1	2022.9	2174.5	2317.7	2430.7	2538.3
27.5°	1120.5	1122.8	1176.1	1230.4	1290.2	1408.2	1572.8	1753.9	1958.0	2126.5	2320.2
30°	959.6	954.9	977.3	1010.7	1061.8	1153.1	1276.9	1454.9	1658.4	1912.2	2138.2
32.5°	845.7	846.0	862.8	887.5	929.9	991.5	1076.3	1220.8	1413.2	1662.7	1927.7
35°	735.2	734.4	746.8	764.6	782.3	821.8	879.9	955.7	1088.0	1321.0	1591.9
37.5°	655.9	659.3	665.4	676.5	696.2	718.1	753.0	803.9	898.2	1035.9	1263.5
40°	611.4	612.9	621.4	630.7	642.3	659.3	687.9	729.0	797.9	907.8	1074.1
42.5°	570.5	572.1	578.0	586.7	595.9	612.9	636.6	672.1	727.9	813.6	950.9
45°	510.8	510.8	516.1	520.1	530.1	545.5	564.9	594.3	633.0	696.5	787.8
47.5°	454.7	454.8	458.5	465.1	471.4	483.5	502.5	526.5	554.7	603.8	681.8
50°	422.5	423.3	425.7	431.0	434.9	445.8	460.5	481.3	510.8	548.7	613.7
52.5°	396.6	396.1	399.0	401.3	403.9	411.7	422.7	441.1	467.4	500.4	554.2
55°	354.5	351.3	356.0	359.8	362.1	365.3	371.4	383.0	405.5	433.3	473.6
57.5°	301.8	300.5	303.9	307.4	314.7	323.1	328.3	335.7	347.3	367.3	407.2
60°	258.4	258.4	265.4	267.7	276.3	287.1	297.9	304.2	315.8	328.9	358.3
62.5°	220.0	220.8	224.0	226.3	231.1	244.4	259.5	273.2	284.2	296.7	316.2
65°	184.2	185.7	185.7	187.2	190.4	193.5	199.7	210.5	229.8	247.6	262.4
67.5°	156.3	156.8	157.2	158.8	159.6	163.0	165.4	170.3	174.7	191.6	209.8
70°	137.7	140.1	139.3	140.9	141.6	143.2	146.2	148.6	155.5	159.5	170.3
72.5°	120.4	122.1	122.0	122.9	124.9	125.2	127.6	130.0	134.5	137.7	143.6
75°	97.6	96.7	97.6	99.1	99.9	100.6	100.6	103.7	106.0	109.1	113.0
77.5°	75.2	76.0	75.8	76.0	76.1	77.6	77.4	78.8	81.1	82.6	84.5
80°	60.4	61.1	60.4	61.1	61.9	62.7	61.9	62.7	65.0	66.6	66.6
82.5°	46.8	46.9	47.4	47.6	47.7	47.9	48.9	49.1	50.8	50.5	51.1
85°	27.9	27.1	27.1	27.1	27.9	28.7	27.9	27.9	28.7	28.7	28.7
87.5°	13.7	14.3	14.3	14.3	14.3	14.2	13.9	14.8	14.3	15.0	14.3
90°	19.0	19.0	19.0	19.0	19.0	18.4	17.3	18.4	19.0	19.6	19.0
92.5°	31.9	32.8	32.4	34.2	34.6	38.3	43.1	50.2	63.2	74.8	73.8
95°	65.6	65.0	66.9	71.4	78.9	91.6	115.7	150.9	197.5	225.8	199.9
97.5°	129.3	134.1	142.5	156.6	184.2	225.8	288.1	352.1	404.2	385.4	290.2
100°	206.2	216.5	233.3	258.0	305.8	375.5	454.4	525.8	537.9	454.9	313.3
102.5°	362.8	376.9	397.7	440.0	491.9	565.8	623.5	639.6	587.6	457.3	304.6
105°	649.0	657.1	681.9	717.6	753.3	772.3	764.8	699.7	580.0	426.8	287.4
107.5°	829.1	839.8	844.8	846.7	842.2	814.4	754.5	656.4	529.4	394.0	278.8
110°	883.4	884.0	878.9	867.9	843.1	795.9	722.2	619.1	497.6	378.4	277.0



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	882.5	879.4	869.6	851.3	816.9	762.8	684.0	585.0	475.4	368.2	277.5
115°	854.0	848.9	833.9	807.4	766.6	707.2	631.8	543.1	448.1	357.1	279.9
117.5°	803.2	798.9	783.2	755.2	713.5	657.8	589.4	511.5	430.8	351.6	284.1
120°	770.5	764.8	748.1	721.0	680.8	628.3	567.2	495.8	421.6	348.4	286.8
122.5°	736.5	731.6	716.8	690.1	654.0	606.6	548.9	483.4	413.7	346.6	290.0
125°	692.9	688.2	673.8	652.0	618.5	575.3	524.6	465.3	402.5	343.3	294.9
127.5°	654.6	650.9	638.4	617.9	588.9	549.0	501.2	447.5	392.2	341.3	299.8
130°	632.9	628.3	616.8	597.2	569.0	531.0	485.5	436.0	385.3	340.3	303.5
132.5°	610.4	606.2	595.6	576.0	548.3	512.6	470.8	425.0	379.7	339.9	307.2
135°	574.2	571.9	561.5	542.5	517.8	485.5	447.5	409.5	372.0	339.2	311.5
137.5°	538.7	535.2	526.1	509.8	487.3	459.1	429.0	397.2	366.6	339.1	315.5
140°	514.3	510.8	502.2	487.3	468.8	443.4	417.0	389.3	363.5	338.6	317.3
142.5°	489.9	489.2	481.5	467.9	450.4	429.2	406.4	382.8	360.2	338.6	318.7
145°	458.4	456.7	450.9	441.1	427.4	410.6	392.7	373.8	355.9	337.5	320.2
147.5°	432.0	431.0	427.1	419.3	407.9	395.7	381.7	366.8	351.5	335.4	320.6
150°	416.4	415.8	412.3	405.5	396.8	386.5	374.4	361.6	347.9	334.1	320.2
152.5°	403.0	402.9	400.4	394.4	387.6	378.6	368.4	356.6	344.7	331.7	319.3
155°	385.3	386.5	384.2	380.1	373.8	367.4	358.8	349.6	338.6	327.7	317.9
157.5°	370.2	370.2	369.2	365.8	361.3	356.4	349.1	341.4	333.0	323.6	315.3
160°	360.5	360.5	359.9	357.1	353.0	349.0	342.6	336.3	328.8	320.8	313.9
162.5°	351.3	351.7	351.2	349.2	345.2	342.1	336.7	331.2	325.2	318.5	312.5
165°	338.1	338.6	338.6	336.3	334.1	331.7	327.7	323.7	319.0	313.9	309.8
167.5°	325.9	326.6	326.7	325.4	324.4	322.2	319.5	316.4	313.1	309.8	307.2
170°	318.5	319.6	320.2	318.5	317.9	316.8	314.5	312.8	309.8	307.5	305.8
172.5°	312.5	313.2	313.8	313.0	312.4	311.6	309.8	308.6	306.6	304.8	304.0
175°	304.7	305.8	306.4	305.8	305.8	305.3	304.7	304.1	302.4	301.7	301.2
177.5°	299.9	300.8	301.3	301.3	301.3	301.3	300.8	300.8	299.9	299.4	299.9
180°	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2
2.5°	2280.5	2275.4	2271.2	2260.0	2254.4	2242.0	2240.2	2239.6	2223.5	2208.0	2203.6
5°	2358.7	2346.3	2327.8	2306.1	2283.7	2260.5	2245.0	2232.6	2201.6	2172.2	2155.3
7.5°	2437.7	2411.1	2379.0	2338.0	2303.8	2265.4	2237.0	2211.4	2167.5	2125.4	2097.0
10°	2496.5	2453.2	2410.5	2354.1	2310.0	2266.6	2226.4	2191.6	2142.0	2086.4	2046.9
12.5°	2533.0	2485.4	2426.7	2371.5	2314.3	2259.3	2205.3	2160.6	2102.4	2044.9	1998.0
15°	2582.4	2531.3	2460.1	2381.2	2307.6	2235.7	2173.8	2118.1	2042.3	1973.4	1916.1
17.5°	2622.8	2552.5	2476.1	2384.8	2299.7	2208.2	2128.5	2057.3	1972.9	1889.8	1822.3
20°	2635.7	2566.2	2477.9	2386.6	2286.0	2178.5	2092.5	2015.2	1924.6	1834.0	1756.7
22.5°	2627.8	2573.5	2475.5	2366.2	2263.1	2150.6	2053.6	1963.8	1863.3	1770.9	1681.1
25°	2573.1	2554.6	2461.6	2342.5	2224.8	2094.1	1981.9	1883.6	1769.1	1670.0	1572.5
27.5°	2445.7	2485.8	2428.2	2301.3	2170.5	2030.3	1904.2	1792.3	1673.4	1562.0	1464.8
30°	2323.2	2415.2	2390.5	2272.8	2126.6	1988.8	1847.2	1730.4	1603.5	1488.9	1393.0
32.5°	2155.4	2307.5	2331.7	2233.2	2082.0	1930.7	1782.2	1666.0	1533.5	1412.8	1319.3
35°	1888.2	2115.8	2220.2	2157.6	2005.9	1842.6	1689.3	1553.9	1420.8	1301.6	1208.8
37.5°	1569.5	1879.5	2053.6	2058.0	1918.7	1749.0	1582.1	1447.6	1311.4	1194.4	1094.0
40°	1362.8	1698.6	1925.4	1975.7	1858.1	1674.7	1505.9	1369.0	1235.9	1121.4	1006.0
42.5°	1177.1	1511.7	1790.4	1877.8	1784.4	1602.3	1432.9	1289.7	1160.3	1052.0	934.2
45°	951.9	1244.4	1551.6	1707.9	1656.1	1487.3	1308.6	1172.5	1050.9	957.3	844.2
47.5°	802.9	1009.2	1306.5	1517.8	1516.9	1362.9	1187.1	1056.6	943.9	856.2	764.8
50°	718.1	897.7	1149.2	1389.1	1409.2	1280.0	1112.8	983.6	878.4	786.3	712.8
52.5°	642.0	789.9	1016.1	1246.1	1303.3	1191.4	1029.3	909.9	807.8	723.1	660.1
55°	542.5	657.0	828.8	1043.9	1130.6	1051.7	907.8	796.3	713.5	642.3	588.1
57.5°	458.9	544.8	682.7	855.9	956.8	907.2	788.4	697.9	627.0	562.6	519.9
60°	406.3	476.7	593.6	738.3	849.7	814.9	713.5	629.1	568.8	513.1	472.8
62.5°	356.8	417.3	517.5	634.9	737.0	722.7	639.9	569.1	516.1	465.4	431.3
65°	287.1	331.2	409.4	501.5	583.5	590.5	530.9	482.9	435.7	395.5	365.3
67.5°	228.6	257.4	312.5	390.0	451.5	473.4	437.1	400.4	362.9	331.8	305.7
70°	192.7	215.9	256.1	318.8	375.4	398.5	377.7	349.0	316.5	290.9	268.5
72.5°	156.1	178.7	208.4	254.5	302.9	328.0	320.7	300.1	273.8	252.6	231.4
75°	117.6	124.6	144.7	175.7	213.6	235.3	240.7	229.8	208.9	192.7	180.3
77.5°	86.9	91.2	100.8	117.0	141.8	161.1	169.1	167.7	153.4	143.9	132.3
80°	69.7	72.0	76.6	83.6	102.2	121.5	126.9	126.9	116.8	113.0	101.4
82.5°	52.9	54.6	57.5	61.3	70.0	86.8	92.9	94.1	87.8	82.6	73.5
85°	30.2	29.4	31.0	33.3	34.8	39.5	48.8	50.3	48.8	42.5	40.2
87.5°	13.6	13.4	12.8	11.9	12.3	12.7	15.3	18.1	16.0	14.5	13.5
90°	15.6	11.5	8.7	6.9	5.8	4.6	2.3	0.6	2.3	4.6	5.8
92.5°	57.5	39.2	26.2	20.7	16.9	14.2	10.1	7.1	10.1	14.2	16.9
95°	133.0	82.9	56.5	42.6	33.4	28.2	22.4	20.2	22.4	28.2	33.4
97.5°	179.3	109.5	76.1	60.5	49.9	42.0	36.0	32.8	36.0	42.0	49.9
100°	188.9	118.7	88.2	72.0	60.5	51.3	46.0	44.3	46.0	51.3	60.5
102.5°	189.3	126.9	98.7	82.6	70.6	61.4	56.2	54.9	56.2	61.4	70.6
105°	192.4	141.1	114.0	97.9	85.2	76.5	72.6	70.3	72.6	76.5	85.2
107.5°	200.3	155.6	129.4	113.1	100.6	92.6	88.7	86.8	88.7	92.6	100.6
110°	206.7	165.3	140.0	123.2	111.2	103.7	100.2	97.9	100.2	103.7	111.2



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	213.7	174.5	150.1	132.9	121.3	114.2	110.4	108.1	110.4	114.2	121.3
115°	224.0	188.9	164.1	148.6	137.0	130.2	126.7	123.8	126.7	130.2	137.0
117.5°	235.1	202.2	179.3	163.1	152.1	145.9	142.5	140.2	142.5	145.9	152.1
120°	242.5	211.4	188.9	172.8	161.3	156.0	152.6	150.3	152.6	156.0	161.3
122.5°	248.9	220.2	199.0	182.5	171.0	165.3	161.9	160.0	161.9	165.3	171.0
125°	259.1	233.3	212.5	196.4	184.9	177.9	174.5	172.8	174.5	177.9	184.9
127.5°	268.7	245.5	225.3	208.7	197.6	190.1	185.2	182.9	185.2	190.1	197.6
130°	274.7	252.9	232.7	216.5	205.0	196.9	191.2	188.9	191.2	196.9	205.0
132.5°	280.7	259.2	240.0	223.9	212.0	203.4	197.2	194.4	197.2	203.4	212.0
135°	288.5	268.4	249.9	233.8	220.6	212.0	205.0	202.7	205.0	212.0	220.6
137.5°	294.5	275.8	257.5	242.6	229.4	220.3	213.3	210.6	213.3	220.3	229.4
140°	297.7	279.9	262.7	247.6	235.0	225.8	218.8	216.5	218.8	225.8	235.0
142.5°	300.5	283.2	266.3	252.3	240.0	230.9	224.4	222.6	224.4	230.9	240.0
145°	304.1	287.9	272.4	259.7	248.2	239.5	233.8	231.6	233.8	239.5	248.2
147.5°	306.1	291.9	277.2	266.0	256.4	248.4	242.9	241.2	242.9	248.4	256.4
150°	307.0	293.7	280.4	270.1	261.5	254.0	249.3	247.6	249.3	254.0	261.5
152.5°	307.4	295.6	283.7	274.3	266.1	259.5	254.9	254.1	254.9	259.5	266.1
155°	308.1	298.3	288.5	279.9	273.6	267.2	263.8	263.2	263.8	267.2	273.6
157.5°	308.1	300.2	292.0	284.8	279.6	274.2	271.4	270.7	271.4	274.2	279.6
160°	308.1	301.2	294.3	287.9	283.4	278.7	276.4	275.9	276.4	278.7	283.4
162.5°	307.6	301.6	295.7	290.7	286.6	282.9	280.5	280.9	280.5	282.9	286.6
165°	306.4	302.4	297.2	293.7	290.8	287.4	286.2	286.8	286.2	287.4	290.8
167.5°	305.6	302.3	298.4	296.3	294.2	292.0	290.9	291.6	290.9	292.0	294.2
170°	304.7	301.7	298.9	297.2	296.0	294.3	293.7	294.9	293.7	294.3	296.0
172.5°	303.3	301.3	299.3	298.1	297.4	295.7	296.0	296.7	296.0	295.7	297.4
175°	301.7	300.6	299.4	298.9	298.9	297.7	298.3	298.9	298.3	297.7	298.9
177.5°	300.8	299.9	299.4	299.4	299.4	298.5	299.0	299.9	299.0	298.5	299.4
180°	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2
2.5°	2195.6	2191.3	2183.2	2170.8	2163.4	2150.4	2141.7	2146.7	2148.0	2146.7	2145.5
5°	2136.7	2120.4	2098.0	2076.3	2056.2	2034.5	2022.2	2016.7	2005.9	1999.6	1996.6
7.5°	2065.3	2037.3	2005.6	1967.8	1935.7	1902.2	1885.0	1876.4	1854.3	1842.3	1831.7
10°	2012.1	1967.9	1936.2	1886.7	1856.5	1812.4	1782.2	1783.0	1752.8	1735.8	1723.4
12.5°	1953.3	1904.8	1852.0	1807.5	1765.5	1730.1	1693.6	1679.0	1647.0	1630.5	1597.1
15°	1855.7	1799.3	1743.5	1683.1	1640.6	1585.7	1533.1	1468.8	1416.9	1372.1	1359.7
17.5°	1749.3	1679.3	1623.5	1552.6	1479.7	1387.3	1326.3	1289.0	1257.7	1234.1	1216.4
20°	1676.2	1605.0	1545.4	1438.7	1340.3	1277.7	1232.7	1204.2	1171.6	1146.1	1132.2
22.5°	1599.4	1525.1	1443.9	1324.7	1248.1	1197.8	1157.8	1124.9	1102.9	1083.0	1070.3
25°	1490.5	1409.2	1275.4	1193.3	1131.4	1078.7	1050.9	1030.8	1007.5	980.5	968.2
27.5°	1375.3	1246.1	1149.9	1088.9	1029.9	995.6	970.6	940.6	919.8	907.6	894.7
30°	1289.3	1160.0	1085.0	1018.4	976.6	938.7	909.3	892.3	872.1	851.2	842.7
32.5°	1193.3	1090.0	1018.1	962.7	920.3	888.0	864.7	837.2	822.6	809.8	791.9
35°	1074.1	995.9	930.2	885.3	845.1	818.8	791.6	775.4	749.1	738.3	731.3
37.5°	973.2	905.4	856.4	809.0	777.1	748.0	731.4	705.6	694.2	679.1	664.5
40°	916.3	849.7	802.5	763.8	728.2	706.5	685.6	664.8	647.7	640.8	623.0
42.5°	858.1	803.9	756.7	714.3	690.4	667.5	641.1	625.7	608.1	596.8	585.8
45°	777.7	729.7	689.5	654.7	628.3	604.4	587.3	561.8	551.8	529.4	520.1
47.5°	707.2	662.6	624.2	591.1	565.4	549.8	524.8	504.8	488.8	475.0	463.1
50°	657.0	619.9	582.7	553.3	530.1	507.7	482.1	472.0	447.3	440.3	433.3
52.5°	611.2	575.9	541.9	513.1	489.9	468.1	445.6	432.4	415.8	408.8	403.6
55°	547.1	513.1	480.6	455.0	431.8	409.4	395.5	379.2	371.4	366.1	359.8
57.5°	482.7	452.1	427.2	401.3	378.0	360.1	344.1	334.3	326.3	319.1	311.7
60°	441.9	412.4	390.0	366.1	342.0	327.3	315.0	303.4	294.1	283.3	280.1
62.5°	398.5	372.8	352.2	328.9	308.0	294.6	282.8	271.8	260.6	244.9	240.5
65°	338.9	318.8	297.2	277.8	259.2	246.1	229.0	216.7	212.1	210.5	209.7
67.5°	285.1	266.1	247.5	227.6	210.8	198.5	190.0	188.0	184.8	183.9	181.7
70°	249.2	231.4	212.8	194.2	178.0	175.7	172.6	169.5	165.6	164.1	162.5
72.5°	217.0	198.5	180.0	165.1	158.1	155.2	152.2	149.1	146.4	144.9	143.9
75°	166.4	149.4	136.9	131.6	127.6	125.3	120.7	118.4	116.8	114.5	113.7
77.5°	119.8	110.2	104.5	101.1	97.0	94.5	91.9	89.6	88.0	87.5	86.2
80°	91.3	86.6	82.8	78.2	76.6	73.5	72.7	70.4	71.2	68.9	68.9
82.5°	70.9	65.0	61.8	59.6	58.1	55.5	54.8	53.7	53.8	52.1	52.1
85°	36.4	34.8	33.3	31.7	31.7	29.4	30.2	29.4	29.4	27.9	27.1
87.5°	13.1	12.8	12.2	13.0	13.7	13.2	13.1	12.3	12.1	12.3	11.8
90°	6.9	8.7	11.5	15.6	19.0	19.6	19.0	18.4	17.3	18.4	19.0
92.5°	20.7	26.2	39.2	57.5	73.8	74.8	63.2	50.2	43.1	38.3	34.6
95°	42.6	56.5	82.9	133.0	199.9	225.8	197.5	150.9	115.7	91.6	78.9
97.5°	60.5	76.1	109.5	179.3	290.2	385.4	404.2	352.1	288.1	225.8	184.2
100°	72.0	88.2	118.7	188.9	313.3	454.9	537.9	525.8	454.4	375.5	305.8
102.5°	82.6	98.7	126.9	189.3	304.6	457.3	587.6	639.6	623.5	565.8	491.9
105°	97.9	114.0	141.1	192.4	287.4	426.8	580.0	699.7	764.8	772.3	753.3
107.5°	113.1	129.4	155.6	200.3	278.8	394.0	529.4	656.4	754.5	814.4	842.2
110°	123.2	140.0	165.3	206.7	277.0	378.4	497.6	619.1	722.2	795.9	843.1



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	132.9	150.1	174.5	213.7	277.5	368.2	475.4	585.0	684.0	762.8	816.9
115°	148.6	164.1	188.9	224.0	279.9	357.1	448.1	543.1	631.8	707.2	766.6
117.5°	163.1	179.3	202.2	235.1	284.1	351.6	430.8	511.5	589.4	657.8	713.5
120°	172.8	188.9	211.4	242.5	286.8	348.4	421.6	495.8	567.2	628.3	680.8
122.5°	182.5	199.0	220.2	248.9	290.0	346.6	413.7	483.4	548.9	606.6	654.0
125°	196.4	212.5	233.3	259.1	294.9	343.3	402.5	465.3	524.6	575.3	618.5
127.5°	208.7	225.3	245.5	268.7	299.8	341.3	392.2	447.5	501.2	549.0	588.9
130°	216.5	232.7	252.9	274.7	303.5	340.3	385.3	436.0	485.5	531.0	569.0
132.5°	223.9	240.0	259.2	280.7	307.2	339.9	379.7	425.0	470.8	512.6	548.3
135°	233.8	249.9	268.4	288.5	311.5	339.2	372.0	409.5	447.5	485.5	517.8
137.5°	242.6	257.5	275.8	294.5	315.5	339.1	366.6	397.2	429.0	459.1	487.3
140°	247.6	262.7	279.9	297.7	317.3	338.6	363.5	389.3	417.0	443.4	468.8
142.5°	252.3	266.3	283.2	300.5	318.7	338.6	360.2	382.8	406.4	429.2	450.4
145°	259.7	272.4	287.9	304.1	320.2	337.5	355.9	373.8	392.7	410.6	427.4
147.5°	266.0	277.2	291.9	306.1	320.6	335.4	351.5	366.8	381.7	395.7	407.9
150°	270.1	280.4	293.7	307.0	320.2	334.1	347.9	361.6	374.4	386.5	396.8
152.5°	274.3	283.7	295.6	307.4	319.3	331.7	344.7	356.6	368.4	378.6	387.6
155°	279.9	288.5	298.3	308.1	317.9	327.7	338.6	349.6	358.8	367.4	373.8
157.5°	284.8	292.0	300.2	308.1	315.3	323.6	333.0	341.4	349.1	356.4	361.3
160°	287.9	294.3	301.2	308.1	313.9	320.8	328.8	336.3	342.6	349.0	353.0
162.5°	290.7	295.7	301.6	307.6	312.5	318.5	325.2	331.2	336.7	342.1	345.2
165°	293.7	297.2	302.4	306.4	309.8	313.9	319.0	323.7	327.7	331.7	334.1
167.5°	296.3	298.4	302.3	305.6	307.2	309.8	313.1	316.4	319.5	322.2	324.4
170°	297.2	298.9	301.7	304.7	305.8	307.5	309.8	312.8	314.5	316.8	317.9
172.5°	298.1	299.3	301.3	303.3	304.0	304.8	306.6	308.6	309.8	311.6	312.4
175°	298.9	299.4	300.6	301.7	301.2	301.7	302.4	304.1	304.7	305.3	305.8
177.5°	299.4	299.4	299.9	300.8	299.9	299.4	299.9	300.8	300.8	301.3	301.3
180°	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2
2.5°	2138.7	2139.9	2138.1	2139.3	2138.1	2139.9	2138.7	2145.5	2146.7	2148.0	2146.7
5°	1992.7	1983.4	1981.9	1979.5	1981.9	1983.4	1992.7	1996.6	1999.6	2005.9	2016.7
7.5°	1818.5	1817.1	1813.2	1807.8	1813.2	1817.1	1818.5	1831.7	1842.3	1854.3	1876.4
10°	1706.4	1702.5	1701.7	1696.3	1701.7	1702.5	1706.4	1723.4	1735.8	1752.8	1783.0
12.5°	1575.1	1550.2	1547.6	1534.1	1547.6	1550.2	1575.1	1597.1	1630.5	1647.0	1679.0
15°	1341.1	1336.5	1321.0	1310.9	1321.0	1336.5	1341.1	1359.7	1372.1	1416.9	1468.8
17.5°	1207.4	1192.2	1187.4	1185.3	1187.4	1192.2	1207.4	1216.4	1234.1	1257.7	1289.0
20°	1121.4	1107.4	1105.1	1103.6	1105.1	1107.4	1121.4	1132.2	1146.1	1171.6	1204.2
22.5°	1061.9	1047.3	1041.3	1036.6	1041.3	1047.3	1061.9	1070.3	1083.0	1102.9	1124.9
25°	960.4	954.9	951.9	950.3	951.9	954.9	960.4	968.2	980.5	1007.5	1030.8
27.5°	881.0	869.1	866.8	862.7	866.8	869.1	881.0	894.7	907.6	919.8	940.6
30°	835.8	831.9	826.5	821.8	826.5	831.9	835.8	842.7	851.2	872.1	892.3
32.5°	782.5	779.3	774.5	772.3	774.5	779.3	782.5	791.9	809.8	822.6	837.2
35°	723.6	712.8	708.1	701.1	708.1	712.8	723.6	731.3	738.3	749.1	775.4
37.5°	661.2	655.5	648.9	651.3	648.9	655.5	661.2	664.5	679.1	694.2	705.6
40°	612.9	609.0	607.5	606.7	607.5	609.0	612.9	623.0	640.8	647.7	664.8
42.5°	574.5	563.8	559.8	559.7	559.8	563.8	574.5	585.8	596.8	608.1	625.7
45°	516.1	506.1	499.2	499.9	499.2	506.1	516.1	520.1	529.4	551.8	561.8
47.5°	456.5	456.2	451.8	453.1	451.8	456.2	456.5	463.1	475.0	488.8	504.8
50°	428.0	423.3	420.2	421.0	420.2	423.3	428.0	433.3	440.3	447.3	472.0
52.5°	400.7	396.7	394.3	397.5	394.3	396.7	400.7	403.6	408.8	415.8	432.4
55°	356.0	351.3	350.5	349.8	350.5	351.3	356.0	359.8	366.1	371.4	379.2
57.5°	306.0	302.9	298.2	296.2	298.2	302.9	306.0	311.7	319.1	326.3	334.3
60°	270.0	263.9	256.1	255.4	256.1	263.9	270.0	280.1	283.3	294.1	303.4
62.5°	237.2	236.0	234.5	234.3	234.5	236.0	237.2	240.5	244.9	260.6	271.8
65°	208.1	207.4	208.1	208.9	208.1	207.4	208.1	209.7	210.5	212.1	216.7
67.5°	181.4	180.0	178.6	179.3	178.6	180.0	181.4	181.7	183.9	184.8	188.0
70°	161.0	160.2	159.5	159.5	159.5	160.2	161.0	162.5	164.1	165.6	169.5
72.5°	141.2	141.0	140.3	139.6	140.3	141.0	141.2	143.9	144.9	146.4	149.1
75°	113.0	111.4	111.4	111.4	111.4	111.4	113.0	113.7	114.5	116.8	118.4
77.5°	86.0	85.2	84.5	83.9	84.5	85.2	86.0	86.2	87.5	88.0	89.6
80°	68.1	67.4	66.6	66.6	66.6	67.4	68.1	68.9	68.9	71.2	70.4
82.5°	52.0	51.2	51.1	50.5	51.1	51.2	52.0	52.1	52.1	53.8	53.7
85°	27.9	28.7	27.9	29.4	27.9	28.7	27.9	27.1	27.9	29.4	29.4
87.5°	11.8	11.2	11.8	11.2	11.8	11.2	11.8	11.8	12.3	12.1	12.3
90°	19.0	19.0	19.0	19.0	19.0	19.0	19.0	19.0	18.4	17.3	18.4
92.5°	34.2	32.4	32.8	31.9	32.8	32.4	34.2	34.6	38.3	43.1	50.2
95°	71.4	66.9	65.0	65.6	65.0	66.9	71.4	78.9	91.6	115.7	150.9
97.5°	156.6	142.5	134.1	129.3	134.1	142.5	156.6	184.2	225.8	288.1	352.1
100°	258.0	233.3	216.5	206.2	216.5	233.3	258.0	305.8	375.5	454.4	525.8
102.5°	440.0	397.7	376.9	362.8	376.9	397.7	440.0	491.9	565.8	623.5	639.6
105°	717.6	681.9	657.1	649.0	657.1	681.9	717.6	753.3	772.3	764.8	699.7
107.5°	846.7	844.8	839.8	829.1	839.8	844.8	846.7	842.2	814.4	754.5	656.4
110°	867.9	878.9	884.0	883.4	884.0	878.9	867.9	843.1	795.9	722.2	619.1



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	851.3	869.6	879.4	882.5	879.4	869.6	851.3	816.9	762.8	684.0	585.0
115°	807.4	833.9	848.9	854.0	848.9	833.9	807.4	766.6	707.2	631.8	543.1
117.5°	755.2	783.2	798.9	803.2	798.9	783.2	755.2	713.5	657.8	589.4	511.5
120°	721.0	748.1	764.8	770.5	764.8	748.1	721.0	680.8	628.3	567.2	495.8
122.5°	690.1	716.8	731.6	736.5	731.6	716.8	690.1	654.0	606.6	548.9	483.4
125°	652.0	673.8	688.2	692.9	688.2	673.8	652.0	618.5	575.3	524.6	465.3
127.5°	617.9	638.4	650.9	654.6	650.9	638.4	617.9	588.9	549.0	501.2	447.5
130°	597.2	616.8	628.3	632.9	628.3	616.8	597.2	569.0	531.0	485.5	436.0
132.5°	576.0	595.6	606.2	610.4	606.2	595.6	576.0	548.3	512.6	470.8	425.0
135°	542.5	561.5	571.9	574.2	571.9	561.5	542.5	517.8	485.5	447.5	409.5
137.5°	509.8	526.1	535.2	538.7	535.2	526.1	509.8	487.3	459.1	429.0	397.2
140°	487.3	502.2	510.8	514.3	510.8	502.2	487.3	468.8	443.4	417.0	389.3
142.5°	467.9	481.5	489.2	489.9	489.2	481.5	467.9	450.4	429.2	406.4	382.8
145°	441.1	450.9	456.7	458.4	456.7	450.9	441.1	427.4	410.6	392.7	373.8
147.5°	419.3	427.1	431.0	432.0	431.0	427.1	419.3	407.9	395.7	381.7	366.8
150°	405.5	412.3	415.8	416.4	415.8	412.3	405.5	396.8	386.5	374.4	361.6
152.5°	394.4	400.4	402.9	403.0	402.9	400.4	394.4	387.6	378.6	368.4	356.6
155°	380.1	384.2	386.5	385.3	386.5	384.2	380.1	373.8	367.4	358.8	349.6
157.5°	365.8	369.2	370.2	370.2	370.2	369.2	365.8	361.3	356.4	349.1	341.4
160°	357.1	359.9	360.5	360.5	360.5	359.9	357.1	353.0	349.0	342.6	336.3
162.5°	349.2	351.2	351.7	351.3	351.7	351.2	349.2	345.2	342.1	336.7	331.2
165°	336.3	338.6	338.6	338.1	338.6	338.6	336.3	334.1	331.7	327.7	323.7
167.5°	325.4	326.7	326.6	325.9	326.6	326.7	325.4	324.4	322.2	319.5	316.4
170°	318.5	320.2	319.6	318.5	319.6	320.2	318.5	317.9	316.8	314.5	312.8
172.5°	313.0	313.8	313.2	312.5	313.2	313.8	313.0	312.4	311.6	309.8	308.6
175°	305.8	306.4	305.8	304.7	305.8	306.4	305.8	305.8	305.3	304.7	304.1
177.5°	301.3	301.3	300.8	299.9	300.8	301.3	301.3	301.3	301.3	300.8	300.8
180°	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2
2.5°	2141.7	2150.4	2163.4	2170.8	2183.2	2191.3	2195.6	2203.6	2208.0	2223.5	2239.6
5°	2022.2	2034.5	2056.2	2076.3	2098.0	2120.4	2136.7	2155.3	2172.2	2201.6	2232.6
7.5°	1885.0	1902.2	1935.7	1967.8	2005.6	2037.3	2065.3	2097.0	2125.4	2167.5	2211.4
10°	1782.2	1812.4	1856.5	1886.7	1936.2	1967.9	2012.1	2046.9	2086.4	2142.0	2191.6
12.5°	1693.6	1730.1	1765.5	1807.5	1852.0	1904.8	1953.3	1998.0	2044.9	2102.4	2160.6
15°	1533.1	1585.7	1640.6	1683.1	1743.5	1799.3	1855.7	1916.1	1973.4	2042.3	2118.1
17.5°	1326.3	1387.3	1479.7	1552.6	1623.5	1679.3	1749.3	1822.3	1889.8	1972.9	2057.3
20°	1232.7	1277.7	1340.3	1438.7	1545.4	1605.0	1676.2	1756.7	1834.0	1924.6	2015.2
22.5°	1157.8	1197.8	1248.1	1324.7	1443.9	1525.1	1599.4	1681.1	1770.9	1863.3	1963.8
25°	1050.9	1078.7	1131.4	1193.3	1275.4	1409.2	1490.5	1572.5	1670.0	1769.1	1883.6
27.5°	970.6	995.6	1029.9	1088.9	1149.9	1246.1	1375.3	1464.8	1562.0	1673.4	1792.3
30°	909.3	938.7	976.6	1018.4	1085.0	1160.0	1289.3	1393.0	1488.9	1603.5	1730.4
32.5°	864.7	888.0	920.3	962.7	1018.1	1090.0	1193.3	1319.3	1412.8	1533.5	1666.0
35°	791.6	818.8	845.1	885.3	930.2	995.9	1074.1	1208.8	1301.6	1420.8	1553.9
37.5°	731.4	748.0	777.1	809.0	856.4	905.4	973.2	1094.0	1194.4	1311.4	1447.6
40°	685.6	706.5	728.2	763.8	802.5	849.7	916.3	1006.0	1121.4	1235.9	1369.0
42.5°	641.1	667.5	690.4	714.3	756.7	803.9	858.1	934.2	1052.0	1160.3	1289.7
45°	587.3	604.4	628.3	654.7	689.5	729.7	777.7	844.2	957.3	1050.9	1172.5
47.5°	524.8	549.8	565.4	591.1	624.2	662.6	707.2	764.8	856.2	943.9	1056.6
50°	482.1	507.7	530.1	553.3	582.7	619.9	657.0	712.8	786.3	878.4	983.6
52.5°	445.6	468.1	489.9	513.1	541.9	575.9	611.2	660.1	723.1	807.8	909.9
55°	395.5	409.4	431.8	455.0	480.6	513.1	547.1	588.1	642.3	713.5	796.3
57.5°	344.1	360.1	378.0	401.3	427.2	452.1	482.7	519.9	562.6	627.0	697.9
60°	315.0	327.3	342.0	366.1	390.0	412.4	441.9	472.8	513.1	568.8	629.1
62.5°	282.8	294.6	308.0	328.9	352.2	372.8	398.5	431.3	465.4	516.1	569.1
65°	229.0	246.1	259.2	277.8	297.2	318.8	338.9	365.3	395.5	435.7	482.9
67.5°	190.0	198.5	210.8	227.6	247.5	266.1	285.1	305.7	331.8	362.9	400.4
70°	172.6	175.7	178.0	194.2	212.8	231.4	249.2	268.5	290.9	316.5	349.0
72.5°	152.2	155.2	158.1	165.1	180.0	198.5	217.0	231.4	252.6	273.8	300.1
75°	120.7	125.3	127.6	131.6	136.9	149.4	166.4	180.3	192.7	208.9	229.8
77.5°	91.9	94.5	97.0	101.1	104.5	110.2	119.8	132.3	143.9	153.4	167.7
80°	72.7	73.5	76.6	78.2	82.8	86.6	91.3	101.4	113.0	116.8	126.9
82.5°	54.8	55.5	58.1	59.6	61.8	65.0	70.9	73.5	82.6	87.8	94.1
85°	30.2	29.4	31.7	31.7	33.3	34.8	36.4	40.2	42.5	48.8	50.3
87.5°	13.1	13.2	13.7	13.0	12.2	12.8	13.1	13.5	14.5	16.0	18.1
90°	19.0	19.6	19.0	15.6	11.5	8.7	6.9	5.8	4.6	2.3	0.6
92.5°	63.2	74.8	73.8	57.5	39.2	26.2	20.7	16.9	14.2	10.1	7.1
95°	197.5	225.8	199.9	133.0	82.9	56.5	42.6	33.4	28.2	22.4	20.2
97.5°	404.2	385.4	290.2	179.3	109.5	76.1	60.5	49.9	42.0	36.0	32.8
100°	537.9	454.9	313.3	188.9	118.7	88.2	72.0	60.5	51.3	46.0	44.3
102.5°	587.6	457.3	304.6	189.3	126.9	98.7	82.6	70.6	61.4	56.2	54.9
105°	580.0	426.8	287.4	192.4	141.1	114.0	97.9	85.2	76.5	72.6	70.3
107.5°	529.4	394.0	278.8	200.3	155.6	129.4	113.1	100.6	92.6	88.7	86.8
110°	497.6	378.4	277.0	206.7	165.3	140.0	123.2	111.2	103.7	100.2	97.9



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	475.4	368.2	277.5	213.7	174.5	150.1	132.9	121.3	114.2	110.4	108.1
115°	448.1	357.1	279.9	224.0	188.9	164.1	148.6	137.0	130.2	126.7	123.8
117.5°	430.8	351.6	284.1	235.1	202.2	179.3	163.1	152.1	145.9	142.5	140.2
120°	421.6	348.4	286.8	242.5	211.4	188.9	172.8	161.3	156.0	152.6	150.3
122.5°	413.7	346.6	290.0	248.9	220.2	199.0	182.5	171.0	165.3	161.9	160.0
125°	402.5	343.3	294.9	259.1	233.3	212.5	196.4	184.9	177.9	174.5	172.8
127.5°	392.2	341.3	299.8	268.7	245.5	225.3	208.7	197.6	190.1	185.2	182.9
130°	385.3	340.3	303.5	274.7	252.9	232.7	216.5	205.0	196.9	191.2	188.9
132.5°	379.7	339.9	307.2	280.7	259.2	240.0	223.9	212.0	203.4	197.2	194.4
135°	372.0	339.2	311.5	288.5	268.4	249.9	233.8	220.6	212.0	205.0	202.7
137.5°	366.6	339.1	315.5	294.5	275.8	257.5	242.6	229.4	220.3	213.3	210.6
140°	363.5	338.6	317.3	297.7	279.9	262.7	247.6	235.0	225.8	218.8	216.5
142.5°	360.2	338.6	318.7	300.5	283.2	266.3	252.3	240.0	230.9	224.4	222.6
145°	355.9	337.5	320.2	304.1	287.9	272.4	259.7	248.2	239.5	233.8	231.6
147.5°	351.5	335.4	320.6	306.1	291.9	277.2	266.0	256.4	248.4	242.9	241.2
150°	347.9	334.1	320.2	307.0	293.7	280.4	270.1	261.5	254.0	249.3	247.6
152.5°	344.7	331.7	319.3	307.4	295.6	283.7	274.3	266.1	259.5	254.9	254.1
155°	338.6	327.7	317.9	308.1	298.3	288.5	279.9	273.6	267.2	263.8	263.2
157.5°	333.0	323.6	315.3	308.1	300.2	292.0	284.8	279.6	274.2	271.4	270.7
160°	328.8	320.8	313.9	308.1	301.2	294.3	287.9	283.4	278.7	276.4	275.9
162.5°	325.2	318.5	312.5	307.6	301.6	295.7	290.7	286.6	282.9	280.5	280.9
165°	319.0	313.9	309.8	306.4	302.4	297.2	293.7	290.8	287.4	286.2	286.8
167.5°	313.1	309.8	307.2	305.6	302.3	298.4	296.3	294.2	292.0	290.9	291.6
170°	309.8	307.5	305.8	304.7	301.7	298.9	297.2	296.0	294.3	293.7	294.9
172.5°	306.6	304.8	304.0	303.3	301.3	299.3	298.1	297.4	295.7	296.0	296.7
175°	302.4	301.7	301.2	301.7	300.6	299.4	298.9	298.9	297.7	298.3	298.9
177.5°	299.9	299.4	299.9	300.8	299.9	299.4	299.4	299.4	298.5	299.0	299.9
180°	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2
2.5°	2240.2	2242.0	2254.4	2260.0	2271.2	2275.4	2280.5	2279.2	2279.2	2281.7	2299.0
5°	2245.0	2260.5	2283.7	2306.1	2327.8	2346.3	2358.7	2371.2	2375.8	2398.2	2418.3
7.5°	2237.0	2265.4	2303.8	2338.0	2379.0	2411.1	2437.7	2461.6	2478.1	2510.7	2544.2
10°	2226.4	2266.6	2310.0	2354.1	2410.5	2453.2	2496.5	2529.8	2540.6	2589.4	2617.3
12.5°	2205.3	2259.3	2314.3	2371.5	2426.7	2485.4	2533.0	2566.3	2604.3	2648.2	2699.6
15°	2173.8	2235.7	2307.6	2381.2	2460.1	2531.3	2582.4	2640.4	2682.2	2730.2	2775.1
17.5°	2128.5	2208.2	2299.7	2384.8	2476.1	2552.5	2622.8	2678.5	2708.0	2735.3	2742.0
20°	2092.5	2178.5	2286.0	2386.6	2477.9	2566.2	2635.7	2682.2	2690.0	2690.7	2649.7
22.5°	2053.6	2150.6	2263.1	2366.2	2475.5	2573.5	2627.8	2647.6	2616.9	2564.5	2485.1
25°	1981.9	2094.1	2224.8	2342.5	2461.6	2554.6	2573.1	2538.3	2430.7	2317.7	2174.5
27.5°	1904.2	2030.3	2170.5	2301.3	2428.2	2485.8	2445.7	2320.2	2126.5	1958.0	1753.9
30°	1847.2	1988.8	2126.6	2272.8	2390.5	2415.2	2323.2	2138.2	1912.2	1658.4	1454.9
32.5°	1782.2	1930.7	2082.0	2233.2	2331.7	2307.5	2155.4	1927.7	1662.7	1413.2	1220.8
35°	1689.3	1842.6	2005.9	2157.6	2220.2	2115.8	1888.2	1591.9	1321.0	1088.0	955.7
37.5°	1582.1	1749.0	1918.7	2058.0	2053.6	1879.5	1569.5	1263.5	1035.9	898.2	803.9
40°	1505.9	1674.7	1858.1	1975.7	1925.4	1698.6	1362.8	1074.1	907.8	797.9	729.0
42.5°	1432.9	1602.3	1784.4	1877.8	1790.4	1511.7	1177.1	950.9	813.6	727.9	672.1
45°	1308.6	1487.3	1656.1	1707.9	1551.6	1244.4	951.9	787.8	696.5	633.0	594.3
47.5°	1187.1	1362.9	1516.9	1517.8	1306.5	1009.2	802.9	681.8	603.8	554.7	526.5
50°	1112.8	1280.0	1409.2	1389.1	1149.2	897.7	718.1	613.7	548.7	510.8	481.3
52.5°	1029.3	1191.4	1303.3	1246.1	1016.1	789.9	642.0	554.2	500.4	467.4	441.1
55°	907.8	1051.7	1130.6	1043.9	828.8	657.0	542.5	473.6	433.3	405.5	383.0
57.5°	788.4	907.2	956.8	855.9	682.7	544.8	458.9	407.2	367.3	347.3	335.7
60°	713.5	814.9	849.7	738.3	593.6	476.7	406.3	358.3	328.9	315.8	304.2
62.5°	639.9	722.7	737.0	634.9	517.5	417.3	356.8	316.2	296.7	284.2	273.2
65°	530.9	590.5	583.5	501.5	409.4	331.2	287.1	262.4	247.6	229.8	210.5
67.5°	437.1	473.4	451.5	390.0	312.5	257.4	228.6	209.8	191.6	174.7	170.3
70°	377.7	398.5	375.4	318.8	256.1	215.9	192.7	170.3	159.5	155.5	148.6
72.5°	320.7	328.0	302.9	254.5	208.4	178.7	156.1	143.6	137.7	134.5	130.0
75°	240.7	235.3	213.6	175.7	144.7	124.6	117.6	113.0	109.1	106.0	103.7
77.5°	169.1	161.1	141.8	117.0	100.8	91.2	86.9	84.5	82.6	81.1	78.8
80°	126.9	121.5	102.2	83.6	76.6	72.0	69.7	66.6	66.6	65.0	62.7
82.5°	92.9	86.8	70.0	61.3	57.5	54.6	52.9	51.1	50.5	50.8	49.1
85°	48.8	39.5	34.8	33.3	31.0	29.4	30.2	28.7	28.7	28.7	27.9
87.5°	15.3	12.7	12.3	11.9	12.8	13.4	13.6	14.3	15.0	14.3	14.8
90°	2.3	4.6	5.8	6.9	8.7	11.5	15.6	19.0	19.6	19.0	18.4
92.5°	10.1	14.2	16.9	20.7	26.2	39.2	57.5	73.8	74.8	63.2	50.2
95°	22.4	28.2	33.4	42.6	56.5	82.9	133.0	199.9	225.8	197.5	150.9
97.5°	36.0	42.0	49.9	60.5	76.1	109.5	179.3	290.2	385.4	404.2	352.1
100°	46.0	51.3	60.5	72.0	88.2	118.7	188.9	313.3	454.9	537.9	525.8
102.5°	56.2	61.4	70.6	82.6	98.7	126.9	189.3	304.6	457.3	587.6	639.6
105°	72.6	76.5	85.2	97.9	114.0	141.1	192.4	287.4	426.8	580.0	699.7
107.5°	88.7	92.6	100.6	113.1	129.4	155.6	200.3	278.8	394.0	529.4	656.4
110°	100.2	103.7	111.2	123.2	140.0	165.3	206.7	277.0	378.4	497.6	619.1



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	110.4	114.2	121.3	132.9	150.1	174.5	213.7	277.5	368.2	475.4	585.0
115°	126.7	130.2	137.0	148.6	164.1	188.9	224.0	279.9	357.1	448.1	543.1
117.5°	142.5	145.9	152.1	163.1	179.3	202.2	235.1	284.1	351.6	430.8	511.5
120°	152.6	156.0	161.3	172.8	188.9	211.4	242.5	286.8	348.4	421.6	495.8
122.5°	161.9	165.3	171.0	182.5	199.0	220.2	248.9	290.0	346.6	413.7	483.4
125°	174.5	177.9	184.9	196.4	212.5	233.3	259.1	294.9	343.3	402.5	465.3
127.5°	185.2	190.1	197.6	208.7	225.3	245.5	268.7	299.8	341.3	392.2	447.5
130°	191.2	196.9	205.0	216.5	232.7	252.9	274.7	303.5	340.3	385.3	436.0
132.5°	197.2	203.4	212.0	223.9	240.0	259.2	280.7	307.2	339.9	379.7	425.0
135°	205.0	212.0	220.6	233.8	249.9	268.4	288.5	311.5	339.2	372.0	409.5
137.5°	213.3	220.3	229.4	242.6	257.5	275.8	294.5	315.5	339.1	366.6	397.2
140°	218.8	225.8	235.0	247.6	262.7	279.9	297.7	317.3	338.6	363.5	389.3
142.5°	224.4	230.9	240.0	252.3	266.3	283.2	300.5	318.7	338.6	360.2	382.8
145°	233.8	239.5	248.2	259.7	272.4	287.9	304.1	320.2	337.5	355.9	373.8
147.5°	242.9	248.4	256.4	266.0	277.2	291.9	306.1	320.6	335.4	351.5	366.8
150°	249.3	254.0	261.5	270.1	280.4	293.7	307.0	320.2	334.1	347.9	361.6
152.5°	254.9	259.5	266.1	274.3	283.7	295.6	307.4	319.3	331.7	344.7	356.6
155°	263.8	267.2	273.6	279.9	288.5	298.3	308.1	317.9	327.7	338.6	349.6
157.5°	271.4	274.2	279.6	284.8	292.0	300.2	308.1	315.3	323.6	333.0	341.4
160°	276.4	278.7	283.4	287.9	294.3	301.2	308.1	313.9	320.8	328.8	336.3
162.5°	280.5	282.9	286.6	290.7	295.7	301.6	307.6	312.5	318.5	325.2	331.2
165°	286.2	287.4	290.8	293.7	297.2	302.4	306.4	309.8	313.9	319.0	323.7
167.5°	290.9	292.0	294.2	296.3	298.4	302.3	305.6	307.2	309.8	313.1	316.4
170°	293.7	294.3	296.0	297.2	298.9	301.7	304.7	305.8	307.5	309.8	312.8
172.5°	296.0	295.7	297.4	298.1	299.3	301.3	303.3	304.0	304.8	306.6	308.6
175°	298.3	297.7	298.9	298.9	299.4	300.6	301.7	301.2	301.7	302.4	304.1
177.5°	299.0	298.5	299.4	299.4	299.4	299.9	300.8	299.9	299.4	299.9	300.8
180°	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4	299.4



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2	2227.2
2.5°	2305.2	2313.2	2316.9	2316.9	2321.3	2319.5	2317.5
5°	2437.7	2452.4	2455.5	2469.4	2479.4	2476.4	2477.9
7.5°	2569.4	2593.0	2616.5	2627.2	2628.8	2635.0	2637.4
10°	2650.5	2669.9	2706.2	2700.8	2727.8	2743.4	2717.8
12.5°	2728.5	2754.6	2779.9	2786.8	2802.2	2807.1	2797.0
15°	2799.0	2813.0	2814.6	2810.7	2815.3	2811.5	2796.7
17.5°	2733.1	2710.6	2664.7	2643.0	2625.9	2600.5	2590.3
20°	2624.1	2557.6	2480.2	2449.3	2412.9	2341.7	2358.7
22.5°	2388.9	2313.1	2235.7	2145.4	2102.1	2034.7	2030.6
25°	2022.9	1892.1	1748.2	1647.6	1588.7	1521.5	1492.0
27.5°	1572.8	1408.2	1290.2	1230.4	1176.1	1122.8	1120.5
30°	1276.9	1153.1	1061.8	1010.7	977.3	954.9	959.6
32.5°	1076.3	991.5	929.9	887.5	862.8	846.0	845.7
35°	879.9	821.8	782.3	764.6	746.8	734.4	735.2
37.5°	753.0	718.1	696.2	676.5	665.4	659.3	655.9
40°	687.9	659.3	642.3	630.7	621.4	612.9	611.4
42.5°	636.6	612.9	595.9	586.7	578.0	572.1	570.5
45°	564.9	545.5	530.1	520.1	516.1	510.8	510.8
47.5°	502.5	483.5	471.4	465.1	458.5	454.8	454.7
50°	460.5	445.8	434.9	431.0	425.7	423.3	422.5
52.5°	422.7	411.7	403.9	401.3	399.0	396.1	396.6
55°	371.4	365.3	362.1	359.8	356.0	351.3	354.5
57.5°	328.3	323.1	314.7	307.4	303.9	300.5	301.8
60°	297.9	287.1	276.3	267.7	265.4	258.4	258.4
62.5°	259.5	244.4	231.1	226.3	224.0	220.8	220.0
65°	199.7	193.5	190.4	187.2	185.7	185.7	184.2
67.5°	165.4	163.0	159.6	158.8	157.2	156.8	156.3
70°	146.2	143.2	141.6	140.9	139.3	140.1	137.7
72.5°	127.6	125.2	124.9	122.9	122.0	122.1	120.4
75°	100.6	100.6	99.9	99.1	97.6	96.7	97.6
77.5°	77.4	77.6	76.1	76.0	75.8	76.0	75.2
80°	61.9	62.7	61.9	61.1	60.4	61.1	60.4
82.5°	48.9	47.9	47.7	47.6	47.4	46.9	46.8
85°	27.9	28.7	27.9	27.1	27.1	27.1	27.9
87.5°	13.9	14.2	14.3	14.3	14.3	14.3	13.7
90°	17.3	18.4	19.0	19.0	19.0	19.0	19.0
92.5°	43.1	38.3	34.6	34.2	32.4	32.8	31.9
95°	115.7	91.6	78.9	71.4	66.9	65.0	65.6
97.5°	288.1	225.8	184.2	156.6	142.5	134.1	129.3
100°	454.4	375.5	305.8	258.0	233.3	216.5	206.2
102.5°	623.5	565.8	491.9	440.0	397.7	376.9	362.8
105°	764.8	772.3	753.3	717.6	681.9	657.1	649.0
107.5°	754.5	814.4	842.2	846.7	844.8	839.8	829.1
110°	722.2	795.9	843.1	867.9	878.9	884.0	883.4



TEST NUMBER: P331743-840

CATALOG NUMBER: SA2XXRDIP-C1005D530U840-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	684.0	762.8	816.9	851.3	869.6	879.4	882.5
115°	631.8	707.2	766.6	807.4	833.9	848.9	854.0
117.5°	589.4	657.8	713.5	755.2	783.2	798.9	803.2
120°	567.2	628.3	680.8	721.0	748.1	764.8	770.5
122.5°	548.9	606.6	654.0	690.1	716.8	731.6	736.5
125°	524.6	575.3	618.5	652.0	673.8	688.2	692.9
127.5°	501.2	549.0	588.9	617.9	638.4	650.9	654.6
130°	485.5	531.0	569.0	597.2	616.8	628.3	632.9
132.5°	470.8	512.6	548.3	576.0	595.6	606.2	610.4
135°	447.5	485.5	517.8	542.5	561.5	571.9	574.2
137.5°	429.0	459.1	487.3	509.8	526.1	535.2	538.7
140°	417.0	443.4	468.8	487.3	502.2	510.8	514.3
142.5°	406.4	429.2	450.4	467.9	481.5	489.2	489.9
145°	392.7	410.6	427.4	441.1	450.9	456.7	458.4
147.5°	381.7	395.7	407.9	419.3	427.1	431.0	432.0
150°	374.4	386.5	396.8	405.5	412.3	415.8	416.4
152.5°	368.4	378.6	387.6	394.4	400.4	402.9	403.0
155°	358.8	367.4	373.8	380.1	384.2	386.5	385.3
157.5°	349.1	356.4	361.3	365.8	369.2	370.2	370.2
160°	342.6	349.0	353.0	357.1	359.9	360.5	360.5
162.5°	336.7	342.1	345.2	349.2	351.2	351.7	351.3
165°	327.7	331.7	334.1	336.3	338.6	338.6	338.1
167.5°	319.5	322.2	324.4	325.4	326.7	326.6	325.9
170°	314.5	316.8	317.9	318.5	320.2	319.6	318.5
172.5°	309.8	311.6	312.4	313.0	313.8	313.2	312.5
175°	304.7	305.3	305.8	305.8	306.4	305.8	304.7
177.5°	300.8	301.3	301.3	301.3	301.3	300.8	299.9
180°	299.4	299.4	299.4	299.4	299.4	299.4	299.4

(END OF REPORT)