

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331758-840

Luminaire Tested: **SA2XXRDIP-C1005D925U840-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P331758-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA2XXRDIP-C1005D925U840-4F0-1E-UDD-F4  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 925 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7169.1 lumens  
Efficiency: N/A  
Efficacy: 107.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 66.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331758-840

CATALOG NUMBER: SA2XXRDIP-C1005D925U840-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

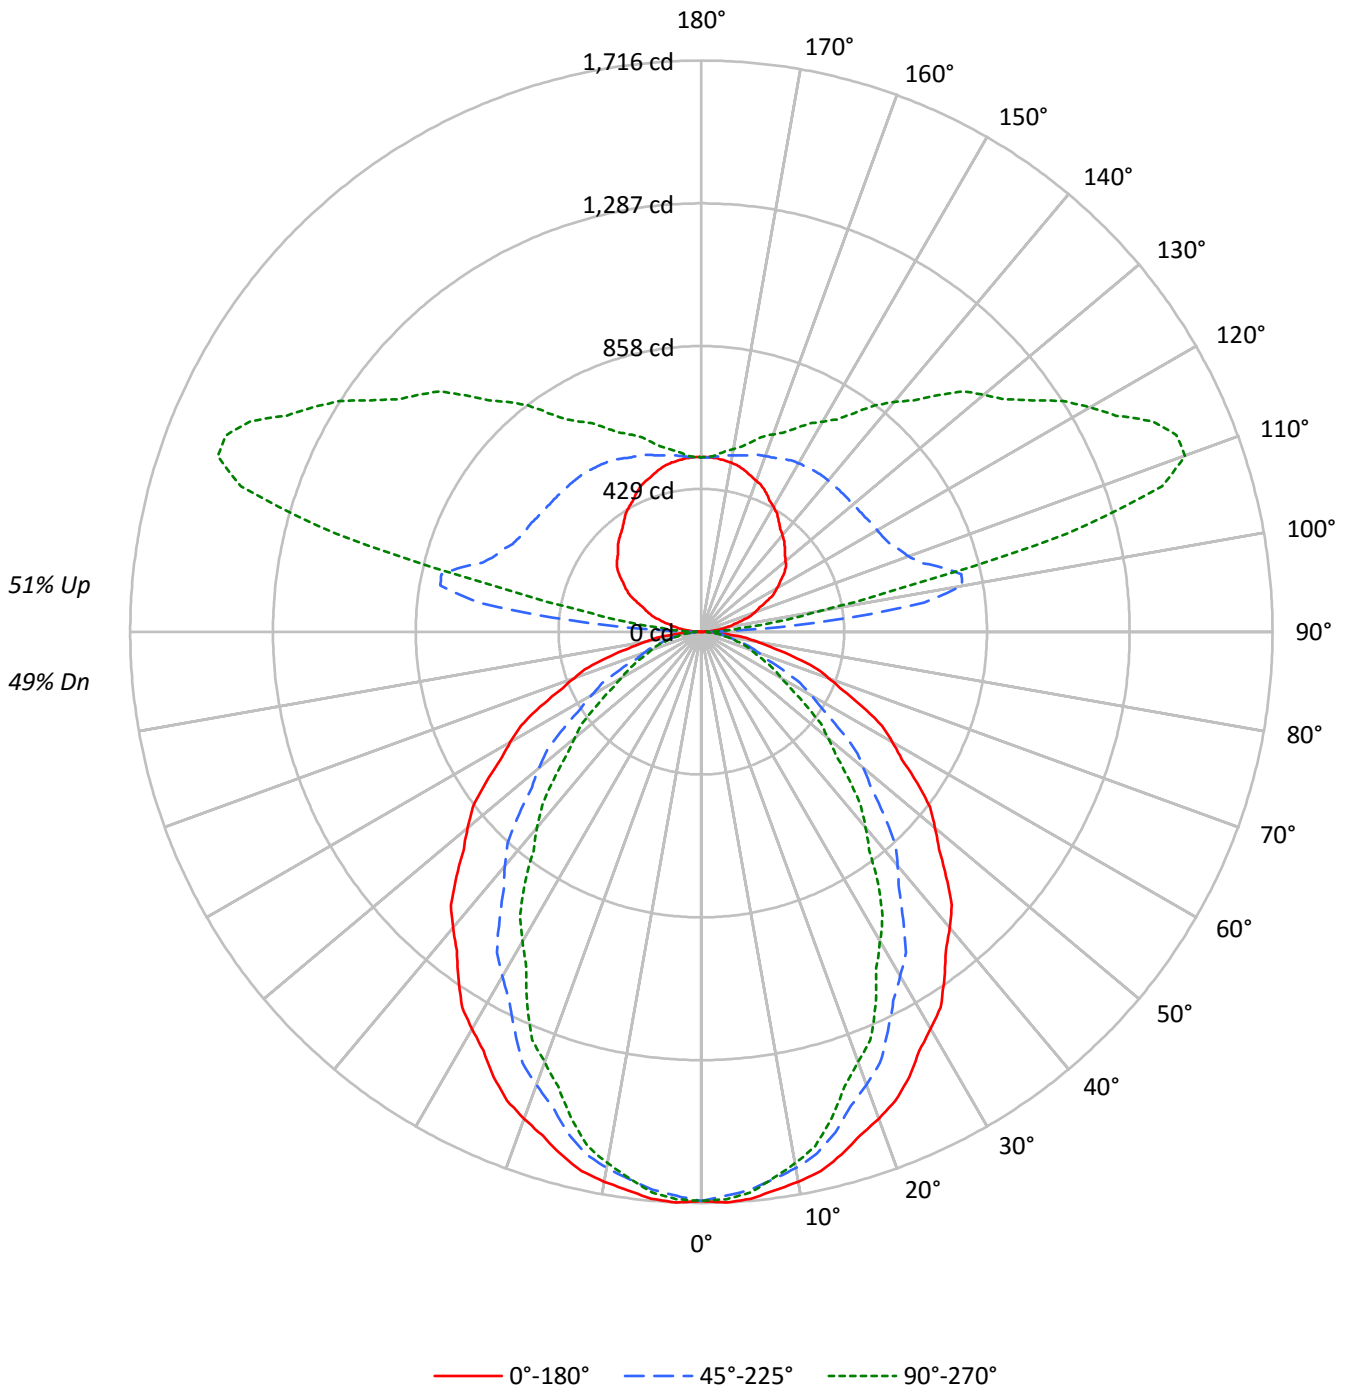



TEST NUMBER: P331758-840

CATALOG NUMBER: SA2XXRDIP-C1005D925U840-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	55	55	55	49
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48	42
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41	36
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35	31
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31	27
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27	24
6	64	52	44	39	59	49	42	37	42	36	32	36	31	28	30	27	24	21
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22	19
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20	17
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18	16
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	27611	27611	27611
5°	27716	27266	27417
10°	27506	26820	26591
15°	27189	26024	25275
20°	26751	24890	23639
25°	26302	23599	22057
30°	25682	22275	20025
35°	25074	20834	18242
40°	24464	19344	16179
45°	23749	17671	14312
50°	23016	15978	12479
55°	22261	14159	10716
60°	21390	12245	8896
65°	20397	10288	8103
70°	19218	8478	7449
75°	17767	7723	6949
80°	15676	6908	6332
85°	12338	5446	5446



TEST NUMBER: P331758-840

CATALOG NUMBER: SA2XXRDIP-C1005D925U840-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	160.1	2.2
10°-20°	439.5	6.1
20°-30°	617.2	8.6
30°-40°	673.0	9.4
40°-50°	618.8	8.6
50°-60°	486.0	6.8
60°-70°	316.9	4.4
70°-80°	163.4	2.3
80°-90°	47.1	0.7
90°-100°	209.6	2.9
100°-110°	711.1	9.9
110°-120°	755.5	10.5
120°-130°	621.9	8.7
130°-140°	499.4	7.0
140°-150°	377.4	5.3
150°-160°	265.2	3.7
160°-170°	156.1	2.2
170°-180°	50.8	0.7
0°-30°	1216.8	17.0
0°-40°	1889.8	26.4
0°-60°	2994.7	41.8
0°-90°	3522.1	49.1
90°-120°	1676.1	23.4
90°-150°	3174.8	44.3
90°-180°	3647.0	50.9
0°-180°	7169.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1710	1710	1710	1710	1710	
5°	1710	1702	1682	1695	1692	162
15°	1627	1608	1557	1528	1512	458
25°	1476	1424	1325	1264	1238	679
35°	1272	1190	1057	963	926	796
45°	1040	933	774	668	627	803
55°	791	668	503	414	381	706
65°	534	408	269	219	212	529
75°	285	180	124	114	111	301
85°	67	36	29	29	29	78
90°	1	14	34	33	33	5
95°	35	87	395	149	115	37
105°	123	185	747	1335	1136	131
115°	217	274	625	1290	1495	215
125°	302	358	601	1045	1212	268
135°	355	423	594	878	1005	274
145°	405	466	591	733	802	254
155°	461	497	574	649	674	212
165°	502	517	549	583	592	141
175°	523	524	528	535	533	50
180°	524	524	524	524	524	



TEST NUMBER: P331758-840

CATALOG NUMBER: SA2XXRDIP-C1005D925U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1
2.5°	1716.4	1715.0	1713.5	1712.2	1710.8	1708.6	1705.6	1702.6	1699.6	1696.6	1699.3
5°	1710.1	1708.4	1706.7	1705.0	1703.2	1700.2	1695.7	1691.2	1686.8	1682.3	1685.4
7.5°	1692.5	1690.4	1688.3	1686.1	1683.9	1680.3	1675.1	1669.8	1664.7	1659.4	1660.3
10°	1677.7	1675.3	1672.8	1670.4	1668.0	1663.3	1656.5	1649.6	1642.7	1635.9	1634.9
12.5°	1659.1	1656.1	1653.1	1650.2	1647.3	1641.3	1632.5	1623.8	1615.0	1606.2	1604.3
15°	1626.6	1622.8	1619.0	1615.2	1611.4	1603.7	1592.1	1580.3	1568.6	1556.9	1550.4
17.5°	1586.6	1580.8	1575.1	1569.3	1563.6	1553.2	1538.1	1523.2	1508.1	1493.2	1485.4
20°	1556.9	1550.0	1543.2	1536.3	1529.4	1517.4	1500.2	1483.0	1465.8	1448.6	1440.0
22.5°	1524.7	1517.0	1509.3	1501.7	1493.9	1480.4	1461.0	1441.6	1422.2	1402.8	1391.7
25°	1476.4	1465.4	1454.4	1443.4	1432.4	1415.6	1392.9	1370.2	1347.5	1324.7	1310.7
27.5°	1418.3	1406.3	1394.3	1382.4	1370.4	1351.6	1326.1	1300.4	1274.9	1249.3	1232.8
30°	1377.5	1364.3	1351.3	1338.2	1325.1	1304.8	1277.3	1249.8	1222.3	1194.8	1177.2
32.5°	1337.8	1322.5	1307.3	1292.0	1276.7	1255.1	1227.0	1198.9	1170.8	1142.8	1122.8
35°	1272.1	1254.7	1237.1	1219.5	1202.0	1178.1	1147.8	1117.6	1087.3	1057.0	1035.4
37.5°	1206.6	1187.3	1168.0	1148.7	1129.5	1103.8	1071.5	1039.3	1006.9	974.7	950.9
40°	1160.7	1140.1	1119.4	1098.8	1078.2	1051.2	1017.8	984.5	951.1	917.8	893.3
42.5°	1113.7	1092.0	1070.3	1048.4	1026.7	998.7	964.2	929.7	895.2	860.8	835.6
45°	1040.1	1016.9	993.9	970.9	947.9	918.3	882.1	846.1	809.9	773.9	749.4
47.5°	968.2	943.8	919.4	894.9	870.5	839.7	802.4	765.1	727.8	690.5	666.3
50°	916.3	891.8	867.4	842.9	818.5	787.4	749.6	711.8	673.9	636.1	612.4
52.5°	865.5	839.9	814.5	788.9	763.4	732.2	695.1	658.1	621.1	584.1	561.2
55°	790.8	764.1	737.2	710.3	683.6	651.6	614.4	577.2	540.2	503.0	482.3
57.5°	714.4	686.9	659.3	631.9	604.3	572.7	537.0	501.3	465.6	429.9	411.0
60°	662.4	634.9	607.3	579.9	552.3	520.9	485.4	450.0	414.5	379.2	361.6
62.5°	611.7	584.1	556.6	529.1	501.6	470.9	437.2	403.3	369.6	335.9	319.1
65°	533.9	506.0	478.3	450.4	422.5	393.1	362.1	331.2	300.2	269.3	257.6
67.5°	459.0	431.4	403.7	376.1	348.4	320.6	292.9	265.0	237.1	209.2	203.9
70°	407.1	380.2	353.4	326.6	299.7	274.5	250.7	227.0	203.3	179.6	176.1
72.5°	357.5	331.7	306.1	280.3	254.6	232.2	213.2	194.1	175.0	156.0	153.1
75°	284.8	260.6	236.6	212.6	188.4	170.6	158.9	147.2	135.5	123.8	121.4
77.5°	213.3	192.2	171.1	150.0	128.8	115.4	109.8	104.1	98.5	92.9	91.5
80°	168.6	151.2	133.6	116.0	98.6	88.1	84.6	81.2	77.8	74.3	72.9
82.5°	127.8	114.1	100.5	86.7	73.1	65.0	62.7	60.4	58.1	55.7	54.9
85°	66.6	59.3	52.1	44.8	37.7	33.5	32.5	31.5	30.4	29.4	29.4
87.5°	20.0	18.4	17.1	15.2	13.4	12.9	13.9	15.3	16.6	16.8	16.3
90°	1.0	4.0	8.1	10.1	12.1	15.1	20.2	27.2	33.2	34.2	33.2
92.5°	12.3	17.8	25.0	29.4	36.3	45.7	68.6	100.6	129.2	131.0	110.7
95°	35.2	39.3	49.4	58.5	74.6	98.8	145.1	232.8	349.7	395.1	345.7
97.5°	57.5	62.9	73.6	87.3	105.8	133.2	191.5	313.7	508.0	674.5	707.5
100°	77.6	80.6	89.7	105.8	126.0	154.2	207.6	330.6	548.3	796.2	941.4
102.5°	96.1	98.4	107.4	123.6	144.5	172.8	222.2	331.4	533.0	800.2	1028.4
105°	123.0	127.0	134.0	149.2	171.4	199.5	246.9	336.6	502.9	746.8	1014.9
107.5°	152.0	155.2	162.1	176.0	197.9	226.4	272.4	350.5	488.0	689.6	926.5
110°	171.4	175.4	181.4	194.5	215.7	244.9	289.2	361.8	484.8	662.2	870.8



TEST NUMBER: P331758-840

CATALOG NUMBER: SA2XXRDIP-C1005D925U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	189.0	193.1	200.0	212.3	232.6	262.7	305.4	374.0	485.5	644.4	832.1
115°	216.7	221.8	227.8	239.8	260.0	287.2	330.6	392.0	489.8	624.9	784.2
117.5°	245.3	249.3	255.4	266.1	285.4	313.7	353.8	411.4	497.1	615.4	753.9
120°	263.1	267.1	273.2	282.2	302.4	330.6	369.9	424.3	501.9	609.8	737.8
122.5°	280.0	283.2	289.2	299.1	319.3	348.3	385.2	435.6	507.6	606.5	724.1
125°	302.4	305.4	311.4	323.6	343.7	371.9	408.2	453.5	516.0	600.7	704.5
127.5°	320.1	324.2	332.5	345.9	365.3	394.3	429.6	470.3	524.7	597.2	686.4
130°	330.6	334.6	344.7	358.8	379.0	407.2	442.4	480.8	531.2	595.6	674.3
132.5°	340.2	345.1	356.0	370.9	391.8	420.1	453.7	491.2	537.6	594.8	664.6
135°	354.8	358.8	370.9	386.0	409.2	437.4	469.7	504.9	545.2	593.6	651.1
137.5°	368.5	373.3	385.4	401.5	424.5	450.7	482.6	515.4	552.1	593.4	641.6
140°	379.0	383.0	395.1	411.2	433.4	459.6	489.8	521.1	555.3	592.6	636.0
142.5°	389.4	392.6	403.9	420.1	441.4	466.1	495.4	525.9	557.7	592.6	630.4
145°	405.2	409.2	419.3	434.4	454.5	476.8	503.9	532.2	560.4	590.6	622.9
147.5°	422.1	425.2	434.7	448.7	465.4	485.2	510.8	535.6	561.2	587.0	615.2
150°	433.4	436.4	444.4	457.6	472.7	490.8	514.0	537.1	560.4	584.6	608.7
152.5°	444.6	446.1	454.1	465.6	480.0	496.4	517.3	538.0	558.8	580.6	603.1
155°	460.6	461.6	467.7	478.8	489.8	504.9	522.1	539.2	556.3	573.5	592.6
157.5°	473.9	474.9	479.8	489.4	498.3	511.0	525.5	539.2	551.7	566.2	582.8
160°	482.8	483.8	487.8	495.8	503.9	515.0	527.1	539.2	549.3	561.4	575.5
162.5°	491.6	491.0	495.0	501.5	508.8	517.5	528.0	538.4	546.8	557.3	569.1
165°	501.9	500.9	502.9	509.0	514.0	520.1	529.2	536.2	542.2	549.3	558.4
167.5°	510.4	509.2	511.0	514.8	518.5	522.3	529.0	534.8	537.6	542.2	547.9
170°	516.0	514.0	515.0	518.1	520.1	523.1	528.2	533.2	535.2	538.2	542.2
172.5°	519.3	518.1	517.5	520.5	521.7	523.9	527.4	530.8	532.0	533.4	536.6
175°	523.1	522.1	521.1	523.1	523.1	524.1	526.1	528.2	527.1	528.2	529.2
177.5°	524.9	523.3	522.5	524.1	524.1	524.1	524.9	526.5	524.9	524.1	524.9
180°	524.1	524.1	524.1	524.1	524.1	524.1	524.1	524.1	524.1	524.1	524.1



TEST NUMBER: P331758-840

CATALOG NUMBER: SA2XXRDIP-C1005D925U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1	1710.1
2.5°	1702.0	1704.8	1707.6	1708.6	1708.1	1707.6	1707.0	1706.5
5°	1688.5	1691.6	1694.7	1695.7	1694.7	1693.6	1692.6	1691.6
7.5°	1661.1	1662.0	1662.9	1662.5	1660.7	1658.9	1657.2	1655.4
10°	1633.8	1632.7	1631.7	1630.2	1628.1	1626.1	1624.0	1621.9
12.5°	1602.5	1600.5	1598.7	1596.1	1592.7	1589.2	1585.8	1582.4
15°	1543.9	1537.3	1530.8	1525.8	1522.4	1518.9	1515.5	1512.1
17.5°	1477.6	1469.9	1462.1	1455.2	1449.4	1443.4	1437.4	1431.6
20°	1431.4	1422.8	1414.2	1406.1	1398.6	1391.0	1383.4	1375.8
22.5°	1380.7	1369.6	1358.5	1350.1	1344.5	1338.9	1333.2	1327.6
25°	1296.6	1282.5	1268.4	1258.8	1253.5	1248.4	1243.2	1238.1
27.5°	1216.4	1199.9	1183.5	1171.1	1163.0	1154.8	1146.6	1138.4
30°	1159.7	1142.2	1124.6	1111.3	1102.0	1092.7	1083.4	1074.1
32.5°	1102.8	1082.8	1062.7	1048.3	1039.7	1030.9	1022.1	1013.4
35°	1013.7	992.1	970.4	955.7	948.2	940.6	933.0	925.5
37.5°	927.0	903.1	879.2	862.9	854.3	845.7	837.0	828.3
40°	868.9	844.4	820.1	803.4	794.5	785.5	776.6	767.6
42.5°	810.3	785.1	759.8	742.9	734.2	725.5	716.9	708.2
45°	725.0	700.5	676.1	659.8	651.6	643.3	635.0	626.8
47.5°	642.0	617.7	593.4	577.5	570.1	562.6	555.0	547.5
50°	588.7	564.9	541.2	525.6	518.5	511.2	504.0	496.8
52.5°	538.3	515.3	492.5	477.7	471.0	464.3	457.7	451.0
55°	461.7	441.1	420.4	406.9	400.3	393.7	387.3	380.7
57.5°	392.1	373.1	354.3	342.0	336.6	331.0	325.6	320.0
60°	344.1	326.6	309.0	297.5	292.0	286.5	280.9	275.5
62.5°	302.5	285.7	269.0	258.9	255.7	252.4	249.0	245.8
65°	245.9	234.2	222.5	216.1	215.1	214.1	213.1	212.1
67.5°	198.5	193.2	187.7	184.5	183.5	182.4	181.3	180.2
70°	172.7	169.3	165.8	163.4	162.0	160.6	159.3	157.8
72.5°	150.3	147.3	144.4	142.6	141.8	141.0	140.1	139.3
75°	119.0	116.6	114.2	112.8	112.5	112.1	111.8	111.4
77.5°	90.1	88.8	87.4	86.3	85.8	85.3	84.7	84.2
80°	71.5	70.2	68.8	68.1	68.1	68.1	68.1	68.1
82.5°	54.0	53.2	52.4	52.0	52.0	52.0	52.0	52.0
85°	29.4	29.4	29.4	29.4	29.4	29.4	29.4	29.4
87.5°	15.9	15.1	15.2	15.3	15.3	15.3	15.3	15.3
90°	32.2	30.2	32.2	33.2	33.2	33.2	33.2	33.2
92.5°	87.9	75.4	67.0	60.7	59.9	56.7	57.5	55.8
95°	264.1	202.6	160.3	138.0	125.0	116.9	113.9	114.9
97.5°	616.2	504.1	395.1	322.3	274.2	249.3	234.6	226.2
100°	920.2	795.2	657.1	535.2	451.5	408.2	379.0	360.8
102.5°	1119.3	1091.2	990.2	860.9	770.0	696.0	659.5	635.0
105°	1224.6	1338.5	1351.6	1318.3	1255.8	1193.4	1149.9	1135.9
107.5°	1148.8	1320.3	1425.1	1473.9	1481.8	1478.3	1469.7	1451.0
110°	1083.5	1263.8	1392.9	1475.5	1518.8	1538.0	1547.1	1546.1





TEST NUMBER: P331758-840

CATALOG NUMBER: SA2XXRDIP-C1005D925U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1023.8	1197.0	1334.8	1429.6	1489.9	1521.9	1539.0	1544.5
115°	950.4	1105.6	1237.7	1341.5	1413.0	1459.4	1485.6	1494.7
117.5°	895.1	1031.5	1151.1	1248.6	1321.5	1370.5	1398.2	1405.7
120°	867.8	992.8	1099.5	1191.3	1261.8	1309.2	1338.5	1348.6
122.5°	846.0	960.5	1061.7	1144.6	1207.8	1254.4	1280.4	1288.9
125°	814.4	918.2	1006.8	1082.5	1140.9	1179.2	1204.4	1212.4
127.5°	783.2	877.1	960.7	1030.5	1081.5	1117.3	1139.1	1145.6
130°	763.0	849.6	929.3	995.8	1045.2	1079.4	1099.5	1107.6
132.5°	743.6	823.8	897.0	959.5	1008.0	1042.4	1060.9	1068.1
135°	716.6	783.2	849.6	906.1	949.4	982.7	1000.8	1004.8
137.5°	695.0	750.6	803.4	852.6	892.2	920.8	936.8	942.8
140°	681.4	729.7	776.1	820.4	852.6	878.9	894.0	900.0
142.5°	670.0	711.1	751.0	788.2	818.8	842.6	856.1	857.3
145°	654.1	687.4	718.6	747.8	772.0	789.2	799.2	802.2
147.5°	641.8	668.0	692.4	713.8	733.8	747.4	754.3	756.1
150°	633.0	655.1	676.3	694.4	709.5	721.6	727.7	728.7
152.5°	624.1	644.6	662.6	678.3	690.1	700.6	705.1	705.3
155°	611.8	627.9	643.0	654.1	665.2	672.3	676.3	674.3
157.5°	597.4	611.0	623.7	632.4	640.2	646.0	647.8	647.8
160°	588.5	599.7	610.8	617.8	624.9	630.0	631.0	631.0
162.5°	579.8	589.2	598.6	604.1	611.2	614.6	615.6	614.8
165°	566.4	573.5	580.6	584.6	588.5	592.6	592.6	591.6
167.5°	553.7	559.2	564.0	567.6	569.5	571.7	571.5	570.3
170°	547.2	550.3	554.3	556.3	557.3	560.4	559.4	557.3
172.5°	540.0	542.2	545.4	546.6	547.6	549.1	548.1	546.8
175°	532.2	533.2	534.2	535.2	535.2	536.2	535.2	533.2
177.5°	526.5	526.5	527.4	527.4	527.4	527.4	526.5	524.9
180°	524.1	524.1	524.1	524.1	524.1	524.1	524.1	524.1

(END OF REPORT)