

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331663-840

Luminaire Tested: **SA2XXRDIP-C485D925U840-4F0-1E-UDD-A**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331663-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 485 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 925 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5614.2 lumens
Efficiency: N/A
Efficacy: 126.2 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 44.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331663-840
CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

Luminous Intensity Polar Plot

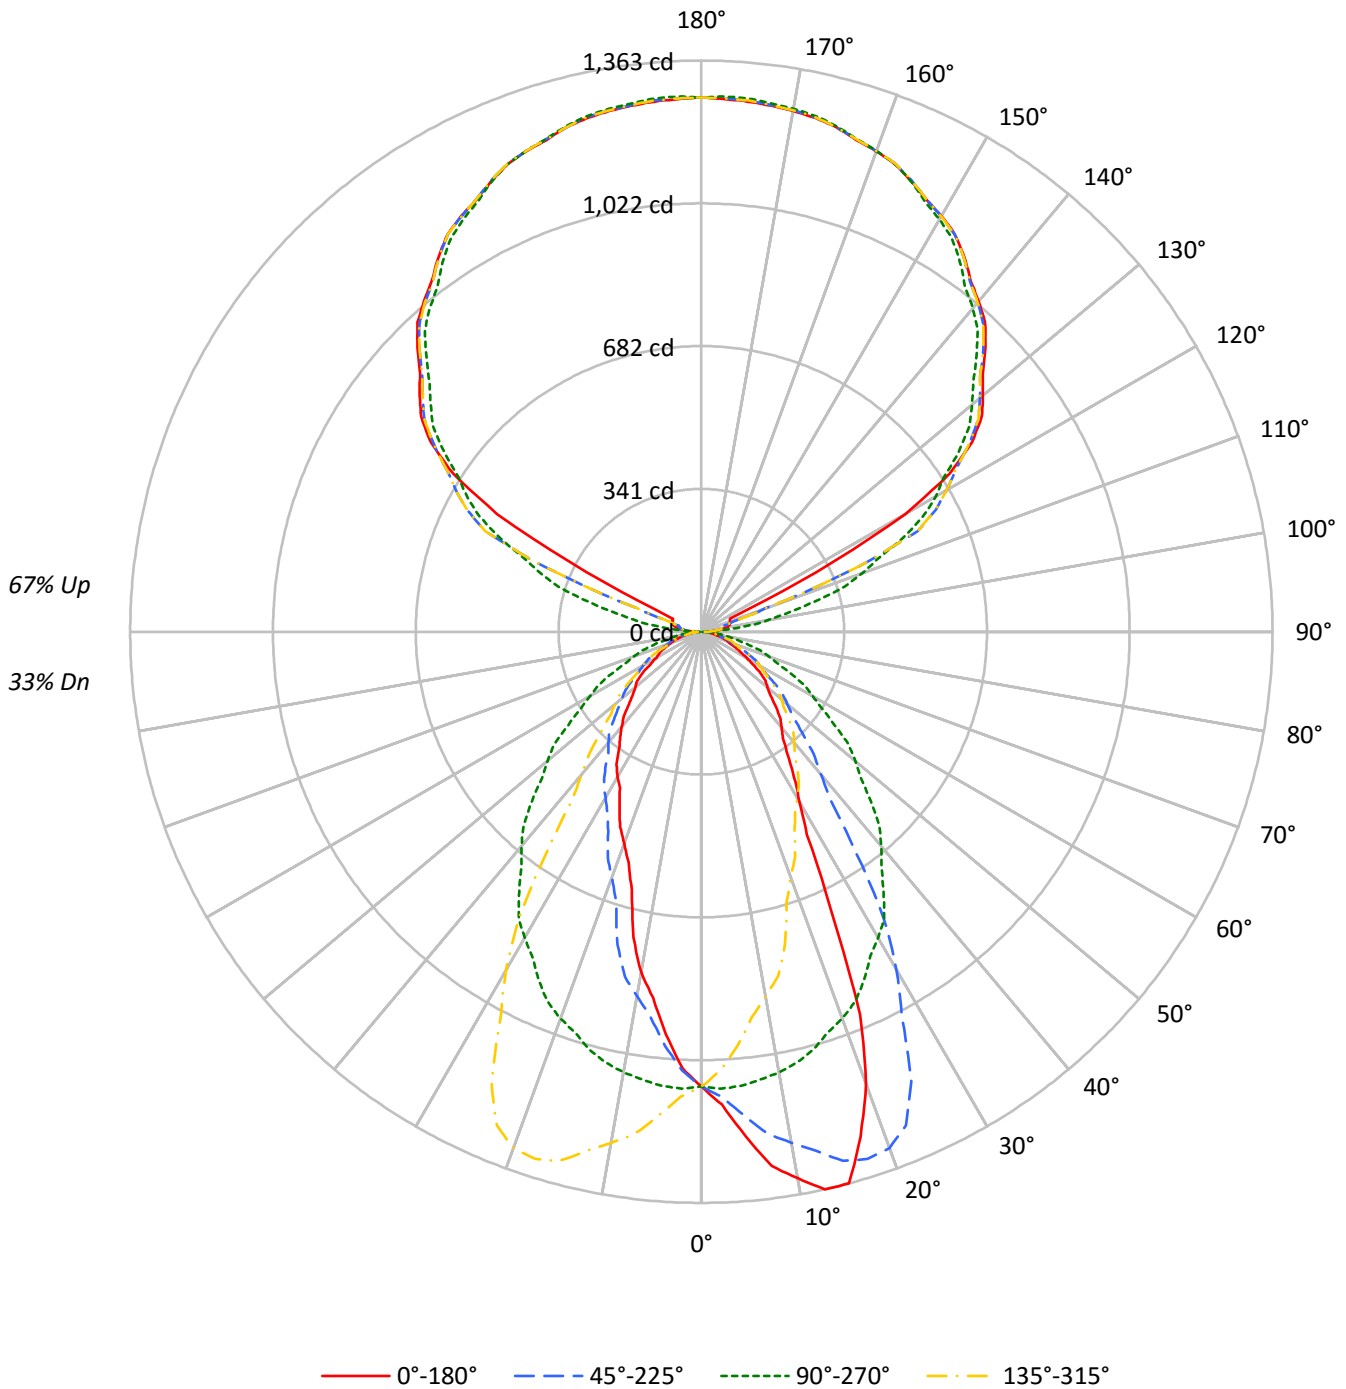



TEST NUMBER: P331663-840

CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	33
1	95	91	87	84	85	82	79	76	66	64	62	51	49	48	37	36	35	29
2	87	80	74	69	78	72	67	63	58	55	52	45	43	41	33	32	31	25
3	79	70	64	58	71	64	58	54	52	48	44	40	38	35	30	28	27	22
4	73	63	55	50	66	57	51	46	46	42	38	36	33	31	27	25	24	20
5	67	56	48	43	60	51	45	40	42	37	33	33	30	27	25	23	21	17
6	62	50	43	37	56	46	39	35	38	33	29	30	27	24	23	20	19	16
7	57	46	38	33	52	42	35	31	34	29	26	27	24	21	21	19	17	14
8	53	42	34	29	48	38	32	27	31	27	23	25	22	19	19	17	15	13
9	50	38	31	26	45	35	29	24	29	24	21	23	20	17	18	16	14	12
10	46	35	28	23	42	32	26	22	27	22	19	22	18	16	17	14	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	17525	17525	17525	17525
5°	19571	17634	15635	17634
10°	21713	17510	13554	17510
15°	22781	17254	10678	17254
20°	19749	16873	9241	16873
25°	12953	16352	8250	16352
30°	8720	15720	7467	15720
35°	7062	14927	6733	14927
40°	6279	14060	6232	14060
45°	5683	13047	5562	13047
50°	5172	12039	5152	12039
55°	4861	10925	4799	10925
60°	4066	9901	4017	9901
65°	3431	8989	3889	8989
70°	3172	8030	3668	8030
75°	2969	6987	3387	6987
80°	2734	5746	3013	5746
85°	2501	4539	2649	4539



TEST NUMBER: P331663-840

CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.9	1.8
10°-20°	286.7	5.1
20°-30°	369.4	6.6
30°-40°	351.1	6.3
40°-50°	300.7	5.4
50°-60°	229.0	4.1
60°-70°	144.8	2.6
70°-80°	72.3	1.3
80°-90°	21.9	0.4
90°-100°	42.5	0.8
100°-110°	155.9	2.8
110°-120°	416.8	7.4
120°-130°	688.0	12.3
130°-140°	731.7	13.0
140°-150°	680.1	12.1
150°-160°	546.8	9.7
160°-170°	352.3	6.3
170°-180°	121.3	2.2
0°-30°	759.0	13.5
0°-40°	1110.1	19.8
0°-60°	1639.8	29.2
0°-90°	1878.9	33.5
90°-120°	615.2	11.0
90°-150°	2714.9	48.4
90°-180°	3735.0	66.5
0°-180°	5614.2	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1085	1085	1085	1085	1085	
5°	1208	1088	965	1088	1208	119
15°	1363	1032	639	1032	1363	368
25°	727	918	463	918	727	345
35°	358	757	342	757	358	229
45°	249	571	244	571	249	193
55°	173	388	170	388	173	152
65°	90	235	102	235	90	91
75°	48	112	54	112	48	50
85°	14	24	14	24	14	15
90°	25	1	25	1	25	12
95°	40	60	40	60	40	37
105°	70	280	70	280	70	73
115°	76	530	76	530	76	189
125°	789	750	789	750	789	682
135°	958	928	958	928	958	739
145°	1093	1076	1093	1076	1093	683
155°	1186	1185	1186	1185	1186	547
165°	1246	1249	1246	1249	1246	352
175°	1270	1277	1270	1277	1270	121
180°	1275	1275	1275	1275	1275	



TEST NUMBER: P331663-840

CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4
2.5°	1129.4	1130.3	1131.3	1129.1	1129.1	1127.3	1123.4	1120.3	1111.9	1110.6	1110.6
5°	1207.5	1206.8	1208.3	1203.4	1196.6	1195.1	1187.9	1178.5	1168.7	1157.7	1155.5
7.5°	1285.3	1284.1	1281.1	1280.2	1275.1	1263.6	1252.1	1239.8	1223.6	1207.6	1199.6
10°	1324.4	1336.9	1329.4	1316.2	1318.8	1301.1	1291.6	1275.5	1261.8	1238.1	1232.8
12.5°	1363.0	1368.0	1365.5	1358.1	1354.7	1342.4	1329.7	1315.6	1290.5	1269.2	1250.6
15°	1362.9	1370.1	1372.0	1369.7	1371.6	1370.8	1364.0	1352.3	1330.5	1307.1	1286.8
17.5°	1262.3	1267.3	1279.6	1288.0	1298.6	1320.9	1331.9	1336.3	1332.9	1319.6	1305.3
20°	1149.4	1141.1	1175.9	1193.6	1208.7	1246.4	1278.8	1291.2	1311.2	1310.9	1307.1
22.5°	989.6	991.5	1024.4	1045.4	1089.5	1127.2	1164.2	1211.0	1249.7	1275.3	1290.2
25°	727.1	741.4	774.3	802.8	851.9	922.1	985.8	1059.8	1129.4	1184.6	1237.0
27.5°	546.0	547.1	573.1	599.7	628.7	686.2	766.5	854.7	954.2	1036.2	1130.6
30°	467.7	465.3	476.4	492.5	517.5	561.9	622.3	709.0	808.2	931.9	1042.0
32.5°	412.1	412.2	420.5	432.5	453.1	483.1	524.5	594.9	688.7	810.3	939.4
35°	358.3	357.9	364.0	372.6	381.2	400.5	428.8	465.7	530.3	643.8	775.8
37.5°	319.6	321.3	324.3	329.7	339.2	349.9	367.0	391.7	437.7	504.8	615.7
40°	297.9	298.7	302.9	307.4	313.1	321.3	335.3	355.3	388.8	442.3	523.4
42.5°	278.0	278.7	281.8	285.9	290.3	298.7	310.2	327.5	354.8	396.5	463.4
45°	248.9	248.9	251.6	253.4	258.3	265.9	275.3	289.6	308.5	339.4	384.0
47.5°	221.6	221.7	223.4	226.6	229.7	235.6	244.9	256.6	270.3	294.3	332.2
50°	205.9	206.3	207.4	210.1	212.0	217.2	224.4	234.6	248.9	267.4	299.0
52.5°	193.2	193.0	194.4	195.6	196.8	200.7	206.0	215.0	227.8	243.9	270.1
55°	172.7	171.2	173.5	175.3	176.5	178.0	181.0	186.7	197.6	211.2	230.8
57.5°	147.0	146.4	148.0	149.8	153.3	157.4	160.0	163.6	169.3	178.9	198.4
60°	125.9	125.9	129.4	130.5	134.6	139.9	145.2	148.2	153.9	160.3	174.6
62.5°	107.2	107.6	109.2	110.3	112.6	119.1	126.5	133.1	138.5	144.6	154.1
65°	89.8	90.5	90.5	91.3	92.8	94.3	97.3	102.6	112.0	120.7	127.8
67.5°	76.1	76.4	76.6	77.4	77.8	79.4	80.6	83.0	85.1	93.4	102.3
70°	67.2	68.3	67.9	68.7	69.0	69.8	71.3	72.4	75.8	77.7	83.0
72.5°	58.7	59.5	59.5	59.9	60.9	61.0	62.2	63.3	65.5	67.2	70.0
75°	47.6	47.2	47.6	48.3	48.7	49.0	49.0	50.5	51.7	53.2	55.0
77.5°	36.7	37.1	37.0	37.1	37.1	37.8	37.7	38.4	39.5	40.3	41.2
80°	29.4	29.8	29.4	29.8	30.2	30.5	30.2	30.5	31.7	32.4	32.4
82.5°	22.8	22.8	23.1	23.1	23.2	23.3	23.8	23.9	24.7	24.5	24.8
85°	13.5	13.2	13.2	13.2	13.5	13.9	13.5	13.5	13.9	13.9	13.9
87.5°	9.8	10.0	9.9	9.9	9.8	9.6	9.4	9.5	9.0	9.1	8.5
90°	24.9	24.5	24.0	23.6	23.2	22.5	21.5	20.5	19.5	18.5	16.8
92.5°	24.9	24.6	24.4	24.1	23.9	23.5	23.0	22.4	21.9	21.4	20.6
95°	39.7	39.9	40.1	40.3	40.5	40.1	39.1	38.0	37.0	36.0	34.5
97.5°	52.9	52.7	52.4	52.2	51.9	51.4	50.6	49.8	49.0	48.2	44.8
100°	61.8	61.4	61.0	60.6	60.2	59.2	57.5	55.8	54.2	52.6	49.1
102.5°	66.2	65.6	65.0	64.5	63.9	62.6	60.5	58.3	56.1	54.0	83.2
105°	70.1	69.3	68.5	67.7	66.9	65.2	63.0	60.8	58.5	56.2	112.2
107.5°	72.1	71.3	70.5	69.7	68.9	69.6	71.9	74.1	76.4	78.8	145.8
110°	72.9	72.0	71.2	70.4	69.6	79.4	99.9	120.4	140.9	161.4	220.7



TEST NUMBER: P331663-840

CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	73.6	72.9	72.3	71.6	71.0	108.1	182.8	257.6	332.3	407.1	421.7
115°	75.6	90.4	105.1	119.9	134.6	189.5	284.4	379.3	474.1	569.1	563.9
117.5°	308.8	357.3	405.8	454.2	502.7	538.5	561.5	584.4	607.3	630.3	626.8
120°	562.6	590.3	617.9	645.6	673.3	685.9	683.5	681.0	678.5	676.0	672.4
122.5°	702.1	707.4	712.8	718.2	723.6	725.5	724.0	722.6	721.0	719.6	715.6
125°	788.6	788.0	787.3	786.7	786.1	785.1	783.7	782.2	780.8	779.3	775.5
127.5°	843.1	843.0	842.9	842.8	842.6	841.6	839.5	837.4	835.3	833.2	830.3
130°	877.1	877.3	877.5	877.8	878.0	876.9	874.6	872.4	870.1	867.9	865.7
132.5°	910.3	910.5	910.7	910.9	911.1	910.3	908.4	906.5	904.5	902.5	900.3
135°	958.3	958.7	959.1	959.5	959.9	959.1	957.0	955.0	952.9	950.9	949.1
137.5°	1002.0	1002.7	1003.4	1004.1	1004.8	1004.1	1002.1	1000.1	998.0	996.1	994.0
140°	1029.3	1030.4	1031.4	1032.4	1033.4	1033.0	1031.2	1029.3	1027.4	1025.6	1023.4
142.5°	1055.8	1056.9	1057.9	1058.9	1060.0	1059.7	1057.9	1056.2	1054.6	1052.9	1050.4
145°	1093.0	1094.0	1095.0	1096.0	1097.0	1096.8	1095.4	1094.0	1092.5	1091.1	1087.6
147.5°	1125.6	1126.4	1127.3	1128.1	1129.0	1128.9	1127.8	1126.8	1125.7	1124.7	1121.3
150°	1145.5	1146.5	1147.5	1148.6	1149.6	1149.5	1148.3	1147.0	1145.8	1144.6	1141.3
152.5°	1162.5	1163.9	1165.2	1166.5	1167.9	1167.9	1166.7	1165.5	1164.3	1163.1	1159.9
155°	1186.1	1187.7	1189.3	1191.0	1192.7	1192.9	1191.6	1190.4	1189.1	1187.9	1185.5
157.5°	1207.7	1209.2	1210.8	1212.4	1214.1	1214.2	1212.7	1211.3	1210.0	1208.6	1206.9
160°	1220.2	1221.6	1223.0	1224.5	1226.0	1226.1	1224.9	1223.6	1222.3	1221.1	1219.9
162.5°	1230.5	1232.3	1234.1	1235.9	1237.6	1237.8	1236.4	1235.0	1233.6	1232.2	1231.1
165°	1246.1	1247.5	1248.9	1250.3	1251.7	1251.7	1250.3	1248.9	1247.5	1246.1	1245.5
167.5°	1255.8	1257.7	1259.5	1261.3	1263.1	1263.4	1261.9	1260.5	1259.1	1257.7	1257.1
170°	1261.7	1263.5	1265.4	1267.3	1269.1	1269.3	1267.9	1266.5	1265.0	1263.5	1263.1
172.5°	1266.2	1268.0	1269.8	1271.6	1273.5	1273.7	1272.3	1270.8	1269.4	1268.0	1267.6
175°	1270.0	1272.0	1274.1	1276.2	1278.2	1278.5	1277.1	1275.7	1274.2	1272.7	1272.3
177.5°	1272.4	1273.8	1275.4	1276.9	1278.3	1278.5	1277.4	1276.2	1275.1	1273.8	1273.7
180°	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7



TEST NUMBER: P331663-840

CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4
2.5°	1111.3	1108.9	1106.8	1101.4	1098.6	1092.6	1091.7	1091.4	1083.6	1076.0	1073.9
5°	1149.4	1143.5	1134.4	1123.8	1112.9	1101.6	1094.0	1088.0	1072.9	1058.5	1050.3
7.5°	1187.9	1175.0	1159.3	1139.3	1122.7	1104.0	1090.1	1077.6	1056.2	1035.7	1021.9
10°	1216.6	1195.5	1174.8	1147.2	1125.7	1104.6	1085.0	1068.0	1043.9	1016.7	997.4
12.5°	1234.4	1211.1	1182.6	1155.7	1127.8	1101.0	1074.7	1052.9	1024.6	996.5	973.6
15°	1258.5	1233.6	1198.9	1160.4	1124.6	1089.5	1059.3	1032.2	995.2	961.7	933.7
17.5°	1278.2	1243.9	1206.6	1162.2	1120.6	1076.1	1037.2	1002.5	961.4	920.9	888.1
20°	1284.4	1250.5	1207.5	1163.1	1114.0	1061.6	1019.8	982.0	937.9	893.7	856.1
22.5°	1280.5	1254.2	1206.3	1153.1	1102.9	1048.0	1000.8	956.9	908.1	863.0	819.3
25°	1253.9	1244.9	1199.6	1141.6	1084.2	1020.5	965.8	917.9	862.1	813.9	766.3
27.5°	1191.8	1211.4	1183.4	1121.5	1057.7	989.4	928.0	873.4	815.5	761.1	713.8
30°	1132.2	1177.0	1164.9	1107.6	1036.3	969.2	900.2	843.2	781.4	725.6	678.8
32.5°	1050.4	1124.5	1136.3	1088.3	1014.6	940.8	868.5	811.8	747.3	688.4	642.9
35°	920.2	1031.1	1082.0	1051.4	977.4	898.0	823.2	757.3	692.4	634.3	589.1
37.5°	764.9	915.8	1000.8	1002.9	935.0	852.3	771.0	705.5	639.0	582.1	533.1
40°	664.1	827.8	938.3	962.8	905.4	816.1	733.9	667.1	602.3	546.4	490.3
42.5°	573.6	736.7	872.5	915.1	869.6	780.8	698.3	628.5	565.4	512.6	455.2
45°	463.8	606.4	756.1	832.3	807.1	724.8	637.7	571.4	512.1	466.5	411.4
47.5°	391.3	491.8	636.6	739.7	739.2	664.2	578.6	514.9	460.0	417.3	372.6
50°	349.9	437.5	560.1	676.9	686.7	623.8	542.3	479.3	428.1	383.1	347.3
52.5°	312.9	385.0	495.1	607.2	635.1	580.6	501.6	443.4	393.6	352.3	321.6
55°	264.4	320.1	403.9	508.8	551.0	512.5	442.3	388.1	347.7	313.1	286.6
57.5°	223.6	265.5	332.6	417.1	466.3	442.0	384.3	340.1	305.6	274.2	253.4
60°	198.0	232.3	289.2	359.8	414.0	397.1	347.7	306.6	277.2	250.0	230.5
62.5°	173.9	203.4	252.2	309.4	359.2	352.1	311.8	277.3	251.6	226.8	210.3
65°	139.9	161.4	199.4	244.4	284.4	287.7	258.7	235.3	212.3	192.7	178.0
67.5°	111.4	125.4	152.3	190.1	220.0	230.8	213.0	195.1	176.8	161.7	149.0
70°	93.9	105.2	124.8	155.4	182.9	194.2	184.0	170.1	154.2	141.8	130.9
72.5°	76.1	87.2	101.6	124.0	147.6	159.9	156.3	146.2	133.4	123.1	112.8
75°	57.4	60.7	70.5	85.6	104.1	114.6	117.2	112.0	101.8	93.9	87.9
77.5°	42.4	44.4	49.1	57.1	69.1	78.5	82.4	81.8	74.7	70.2	64.5
80°	33.9	35.0	37.4	40.7	49.8	59.2	61.8	61.8	57.0	55.0	49.4
82.5°	25.8	26.7	28.0	29.9	34.1	42.3	45.2	45.8	42.7	40.3	35.9
85°	14.7	14.3	15.0	16.3	17.0	19.2	23.7	24.5	23.7	20.7	19.6
87.5°	8.2	8.2	7.8	7.1	7.0	6.9	7.9	8.9	8.2	7.7	7.6
90°	15.1	13.5	11.9	9.9	7.7	5.5	3.1	0.9	3.1	5.5	7.7
92.5°	19.8	19.0	18.1	17.8	18.0	18.2	18.4	18.6	18.4	18.2	18.0
95°	33.1	31.7	30.2	32.9	39.7	46.5	53.2	60.0	53.2	46.5	39.7
97.5°	41.5	38.2	34.8	42.7	61.8	80.9	99.9	119.0	99.9	80.9	61.8
100°	45.6	42.1	38.7	50.9	79.0	107.0	135.1	163.3	135.1	107.0	79.0
102.5°	112.3	141.5	170.7	188.1	194.1	200.1	206.0	212.0	206.0	200.1	194.1
105°	168.1	224.1	280.0	305.0	298.8	292.7	286.5	280.3	286.5	292.7	298.8
107.5°	213.0	280.0	347.2	378.3	373.2	368.3	363.3	358.4	363.3	368.3	373.2
110°	279.8	339.1	398.3	425.8	421.5	417.2	412.9	408.6	412.9	417.2	421.5



TEST NUMBER: P331663-840

CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	436.4	451.0	465.6	471.0	467.3	463.4	459.6	455.8	459.6	463.4	467.3
115°	558.9	553.7	548.6	544.2	540.8	537.2	533.8	530.3	533.8	537.2	540.8
117.5°	623.3	619.8	616.2	612.5	608.6	604.7	600.8	596.9	600.8	604.7	608.6
120°	668.6	665.0	661.3	657.9	654.8	651.8	648.6	645.6	648.6	651.8	654.8
122.5°	711.6	707.5	703.5	699.8	696.6	693.4	690.1	686.9	690.1	693.4	696.6
125°	771.5	767.7	763.8	760.5	757.8	755.2	752.5	749.8	752.5	755.2	757.8
127.5°	827.4	824.5	821.5	818.6	815.7	812.7	809.8	806.8	809.8	812.7	815.7
130°	863.3	861.1	858.9	856.1	852.8	849.5	846.3	843.0	846.3	849.5	852.8
132.5°	898.1	895.9	893.5	891.0	888.3	885.4	882.6	879.9	882.6	885.4	888.3
135°	947.3	945.3	943.5	941.0	937.7	934.4	931.1	927.9	931.1	934.4	937.7
137.5°	991.9	989.8	987.7	985.5	983.2	981.0	978.7	976.3	978.7	981.0	983.2
140°	1021.1	1018.9	1016.6	1014.6	1013.0	1011.4	1009.8	1008.0	1009.8	1011.4	1013.0
142.5°	1047.7	1045.1	1042.6	1040.6	1039.1	1037.6	1036.1	1034.6	1036.1	1037.6	1039.1
145°	1084.1	1080.7	1077.1	1075.5	1075.7	1075.9	1076.1	1076.3	1076.1	1075.9	1075.7
147.5°	1117.8	1114.3	1110.9	1109.5	1110.3	1111.2	1111.9	1112.7	1111.9	1111.2	1110.3
150°	1138.0	1134.8	1131.5	1130.5	1132.0	1133.4	1134.9	1136.3	1134.9	1133.4	1132.0
152.5°	1156.8	1153.7	1150.5	1149.8	1151.4	1153.0	1154.6	1156.2	1154.6	1153.0	1151.4
155°	1183.1	1180.5	1178.1	1177.8	1179.6	1181.4	1183.4	1185.2	1183.4	1181.4	1179.6
157.5°	1205.2	1203.5	1201.7	1201.6	1203.2	1204.8	1206.3	1207.8	1206.3	1204.8	1203.2
160°	1218.7	1217.4	1216.2	1216.2	1217.4	1218.7	1219.9	1221.1	1219.9	1218.7	1217.4
162.5°	1230.0	1229.0	1227.9	1228.0	1229.2	1230.5	1231.7	1232.9	1231.7	1230.5	1229.2
165°	1244.8	1244.2	1243.5	1243.9	1245.1	1246.4	1247.6	1248.8	1247.6	1246.4	1245.1
167.5°	1256.5	1256.0	1255.4	1255.7	1256.9	1258.2	1259.4	1260.6	1259.4	1258.2	1256.9
170°	1262.7	1262.3	1261.9	1262.3	1263.5	1264.8	1266.0	1267.3	1266.0	1264.8	1263.5
172.5°	1267.2	1266.8	1266.4	1266.8	1268.0	1269.2	1270.4	1271.6	1270.4	1269.2	1268.0
175°	1271.9	1271.5	1271.1	1271.6	1273.0	1274.6	1276.0	1277.4	1276.0	1274.6	1273.0
177.5°	1273.5	1273.4	1273.2	1273.7	1274.9	1276.1	1277.2	1278.3	1277.2	1276.1	1274.9
180°	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7



TEST NUMBER: P331663-840

CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4
2.5°	1070.0	1067.8	1063.9	1057.9	1054.3	1047.9	1043.7	1046.1	1046.7	1046.1	1045.5
5°	1041.3	1033.3	1022.4	1011.8	1002.0	991.5	985.4	982.8	977.4	974.5	973.0
7.5°	1006.4	992.8	977.3	959.0	943.3	927.0	918.6	914.4	903.6	897.8	892.6
10°	980.5	959.0	943.5	919.4	904.7	883.2	868.5	868.9	854.1	845.9	839.8
12.5°	951.9	928.3	902.5	880.8	860.4	843.1	825.4	818.2	802.5	794.6	778.3
15°	904.3	876.8	849.7	820.2	799.5	772.7	747.1	715.8	690.5	668.6	662.6
17.5°	852.4	818.4	791.1	756.6	721.0	676.0	646.3	628.1	612.9	601.4	592.8
20°	816.9	782.1	753.2	701.0	653.2	622.6	600.8	586.8	571.0	558.6	551.7
22.5°	779.4	743.3	703.7	645.5	608.2	583.7	564.2	548.2	537.5	527.8	521.6
25°	726.3	686.7	621.5	581.5	551.4	525.7	512.1	502.3	491.0	477.8	471.8
27.5°	670.2	607.2	560.4	530.7	501.9	485.2	473.0	458.4	448.3	442.3	436.1
30°	628.2	565.3	528.8	496.2	475.9	457.5	443.1	434.8	425.1	414.9	410.7
32.5°	581.5	531.2	496.1	469.2	448.5	432.7	421.4	408.0	400.9	394.7	386.0
35°	523.4	485.3	453.3	431.4	411.8	399.0	385.8	377.9	365.1	359.8	356.4
37.5°	474.2	441.2	417.3	394.3	378.7	364.6	356.5	343.9	338.3	330.9	323.8
40°	446.5	414.0	391.1	372.2	354.9	344.3	334.2	324.0	315.7	312.3	303.6
42.5°	418.2	391.7	368.7	348.1	336.5	325.3	312.5	305.0	296.3	290.8	285.5
45°	379.0	355.7	336.0	319.0	306.2	294.6	286.2	273.8	268.9	257.9	253.4
47.5°	344.6	322.9	304.2	288.0	275.5	267.9	255.8	246.0	238.2	231.5	225.7
50°	320.1	302.1	284.0	269.6	258.3	247.4	235.0	230.0	217.9	214.6	211.2
52.5°	297.8	280.6	264.1	250.0	238.7	228.1	217.1	210.8	202.6	199.1	196.7
55°	266.6	250.0	234.2	221.8	210.5	199.4	192.7	184.8	181.0	178.3	175.3
57.5°	235.2	220.4	208.1	195.6	184.2	175.5	167.6	162.9	159.0	155.5	151.9
60°	215.3	201.0	190.1	178.3	166.7	159.6	153.5	147.8	143.3	138.0	136.5
62.5°	194.2	181.7	171.7	160.3	150.1	143.5	137.8	132.5	127.0	119.4	117.2
65°	165.2	155.4	144.8	135.4	126.3	120.0	111.6	105.6	103.3	102.6	102.2
67.5°	139.0	129.7	120.6	111.0	102.7	96.7	92.5	91.6	90.1	89.6	88.6
70°	121.4	112.8	103.7	94.6	86.7	85.6	84.1	82.6	80.7	80.0	79.2
72.5°	105.7	96.7	87.8	80.5	77.1	75.6	74.1	72.6	71.4	70.6	70.2
75°	81.1	72.8	66.8	64.1	62.2	61.1	58.9	57.7	57.0	55.8	55.4
77.5°	58.4	53.7	50.9	49.3	47.3	46.0	44.8	43.6	42.8	42.6	42.0
80°	44.5	42.2	40.4	38.1	37.4	35.9	35.4	34.3	34.7	33.5	33.5
82.5°	34.5	31.7	30.1	29.1	28.3	27.1	26.7	26.2	26.3	25.4	25.4
85°	17.8	17.0	16.3	15.5	15.5	14.3	14.7	14.3	14.3	13.5	13.2
87.5°	7.7	7.8	7.6	7.9	8.2	8.2	8.4	8.3	8.5	8.7	8.6
90°	9.9	11.9	13.5	15.1	16.8	18.5	19.5	20.5	21.5	22.5	23.2
92.5°	17.8	18.1	19.0	19.8	20.6	21.4	21.9	22.4	23.0	23.5	23.9
95°	32.9	30.2	31.7	33.1	34.5	36.0	37.0	38.0	39.1	40.1	40.5
97.5°	42.7	34.8	38.2	41.5	44.8	48.2	49.0	49.8	50.6	51.4	51.9
100°	50.9	38.7	42.1	45.6	49.1	52.6	54.2	55.8	57.5	59.2	60.2
102.5°	188.1	170.7	141.5	112.3	83.2	54.0	56.1	58.3	60.5	62.6	63.9
105°	305.0	280.0	224.1	168.1	112.2	56.2	58.5	60.8	63.0	65.2	66.9
107.5°	378.3	347.2	280.0	213.0	145.8	78.8	76.4	74.1	71.9	69.6	68.9
110°	425.8	398.3	339.1	279.8	220.7	161.4	140.9	120.4	99.9	79.4	69.6



TEST NUMBER: P331663-840

CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	471.0	465.6	451.0	436.4	421.7	407.1	332.3	257.6	182.8	108.1	71.0
115°	544.2	548.6	553.7	558.9	563.9	569.1	474.1	379.3	284.4	189.5	134.6
117.5°	612.5	616.2	619.8	623.3	626.8	630.3	607.3	584.4	561.5	538.5	502.7
120°	657.9	661.3	665.0	668.6	672.4	676.0	678.5	681.0	683.5	685.9	673.3
122.5°	699.8	703.5	707.5	711.6	715.6	719.6	721.0	722.6	724.0	725.5	723.6
125°	760.5	763.8	767.7	771.5	775.5	779.3	780.8	782.2	783.7	785.1	786.1
127.5°	818.6	821.5	824.5	827.4	830.3	833.2	835.3	837.4	839.5	841.6	842.6
130°	856.1	858.9	861.1	863.3	865.7	867.9	870.1	872.4	874.6	876.9	878.0
132.5°	891.0	893.5	895.9	898.1	900.3	902.5	904.5	906.5	908.4	910.3	911.1
135°	941.0	943.5	945.3	947.3	949.1	950.9	952.9	955.0	957.0	959.1	959.9
137.5°	985.5	987.7	989.8	991.9	994.0	996.1	998.0	1000.1	1002.1	1004.1	1004.8
140°	1014.6	1016.6	1018.9	1021.1	1023.4	1025.6	1027.4	1029.3	1031.2	1033.0	1033.4
142.5°	1040.6	1042.6	1045.1	1047.7	1050.4	1052.9	1054.6	1056.2	1057.9	1059.7	1060.0
145°	1075.5	1077.1	1080.7	1084.1	1087.6	1091.1	1092.5	1094.0	1095.4	1096.8	1097.0
147.5°	1109.5	1110.9	1114.3	1117.8	1121.3	1124.7	1125.7	1126.8	1127.8	1128.9	1129.0
150°	1130.5	1131.5	1134.8	1138.0	1141.3	1144.6	1145.8	1147.0	1148.3	1149.5	1149.6
152.5°	1149.8	1150.5	1153.7	1156.8	1159.9	1163.1	1164.3	1165.5	1166.7	1167.9	1167.9
155°	1177.8	1178.1	1180.5	1183.1	1185.5	1187.9	1189.1	1190.4	1191.6	1192.9	1192.7
157.5°	1201.6	1201.7	1203.5	1205.2	1206.9	1208.6	1210.0	1211.3	1212.7	1214.2	1214.1
160°	1216.2	1216.2	1217.4	1218.7	1219.9	1221.1	1222.3	1223.6	1224.9	1226.1	1226.0
162.5°	1228.0	1227.9	1229.0	1230.0	1231.1	1232.2	1233.6	1235.0	1236.4	1237.8	1237.6
165°	1243.9	1243.5	1244.2	1244.8	1245.5	1246.1	1247.5	1248.9	1250.3	1251.7	1251.7
167.5°	1255.7	1255.4	1256.0	1256.5	1257.1	1257.7	1259.1	1260.5	1261.9	1263.4	1263.1
170°	1262.3	1261.9	1262.3	1262.7	1263.1	1263.5	1265.0	1266.5	1267.9	1269.3	1269.1
172.5°	1266.8	1266.4	1266.8	1267.2	1267.6	1268.0	1269.4	1270.8	1272.3	1273.7	1273.5
175°	1271.6	1271.1	1271.5	1271.9	1272.3	1272.7	1274.2	1275.7	1277.1	1278.5	1278.2
177.5°	1273.7	1273.2	1273.4	1273.5	1273.7	1273.8	1275.1	1276.2	1277.4	1278.5	1278.3
180°	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7



TEST NUMBER: P331663-840

CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4
2.5°	1042.2	1042.8	1041.9	1042.5	1041.9	1042.8	1042.2	1045.5	1046.1	1046.7	1046.1
5°	971.1	966.5	965.8	964.7	965.8	966.5	971.1	973.0	974.5	977.4	982.8
7.5°	886.2	885.4	883.6	880.9	883.6	885.4	886.2	892.6	897.8	903.6	914.4
10°	831.5	829.7	829.3	826.7	829.3	829.7	831.5	839.8	845.9	854.1	868.9
12.5°	767.6	755.5	754.2	747.6	754.2	755.5	767.6	778.3	794.6	802.5	818.2
15°	653.6	651.3	643.8	638.8	643.8	651.3	653.6	662.6	668.6	690.5	715.8
17.5°	588.3	581.0	578.7	577.6	578.7	581.0	588.3	592.8	601.4	612.9	628.1
20°	546.4	539.7	538.6	537.8	538.6	539.7	546.4	551.7	558.6	571.0	586.8
22.5°	517.5	510.4	507.5	505.2	507.5	510.4	517.5	521.6	527.8	537.5	548.2
25°	468.0	465.3	463.8	463.1	463.8	465.3	468.0	471.8	477.8	491.0	502.3
27.5°	429.3	423.5	422.3	420.4	422.3	423.5	429.3	436.1	442.3	448.3	458.4
30°	407.3	405.4	402.7	400.5	402.7	405.4	407.3	410.7	414.9	425.1	434.8
32.5°	381.3	379.8	377.4	376.4	377.4	379.8	381.3	386.0	394.7	400.9	408.0
35°	352.6	347.3	345.1	341.6	345.1	347.3	352.6	356.4	359.8	365.1	377.9
37.5°	322.2	319.4	316.3	317.4	316.3	319.4	322.2	323.8	330.9	338.3	343.9
40°	298.7	296.8	296.0	295.7	296.0	296.8	298.7	303.6	312.3	315.7	324.0
42.5°	279.9	274.8	272.8	272.8	272.8	274.8	279.9	285.5	290.8	296.3	305.0
45°	251.6	246.6	243.3	243.6	243.3	246.6	251.6	253.4	257.9	268.9	273.8
47.5°	222.5	222.3	220.2	220.9	220.2	222.3	222.5	225.7	231.5	238.2	246.0
50°	208.5	206.3	204.8	205.1	204.8	206.3	208.5	211.2	214.6	217.9	230.0
52.5°	195.3	193.3	192.1	193.7	192.1	193.3	195.3	196.7	199.1	202.6	210.8
55°	173.5	171.2	170.9	170.5	170.9	171.2	173.5	175.3	178.3	181.0	184.8
57.5°	149.2	147.6	145.3	144.4	145.3	147.6	149.2	151.9	155.5	159.0	162.9
60°	131.6	128.6	124.8	124.4	124.8	128.6	131.6	136.5	138.0	143.3	147.8
62.5°	115.6	115.0	114.3	114.2	114.3	115.0	115.6	117.2	119.4	127.0	132.5
65°	101.5	101.1	101.5	101.8	101.5	101.1	101.5	102.2	102.6	103.3	105.6
67.5°	88.4	87.8	87.1	87.4	87.1	87.8	88.4	88.6	89.6	90.1	91.6
70°	78.5	78.1	77.7	77.7	77.7	78.1	78.5	79.2	80.0	80.7	82.6
72.5°	68.8	68.7	68.4	68.1	68.4	68.7	68.8	70.2	70.6	71.4	72.6
75°	55.0	54.3	54.3	54.3	54.3	54.3	55.0	55.4	55.8	57.0	57.7
77.5°	41.9	41.6	41.2	40.9	41.2	41.6	41.9	42.0	42.6	42.8	43.6
80°	33.2	32.8	32.4	32.4	32.4	32.8	33.2	33.5	33.5	34.7	34.3
82.5°	25.3	24.9	24.8	24.5	24.8	24.9	25.3	25.4	25.4	26.3	26.2
85°	13.5	13.9	13.5	14.3	13.5	13.9	13.5	13.2	13.5	14.3	14.3
87.5°	8.7	8.5	8.8	8.6	8.8	8.5	8.7	8.6	8.7	8.5	8.3
90°	23.6	24.0	24.5	24.9	24.5	24.0	23.6	23.2	22.5	21.5	20.5
92.5°	24.1	24.4	24.6	24.9	24.6	24.4	24.1	23.9	23.5	23.0	22.4
95°	40.3	40.1	39.9	39.7	39.9	40.1	40.3	40.5	40.1	39.1	38.0
97.5°	52.2	52.4	52.7	52.9	52.7	52.4	52.2	51.9	51.4	50.6	49.8
100°	60.6	61.0	61.4	61.8	61.4	61.0	60.6	60.2	59.2	57.5	55.8
102.5°	64.5	65.0	65.6	66.2	65.6	65.0	64.5	63.9	62.6	60.5	58.3
105°	67.7	68.5	69.3	70.1	69.3	68.5	67.7	66.9	65.2	63.0	60.8
107.5°	69.7	70.5	71.3	72.1	71.3	70.5	69.7	68.9	69.6	71.9	74.1
110°	70.4	71.2	72.0	72.9	72.0	71.2	70.4	69.6	79.4	99.9	120.4



TEST NUMBER: P331663-840

CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	71.6	72.3	72.9	73.6	72.9	72.3	71.6	71.0	108.1	182.8	257.6
115°	119.9	105.1	90.4	75.6	90.4	105.1	119.9	134.6	189.5	284.4	379.3
117.5°	454.2	405.8	357.3	308.8	357.3	405.8	454.2	502.7	538.5	561.5	584.4
120°	645.6	617.9	590.3	562.6	590.3	617.9	645.6	673.3	685.9	683.5	681.0
122.5°	718.2	712.8	707.4	702.1	707.4	712.8	718.2	723.6	725.5	724.0	722.6
125°	786.7	787.3	788.0	788.6	788.0	787.3	786.7	786.1	785.1	783.7	782.2
127.5°	842.8	842.9	843.0	843.1	843.0	842.9	842.8	842.6	841.6	839.5	837.4
130°	877.8	877.5	877.3	877.1	877.3	877.5	877.8	878.0	876.9	874.6	872.4
132.5°	910.9	910.7	910.5	910.3	910.5	910.7	910.9	911.1	910.3	908.4	906.5
135°	959.5	959.1	958.7	958.3	958.7	959.1	959.5	959.9	959.1	957.0	955.0
137.5°	1004.1	1003.4	1002.7	1002.0	1002.7	1003.4	1004.1	1004.8	1004.1	1002.1	1000.1
140°	1032.4	1031.4	1030.4	1029.3	1030.4	1031.4	1032.4	1033.4	1033.0	1031.2	1029.3
142.5°	1058.9	1057.9	1056.9	1055.8	1056.9	1057.9	1058.9	1060.0	1059.7	1057.9	1056.2
145°	1096.0	1095.0	1094.0	1093.0	1094.0	1095.0	1096.0	1097.0	1096.8	1095.4	1094.0
147.5°	1128.1	1127.3	1126.4	1125.6	1126.4	1127.3	1128.1	1129.0	1128.9	1127.8	1126.8
150°	1148.6	1147.5	1146.5	1145.5	1146.5	1147.5	1148.6	1149.6	1149.5	1148.3	1147.0
152.5°	1166.5	1165.2	1163.9	1162.5	1163.9	1165.2	1166.5	1167.9	1167.9	1166.7	1165.5
155°	1191.0	1189.3	1187.7	1186.1	1187.7	1189.3	1191.0	1192.7	1192.9	1191.6	1190.4
157.5°	1212.4	1210.8	1209.2	1207.7	1209.2	1210.8	1212.4	1214.1	1214.2	1212.7	1211.3
160°	1224.5	1223.0	1221.6	1220.2	1221.6	1223.0	1224.5	1226.0	1226.1	1224.9	1223.6
162.5°	1235.9	1234.1	1232.3	1230.5	1232.3	1234.1	1235.9	1237.6	1237.8	1236.4	1235.0
165°	1250.3	1248.9	1247.5	1246.1	1247.5	1248.9	1250.3	1251.7	1251.7	1250.3	1248.9
167.5°	1261.3	1259.5	1257.7	1255.8	1257.7	1259.5	1261.3	1263.1	1263.4	1261.9	1260.5
170°	1267.3	1265.4	1263.5	1261.7	1263.5	1265.4	1267.3	1269.1	1269.3	1267.9	1266.5
172.5°	1271.6	1269.8	1268.0	1266.2	1268.0	1269.8	1271.6	1273.5	1273.7	1272.3	1270.8
175°	1276.2	1274.1	1272.0	1270.0	1272.0	1274.1	1276.2	1278.2	1278.5	1277.1	1275.7
177.5°	1276.9	1275.4	1273.8	1272.4	1273.8	1275.4	1276.9	1278.3	1278.5	1277.4	1276.2
180°	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7



TEST NUMBER: P331663-840

CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4
2.5°	1043.7	1047.9	1054.3	1057.9	1063.9	1067.8	1070.0	1073.9	1076.0	1083.6	1091.4
5°	985.4	991.5	1002.0	1011.8	1022.4	1033.3	1041.3	1050.3	1058.5	1072.9	1088.0
7.5°	918.6	927.0	943.3	959.0	977.3	992.8	1006.4	1021.9	1035.7	1056.2	1077.6
10°	868.5	883.2	904.7	919.4	943.5	959.0	980.5	997.4	1016.7	1043.9	1068.0
12.5°	825.4	843.1	860.4	880.8	902.5	928.3	951.9	973.6	996.5	1024.6	1052.9
15°	747.1	772.7	799.5	820.2	849.7	876.8	904.3	933.7	961.7	995.2	1032.2
17.5°	646.3	676.0	721.0	756.6	791.1	818.4	852.4	888.1	920.9	961.4	1002.5
20°	600.8	622.6	653.2	701.0	753.2	782.1	816.9	856.1	893.7	937.9	982.0
22.5°	564.2	583.7	608.2	645.5	703.7	743.3	779.4	819.3	863.0	908.1	956.9
25°	512.1	525.7	551.4	581.5	621.5	686.7	726.3	766.3	813.9	862.1	917.9
27.5°	473.0	485.2	501.9	530.7	560.4	607.2	670.2	713.8	761.1	815.5	873.4
30°	443.1	457.5	475.9	496.2	528.8	565.3	628.2	678.8	725.6	781.4	843.2
32.5°	421.4	432.7	448.5	469.2	496.1	531.2	581.5	642.9	688.4	747.3	811.8
35°	385.8	399.0	411.8	431.4	453.3	485.3	523.4	589.1	634.3	692.4	757.3
37.5°	356.5	364.6	378.7	394.3	417.3	441.2	474.2	533.1	582.1	639.0	705.5
40°	334.2	344.3	354.9	372.2	391.1	414.0	446.5	490.3	546.4	602.3	667.1
42.5°	312.5	325.3	336.5	348.1	368.7	391.7	418.2	455.2	512.6	565.4	628.5
45°	286.2	294.6	306.2	319.0	336.0	355.7	379.0	411.4	466.5	512.1	571.4
47.5°	255.8	267.9	275.5	288.0	304.2	322.9	344.6	372.6	417.3	460.0	514.9
50°	235.0	247.4	258.3	269.6	284.0	302.1	320.1	347.3	383.1	428.1	479.3
52.5°	217.1	228.1	238.7	250.0	264.1	280.6	297.8	321.6	352.3	393.6	443.4
55°	192.7	199.4	210.5	221.8	234.2	250.0	266.6	286.6	313.1	347.7	388.1
57.5°	167.6	175.5	184.2	195.6	208.1	220.4	235.2	253.4	274.2	305.6	340.1
60°	153.5	159.6	166.7	178.3	190.1	201.0	215.3	230.5	250.0	277.2	306.6
62.5°	137.8	143.5	150.1	160.3	171.7	181.7	194.2	210.3	226.8	251.6	277.3
65°	111.6	120.0	126.3	135.4	144.8	155.4	165.2	178.0	192.7	212.3	235.3
67.5°	92.5	96.7	102.7	111.0	120.6	129.7	139.0	149.0	161.7	176.8	195.1
70°	84.1	85.6	86.7	94.6	103.7	112.8	121.4	130.9	141.8	154.2	170.1
72.5°	74.1	75.6	77.1	80.5	87.8	96.7	105.7	112.8	123.1	133.4	146.2
75°	58.9	61.1	62.2	64.1	66.8	72.8	81.1	87.9	93.9	101.8	112.0
77.5°	44.8	46.0	47.3	49.3	50.9	53.7	58.4	64.5	70.2	74.7	81.8
80°	35.4	35.9	37.4	38.1	40.4	42.2	44.5	49.4	55.0	57.0	61.8
82.5°	26.7	27.1	28.3	29.1	30.1	31.7	34.5	35.9	40.3	42.7	45.8
85°	14.7	14.3	15.5	15.5	16.3	17.0	17.8	19.6	20.7	23.7	24.5
87.5°	8.4	8.2	8.2	7.9	7.6	7.8	7.7	7.6	7.7	8.2	8.9
90°	19.5	18.5	16.8	15.1	13.5	11.9	9.9	7.7	5.5	3.1	0.9
92.5°	21.9	21.4	20.6	19.8	19.0	18.1	17.8	18.0	18.2	18.4	18.6
95°	37.0	36.0	34.5	33.1	31.7	30.2	32.9	39.7	46.5	53.2	60.0
97.5°	49.0	48.2	44.8	41.5	38.2	34.8	42.7	61.8	80.9	99.9	119.0
100°	54.2	52.6	49.1	45.6	42.1	38.7	50.9	79.0	107.0	135.1	163.3
102.5°	56.1	54.0	83.2	112.3	141.5	170.7	188.1	194.1	200.1	206.0	212.0
105°	58.5	56.2	112.2	168.1	224.1	280.0	305.0	298.8	292.7	286.5	280.3
107.5°	76.4	78.8	145.8	213.0	280.0	347.2	378.3	373.2	368.3	363.3	358.4
110°	140.9	161.4	220.7	279.8	339.1	398.3	425.8	421.5	417.2	412.9	408.6



TEST NUMBER: P331663-840

CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	332.3	407.1	421.7	436.4	451.0	465.6	471.0	467.3	463.4	459.6	455.8
115°	474.1	569.1	563.9	558.9	553.7	548.6	544.2	540.8	537.2	533.8	530.3
117.5°	607.3	630.3	626.8	623.3	619.8	616.2	612.5	608.6	604.7	600.8	596.9
120°	678.5	676.0	672.4	668.6	665.0	661.3	657.9	654.8	651.8	648.6	645.6
122.5°	721.0	719.6	715.6	711.6	707.5	703.5	699.8	696.6	693.4	690.1	686.9
125°	780.8	779.3	775.5	771.5	767.7	763.8	760.5	757.8	755.2	752.5	749.8
127.5°	835.3	833.2	830.3	827.4	824.5	821.5	818.6	815.7	812.7	809.8	806.8
130°	870.1	867.9	865.7	863.3	861.1	858.9	856.1	852.8	849.5	846.3	843.0
132.5°	904.5	902.5	900.3	898.1	895.9	893.5	891.0	888.3	885.4	882.6	879.9
135°	952.9	950.9	949.1	947.3	945.3	943.5	941.0	937.7	934.4	931.1	927.9
137.5°	998.0	996.1	994.0	991.9	989.8	987.7	985.5	983.2	981.0	978.7	976.3
140°	1027.4	1025.6	1023.4	1021.1	1018.9	1016.6	1014.6	1013.0	1011.4	1009.8	1008.0
142.5°	1054.6	1052.9	1050.4	1047.7	1045.1	1042.6	1040.6	1039.1	1037.6	1036.1	1034.6
145°	1092.5	1091.1	1087.6	1084.1	1080.7	1077.1	1075.5	1075.7	1075.9	1076.1	1076.3
147.5°	1125.7	1124.7	1121.3	1117.8	1114.3	1110.9	1109.5	1110.3	1111.2	1111.9	1112.7
150°	1145.8	1144.6	1141.3	1138.0	1134.8	1131.5	1130.5	1132.0	1133.4	1134.9	1136.3
152.5°	1164.3	1163.1	1159.9	1156.8	1153.7	1150.5	1149.8	1151.4	1153.0	1154.6	1156.2
155°	1189.1	1187.9	1185.5	1183.1	1180.5	1178.1	1177.8	1179.6	1181.4	1183.4	1185.2
157.5°	1210.0	1208.6	1206.9	1205.2	1203.5	1201.7	1201.6	1203.2	1204.8	1206.3	1207.8
160°	1222.3	1221.1	1219.9	1218.7	1217.4	1216.2	1216.2	1217.4	1218.7	1219.9	1221.1
162.5°	1233.6	1232.2	1231.1	1230.0	1229.0	1227.9	1228.0	1229.2	1230.5	1231.7	1232.9
165°	1247.5	1246.1	1245.5	1244.8	1244.2	1243.5	1243.9	1245.1	1246.4	1247.6	1248.8
167.5°	1259.1	1257.7	1257.1	1256.5	1256.0	1255.4	1255.7	1256.9	1258.2	1259.4	1260.6
170°	1265.0	1263.5	1263.1	1262.7	1262.3	1261.9	1262.3	1263.5	1264.8	1266.0	1267.3
172.5°	1269.4	1268.0	1267.6	1267.2	1266.8	1266.4	1266.8	1268.0	1269.2	1270.4	1271.6
175°	1274.2	1272.7	1272.3	1271.9	1271.5	1271.1	1271.6	1273.0	1274.6	1276.0	1277.4
177.5°	1275.1	1273.8	1273.7	1273.5	1273.4	1273.2	1273.7	1274.9	1276.1	1277.2	1278.3
180°	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7



TEST NUMBER: P331663-840

CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4
2.5°	1091.7	1092.6	1098.6	1101.4	1106.8	1108.9	1111.3	1110.6	1110.6	1111.9	1120.3
5°	1094.0	1101.6	1112.9	1123.8	1134.4	1143.5	1149.4	1155.5	1157.7	1168.7	1178.5
7.5°	1090.1	1104.0	1122.7	1139.3	1159.3	1175.0	1187.9	1199.6	1207.6	1223.6	1239.8
10°	1085.0	1104.6	1125.7	1147.2	1174.8	1195.5	1216.6	1232.8	1238.1	1261.8	1275.5
12.5°	1074.7	1101.0	1127.8	1155.7	1182.6	1211.1	1234.4	1250.6	1269.2	1290.5	1315.6
15°	1059.3	1089.5	1124.6	1160.4	1198.9	1233.6	1258.5	1286.8	1307.1	1330.5	1352.3
17.5°	1037.2	1076.1	1120.6	1162.2	1206.6	1243.9	1278.2	1305.3	1319.6	1332.9	1336.3
20°	1019.8	1061.6	1114.0	1163.1	1207.5	1250.5	1284.4	1307.1	1310.9	1311.2	1291.2
22.5°	1000.8	1048.0	1102.9	1153.1	1206.3	1254.2	1280.5	1290.2	1275.3	1249.7	1211.0
25°	965.8	1020.5	1084.2	1141.6	1199.6	1244.9	1253.9	1237.0	1184.6	1129.4	1059.8
27.5°	928.0	989.4	1057.7	1121.5	1183.4	1211.4	1191.8	1130.6	1036.2	954.2	854.7
30°	900.2	969.2	1036.3	1107.6	1164.9	1177.0	1132.2	1042.0	931.9	808.2	709.0
32.5°	868.5	940.8	1014.6	1088.3	1136.3	1124.5	1050.4	939.4	810.3	688.7	594.9
35°	823.2	898.0	977.4	1051.4	1082.0	1031.1	920.2	775.8	643.8	530.3	465.7
37.5°	771.0	852.3	935.0	1002.9	1000.8	915.8	764.9	615.7	504.8	437.7	391.7
40°	733.9	816.1	905.4	962.8	938.3	827.8	664.1	523.4	442.3	388.8	355.3
42.5°	698.3	780.8	869.6	915.1	872.5	736.7	573.6	463.4	396.5	354.8	327.5
45°	637.7	724.8	807.1	832.3	756.1	606.4	463.8	384.0	339.4	308.5	289.6
47.5°	578.6	664.2	739.2	739.7	636.6	491.8	391.3	332.2	294.3	270.3	256.6
50°	542.3	623.8	686.7	676.9	560.1	437.5	349.9	299.0	267.4	248.9	234.6
52.5°	501.6	580.6	635.1	607.2	495.1	385.0	312.9	270.1	243.9	227.8	215.0
55°	442.3	512.5	551.0	508.8	403.9	320.1	264.4	230.8	211.2	197.6	186.7
57.5°	384.3	442.0	466.3	417.1	332.6	265.5	223.6	198.4	178.9	169.3	163.6
60°	347.7	397.1	414.0	359.8	289.2	232.3	198.0	174.6	160.3	153.9	148.2
62.5°	311.8	352.1	359.2	309.4	252.2	203.4	173.9	154.1	144.6	138.5	133.1
65°	258.7	287.7	284.4	244.4	199.4	161.4	139.9	127.8	120.7	112.0	102.6
67.5°	213.0	230.8	220.0	190.1	152.3	125.4	111.4	102.3	93.4	85.1	83.0
70°	184.0	194.2	182.9	155.4	124.8	105.2	93.9	83.0	77.7	75.8	72.4
72.5°	156.3	159.9	147.6	124.0	101.6	87.2	76.1	70.0	67.2	65.5	63.3
75°	117.2	114.6	104.1	85.6	70.5	60.7	57.4	55.0	53.2	51.7	50.5
77.5°	82.4	78.5	69.1	57.1	49.1	44.4	42.4	41.2	40.3	39.5	38.4
80°	61.8	59.2	49.8	40.7	37.4	35.0	33.9	32.4	32.4	31.7	30.5
82.5°	45.2	42.3	34.1	29.9	28.0	26.7	25.8	24.8	24.5	24.7	23.9
85°	23.7	19.2	17.0	16.3	15.0	14.3	14.7	13.9	13.9	13.9	13.5
87.5°	7.9	6.9	7.0	7.1	7.8	8.2	8.2	8.5	9.1	9.0	9.5
90°	3.1	5.5	7.7	9.9	11.9	13.5	15.1	16.8	18.5	19.5	20.5
92.5°	18.4	18.2	18.0	17.8	18.1	19.0	19.8	20.6	21.4	21.9	22.4
95°	53.2	46.5	39.7	32.9	30.2	31.7	33.1	34.5	36.0	37.0	38.0
97.5°	99.9	80.9	61.8	42.7	34.8	38.2	41.5	44.8	48.2	49.0	49.8
100°	135.1	107.0	79.0	50.9	38.7	42.1	45.6	49.1	52.6	54.2	55.8
102.5°	206.0	200.1	194.1	188.1	170.7	141.5	112.3	83.2	54.0	56.1	58.3
105°	286.5	292.7	298.8	305.0	280.0	224.1	168.1	112.2	56.2	58.5	60.8
107.5°	363.3	368.3	373.2	378.3	347.2	280.0	213.0	145.8	78.8	76.4	74.1
110°	412.9	417.2	421.5	425.8	398.3	339.1	279.8	220.7	161.4	140.9	120.4



TEST NUMBER: P331663-840

CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	459.6	463.4	467.3	471.0	465.6	451.0	436.4	421.7	407.1	332.3	257.6
115°	533.8	537.2	540.8	544.2	548.6	553.7	558.9	563.9	569.1	474.1	379.3
117.5°	600.8	604.7	608.6	612.5	616.2	619.8	623.3	626.8	630.3	607.3	584.4
120°	648.6	651.8	654.8	657.9	661.3	665.0	668.6	672.4	676.0	678.5	681.0
122.5°	690.1	693.4	696.6	699.8	703.5	707.5	711.6	715.6	719.6	721.0	722.6
125°	752.5	755.2	757.8	760.5	763.8	767.7	771.5	775.5	779.3	780.8	782.2
127.5°	809.8	812.7	815.7	818.6	821.5	824.5	827.4	830.3	833.2	835.3	837.4
130°	846.3	849.5	852.8	856.1	858.9	861.1	863.3	865.7	867.9	870.1	872.4
132.5°	882.6	885.4	888.3	891.0	893.5	895.9	898.1	900.3	902.5	904.5	906.5
135°	931.1	934.4	937.7	941.0	943.5	945.3	947.3	949.1	950.9	952.9	955.0
137.5°	978.7	981.0	983.2	985.5	987.7	989.8	991.9	994.0	996.1	998.0	1000.1
140°	1009.8	1011.4	1013.0	1014.6	1016.6	1018.9	1021.1	1023.4	1025.6	1027.4	1029.3
142.5°	1036.1	1037.6	1039.1	1040.6	1042.6	1045.1	1047.7	1050.4	1052.9	1054.6	1056.2
145°	1076.1	1075.9	1075.7	1075.5	1077.1	1080.7	1084.1	1087.6	1091.1	1092.5	1094.0
147.5°	1111.9	1111.2	1110.3	1109.5	1110.9	1114.3	1117.8	1121.3	1124.7	1125.7	1126.8
150°	1134.9	1133.4	1132.0	1130.5	1131.5	1134.8	1138.0	1141.3	1144.6	1145.8	1147.0
152.5°	1154.6	1153.0	1151.4	1149.8	1150.5	1153.7	1156.8	1159.9	1163.1	1164.3	1165.5
155°	1183.4	1181.4	1179.6	1177.8	1178.1	1180.5	1183.1	1185.5	1187.9	1189.1	1190.4
157.5°	1206.3	1204.8	1203.2	1201.6	1201.7	1203.5	1205.2	1206.9	1208.6	1210.0	1211.3
160°	1219.9	1218.7	1217.4	1216.2	1216.2	1217.4	1218.7	1219.9	1221.1	1222.3	1223.6
162.5°	1231.7	1230.5	1229.2	1228.0	1227.9	1229.0	1230.0	1231.1	1232.2	1233.6	1235.0
165°	1247.6	1246.4	1245.1	1243.9	1243.5	1244.2	1244.8	1245.5	1246.1	1247.5	1248.9
167.5°	1259.4	1258.2	1256.9	1255.7	1255.4	1256.0	1256.5	1257.1	1257.7	1259.1	1260.5
170°	1266.0	1264.8	1263.5	1262.3	1261.9	1262.3	1262.7	1263.1	1263.5	1265.0	1266.5
172.5°	1270.4	1269.2	1268.0	1266.8	1266.4	1266.8	1267.2	1267.6	1268.0	1269.4	1270.8
175°	1276.0	1274.6	1273.0	1271.6	1271.1	1271.5	1271.9	1272.3	1272.7	1274.2	1275.7
177.5°	1277.2	1276.1	1274.9	1273.7	1273.2	1273.4	1273.5	1273.7	1273.8	1275.1	1276.2
180°	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7



TEST NUMBER: P331663-840

CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4	1085.4
2.5°	1123.4	1127.3	1129.1	1129.1	1131.3	1130.3	1129.4
5°	1187.9	1195.1	1196.6	1203.4	1208.3	1206.8	1207.5
7.5°	1252.1	1263.6	1275.1	1280.2	1281.1	1284.1	1285.3
10°	1291.6	1301.1	1318.8	1316.2	1329.4	1336.9	1324.4
12.5°	1329.7	1342.4	1354.7	1358.1	1365.5	1368.0	1363.0
15°	1364.0	1370.8	1371.6	1369.7	1372.0	1370.1	1362.9
17.5°	1331.9	1320.9	1298.6	1288.0	1279.6	1267.3	1262.3
20°	1278.8	1246.4	1208.7	1193.6	1175.9	1141.1	1149.4
22.5°	1164.2	1127.2	1089.5	1045.4	1024.4	991.5	989.6
25°	985.8	922.1	851.9	802.8	774.3	741.4	727.1
27.5°	766.5	686.2	628.7	599.7	573.1	547.1	546.0
30°	622.3	561.9	517.5	492.5	476.4	465.3	467.7
32.5°	524.5	483.1	453.1	432.5	420.5	412.2	412.1
35°	428.8	400.5	381.2	372.6	364.0	357.9	358.3
37.5°	367.0	349.9	339.2	329.7	324.3	321.3	319.6
40°	335.3	321.3	313.1	307.4	302.9	298.7	297.9
42.5°	310.2	298.7	290.3	285.9	281.8	278.7	278.0
45°	275.3	265.9	258.3	253.4	251.6	248.9	248.9
47.5°	244.9	235.6	229.7	226.6	223.4	221.7	221.6
50°	224.4	217.2	212.0	210.1	207.4	206.3	205.9
52.5°	206.0	200.7	196.8	195.6	194.4	193.0	193.2
55°	181.0	178.0	176.5	175.3	173.5	171.2	172.7
57.5°	160.0	157.4	153.3	149.8	148.0	146.4	147.0
60°	145.2	139.9	134.6	130.5	129.4	125.9	125.9
62.5°	126.5	119.1	112.6	110.3	109.2	107.6	107.2
65°	97.3	94.3	92.8	91.3	90.5	90.5	89.8
67.5°	80.6	79.4	77.8	77.4	76.6	76.4	76.1
70°	71.3	69.8	69.0	68.7	67.9	68.3	67.2
72.5°	62.2	61.0	60.9	59.9	59.5	59.5	58.7
75°	49.0	49.0	48.7	48.3	47.6	47.2	47.6
77.5°	37.7	37.8	37.1	37.1	37.0	37.1	36.7
80°	30.2	30.5	30.2	29.8	29.4	29.8	29.4
82.5°	23.8	23.3	23.2	23.1	23.1	22.8	22.8
85°	13.5	13.9	13.5	13.2	13.2	13.2	13.5
87.5°	9.4	9.6	9.8	9.9	9.9	10.0	9.8
90°	21.5	22.5	23.2	23.6	24.0	24.5	24.9
92.5°	23.0	23.5	23.9	24.1	24.4	24.6	24.9
95°	39.1	40.1	40.5	40.3	40.1	39.9	39.7
97.5°	50.6	51.4	51.9	52.2	52.4	52.7	52.9
100°	57.5	59.2	60.2	60.6	61.0	61.4	61.8
102.5°	60.5	62.6	63.9	64.5	65.0	65.6	66.2
105°	63.0	65.2	66.9	67.7	68.5	69.3	70.1
107.5°	71.9	69.6	68.9	69.7	70.5	71.3	72.1
110°	99.9	79.4	69.6	70.4	71.2	72.0	72.9



TEST NUMBER: P331663-840

CATALOG NUMBER: SA2XXRDIP-C485D925U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	182.8	108.1	71.0	71.6	72.3	72.9	73.6
115°	284.4	189.5	134.6	119.9	105.1	90.4	75.6
117.5°	561.5	538.5	502.7	454.2	405.8	357.3	308.8
120°	683.5	685.9	673.3	645.6	617.9	590.3	562.6
122.5°	724.0	725.5	723.6	718.2	712.8	707.4	702.1
125°	783.7	785.1	786.1	786.7	787.3	788.0	788.6
127.5°	839.5	841.6	842.6	842.8	842.9	843.0	843.1
130°	874.6	876.9	878.0	877.8	877.5	877.3	877.1
132.5°	908.4	910.3	911.1	910.9	910.7	910.5	910.3
135°	957.0	959.1	959.9	959.5	959.1	958.7	958.3
137.5°	1002.1	1004.1	1004.8	1004.1	1003.4	1002.7	1002.0
140°	1031.2	1033.0	1033.4	1032.4	1031.4	1030.4	1029.3
142.5°	1057.9	1059.7	1060.0	1058.9	1057.9	1056.9	1055.8
145°	1095.4	1096.8	1097.0	1096.0	1095.0	1094.0	1093.0
147.5°	1127.8	1128.9	1129.0	1128.1	1127.3	1126.4	1125.6
150°	1148.3	1149.5	1149.6	1148.6	1147.5	1146.5	1145.5
152.5°	1166.7	1167.9	1167.9	1166.5	1165.2	1163.9	1162.5
155°	1191.6	1192.9	1192.7	1191.0	1189.3	1187.7	1186.1
157.5°	1212.7	1214.2	1214.1	1212.4	1210.8	1209.2	1207.7
160°	1224.9	1226.1	1226.0	1224.5	1223.0	1221.6	1220.2
162.5°	1236.4	1237.8	1237.6	1235.9	1234.1	1232.3	1230.5
165°	1250.3	1251.7	1251.7	1250.3	1248.9	1247.5	1246.1
167.5°	1261.9	1263.4	1263.1	1261.3	1259.5	1257.7	1255.8
170°	1267.9	1269.3	1269.1	1267.3	1265.4	1263.5	1261.7
172.5°	1272.3	1273.7	1273.5	1271.6	1269.8	1268.0	1266.2
175°	1277.1	1278.5	1278.2	1276.2	1274.1	1272.0	1270.0
177.5°	1277.4	1278.5	1278.3	1276.9	1275.4	1273.8	1272.4
180°	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7

(END OF REPORT)