

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331696-840

Luminaire Tested: **SA2XXRDIP-C675D925U840-4F0-1E-UDD-F**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P331696-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA2XXRDIP-C675D925U840-4F0-1E-UDD-F  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 675 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 925 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6081.4 lumens  
Efficiency: N/A  
Efficacy: 117.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Indirect

Input Watts (W): 52  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331696-840  
CATALOG NUMBER: SA2XXRDIP-C675D925U840-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

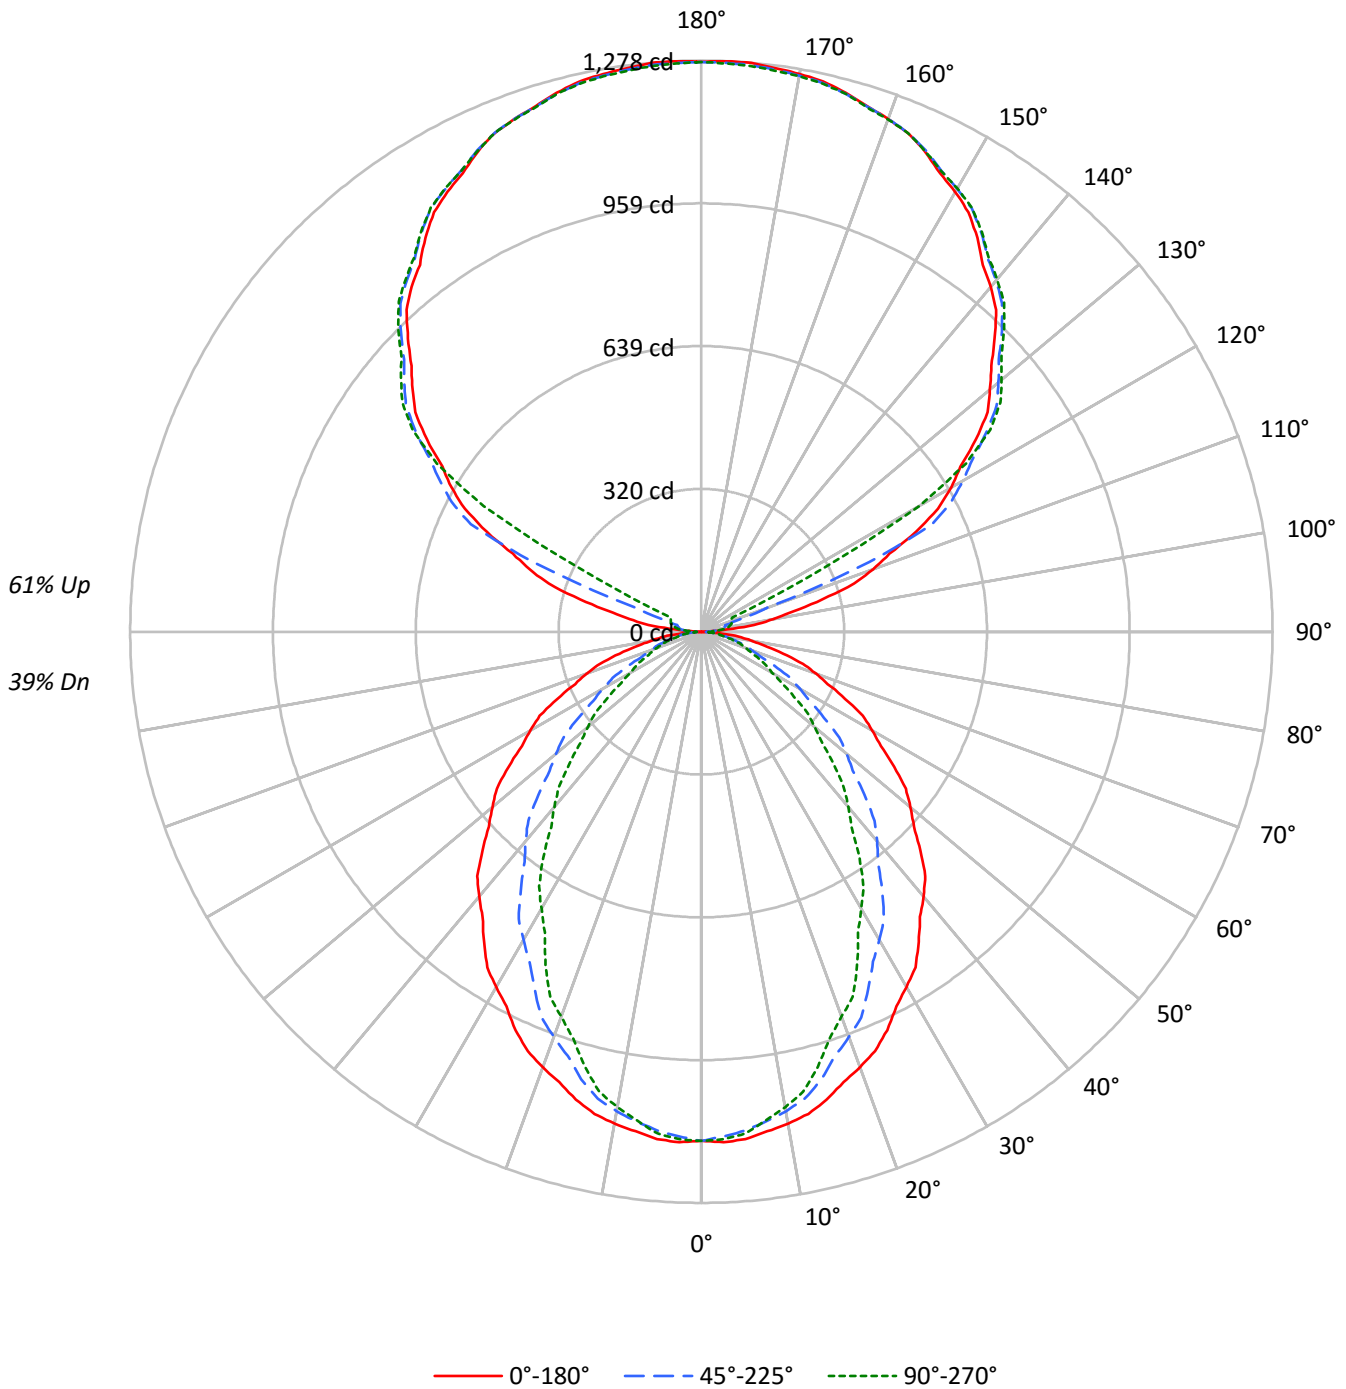



TEST NUMBER: P331696-840

CATALOG NUMBER: SA2XXRDIP-C675D925U840-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46	39
1	96	91	88	84	87	83	80	77	68	66	64	54	52	51	41	40	39	33
2	87	80	74	70	79	73	68	64	60	56	53	48	45	43	36	35	34	28
3	80	71	64	58	72	65	59	54	53	49	45	42	40	37	33	31	29	25
4	73	63	55	50	66	58	51	46	47	43	39	38	35	32	29	27	25	21
5	67	56	48	43	61	51	45	40	43	38	34	34	31	28	27	24	22	19
6	62	50	43	37	56	46	39	35	38	33	30	31	27	25	24	22	20	17
7	57	46	38	33	52	42	35	30	35	30	26	28	25	22	22	20	18	15
8	53	41	34	29	48	38	32	27	32	27	23	26	22	20	20	18	16	13
9	50	38	31	26	45	35	28	24	29	24	21	24	20	18	19	16	14	12
10	46	35	28	23	42	32	26	22	27	22	19	22	19	16	18	15	13	11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	18392	18392	18392
5°	18462	18162	18263
10°	18321	17864	17713
15°	18111	17336	16836
20°	17819	16579	15747
25°	17521	15720	14694
30°	17107	14838	13340
35°	16703	13878	12151
40°	16297	12886	10777
45°	15819	11768	9533
50°	15330	10643	8312
55°	14829	9433	7139
60°	14247	8157	5926
65°	13589	6854	5398
70°	12798	5646	4961
75°	11834	5147	4629
80°	10451	4603	4212
85°	8207	3631	3631



TEST NUMBER: P331696-840

CATALOG NUMBER: SA2XXRDIP-C675D925U840-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	106.6	1.8
10°-20°	292.8	4.8
20°-30°	411.1	6.8
30°-40°	448.3	7.4
40°-50°	412.2	6.8
50°-60°	323.8	5.3
60°-70°	211.1	3.5
70°-80°	108.8	1.8
80°-90°	31.4	0.5
90°-100°	42.5	0.7
100°-110°	155.9	2.6
110°-120°	416.8	6.9
120°-130°	688.0	11.3
130°-140°	731.7	12.0
140°-150°	680.1	11.2
150°-160°	546.8	9.0
160°-170°	352.3	5.8
170°-180°	121.3	2.0
0°-30°	810.5	13.3
0°-40°	1258.9	20.7
0°-60°	1994.8	32.8
0°-90°	2346.1	38.6
90°-120°	615.2	10.1
90°-150°	2714.9	44.6
90°-180°	3735.0	61.4
0°-180°	6081.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1139	1139	1139	1139	1139	
5°	1139	1134	1121	1129	1127	108
15°	1084	1071	1037	1018	1007	305
25°	984	949	882	842	825	452
35°	847	793	704	642	616	530
45°	693	622	515	445	418	535
55°	527	445	335	276	254	471
65°	356	272	179	146	141	352
75°	190	120	82	76	74	201
85°	44	24	20	20	20	52
90°	1	11	18	23	25	5
95°	60	32	36	40	40	73
105°	280	292	56	66	70	300
115°	530	546	569	162	76	522
125°	750	762	779	786	789	668
135°	928	942	951	960	958	716
145°	1076	1076	1091	1097	1093	673
155°	1185	1178	1188	1193	1186	546
165°	1249	1244	1246	1252	1246	353
175°	1277	1271	1273	1278	1270	122
180°	1275	1275	1275	1275	1275	



TEST NUMBER: P331696-840

CATALOG NUMBER: SA2XXRDIP-C675D925U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1
2.5°	1143.3	1142.4	1141.5	1140.5	1139.6	1138.1	1136.1	1134.1	1132.2	1130.1	1132.0
5°	1139.1	1138.0	1136.9	1135.7	1134.6	1132.6	1129.5	1126.6	1123.6	1120.6	1122.7
7.5°	1127.4	1126.0	1124.6	1123.2	1121.8	1119.2	1115.8	1112.4	1108.8	1105.4	1105.9
10°	1117.5	1115.9	1114.3	1112.7	1111.1	1108.0	1103.4	1098.8	1094.3	1089.6	1089.0
12.5°	1105.1	1103.2	1101.2	1099.2	1097.2	1093.4	1087.5	1081.7	1075.7	1069.9	1068.6
15°	1083.5	1081.0	1078.4	1075.9	1073.4	1068.2	1060.5	1052.7	1044.9	1037.1	1032.8
17.5°	1056.9	1053.1	1049.2	1045.3	1041.5	1034.6	1024.6	1014.6	1004.6	994.6	989.5
20°	1037.1	1032.5	1027.9	1023.4	1018.8	1010.8	999.3	987.8	976.4	964.9	959.2
22.5°	1015.6	1010.6	1005.4	1000.3	995.1	986.1	973.2	960.3	947.4	934.4	927.1
25°	983.5	976.1	968.9	961.5	954.2	942.9	927.9	912.7	897.6	882.4	873.0
27.5°	944.7	936.8	928.8	920.8	912.8	900.3	883.3	866.3	849.2	832.1	821.2
30°	917.6	908.8	900.1	891.4	882.7	869.2	850.8	832.5	814.2	795.9	784.2
32.5°	891.1	880.9	870.8	860.6	850.4	836.0	817.3	798.6	779.9	761.2	747.9
35°	847.4	835.8	824.0	812.3	800.7	784.8	764.6	744.5	724.3	704.1	689.6
37.5°	803.8	790.8	778.0	765.2	752.3	735.2	713.8	692.3	670.8	649.2	633.4
40°	773.2	759.4	745.7	732.0	718.2	700.2	678.0	655.8	633.6	611.4	595.1
42.5°	741.8	727.4	712.9	698.4	684.0	665.2	642.3	619.4	596.3	573.4	556.5
45°	692.8	677.4	662.1	646.7	631.4	611.7	587.6	563.6	539.5	515.4	499.2
47.5°	644.9	628.6	612.4	596.1	579.9	559.4	534.5	509.7	484.8	460.0	443.8
50°	610.3	594.0	577.7	561.5	545.2	524.5	499.3	474.1	448.9	423.7	407.9
52.5°	576.5	559.5	542.5	525.5	508.5	487.7	463.0	438.4	413.7	389.1	373.9
55°	526.8	509.0	491.1	473.2	455.3	434.0	409.3	384.6	359.8	335.1	321.3
57.5°	475.8	457.6	439.2	420.9	402.5	381.5	357.7	334.0	310.1	286.4	273.8
60°	441.2	422.9	404.6	386.3	367.9	347.0	323.4	299.7	276.2	252.6	240.9
62.5°	407.4	389.1	370.7	352.4	334.1	313.7	291.2	268.7	246.2	223.7	212.6
65°	355.7	337.1	318.5	300.0	281.4	261.9	241.3	220.7	200.0	179.4	171.6
67.5°	305.8	287.3	268.9	250.5	232.1	213.6	195.0	176.5	157.9	139.4	135.8
70°	271.1	253.3	235.4	217.5	199.7	182.8	167.0	151.2	135.4	119.6	117.2
72.5°	238.1	221.0	203.9	186.7	169.6	154.7	142.0	129.3	116.6	103.9	102.0
75°	189.7	173.7	157.6	141.6	125.5	113.6	105.8	98.1	90.3	82.5	80.9
77.5°	142.1	127.9	113.9	99.9	85.8	76.9	73.1	69.4	65.6	61.9	60.9
80°	112.4	100.7	89.0	77.4	65.6	58.7	56.4	54.0	51.8	49.5	48.6
82.5°	85.1	76.0	67.0	57.8	48.7	43.3	41.8	40.2	38.7	37.2	36.6
85°	44.3	39.5	34.7	29.9	25.0	22.3	21.6	21.0	20.3	19.6	19.6
87.5°	13.3	12.3	11.3	10.3	9.3	9.0	9.3	9.6	10.0	10.3	10.3
90°	0.9	3.1	5.5	7.7	9.9	11.9	13.5	15.1	16.8	18.5	19.5
92.5°	18.6	18.4	18.2	18.0	17.8	18.1	19.0	19.8	20.6	21.4	21.9
95°	60.0	53.2	46.5	39.7	32.9	30.2	31.7	33.1	34.5	36.0	37.0
97.5°	119.0	99.9	80.9	61.8	42.7	34.8	38.2	41.5	44.8	48.2	49.0
100°	163.3	135.1	107.0	79.0	50.9	38.7	42.1	45.6	49.1	52.6	54.2
102.5°	212.0	206.0	200.1	194.1	188.1	170.7	141.5	112.3	83.2	54.0	56.1
105°	280.3	286.5	292.7	298.8	305.0	280.0	224.1	168.1	112.2	56.2	58.5
107.5°	358.4	363.3	368.3	373.2	378.3	347.2	280.0	213.0	145.8	78.8	76.4
110°	408.6	412.9	417.2	421.5	425.8	398.3	339.1	279.8	220.7	161.4	140.9



TEST NUMBER: P331696-840

CATALOG NUMBER: SA2XXRDIP-C675D925U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	455.8	459.6	463.4	467.3	471.0	465.6	451.0	436.4	421.7	407.1	332.3
115°	530.3	533.8	537.2	540.8	544.2	548.6	553.7	558.9	563.9	569.1	474.1
117.5°	596.9	600.8	604.7	608.6	612.5	616.2	619.8	623.3	626.8	630.3	607.3
120°	645.6	648.6	651.8	654.8	657.9	661.3	665.0	668.6	672.4	676.0	678.5
122.5°	686.9	690.1	693.4	696.6	699.8	703.5	707.5	711.6	715.6	719.6	721.0
125°	749.8	752.5	755.2	757.8	760.5	763.8	767.7	771.5	775.5	779.3	780.8
127.5°	806.8	809.8	812.7	815.7	818.6	821.5	824.5	827.4	830.3	833.2	835.3
130°	843.0	846.3	849.5	852.8	856.1	858.9	861.1	863.3	865.7	867.9	870.1
132.5°	879.9	882.6	885.4	888.3	891.0	893.5	895.9	898.1	900.3	902.5	904.5
135°	927.9	931.1	934.4	937.7	941.0	943.5	945.3	947.3	949.1	950.9	952.9
137.5°	976.3	978.7	981.0	983.2	985.5	987.7	989.8	991.9	994.0	996.1	998.0
140°	1008.0	1009.8	1011.4	1013.0	1014.6	1016.6	1018.9	1021.1	1023.4	1025.6	1027.4
142.5°	1034.6	1036.1	1037.6	1039.1	1040.6	1042.6	1045.1	1047.7	1050.4	1052.9	1054.6
145°	1076.3	1076.1	1075.9	1075.7	1075.5	1077.1	1080.7	1084.1	1087.6	1091.1	1092.5
147.5°	1112.7	1111.9	1111.2	1110.3	1109.5	1110.9	1114.3	1117.8	1121.3	1124.7	1125.7
150°	1136.3	1134.9	1133.4	1132.0	1130.5	1131.5	1134.8	1138.0	1141.3	1144.6	1145.8
152.5°	1156.2	1154.6	1153.0	1151.4	1149.8	1150.5	1153.7	1156.8	1159.9	1163.1	1164.3
155°	1185.2	1183.4	1181.4	1179.6	1177.8	1178.1	1180.5	1183.1	1185.5	1187.9	1189.1
157.5°	1207.8	1206.3	1204.8	1203.2	1201.6	1201.7	1203.5	1205.2	1206.9	1208.6	1210.0
160°	1221.1	1219.9	1218.7	1217.4	1216.2	1216.2	1217.4	1218.7	1219.9	1221.1	1222.3
162.5°	1232.9	1231.7	1230.5	1229.2	1228.0	1227.9	1229.0	1230.0	1231.1	1232.2	1233.6
165°	1248.8	1247.6	1246.4	1245.1	1243.9	1243.5	1244.2	1244.8	1245.5	1246.1	1247.5
167.5°	1260.6	1259.4	1258.2	1256.9	1255.7	1255.4	1256.0	1256.5	1257.1	1257.7	1259.1
170°	1267.3	1266.0	1264.8	1263.5	1262.3	1261.9	1262.3	1262.7	1263.1	1263.5	1265.0
172.5°	1271.6	1270.4	1269.2	1268.0	1266.8	1266.4	1266.8	1267.2	1267.6	1268.0	1269.4
175°	1277.4	1276.0	1274.6	1273.0	1271.6	1271.1	1271.5	1271.9	1272.3	1272.7	1274.2
177.5°	1278.3	1277.2	1276.1	1274.9	1273.7	1273.2	1273.4	1273.5	1273.7	1273.8	1275.1
180°	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7



TEST NUMBER: P331696-840

CATALOG NUMBER: SA2XXRDIP-C675D925U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1	1139.1
2.5°	1133.8	1135.6	1137.4	1138.1	1137.8	1137.4	1137.1	1136.7
5°	1124.7	1126.8	1128.8	1129.5	1128.8	1128.1	1127.5	1126.8
7.5°	1106.5	1107.1	1107.7	1107.4	1106.2	1105.1	1103.9	1102.7
10°	1088.3	1087.6	1086.9	1085.9	1084.5	1083.2	1081.8	1080.4
12.5°	1067.4	1066.2	1064.9	1063.2	1060.9	1058.6	1056.3	1054.0
15°	1028.4	1024.0	1019.7	1016.3	1014.1	1011.8	1009.5	1007.2
17.5°	984.3	979.1	973.9	969.4	965.4	961.5	957.6	953.6
20°	953.5	947.8	942.0	936.6	931.6	926.6	921.5	916.5
22.5°	919.7	912.3	904.9	899.4	895.5	891.8	888.1	884.3
25°	863.6	854.2	844.9	838.5	835.1	831.6	828.2	824.8
27.5°	810.2	799.3	788.4	780.1	774.7	769.2	763.8	758.3
30°	772.5	760.8	749.1	740.2	734.0	727.8	721.6	715.5
32.5°	734.6	721.2	707.9	698.3	692.5	686.7	680.9	675.1
35°	675.3	660.9	646.4	636.6	631.6	626.5	621.6	616.5
37.5°	617.4	601.6	585.7	574.8	569.1	563.3	557.5	551.8
40°	578.8	562.5	546.2	535.1	529.2	523.2	517.3	511.3
42.5°	539.8	522.9	506.1	494.8	489.1	483.3	477.6	471.7
45°	482.9	466.7	450.4	439.5	434.0	428.5	423.0	417.5
47.5°	427.7	411.5	395.3	384.8	379.7	374.8	369.7	364.8
50°	392.1	376.3	360.5	350.1	345.4	340.5	335.8	330.9
52.5°	358.6	343.3	328.0	318.2	313.8	309.3	304.9	300.4
55°	307.6	293.8	280.0	271.0	266.7	262.3	257.9	253.6
57.5°	261.2	248.6	236.0	227.8	224.2	220.6	216.8	213.2
60°	229.2	217.5	205.8	198.1	194.5	190.9	187.1	183.5
62.5°	201.5	190.3	179.2	172.5	170.3	168.1	165.9	163.7
65°	163.8	156.0	148.2	144.0	143.3	142.6	141.9	141.3
67.5°	132.2	128.7	125.1	122.9	122.2	121.5	120.8	120.0
70°	115.0	112.7	110.4	108.9	107.9	106.9	106.0	105.1
72.5°	100.1	98.2	96.2	95.0	94.4	93.9	93.3	92.8
75°	79.3	77.7	76.0	75.1	74.9	74.7	74.4	74.2
77.5°	60.0	59.1	58.2	57.6	57.2	56.9	56.5	56.0
80°	47.7	46.8	45.8	45.3	45.3	45.3	45.3	45.3
82.5°	36.1	35.4	34.9	34.6	34.6	34.6	34.6	34.6
85°	19.6	19.6	19.6	19.6	19.6	19.6	19.6	19.6
87.5°	10.3	10.4	10.4	10.4	10.5	10.6	10.7	10.7
90°	20.5	21.5	22.5	23.2	23.6	24.0	24.5	24.9
92.5°	22.4	23.0	23.5	23.9	24.1	24.4	24.6	24.9
95°	38.0	39.1	40.1	40.5	40.3	40.1	39.9	39.7
97.5°	49.8	50.6	51.4	51.9	52.2	52.4	52.7	52.9
100°	55.8	57.5	59.2	60.2	60.6	61.0	61.4	61.8
102.5°	58.3	60.5	62.6	63.9	64.5	65.0	65.6	66.2
105°	60.8	63.0	65.2	66.9	67.7	68.5	69.3	70.1
107.5°	74.1	71.9	69.6	68.9	69.7	70.5	71.3	72.1
110°	120.4	99.9	79.4	69.6	70.4	71.2	72.0	72.9





TEST NUMBER: P331696-840

CATALOG NUMBER: SA2XXRDIP-C675D925U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	257.6	182.8	108.1	71.0	71.6	72.3	72.9	73.6
115°	379.3	284.4	189.5	134.6	119.9	105.1	90.4	75.6
117.5°	584.4	561.5	538.5	502.7	454.2	405.8	357.3	308.8
120°	681.0	683.5	685.9	673.3	645.6	617.9	590.3	562.6
122.5°	722.6	724.0	725.5	723.6	718.2	712.8	707.4	702.1
125°	782.2	783.7	785.1	786.1	786.7	787.3	788.0	788.6
127.5°	837.4	839.5	841.6	842.6	842.8	842.9	843.0	843.1
130°	872.4	874.6	876.9	878.0	877.8	877.5	877.3	877.1
132.5°	906.5	908.4	910.3	911.1	910.9	910.7	910.5	910.3
135°	955.0	957.0	959.1	959.9	959.5	959.1	958.7	958.3
137.5°	1000.1	1002.1	1004.1	1004.8	1004.1	1003.4	1002.7	1002.0
140°	1029.3	1031.2	1033.0	1033.4	1032.4	1031.4	1030.4	1029.3
142.5°	1056.2	1057.9	1059.7	1060.0	1058.9	1057.9	1056.9	1055.8
145°	1094.0	1095.4	1096.8	1097.0	1096.0	1095.0	1094.0	1093.0
147.5°	1126.8	1127.8	1128.9	1129.0	1128.1	1127.3	1126.4	1125.6
150°	1147.0	1148.3	1149.5	1149.6	1148.6	1147.5	1146.5	1145.5
152.5°	1165.5	1166.7	1167.9	1167.9	1166.5	1165.2	1163.9	1162.5
155°	1190.4	1191.6	1192.9	1192.7	1191.0	1189.3	1187.7	1186.1
157.5°	1211.3	1212.7	1214.2	1214.1	1212.4	1210.8	1209.2	1207.7
160°	1223.6	1224.9	1226.1	1226.0	1224.5	1223.0	1221.6	1220.2
162.5°	1235.0	1236.4	1237.8	1237.6	1235.9	1234.1	1232.3	1230.5
165°	1248.9	1250.3	1251.7	1251.7	1250.3	1248.9	1247.5	1246.1
167.5°	1260.5	1261.9	1263.4	1263.1	1261.3	1259.5	1257.7	1255.8
170°	1266.5	1267.9	1269.3	1269.1	1267.3	1265.4	1263.5	1261.7
172.5°	1270.8	1272.3	1273.7	1273.5	1271.6	1269.8	1268.0	1266.2
175°	1275.7	1277.1	1278.5	1278.2	1276.2	1274.1	1272.0	1270.0
177.5°	1276.2	1277.4	1278.5	1278.3	1276.9	1275.4	1273.8	1272.4
180°	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7	1274.7

(END OF REPORT)