

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331464-940

Luminaire Tested: **SA2XXDIP-C1005D1080U940-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331464-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C1005D1080U940-4F0-1E-UDD-F4
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1080 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7369.0 lumens
Efficiency: N/A
Efficacy: 102.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331464-940
CATALOG NUMBER: SA2XXDIP-C1005D1080U940-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

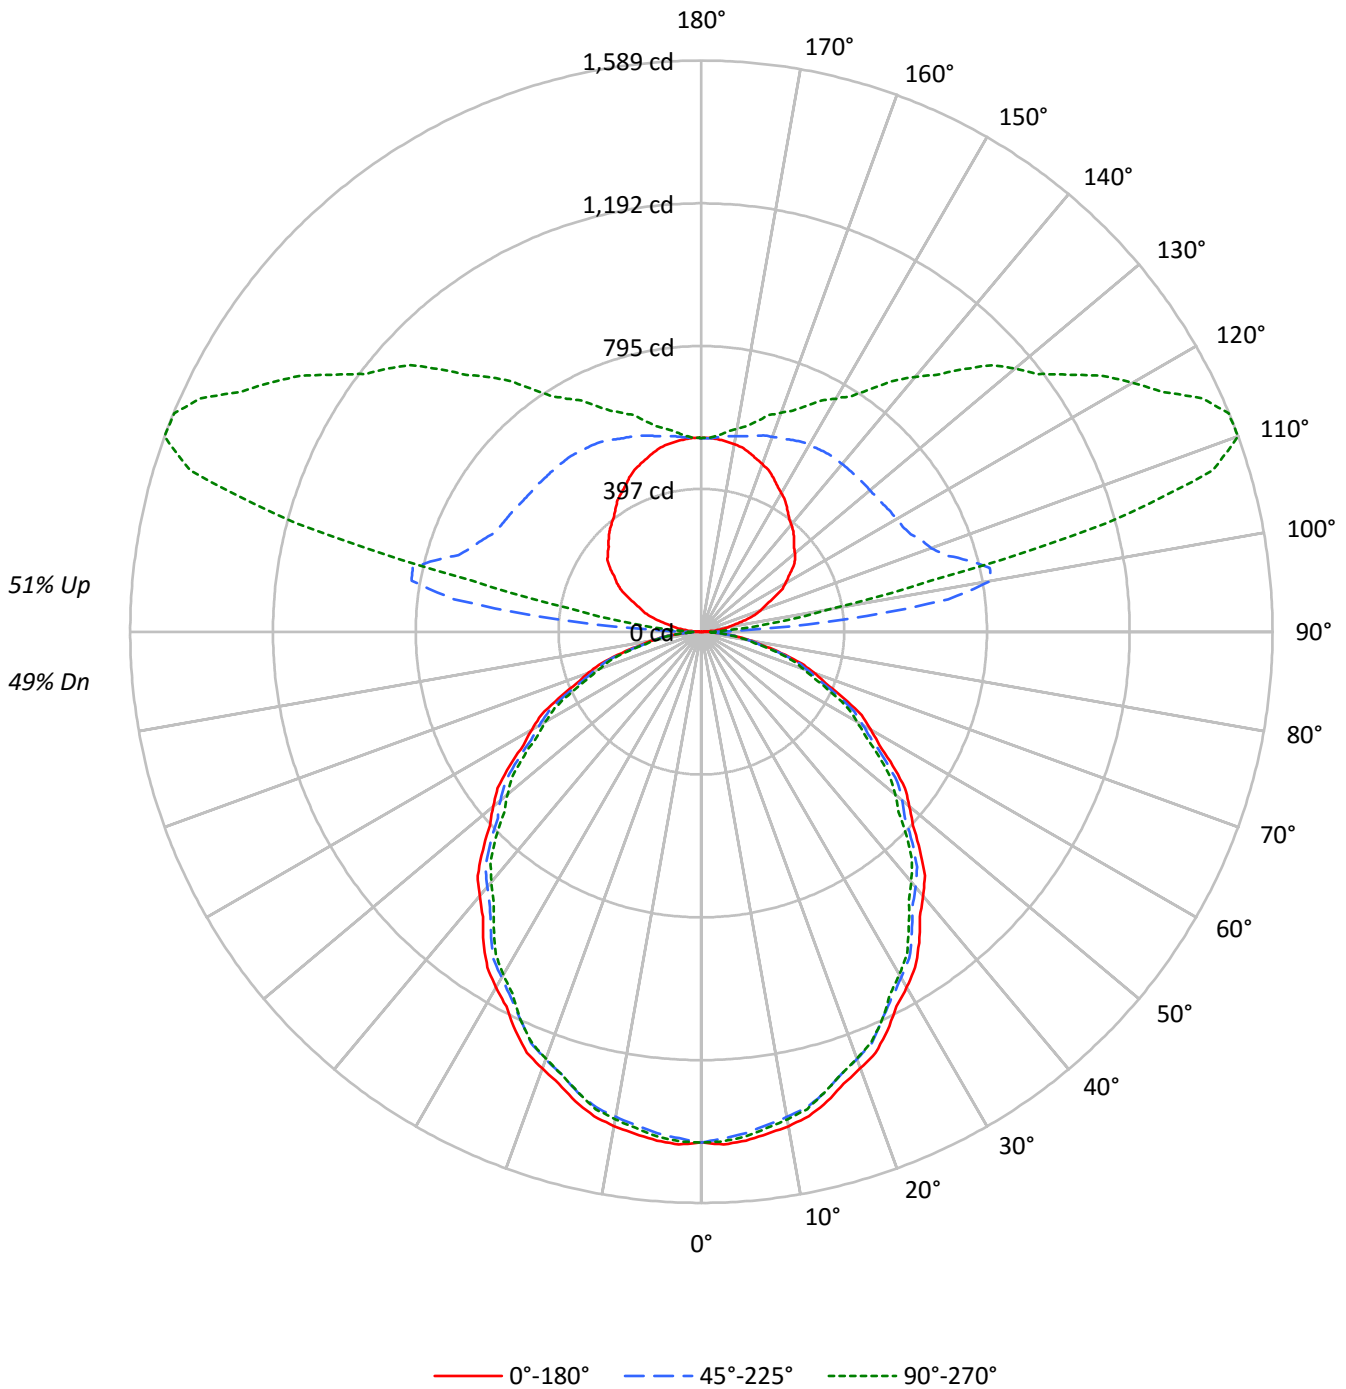



TEST NUMBER: P331464-940

CATALOG NUMBER: SA2XXDIP-C1005D1080U940-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	55	55	55	49		
1	98	93	89	86	90	86	83	80	73	70	68	60	59	57	49	48	47	41		
2	89	81	75	70	82	75	70	65	64	60	56	53	50	48	43	41	39	35		
3	81	72	64	58	74	66	60	55	56	51	47	47	43	40	38	36	33	29		
4	74	63	55	49	68	59	52	46	50	45	40	42	38	35	34	31	29	25		
5	68	56	48	42	62	52	45	40	45	39	35	37	33	30	31	28	25	22		
6	63	51	43	37	58	47	40	35	40	35	30	34	30	26	28	25	22	19		
7	58	46	38	32	53	43	35	30	36	31	27	31	26	23	25	22	20	17		
8	54	41	34	28	49	39	32	27	33	28	24	28	24	21	23	20	18	15		
9	50	38	30	25	46	35	29	24	30	25	21	26	22	19	22	18	16	14		
10	47	35	28	23	43	32	26	22	28	23	19	24	20	17	20	17	14	13		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	22946	22946	22946
5°	23034	22702	22835
10°	22897	22471	22584
15°	22614	22181	22158
20°	22213	21742	21720
25°	21814	21205	21205
30°	21300	20713	20534
35°	20820	20120	19825
40°	20219	19530	19153
45°	19628	18941	18472
50°	18982	18331	17678
55°	18311	17619	16963
60°	17563	16769	16152
65°	16756	15924	15194
70°	15739	14903	14195
75°	14323	13724	13381
80°	12710	12329	11688
85°	10374	9874	8855



TEST NUMBER: P331464-940

CATALOG NUMBER: SA2XXDIP-C1005D1080U940-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	133.6	1.8
10°-20°	376.0	5.1
20°-30°	552.7	7.5
30°-40°	642.0	8.7
40°-50°	641.3	8.7
50°-60°	559.3	7.6
60°-70°	413.6	5.6
70°-80°	234.2	3.2
80°-90°	67.8	0.9
90°-100°	215.4	2.9
100°-110°	730.9	9.9
110°-120°	776.4	10.5
120°-130°	639.2	8.7
130°-140°	513.3	7.0
140°-150°	387.9	5.3
150°-160°	272.6	3.7
160°-170°	160.5	2.2
170°-180°	52.2	0.7
0°-30°	1062.4	14.4
0°-40°	1704.4	23.1
0°-60°	2905.1	39.4
0°-90°	3620.7	49.1
90°-120°	1722.7	23.4
90°-150°	3263.0	44.3
90°-180°	3748.0	50.9
0°-180°	7369.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1421	1421	1421	1421	1421	
5°	1421	1415	1401	1411	1409	135
15°	1353	1344	1327	1332	1326	381
25°	1224	1213	1190	1193	1190	563
35°	1056	1042	1021	1013	1006	659
45°	860	849	830	815	809	663
55°	650	642	626	610	603	581
65°	439	430	417	405	398	434
75°	230	227	220	212	214	245
85°	56	55	53	49	48	64
90°	1	14	35	34	34	5
95°	36	89	406	153	118	38
105°	126	191	768	1372	1167	134
115°	223	281	642	1325	1536	221
125°	311	368	617	1074	1246	276
135°	365	435	610	902	1033	282
145°	416	479	607	754	825	261
155°	473	511	589	667	693	218
165°	516	531	564	599	608	145
175°	538	538	543	550	548	51
180°	539	539	539	539	539	



TEST NUMBER: P331464-940

CATALOG NUMBER: SA2XXDIP-C1005D1080U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2
2.5°	1427.8	1426.6	1425.4	1424.2	1422.9	1421.0	1418.4	1415.7	1413.0	1410.3	1412.7
5°	1421.2	1420.0	1418.8	1417.6	1416.4	1414.1	1410.8	1407.4	1404.1	1400.7	1403.2
7.5°	1408.6	1406.8	1404.9	1403.0	1401.1	1398.5	1395.1	1391.7	1388.3	1384.9	1387.3
10°	1396.6	1394.5	1392.4	1390.3	1388.1	1385.3	1381.6	1378.0	1374.3	1370.6	1373.1
12.5°	1380.3	1378.3	1376.4	1374.6	1372.7	1369.9	1366.3	1362.6	1359.1	1355.4	1357.1
15°	1352.9	1351.1	1349.2	1347.5	1345.6	1342.7	1338.8	1334.8	1330.9	1327.0	1328.2
17.5°	1317.9	1316.1	1314.3	1312.4	1310.6	1307.7	1303.7	1299.7	1295.7	1291.7	1293.1
20°	1292.8	1290.9	1289.1	1287.3	1285.5	1282.5	1278.2	1274.0	1269.7	1265.4	1266.3
22.5°	1267.7	1265.1	1262.6	1260.0	1257.4	1254.2	1250.2	1246.2	1242.2	1238.1	1238.3
25°	1224.5	1222.0	1219.6	1217.2	1214.8	1210.9	1205.8	1200.6	1195.4	1190.3	1190.9
27.5°	1175.3	1173.0	1170.9	1168.7	1166.5	1163.4	1159.3	1155.2	1151.2	1147.1	1146.2
30°	1142.5	1140.1	1137.6	1135.1	1132.7	1129.3	1124.7	1120.2	1115.6	1111.0	1110.1
32.5°	1107.5	1105.5	1103.6	1101.6	1099.7	1096.4	1091.5	1086.7	1081.9	1077.1	1075.5
35°	1056.3	1053.3	1050.3	1047.2	1044.2	1040.3	1035.4	1030.6	1025.7	1020.8	1019.0
37.5°	998.7	996.0	993.4	990.7	988.0	984.3	979.4	974.6	969.6	964.8	962.5
40°	959.3	956.9	954.5	952.1	949.6	946.0	941.1	936.3	931.4	926.6	923.8
42.5°	921.0	918.6	916.2	913.8	911.3	907.7	902.9	898.0	893.1	888.2	885.3
45°	859.6	857.5	855.3	853.2	851.0	847.7	843.2	838.7	834.1	829.5	826.2
47.5°	798.3	796.4	794.3	792.4	790.3	786.9	782.2	777.5	772.8	768.0	764.5
50°	755.7	754.2	752.7	751.2	749.7	746.7	742.5	738.2	734.0	729.8	725.5
52.5°	714.2	712.2	710.2	708.2	706.1	703.1	699.1	695.1	691.2	687.2	683.6
55°	650.5	648.6	646.8	645.1	643.2	640.4	636.9	633.2	629.5	625.9	622.2
57.5°	586.6	585.1	583.6	582.2	580.7	578.0	574.0	570.0	566.0	562.0	558.4
60°	543.9	542.7	541.4	540.3	539.0	536.3	532.1	527.8	523.5	519.3	515.9
62.5°	502.4	500.4	498.5	496.5	494.5	492.0	488.7	485.4	482.1	478.8	475.7
65°	438.6	436.8	435.1	433.2	431.4	428.9	425.9	422.8	419.8	416.8	414.1
67.5°	373.9	372.5	371.0	369.5	368.1	366.0	363.2	360.5	357.8	355.1	352.9
70°	333.4	332.3	331.0	329.8	328.6	326.6	323.9	321.1	318.4	315.7	313.5
72.5°	291.9	290.7	289.4	288.3	287.0	285.5	283.8	282.0	280.3	278.5	276.3
75°	229.6	229.0	228.4	227.7	227.1	226.0	224.5	223.0	221.5	220.0	218.2
77.5°	173.8	172.8	171.7	170.8	169.7	168.9	168.3	167.6	167.0	166.5	165.5
80°	136.7	136.3	136.1	135.7	135.5	135.0	134.4	133.8	133.1	132.6	131.6
82.5°	101.7	101.7	101.6	101.5	101.4	101.2	100.9	100.5	100.1	99.8	98.6
85°	56.0	55.7	55.5	55.1	54.8	54.5	54.2	53.9	53.6	53.3	52.3
87.5°	19.9	20.1	20.3	20.3	20.2	20.3	20.9	21.8	22.6	22.4	21.4
90°	1.1	4.1	8.3	10.3	12.4	15.5	20.7	28.0	34.2	35.2	34.2
92.5°	12.7	18.2	25.7	30.2	37.3	47.0	70.4	103.3	132.8	134.6	113.8
95°	36.3	40.4	50.7	60.1	76.7	101.5	149.2	239.2	359.4	406.1	355.3
97.5°	59.0	64.6	75.6	89.7	108.8	137.0	196.8	322.4	522.1	693.2	727.2
100°	79.7	82.8	92.2	108.8	129.5	158.5	213.4	339.7	563.5	818.3	967.5
102.5°	98.8	101.1	110.4	127.0	148.6	177.5	228.3	340.6	547.8	822.5	1057.0
105°	126.4	130.5	137.8	153.3	176.1	205.1	253.8	346.0	516.9	767.6	1043.1
107.5°	156.2	159.5	166.6	180.8	203.5	232.6	279.9	360.3	501.6	708.7	952.2
110°	176.1	180.2	186.5	199.9	221.7	251.7	297.3	371.8	498.3	680.6	895.0



TEST NUMBER: P331464-940

CATALOG NUMBER: SA2XXDIP-C1005D1080U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	194.3	198.5	205.5	218.1	239.1	269.9	313.9	384.3	499.1	662.4	855.2
115°	222.7	227.9	234.1	246.6	267.2	295.2	339.7	403.0	503.5	642.2	805.9
117.5°	252.2	256.3	262.5	273.5	293.4	322.4	363.6	422.8	510.9	632.5	774.8
120°	270.4	274.5	280.7	290.1	310.8	339.7	380.1	436.1	515.9	626.7	758.2
122.5°	287.8	291.1	297.3	307.5	328.1	358.0	395.9	447.7	521.7	623.4	744.1
125°	310.8	313.9	320.1	332.5	353.2	382.3	419.5	466.2	530.4	617.4	724.1
127.5°	329.0	333.1	341.9	355.5	375.4	405.2	441.5	483.3	539.3	613.9	705.4
130°	339.7	343.9	354.3	368.8	389.5	418.5	454.8	494.1	545.9	612.2	693.0
132.5°	349.7	354.7	365.9	381.2	402.8	431.8	466.4	504.9	552.5	611.4	683.1
135°	364.6	368.8	381.2	396.7	420.5	449.6	482.7	519.0	560.4	610.1	669.1
137.5°	378.7	383.7	396.1	412.7	436.3	463.2	496.0	529.8	567.5	609.9	659.4
140°	389.5	393.6	406.1	422.7	445.4	472.3	503.5	535.6	570.8	609.1	653.6
142.5°	400.3	403.6	415.2	431.8	453.7	479.0	509.3	540.6	573.3	609.1	647.8
145°	416.4	420.5	431.0	446.5	467.2	490.0	517.9	547.0	576.0	607.0	640.2
147.5°	433.8	436.9	446.8	461.2	478.4	498.6	525.0	550.5	576.8	603.3	632.3
150°	445.4	448.5	456.8	470.3	485.8	504.4	528.3	552.1	576.0	600.8	625.6
152.5°	457.0	458.5	466.7	478.6	493.3	510.2	531.6	552.9	574.3	596.6	619.8
155°	473.4	474.4	480.6	492.0	503.5	519.0	536.5	554.2	571.8	589.4	609.1
157.5°	487.1	488.1	493.1	503.0	512.1	525.2	540.1	554.2	567.0	581.9	599.0
160°	496.1	497.2	501.3	509.6	517.9	529.3	541.8	554.2	564.5	577.0	591.5
162.5°	505.3	504.7	508.8	515.4	522.9	531.8	542.6	553.4	562.0	572.8	584.9
165°	515.9	514.9	516.9	523.1	528.3	534.5	543.9	551.1	557.3	564.5	573.9
167.5°	524.6	523.3	525.2	529.1	532.9	536.8	543.6	549.7	552.5	557.3	563.1
170°	530.4	528.3	529.3	532.4	534.5	537.6	542.8	548.0	550.0	553.1	557.3
172.5°	533.7	532.4	531.8	534.9	536.2	538.4	542.0	545.5	546.7	548.2	551.5
175°	537.6	536.5	535.6	537.6	537.6	538.7	540.7	542.8	541.8	542.8	543.9
177.5°	539.5	537.8	537.0	538.7	538.7	538.7	539.5	541.2	539.5	538.7	539.5
180°	538.7	538.7	538.7	538.7	538.7	538.7	538.7	538.7	538.7	538.7	538.7



TEST NUMBER: P331464-940

CATALOG NUMBER: SA2XXDIP-C1005D1080U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2	1421.2
2.5°	1415.1	1417.6	1420.0	1421.0	1420.5	1420.0	1419.5	1419.1
5°	1405.6	1408.0	1410.4	1411.4	1410.8	1410.2	1409.5	1408.9
7.5°	1389.7	1392.1	1394.6	1395.5	1394.8	1394.2	1393.5	1392.9
10°	1375.6	1378.0	1380.4	1381.2	1380.3	1379.3	1378.4	1377.5
12.5°	1358.8	1360.5	1362.2	1362.7	1362.0	1361.4	1360.7	1360.0
15°	1329.4	1330.6	1331.8	1331.7	1330.2	1328.6	1327.1	1325.6
17.5°	1294.5	1295.9	1297.3	1297.3	1295.7	1294.3	1292.9	1291.4
20°	1267.3	1268.2	1269.1	1268.9	1267.7	1266.5	1265.3	1264.1
22.5°	1238.5	1238.7	1238.9	1238.6	1237.9	1237.2	1236.4	1235.6
25°	1191.5	1192.1	1192.8	1192.8	1192.1	1191.5	1190.9	1190.3
27.5°	1145.3	1144.3	1143.4	1142.3	1140.9	1139.3	1137.9	1136.5
30°	1109.2	1108.3	1107.4	1106.3	1105.1	1103.8	1102.7	1101.4
32.5°	1073.9	1072.2	1070.6	1069.2	1067.9	1066.8	1065.5	1064.3
35°	1017.2	1015.4	1013.5	1011.9	1010.4	1008.9	1007.3	1005.8
37.5°	960.3	958.1	955.8	954.0	952.5	951.0	949.6	948.2
40°	921.0	918.4	915.6	913.6	912.4	911.2	910.0	908.7
42.5°	882.3	879.3	876.4	874.1	872.4	870.7	869.0	867.2
45°	822.9	819.5	816.2	813.9	812.6	811.5	810.2	809.0
47.5°	761.0	757.4	753.9	751.3	749.5	747.8	746.0	744.2
50°	721.2	717.0	712.7	709.9	708.4	706.9	705.3	703.8
52.5°	680.1	676.5	673.1	670.3	668.2	666.3	664.2	662.3
55°	618.6	614.9	611.4	608.8	607.3	605.7	604.2	602.6
57.5°	554.7	551.2	547.6	545.2	544.1	543.0	541.8	540.6
60°	512.6	509.3	506.0	503.8	502.9	502.0	501.1	500.2
62.5°	472.7	469.6	466.5	464.3	463.2	462.0	460.8	459.7
65°	411.3	408.6	405.9	403.8	402.3	400.7	399.2	397.7
67.5°	350.8	348.7	346.5	344.8	343.7	342.4	341.3	340.0
70°	311.4	309.3	307.2	305.5	304.3	303.1	301.8	300.7
72.5°	274.3	272.2	270.0	268.5	267.5	266.5	265.6	264.6
75°	216.4	214.5	212.8	212.1	212.8	213.3	213.9	214.5
77.5°	164.6	163.7	162.8	161.9	161.0	160.2	159.3	158.5
80°	130.7	129.8	128.9	128.1	127.5	127.0	126.4	125.7
82.5°	97.5	96.3	95.1	94.5	94.3	94.3	94.2	94.0
85°	51.5	50.6	49.7	49.0	48.8	48.4	48.2	47.8
87.5°	20.5	19.4	19.0	18.7	18.5	18.3	18.0	17.7
90°	33.2	31.1	33.2	34.2	34.2	34.2	34.2	34.2
92.5°	90.3	77.5	68.8	62.3	61.5	58.2	59.0	57.4
95°	271.4	208.2	164.7	141.9	128.4	120.2	117.1	118.1
97.5°	633.3	518.2	406.1	331.3	281.8	256.3	241.1	232.5
100°	945.7	817.3	675.4	550.0	464.0	419.5	389.5	370.9
102.5°	1150.5	1121.4	1017.6	884.8	791.4	715.4	677.9	652.6
105°	1258.6	1375.6	1389.1	1355.0	1290.7	1226.5	1182.0	1167.4
107.5°	1180.7	1357.0	1464.7	1514.8	1523.0	1519.4	1510.5	1491.2
110°	1113.6	1299.0	1431.6	1516.5	1561.0	1580.7	1590.1	1589.0



TEST NUMBER: P331464-940

CATALOG NUMBER: SA2XXDIP-C1005D1080U940-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1052.2	1230.2	1371.9	1469.3	1531.2	1564.1	1581.8	1587.3
115°	976.9	1136.4	1272.0	1378.8	1452.3	1499.9	1526.9	1536.2
117.5°	920.1	1060.2	1183.2	1283.3	1358.3	1408.5	1437.0	1444.8
120°	891.9	1020.3	1130.2	1224.4	1296.9	1345.6	1375.6	1386.0
122.5°	869.5	987.2	1091.2	1176.3	1241.4	1289.2	1316.0	1324.6
125°	837.0	943.7	1034.8	1112.5	1172.6	1212.0	1237.9	1246.2
127.5°	804.9	901.4	987.4	1059.1	1111.5	1148.3	1170.7	1177.4
130°	784.2	873.3	955.1	1023.4	1074.2	1109.5	1130.2	1138.4
132.5°	764.3	846.8	921.9	986.1	1036.1	1071.3	1090.4	1097.8
135°	736.5	804.9	873.3	931.2	975.8	1010.0	1028.6	1032.8
137.5°	714.3	771.5	825.8	876.4	916.9	946.4	962.8	968.9
140°	700.3	750.0	797.6	843.2	876.4	903.3	918.8	925.1
142.5°	688.7	730.9	772.0	810.0	841.5	866.0	879.9	881.1
145°	672.3	706.5	738.6	768.7	793.4	811.1	821.4	824.6
147.5°	659.7	686.6	711.7	733.6	754.1	768.2	775.3	777.1
150°	650.5	673.3	695.1	713.7	729.2	741.7	747.9	748.9
152.5°	641.4	662.5	681.0	697.1	709.4	720.1	724.7	724.9
155°	628.7	645.3	660.8	672.3	683.7	690.9	695.1	693.0
157.5°	614.0	627.9	641.0	649.9	658.0	664.0	665.8	665.8
160°	604.9	616.4	627.8	635.0	642.2	647.4	648.5	648.5
162.5°	595.8	605.6	615.3	620.9	628.1	631.7	632.7	631.9
165°	582.2	589.4	596.6	600.8	604.9	609.1	609.1	608.1
167.5°	569.1	574.7	579.7	583.4	585.2	587.5	587.4	586.1
170°	562.5	565.6	569.7	571.8	572.8	576.0	574.9	572.8
172.5°	555.0	557.3	560.6	561.9	562.9	564.4	563.3	562.0
175°	547.0	548.0	549.0	550.0	550.0	551.1	550.0	548.0
177.5°	541.2	541.2	542.0	542.0	542.0	542.0	541.2	539.5
180°	538.7	538.7	538.7	538.7	538.7	538.7	538.7	538.7

(END OF REPORT)