

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331384-940

Luminaire Tested: **SA2XXDIP-C865D530U940-4F0-1E-UDD-A**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331384-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXDIP-C865D530U940-4F0-1E-UDD-A
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 530 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5282.9 lumens
Efficiency: N/A
Efficacy: 108.3 lumens/watt
Spacing Criteria (0/90/45): 1.08 / 1.16 / 1.23
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 48.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331384-940
CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

Luminous Intensity Polar Plot

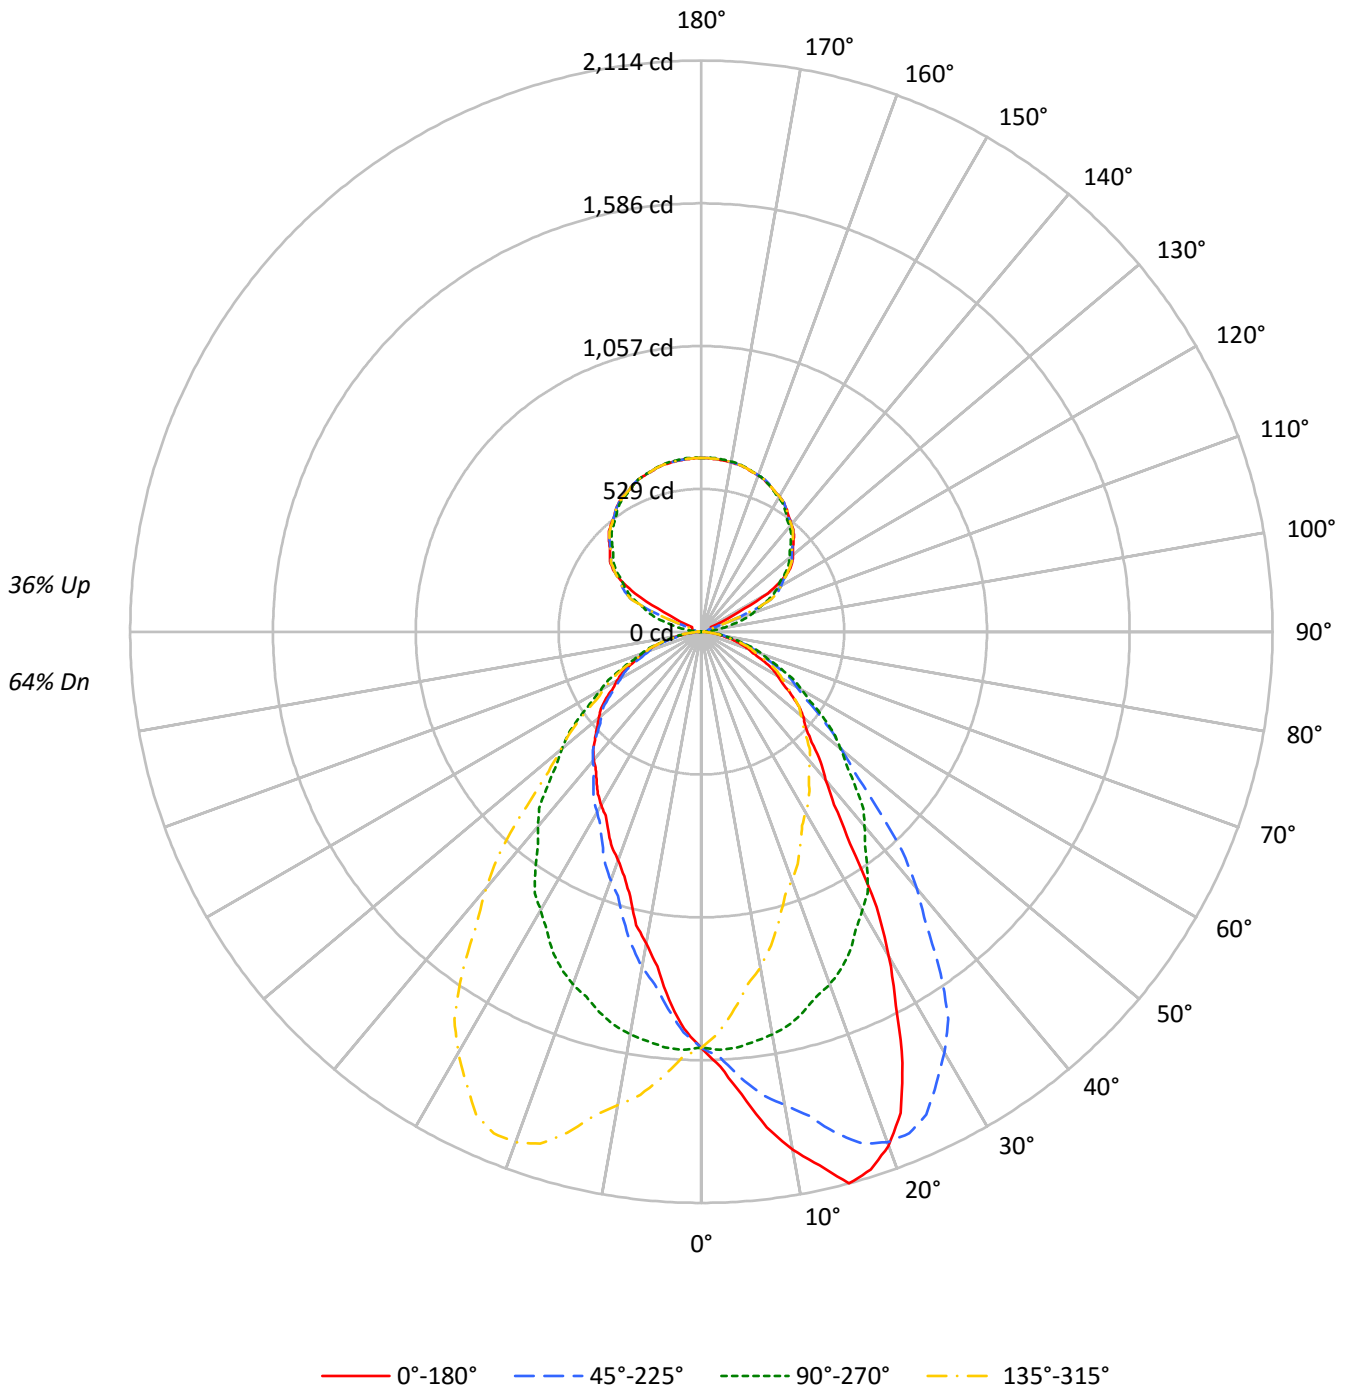



TEST NUMBER: P331384-940

CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	111	111	111	111	104	104	104	104	91	91	91	80	80	80	69	69	69	64				
1	102	97	94	90	95	92	88	86	81	79	76	71	69	68	62	61	60	55				
2	93	86	80	75	87	81	76	71	72	68	64	63	60	58	56	53	51	47				
3	85	76	69	63	80	72	65	60	64	59	55	57	53	49	50	47	44	41				
4	78	68	60	54	73	64	57	52	57	52	47	51	47	43	45	42	39	36				
5	72	61	53	47	68	58	50	45	52	46	41	46	41	38	41	37	34	31				
6	67	55	47	41	63	52	45	40	47	41	36	42	37	33	37	33	30	28				
7	62	50	42	36	58	47	40	35	43	37	32	38	33	30	34	30	27	25				
8	58	46	38	33	54	43	36	31	39	33	29	35	30	27	32	28	25	23				
9	54	42	34	29	51	40	33	28	36	30	26	33	28	24	29	25	22	20				
10	51	39	31	26	48	37	30	26	33	28	24	30	26	22	27	23	21	19				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	24857	24857	24857	24857
5°	27869	25020	22172	25020
10°	31936	24815	19189	24815
15°	35328	24359	16951	24359
20°	34790	23871	15454	23871
25°	31370	23222	14503	23222
30°	25922	22184	13811	22184
35°	18892	21098	13318	21098
40°	15091	19816	13044	19816
45°	13186	18333	12673	18333
50°	12396	16900	12424	16900
55°	11426	15440	12090	15440
60°	10469	13892	11580	13892
65°	9540	12500	11075	12500
70°	8658	11146	10334	11146
75°	7679	9632	9158	9632
80°	6602	7978	7373	7978
85°	5910	5910	4372	5910



TEST NUMBER: P331384-940

CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.6	2.8
10°-20°	426.3	8.1
20°-30°	618.6	11.7
30°-40°	652.8	12.4
40°-50°	578.0	10.9
50°-60°	461.3	8.7
60°-70°	313.5	5.9
70°-80°	160.7	3.0
80°-90°	40.3	0.8
90°-100°	21.5	0.4
100°-110°	78.7	1.5
110°-120°	210.3	4.0
120°-130°	347.1	6.6
130°-140°	369.2	7.0
140°-150°	343.1	6.5
150°-160°	275.9	5.2
160°-170°	177.8	3.4
170°-180°	61.2	1.2
0°-30°	1191.5	22.6
0°-40°	1844.3	34.9
0°-60°	2883.6	54.6
0°-90°	3398.2	64.3
90°-120°	310.4	5.9
90°-150°	1369.9	25.9
90°-180°	1885.0	35.7
0°-180°	5282.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1540	1540	1540	1540	1540	
5°	1720	1544	1368	1544	1720	172
15°	2114	1457	1014	1457	2114	583
25°	1761	1304	814	1304	1761	796
35°	958	1070	676	1070	958	623
45°	578	803	555	803	578	454
55°	406	548	430	548	406	364
65°	250	327	290	327	250	248
75°	123	154	147	154	123	132
85°	32	32	24	32	32	35
90°	13	0	13	0	13	7
95°	20	30	20	30	20	19
105°	35	141	35	141	35	37
115°	38	268	38	268	38	96
125°	398	378	398	378	398	344
135°	484	468	484	468	484	373
145°	551	543	551	543	551	345
155°	598	598	598	598	598	276
165°	629	630	629	630	629	177
175°	641	644	641	644	641	61
180°	643	643	643	643	643	



TEST NUMBER: P331384-940

CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5
2.5°	1610.6	1611.1	1612.0	1604.5	1603.5	1603.5	1596.9	1591.2	1584.6	1575.6	1576.5
5°	1719.5	1726.0	1728.3	1721.3	1710.6	1709.4	1699.3	1682.7	1667.4	1654.9	1646.1
7.5°	1849.4	1852.0	1846.2	1836.8	1828.9	1814.7	1796.0	1777.7	1752.0	1728.5	1710.9
10°	1947.9	1951.4	1941.3	1927.7	1916.5	1899.9	1872.7	1844.9	1811.2	1778.6	1752.6
12.5°	2022.7	2031.4	2018.5	2016.7	1997.4	1974.7	1942.3	1928.2	1880.8	1835.4	1807.5
15°	2113.5	2112.9	2114.2	2102.8	2088.7	2085.1	2050.8	2013.6	1946.7	1920.0	1873.9
17.5°	2087.2	2096.2	2100.4	2100.2	2099.9	2097.7	2086.7	2063.2	2029.6	1986.5	1933.1
20°	2024.8	2036.6	2038.4	2052.0	2059.7	2069.7	2073.9	2067.3	2046.7	2010.5	1964.4
22.5°	1928.2	1931.5	1937.1	1958.3	1975.0	2000.2	2013.3	2035.2	2027.2	2009.6	1971.0
25°	1760.9	1755.0	1775.7	1786.3	1824.8	1865.0	1894.0	1925.9	1954.4	1971.5	1960.2
27.5°	1560.0	1551.0	1582.1	1610.3	1641.6	1685.2	1730.4	1783.7	1828.1	1883.6	1902.6
30°	1390.4	1395.8	1425.4	1455.5	1502.9	1564.4	1615.3	1673.9	1737.2	1799.3	1842.5
32.5°	1207.7	1228.2	1247.0	1293.2	1334.9	1403.5	1478.0	1551.3	1630.2	1700.8	1767.7
35°	958.5	982.2	1008.3	1042.0	1100.5	1168.6	1241.4	1340.2	1447.9	1544.4	1623.6
37.5°	806.8	803.1	818.0	842.3	889.7	944.7	1028.5	1126.1	1252.9	1366.2	1478.0
40°	716.0	713.5	724.2	746.7	782.8	823.0	896.4	982.2	1099.9	1238.4	1371.5
42.5°	653.4	654.9	660.8	676.6	701.4	734.5	789.4	862.5	970.3	1100.6	1243.8
45°	577.5	581.7	588.2	595.8	610.0	637.2	668.0	720.1	805.3	914.2	1055.0
47.5°	522.8	522.9	529.6	536.3	544.7	560.1	585.1	617.9	678.0	766.6	887.7
50°	493.5	489.4	494.1	499.4	508.3	518.9	535.5	566.2	606.5	678.1	779.3
52.5°	457.5	457.6	461.9	463.9	471.8	482.5	497.6	518.9	555.4	611.4	694.6
55°	405.9	408.8	411.3	414.7	421.9	429.5	441.4	455.6	484.0	526.0	587.5
57.5°	357.4	358.3	360.7	367.5	371.9	379.1	390.3	403.1	421.6	452.7	499.0
60°	324.2	324.2	329.0	331.9	337.9	344.9	353.8	366.2	382.8	408.2	445.6
62.5°	294.0	293.5	295.3	300.2	304.7	311.4	320.2	330.7	346.3	369.0	399.7
65°	249.7	248.5	252.1	253.2	258.0	264.5	271.6	282.9	295.2	311.8	339.0
67.5°	207.1	208.5	210.4	212.7	215.3	222.1	226.9	234.8	245.3	259.0	277.5
70°	183.4	183.4	183.4	185.2	188.8	192.3	197.1	203.6	213.6	225.4	242.0
72.5°	156.9	158.8	160.7	159.6	164.2	166.3	171.9	175.6	185.2	192.8	207.4
75°	123.1	123.1	123.1	126.0	127.8	129.6	133.1	136.7	141.4	150.9	158.5
77.5°	91.8	91.6	92.2	92.9	94.8	96.9	98.0	101.2	105.6	109.9	116.5
80°	71.0	72.2	72.8	73.9	73.9	75.2	75.7	79.9	82.8	85.8	90.0
82.5°	54.9	55.1	55.3	55.5	56.0	56.7	58.2	59.6	60.5	63.0	66.3
85°	31.9	31.4	31.4	32.5	31.9	31.9	33.2	34.3	34.3	34.9	36.6
87.5°	14.8	14.8	15.2	14.7	14.6	15.1	15.0	14.4	14.7	15.2	15.4
90°	12.6	12.4	12.1	11.9	11.8	11.4	10.9	10.3	9.8	9.3	8.5
92.5°	12.6	12.5	12.3	12.2	12.0	11.9	11.6	11.3	11.1	10.8	10.3
95°	20.0	20.2	20.2	20.3	20.4	20.2	19.7	19.2	18.6	18.2	17.4
97.5°	26.8	26.6	26.5	26.3	26.2	25.9	25.5	25.1	24.7	24.3	22.6
100°	31.2	30.9	30.8	30.6	30.3	29.9	29.0	28.2	27.4	26.5	24.8
102.5°	33.4	33.1	32.8	32.5	32.3	31.6	30.5	29.4	28.4	27.3	42.0
105°	35.4	35.0	34.5	34.2	33.7	32.9	31.8	30.7	29.5	28.4	56.6
107.5°	36.4	35.9	35.6	35.1	34.8	35.1	36.3	37.5	38.6	39.8	73.6
110°	36.7	36.4	35.9	35.5	35.1	40.0	50.4	60.7	71.1	81.4	111.3



TEST NUMBER: P331384-940

CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	37.1	36.8	36.5	36.1	35.8	54.5	92.2	129.9	167.6	205.5	212.8
115°	38.2	45.6	53.1	60.5	67.9	95.6	143.5	191.4	239.2	287.1	284.5
117.5°	155.8	180.3	204.7	229.2	253.7	271.7	283.3	294.9	306.5	318.0	316.3
120°	283.8	297.8	311.8	325.7	339.7	346.1	344.8	343.6	342.3	341.1	339.2
122.5°	354.2	357.0	359.6	362.4	365.1	366.0	365.3	364.5	363.8	363.1	361.1
125°	397.9	397.6	397.3	397.0	396.6	396.1	395.4	394.7	394.0	393.2	391.3
127.5°	425.4	425.3	425.3	425.3	425.2	424.6	423.6	422.5	421.4	420.4	418.9
130°	442.6	442.6	442.7	442.8	443.0	442.5	441.3	440.1	439.1	437.9	436.8
132.5°	459.3	459.4	459.5	459.6	459.7	459.3	458.3	457.4	456.4	455.4	454.2
135°	483.5	483.8	483.9	484.1	484.4	483.9	482.9	481.9	480.8	479.7	478.8
137.5°	505.6	506.0	506.2	506.6	506.9	506.7	505.6	504.6	503.6	502.6	501.5
140°	519.3	519.9	520.4	520.8	521.4	521.2	520.2	519.3	518.4	517.5	516.3
142.5°	532.7	533.2	533.8	534.3	534.8	534.7	533.8	533.0	532.1	531.3	529.9
145°	551.4	552.0	552.5	553.0	553.5	553.4	552.7	552.0	551.3	550.5	548.8
147.5°	567.9	568.4	568.8	569.3	569.6	569.6	569.1	568.6	568.0	567.5	565.7
150°	578.0	578.5	579.0	579.5	580.1	580.0	579.3	578.7	578.1	577.5	575.9
152.5°	586.6	587.2	587.9	588.6	589.2	589.3	588.7	588.1	587.5	586.8	585.2
155°	598.4	599.3	600.1	600.9	601.7	601.9	601.3	600.7	600.0	599.4	598.2
157.5°	609.3	610.1	610.9	611.7	612.6	612.6	611.9	611.2	610.5	609.8	608.9
160°	615.6	616.4	617.2	617.9	618.6	618.6	618.0	617.3	616.8	616.2	615.5
162.5°	620.9	621.8	622.7	623.6	624.5	624.6	623.8	623.1	622.4	621.7	621.2
165°	628.7	629.5	630.2	630.9	631.6	631.6	630.9	630.2	629.5	628.7	628.4
167.5°	633.6	634.5	635.5	636.4	637.4	637.5	636.8	636.0	635.3	634.5	634.3
170°	636.6	637.6	638.5	639.4	640.3	640.4	639.7	639.0	638.3	637.6	637.3
172.5°	638.8	639.8	640.7	641.7	642.6	642.7	641.9	641.2	640.5	639.8	639.5
175°	640.8	641.9	642.8	643.9	645.0	645.1	644.4	643.6	642.9	642.2	641.9
177.5°	642.0	642.7	643.5	644.3	645.0	645.1	644.5	643.9	643.4	642.7	642.7
180°	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1



TEST NUMBER: P331384-940

CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5
2.5°	1579.8	1576.0	1573.7	1565.1	1557.6	1550.0	1547.7	1548.5	1538.2	1528.2	1523.9
5°	1641.4	1629.5	1618.3	1602.3	1583.4	1562.6	1552.0	1543.7	1523.0	1500.6	1487.6
7.5°	1696.5	1679.5	1658.0	1627.9	1600.3	1567.7	1547.0	1528.7	1498.4	1466.7	1447.2
10°	1730.1	1707.0	1679.2	1642.5	1608.8	1569.1	1541.3	1513.6	1478.0	1440.2	1416.5
12.5°	1759.0	1727.9	1700.5	1653.4	1613.6	1564.0	1531.0	1491.7	1454.4	1409.4	1386.3
15°	1827.7	1770.3	1718.2	1665.0	1615.9	1546.7	1510.0	1457.3	1408.2	1352.6	1326.0
17.5°	1880.9	1816.4	1734.4	1666.7	1609.4	1532.8	1478.9	1415.8	1357.7	1294.1	1257.9
20°	1911.2	1837.2	1749.0	1668.6	1599.9	1512.3	1453.8	1389.3	1321.2	1249.6	1210.6
22.5°	1929.1	1851.4	1764.2	1661.4	1581.0	1495.8	1422.1	1351.4	1282.5	1205.1	1164.2
25°	1934.8	1863.9	1771.6	1655.6	1557.4	1460.9	1372.2	1303.5	1220.0	1147.9	1088.2
27.5°	1906.7	1855.7	1767.0	1644.4	1530.0	1417.2	1318.3	1240.5	1152.5	1074.2	1014.1
30°	1872.1	1842.5	1756.1	1633.1	1508.2	1387.0	1278.1	1189.9	1102.3	1023.1	961.5
32.5°	1818.6	1812.2	1736.3	1616.9	1485.1	1348.6	1235.9	1146.8	1049.8	971.9	913.2
35°	1713.5	1742.0	1694.0	1581.0	1441.4	1294.1	1172.2	1070.4	969.8	895.2	840.2
37.5°	1572.7	1643.2	1630.7	1528.3	1382.4	1234.7	1100.1	993.7	897.9	822.6	768.6
40°	1475.7	1565.6	1578.6	1488.1	1340.8	1188.7	1046.2	940.2	846.7	778.1	723.6
42.5°	1371.5	1476.6	1512.3	1439.8	1295.3	1140.4	997.8	888.1	795.6	728.9	680.6
45°	1197.0	1336.1	1400.5	1359.1	1219.5	1060.9	914.2	802.9	718.9	656.2	618.9
47.5°	1033.8	1185.7	1272.5	1257.8	1135.1	978.0	832.9	726.2	644.4	594.4	561.1
50°	918.3	1074.5	1179.2	1184.0	1074.5	918.9	773.4	672.8	597.6	550.9	523.6
52.5°	818.0	967.1	1081.3	1106.3	1006.8	857.4	719.9	619.7	553.6	510.6	486.2
55°	687.0	813.0	939.6	985.8	905.9	763.8	636.7	548.5	486.3	456.8	435.5
57.5°	571.1	676.2	793.1	844.1	794.9	673.3	554.0	477.5	427.0	401.2	384.9
60°	510.1	592.9	697.1	758.0	715.3	607.1	502.9	430.2	388.8	365.7	350.3
62.5°	453.3	526.6	614.7	670.4	647.2	545.1	451.8	387.5	351.8	330.2	319.1
65°	374.0	431.9	500.0	551.4	536.1	458.5	382.3	327.2	298.8	281.6	272.8
67.5°	307.9	349.8	397.0	442.1	429.7	374.8	313.4	270.6	249.5	234.7	229.3
70°	266.3	298.2	340.2	376.3	366.2	321.3	272.8	236.1	217.8	205.4	200.0
72.5°	226.5	252.8	284.8	314.3	307.6	270.2	229.7	202.0	187.9	176.5	172.1
75°	171.0	191.1	210.6	230.2	228.4	199.4	175.8	154.4	143.2	134.3	132.5
77.5°	126.3	137.5	150.8	162.4	159.2	142.6	124.0	111.8	103.5	97.6	96.7
80°	96.5	103.0	112.4	120.7	116.5	109.5	94.7	85.8	79.9	73.9	71.6
82.5°	69.9	76.4	82.1	86.6	83.5	76.8	67.7	61.6	58.1	54.0	53.1
85°	36.6	40.2	42.6	43.8	42.6	38.4	34.3	31.9	29.0	27.2	26.7
87.5°	15.7	15.6	15.4	16.1	14.5	14.3	12.1	10.5	10.3	10.0	9.3
90°	7.7	6.9	6.0	5.0	3.8	2.8	1.6	0.4	1.6	2.8	3.8
92.5°	10.0	9.5	9.2	9.0	9.1	9.2	9.3	9.4	9.3	9.2	9.1
95°	16.7	16.0	15.2	16.6	20.0	23.5	26.8	30.2	26.8	23.5	20.0
97.5°	21.0	19.3	17.6	21.6	31.2	40.8	50.4	60.0	50.4	40.8	31.2
100°	23.0	21.2	19.5	25.7	39.9	54.0	68.2	82.4	68.2	54.0	39.9
102.5°	56.7	71.4	86.1	95.0	97.9	100.9	104.0	106.9	104.0	100.9	97.9
105°	84.9	113.1	141.3	153.9	150.8	147.7	144.5	141.4	144.5	147.7	150.8
107.5°	107.5	141.3	175.1	190.8	188.3	185.8	183.3	180.8	183.3	185.8	188.3
110°	141.2	171.1	201.0	214.8	212.7	210.5	208.3	206.2	208.3	210.5	212.7



TEST NUMBER: P331384-940

CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	220.2	227.6	235.0	237.6	235.8	233.8	231.9	230.0	231.9	233.8	235.8
115°	282.0	279.4	276.8	274.6	272.9	271.1	269.3	267.6	269.3	271.1	272.9
117.5°	314.5	312.7	310.9	309.1	307.1	305.1	303.2	301.2	303.2	305.1	307.1
120°	337.4	335.6	333.7	332.0	330.4	328.9	327.3	325.7	327.3	328.9	330.4
122.5°	359.0	357.0	355.0	353.1	351.5	349.9	348.2	346.6	348.2	349.9	351.5
125°	389.3	387.4	385.4	383.7	382.4	381.0	379.7	378.4	379.7	381.0	382.4
127.5°	417.5	416.0	414.6	413.0	411.5	410.1	408.6	407.1	408.6	410.1	411.5
130°	435.6	434.5	433.4	431.9	430.3	428.6	427.0	425.3	427.0	428.6	430.3
132.5°	453.2	452.0	450.8	449.6	448.2	446.7	445.3	444.0	445.3	446.7	448.2
135°	478.0	477.0	476.1	474.7	473.1	471.4	469.8	468.1	469.8	471.4	473.1
137.5°	500.5	499.4	498.4	497.2	496.1	494.9	493.7	492.7	493.7	494.9	496.1
140°	515.2	514.1	512.9	511.9	511.1	510.3	509.4	508.6	509.4	510.3	511.1
142.5°	528.6	527.4	526.0	525.0	524.2	523.5	522.8	522.0	522.8	523.5	524.2
145°	547.0	545.3	543.5	542.7	542.8	542.9	543.0	543.1	543.0	542.9	542.8
147.5°	564.0	562.2	560.5	559.8	560.3	560.6	561.0	561.4	561.0	560.6	560.3
150°	574.2	572.6	570.9	570.4	571.1	571.9	572.6	573.3	572.6	571.9	571.1
152.5°	583.7	582.1	580.5	580.1	580.9	581.8	582.6	583.4	582.6	581.8	580.9
155°	596.9	595.7	594.4	594.2	595.2	596.1	597.1	598.0	597.1	596.1	595.2
157.5°	608.1	607.2	606.4	606.3	607.1	607.9	608.7	609.4	608.7	607.9	607.1
160°	614.9	614.3	613.7	613.7	614.3	614.9	615.5	616.2	615.5	614.9	614.3
162.5°	620.6	620.1	619.6	619.6	620.2	620.8	621.4	622.1	621.4	620.8	620.2
165°	628.0	627.8	627.5	627.6	628.2	628.8	629.5	630.1	629.5	628.8	628.2
167.5°	634.0	633.6	633.4	633.6	634.2	634.8	635.4	636.1	635.4	634.8	634.2
170°	637.1	636.9	636.7	636.9	637.6	638.2	638.8	639.4	638.8	638.2	637.6
172.5°	639.4	639.2	638.9	639.2	639.8	640.4	641.1	641.7	641.1	640.4	639.8
175°	641.8	641.6	641.4	641.6	642.4	643.1	643.8	644.5	643.8	643.1	642.4
177.5°	642.6	642.5	642.4	642.7	643.3	643.8	644.4	645.0	644.4	643.8	643.3
180°	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1



TEST NUMBER: P331384-940

CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5
2.5°	1519.2	1516.4	1506.5	1501.3	1492.7	1484.7	1479.4	1481.8	1483.7	1482.7	1481.4
5°	1475.7	1464.5	1447.2	1432.4	1421.8	1402.3	1394.0	1389.9	1386.3	1382.2	1378.0
7.5°	1423.9	1406.1	1381.4	1360.4	1340.5	1316.3	1302.4	1294.1	1285.7	1276.3	1268.0
10°	1387.0	1362.1	1336.1	1306.4	1282.8	1260.9	1241.4	1228.3	1216.6	1205.2	1197.0
12.5°	1348.1	1319.5	1287.3	1246.8	1220.8	1189.5	1186.4	1163.5	1145.0	1138.1	1128.4
15°	1286.4	1246.1	1205.2	1157.4	1136.7	1108.2	1090.5	1072.7	1056.8	1045.5	1042.6
17.5°	1216.2	1164.1	1123.5	1089.0	1055.1	1026.0	1009.7	995.5	982.3	967.3	965.3
20°	1162.7	1117.7	1073.4	1043.1	1008.3	978.7	958.5	944.3	933.1	924.3	916.5
22.5°	1112.1	1062.8	1022.2	989.2	954.8	930.9	915.0	901.3	891.9	882.1	874.9
25°	1030.7	992.3	947.9	910.6	882.2	866.8	853.8	842.0	836.1	829.6	821.3
27.5°	959.6	916.9	875.4	846.5	821.5	807.9	798.7	790.6	785.1	781.2	776.5
30°	909.5	866.2	833.7	805.3	784.6	771.0	765.1	760.4	753.9	751.4	749.1
32.5°	861.1	822.2	794.4	769.8	750.0	741.2	735.8	731.5	726.4	724.0	719.3
35°	792.9	760.4	733.1	719.5	703.6	695.8	691.7	685.8	681.0	678.7	678.1
37.5°	728.6	700.3	682.4	664.9	658.2	653.4	647.8	643.7	642.3	641.9	641.4
40°	687.0	663.9	647.9	633.7	630.7	623.7	618.9	615.4	615.4	616.0	615.4
42.5°	649.1	628.4	614.3	602.0	598.5	594.3	589.6	589.3	590.3	592.3	590.3
45°	591.7	576.9	566.9	560.9	554.4	550.3	549.7	551.4	552.1	552.7	554.4
47.5°	539.0	529.1	520.0	513.4	510.6	509.9	509.2	512.3	515.1	516.2	518.9
50°	507.7	496.4	488.7	484.6	482.2	481.1	482.2	485.8	488.1	491.1	492.8
52.5°	472.6	464.7	459.4	456.2	455.2	455.9	456.2	460.2	464.0	465.0	465.9
55°	424.3	418.3	417.1	411.8	414.2	413.6	416.5	418.9	422.5	426.1	426.6
57.5°	375.9	371.2	368.0	368.5	369.3	371.8	374.3	378.4	382.3	386.0	386.4
60°	343.8	341.4	339.7	339.7	340.8	344.4	347.3	351.4	353.8	356.2	357.9
62.5°	314.4	312.1	310.3	311.2	314.3	316.5	319.9	322.1	324.5	326.8	327.7
65°	268.0	266.9	268.7	269.8	270.4	273.4	277.5	279.3	281.6	282.9	287.0
67.5°	225.3	225.5	225.3	226.9	230.4	231.1	235.1	239.2	239.6	241.9	244.6
70°	196.4	197.6	198.9	200.0	203.0	204.1	207.1	208.8	211.2	213.0	214.8
72.5°	170.0	170.1	171.4	171.1	173.6	176.2	178.7	180.5	182.8	185.1	186.8
75°	130.7	130.7	132.0	132.5	135.5	138.5	137.9	139.0	141.4	143.7	145.0
77.5°	95.5	94.2	95.5	96.1	97.0	99.5	100.0	101.7	104.3	103.5	104.9
80°	72.8	71.0	72.8	73.4	73.4	76.3	76.3	77.5	79.3	77.5	79.3
82.5°	52.0	51.1	52.4	52.5	53.5	53.6	54.6	54.8	56.5	55.7	56.5
85°	26.0	25.4	26.0	25.4	26.0	26.7	26.7	26.0	26.0	27.2	25.4
87.5°	9.0	8.7	8.5	8.6	8.3	8.0	7.7	7.8	7.8	7.0	7.0
90°	5.0	6.0	6.9	7.7	8.5	9.3	9.8	10.3	10.9	11.4	11.8
92.5°	9.0	9.2	9.5	10.0	10.3	10.8	11.1	11.3	11.6	11.9	12.0
95°	16.6	15.2	16.0	16.7	17.4	18.2	18.6	19.2	19.7	20.2	20.4
97.5°	21.6	17.6	19.3	21.0	22.6	24.3	24.7	25.1	25.5	25.9	26.2
100°	25.7	19.5	21.2	23.0	24.8	26.5	27.4	28.2	29.0	29.9	30.3
102.5°	95.0	86.1	71.4	56.7	42.0	27.3	28.4	29.4	30.5	31.6	32.3
105°	153.9	141.3	113.1	84.9	56.6	28.4	29.5	30.7	31.8	32.9	33.7
107.5°	190.8	175.1	141.3	107.5	73.6	39.8	38.6	37.5	36.3	35.1	34.8
110°	214.8	201.0	171.1	141.2	111.3	81.4	71.1	60.7	50.4	40.0	35.1



TEST NUMBER: P331384-940

CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	237.6	235.0	227.6	220.2	212.8	205.5	167.6	129.9	92.2	54.5	35.8
115°	274.6	276.8	279.4	282.0	284.5	287.1	239.2	191.4	143.5	95.6	67.9
117.5°	309.1	310.9	312.7	314.5	316.3	318.0	306.5	294.9	283.3	271.7	253.7
120°	332.0	333.7	335.6	337.4	339.2	341.1	342.3	343.6	344.8	346.1	339.7
122.5°	353.1	355.0	357.0	359.0	361.1	363.1	363.8	364.5	365.3	366.0	365.1
125°	383.7	385.4	387.4	389.3	391.3	393.2	394.0	394.7	395.4	396.1	396.6
127.5°	413.0	414.6	416.0	417.5	418.9	420.4	421.4	422.5	423.6	424.6	425.2
130°	431.9	433.4	434.5	435.6	436.8	437.9	439.1	440.1	441.3	442.5	443.0
132.5°	449.6	450.8	452.0	453.2	454.2	455.4	456.4	457.4	458.3	459.3	459.7
135°	474.7	476.1	477.0	478.0	478.8	479.7	480.8	481.9	482.9	483.9	484.4
137.5°	497.2	498.4	499.4	500.5	501.5	502.6	503.6	504.6	505.6	506.7	506.9
140°	511.9	512.9	514.1	515.2	516.3	517.5	518.4	519.3	520.2	521.2	521.4
142.5°	525.0	526.0	527.4	528.6	529.9	531.3	532.1	533.0	533.8	534.7	534.8
145°	542.7	543.5	545.3	547.0	548.8	550.5	551.3	552.0	552.7	553.4	553.5
147.5°	559.8	560.5	562.2	564.0	565.7	567.5	568.0	568.6	569.1	569.6	569.6
150°	570.4	570.9	572.6	574.2	575.9	577.5	578.1	578.7	579.3	580.0	580.1
152.5°	580.1	580.5	582.1	583.7	585.2	586.8	587.5	588.1	588.7	589.3	589.2
155°	594.2	594.4	595.7	596.9	598.2	599.4	600.0	600.7	601.3	601.9	601.7
157.5°	606.3	606.4	607.2	608.1	608.9	609.8	610.5	611.2	611.9	612.6	612.6
160°	613.7	613.7	614.3	614.9	615.5	616.2	616.8	617.3	618.0	618.6	618.6
162.5°	619.6	619.6	620.1	620.6	621.2	621.7	622.4	623.1	623.8	624.6	624.5
165°	627.6	627.5	627.8	628.0	628.4	628.7	629.5	630.2	630.9	631.6	631.6
167.5°	633.6	633.4	633.6	634.0	634.3	634.5	635.3	636.0	636.8	637.5	637.4
170°	636.9	636.7	636.9	637.1	637.3	637.6	638.3	639.0	639.7	640.4	640.3
172.5°	639.2	638.9	639.2	639.4	639.5	639.8	640.5	641.2	641.9	642.7	642.6
175°	641.6	641.4	641.6	641.8	641.9	642.2	642.9	643.6	644.4	645.1	645.0
177.5°	642.7	642.4	642.5	642.6	642.7	642.7	643.4	643.9	644.5	645.1	645.0
180°	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1



TEST NUMBER: P331384-940

CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5
2.5°	1476.6	1475.7	1475.7	1471.4	1475.7	1475.7	1476.6	1481.4	1482.7	1483.7	1481.8
5°	1369.8	1368.0	1365.0	1368.0	1365.0	1368.0	1369.8	1378.0	1382.2	1386.3	1389.9
7.5°	1264.1	1257.0	1255.9	1248.9	1255.9	1257.0	1264.1	1268.0	1276.3	1285.7	1294.1
10°	1187.0	1182.2	1181.6	1170.4	1181.6	1182.2	1187.0	1197.0	1205.2	1216.6	1228.3
12.5°	1128.3	1116.9	1119.1	1112.6	1119.1	1116.9	1128.3	1128.4	1138.1	1145.0	1163.5
15°	1026.6	1026.6	1024.2	1014.1	1024.2	1026.6	1026.6	1042.6	1045.5	1056.8	1072.7
17.5°	953.6	952.3	946.7	949.6	946.7	952.3	953.6	965.3	967.3	982.3	995.5
20°	910.0	906.5	899.4	899.4	899.4	906.5	910.0	916.5	924.3	933.1	944.3
22.5°	868.9	868.6	861.0	863.4	861.0	868.6	868.9	874.9	882.1	891.9	901.3
25°	820.6	815.9	812.4	814.1	812.4	815.9	820.6	821.3	829.6	836.1	842.0
27.5°	775.0	772.4	772.1	767.3	772.1	772.4	775.0	776.5	781.2	785.1	790.6
30°	748.5	742.6	743.8	740.8	743.8	742.6	748.5	749.1	751.4	753.9	760.4
32.5°	718.2	716.0	714.9	712.4	714.9	716.0	718.2	719.3	724.0	726.4	731.5
35°	676.9	677.5	674.5	675.7	674.5	677.5	676.9	678.1	678.7	681.0	685.8
37.5°	640.8	642.7	641.3	641.7	641.3	642.7	640.8	641.4	641.9	642.3	643.7
40°	617.2	617.2	617.2	618.9	617.2	617.2	617.2	615.4	616.0	615.4	615.4
42.5°	594.4	593.4	592.5	592.4	592.5	593.4	594.4	590.3	592.3	590.3	589.3
45°	555.6	557.4	557.9	555.0	557.9	557.4	555.6	554.4	552.7	552.1	551.4
47.5°	520.5	520.7	520.5	523.1	520.5	520.7	520.5	518.9	516.2	515.1	512.3
50°	495.9	494.6	495.9	494.6	495.9	494.6	495.9	492.8	491.1	488.1	485.8
52.5°	469.8	470.0	469.3	469.1	469.3	470.0	469.8	465.9	465.0	464.0	460.2
55°	429.0	430.2	429.5	429.5	429.5	430.2	429.0	426.6	426.1	422.5	418.9
57.5°	386.7	387.8	388.6	386.0	388.6	387.8	386.7	386.4	386.0	382.3	378.4
60°	357.4	360.3	359.7	358.6	359.7	360.3	357.4	357.9	356.2	353.8	351.4
62.5°	330.4	331.4	331.4	331.1	331.4	331.4	330.4	327.7	326.8	324.5	322.1
65°	288.7	289.9	288.1	289.9	288.1	289.9	288.7	287.0	282.9	281.6	279.3
67.5°	243.9	244.2	245.6	246.4	245.6	244.2	243.9	244.6	241.9	239.6	239.2
70°	216.0	215.3	217.1	218.9	217.1	215.3	216.0	214.8	213.0	211.2	208.8
72.5°	186.6	187.9	187.3	188.6	187.3	187.9	186.6	186.8	185.1	182.8	180.5
75°	143.7	145.5	145.0	146.8	145.0	145.5	143.7	145.0	143.7	141.4	139.0
77.5°	103.9	104.2	103.9	104.9	103.9	104.2	103.9	104.9	103.5	104.3	101.7
80°	79.3	78.1	77.0	79.3	77.0	78.1	79.3	79.3	77.5	79.3	77.5
82.5°	55.1	55.8	54.7	54.7	54.7	55.8	55.1	56.5	55.7	56.5	54.8
85°	25.4	24.9	23.6	23.6	23.6	24.9	25.4	25.4	27.2	26.0	26.0
87.5°	7.1	6.7	6.7	6.3	6.7	6.7	7.1	7.0	7.0	7.8	7.8
90°	11.9	12.1	12.4	12.6	12.4	12.1	11.9	11.8	11.4	10.9	10.3
92.5°	12.2	12.3	12.5	12.6	12.5	12.3	12.2	12.0	11.9	11.6	11.3
95°	20.3	20.2	20.2	20.0	20.2	20.2	20.3	20.4	20.2	19.7	19.2
97.5°	26.3	26.5	26.6	26.8	26.6	26.5	26.3	26.2	25.9	25.5	25.1
100°	30.6	30.8	30.9	31.2	30.9	30.8	30.6	30.3	29.9	29.0	28.2
102.5°	32.5	32.8	33.1	33.4	33.1	32.8	32.5	32.3	31.6	30.5	29.4
105°	34.2	34.5	35.0	35.4	35.0	34.5	34.2	33.7	32.9	31.8	30.7
107.5°	35.1	35.6	35.9	36.4	35.9	35.6	35.1	34.8	35.1	36.3	37.5
110°	35.5	35.9	36.4	36.7	36.4	35.9	35.5	35.1	40.0	50.4	60.7



TEST NUMBER: P331384-940

CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	36.1	36.5	36.8	37.1	36.8	36.5	36.1	35.8	54.5	92.2	129.9
115°	60.5	53.1	45.6	38.2	45.6	53.1	60.5	67.9	95.6	143.5	191.4
117.5°	229.2	204.7	180.3	155.8	180.3	204.7	229.2	253.7	271.7	283.3	294.9
120°	325.7	311.8	297.8	283.8	297.8	311.8	325.7	339.7	346.1	344.8	343.6
122.5°	362.4	359.6	357.0	354.2	357.0	359.6	362.4	365.1	366.0	365.3	364.5
125°	397.0	397.3	397.6	397.9	397.6	397.3	397.0	396.6	396.1	395.4	394.7
127.5°	425.3	425.3	425.3	425.4	425.3	425.3	425.3	425.2	424.6	423.6	422.5
130°	442.8	442.7	442.6	442.6	442.6	442.7	442.8	443.0	442.5	441.3	440.1
132.5°	459.6	459.5	459.4	459.3	459.4	459.5	459.6	459.7	459.3	458.3	457.4
135°	484.1	483.9	483.8	483.5	483.8	483.9	484.1	484.4	483.9	482.9	481.9
137.5°	506.6	506.2	506.0	505.6	506.0	506.2	506.6	506.9	506.7	505.6	504.6
140°	520.8	520.4	519.9	519.3	519.9	520.4	520.8	521.4	521.2	520.2	519.3
142.5°	534.3	533.8	533.2	532.7	533.2	533.8	534.3	534.8	534.7	533.8	533.0
145°	553.0	552.5	552.0	551.4	552.0	552.5	553.0	553.5	553.4	552.7	552.0
147.5°	569.3	568.8	568.4	567.9	568.4	568.8	569.3	569.6	569.6	569.1	568.6
150°	579.5	579.0	578.5	578.0	578.5	579.0	579.5	580.1	580.0	579.3	578.7
152.5°	588.6	587.9	587.2	586.6	587.2	587.9	588.6	589.2	589.3	588.7	588.1
155°	600.9	600.1	599.3	598.4	599.3	600.1	600.9	601.7	601.9	601.3	600.7
157.5°	611.7	610.9	610.1	609.3	610.1	610.9	611.7	612.6	612.6	611.9	611.2
160°	617.9	617.2	616.4	615.6	616.4	617.2	617.9	618.6	618.6	618.0	617.3
162.5°	623.6	622.7	621.8	620.9	621.8	622.7	623.6	624.5	624.6	623.8	623.1
165°	630.9	630.2	629.5	628.7	629.5	630.2	630.9	631.6	631.6	630.9	630.2
167.5°	636.4	635.5	634.5	633.6	634.5	635.5	636.4	637.4	637.5	636.8	636.0
170°	639.4	638.5	637.6	636.6	637.6	638.5	639.4	640.3	640.4	639.7	639.0
172.5°	641.7	640.7	639.8	638.8	639.8	640.7	641.7	642.6	642.7	641.9	641.2
175°	643.9	642.8	641.9	640.8	641.9	642.8	643.9	645.0	645.1	644.4	643.6
177.5°	644.3	643.5	642.7	642.0	642.7	643.5	644.3	645.0	645.1	644.5	643.9
180°	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1



TEST NUMBER: P331384-940

CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5
2.5°	1479.4	1484.7	1492.7	1501.3	1506.5	1516.4	1519.2	1523.9	1528.2	1538.2	1548.5
5°	1394.0	1402.3	1421.8	1432.4	1447.2	1464.5	1475.7	1487.6	1500.6	1523.0	1543.7
7.5°	1302.4	1316.3	1340.5	1360.4	1381.4	1406.1	1423.9	1447.2	1466.7	1498.4	1528.7
10°	1241.4	1260.9	1282.8	1306.4	1336.1	1362.1	1387.0	1416.5	1440.2	1478.0	1513.6
12.5°	1186.4	1189.5	1220.8	1246.8	1287.3	1319.5	1348.1	1386.3	1409.4	1454.4	1491.7
15°	1090.5	1108.2	1136.7	1157.4	1205.2	1246.1	1286.4	1326.0	1352.6	1408.2	1457.3
17.5°	1009.7	1026.0	1055.1	1089.0	1123.5	1164.1	1216.2	1257.9	1294.1	1357.7	1415.8
20°	958.5	978.7	1008.3	1043.1	1073.4	1117.7	1162.7	1210.6	1249.6	1321.2	1389.3
22.5°	915.0	930.9	954.8	989.2	1022.2	1062.8	1112.1	1164.2	1205.1	1282.5	1351.4
25°	853.8	866.8	882.2	910.6	947.9	992.3	1030.7	1088.2	1147.9	1220.0	1303.5
27.5°	798.7	807.9	821.5	846.5	875.4	916.9	959.6	1014.1	1074.2	1152.5	1240.5
30°	765.1	771.0	784.6	805.3	833.7	866.2	909.5	961.5	1023.1	1102.3	1189.9
32.5°	735.8	741.2	750.0	769.8	794.4	822.2	861.1	913.2	971.9	1049.8	1146.8
35°	691.7	695.8	703.6	719.5	733.1	760.4	792.9	840.2	895.2	969.8	1070.4
37.5°	647.8	653.4	658.2	664.9	682.4	700.3	728.6	768.6	822.6	897.9	993.7
40°	618.9	623.7	630.7	633.7	647.9	663.9	687.0	723.6	778.1	846.7	940.2
42.5°	589.6	594.3	598.5	602.0	614.3	628.4	649.1	680.6	728.9	795.6	888.1
45°	549.7	550.3	554.4	560.9	566.9	576.9	591.7	618.9	656.2	718.9	802.9
47.5°	509.2	509.9	510.6	513.4	520.0	529.1	539.0	561.1	594.4	644.4	726.2
50°	482.2	481.1	482.2	484.6	488.7	496.4	507.7	523.6	550.9	597.6	672.8
52.5°	456.2	455.9	455.2	456.2	459.4	464.7	472.6	486.2	510.6	553.6	619.7
55°	416.5	413.6	414.2	411.8	417.1	418.3	424.3	435.5	456.8	486.3	548.5
57.5°	374.3	371.8	369.3	368.5	368.0	371.2	375.9	384.9	401.2	427.0	477.5
60°	347.3	344.4	340.8	339.7	339.7	341.4	343.8	350.3	365.7	388.8	430.2
62.5°	319.9	316.5	314.3	311.2	310.3	312.1	314.4	319.1	330.2	351.8	387.5
65°	277.5	273.4	270.4	269.8	268.7	266.9	268.0	272.8	281.6	298.8	327.2
67.5°	235.1	231.1	230.4	226.9	225.3	225.5	225.3	229.3	234.7	249.5	270.6
70°	207.1	204.1	203.0	200.0	198.9	197.6	196.4	200.0	205.4	217.8	236.1
72.5°	178.7	176.2	173.6	171.1	171.4	170.1	170.0	172.1	176.5	187.9	202.0
75°	137.9	138.5	135.5	132.5	132.0	130.7	130.7	132.5	134.3	143.2	154.4
77.5°	100.0	99.5	97.0	96.1	95.5	94.2	95.5	96.7	97.6	103.5	111.8
80°	76.3	76.3	73.4	73.4	72.8	71.0	72.8	71.6	73.9	79.9	85.8
82.5°	54.6	53.6	53.5	52.5	52.4	51.1	52.0	53.1	54.0	58.1	61.6
85°	26.7	26.7	26.0	25.4	26.0	25.4	26.0	26.7	27.2	29.0	31.9
87.5°	7.7	8.0	8.3	8.6	8.5	8.7	9.0	9.3	10.0	10.3	10.5
90°	9.8	9.3	8.5	7.7	6.9	6.0	5.0	3.8	2.8	1.6	0.4
92.5°	11.1	10.8	10.3	10.0	9.5	9.2	9.0	9.1	9.2	9.3	9.4
95°	18.6	18.2	17.4	16.7	16.0	15.2	16.6	20.0	23.5	26.8	30.2
97.5°	24.7	24.3	22.6	21.0	19.3	17.6	21.6	31.2	40.8	50.4	60.0
100°	27.4	26.5	24.8	23.0	21.2	19.5	25.7	39.9	54.0	68.2	82.4
102.5°	28.4	27.3	42.0	56.7	71.4	86.1	95.0	97.9	100.9	104.0	106.9
105°	29.5	28.4	56.6	84.9	113.1	141.3	153.9	150.8	147.7	144.5	141.4
107.5°	38.6	39.8	73.6	107.5	141.3	175.1	190.8	188.3	185.8	183.3	180.8
110°	71.1	81.4	111.3	141.2	171.1	201.0	214.8	212.7	210.5	208.3	206.2



TEST NUMBER: P331384-940

CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	167.6	205.5	212.8	220.2	227.6	235.0	237.6	235.8	233.8	231.9	230.0
115°	239.2	287.1	284.5	282.0	279.4	276.8	274.6	272.9	271.1	269.3	267.6
117.5°	306.5	318.0	316.3	314.5	312.7	310.9	309.1	307.1	305.1	303.2	301.2
120°	342.3	341.1	339.2	337.4	335.6	333.7	332.0	330.4	328.9	327.3	325.7
122.5°	363.8	363.1	361.1	359.0	357.0	355.0	353.1	351.5	349.9	348.2	346.6
125°	394.0	393.2	391.3	389.3	387.4	385.4	383.7	382.4	381.0	379.7	378.4
127.5°	421.4	420.4	418.9	417.5	416.0	414.6	413.0	411.5	410.1	408.6	407.1
130°	439.1	437.9	436.8	435.6	434.5	433.4	431.9	430.3	428.6	427.0	425.3
132.5°	456.4	455.4	454.2	453.2	452.0	450.8	449.6	448.2	446.7	445.3	444.0
135°	480.8	479.7	478.8	478.0	477.0	476.1	474.7	473.1	471.4	469.8	468.1
137.5°	503.6	502.6	501.5	500.5	499.4	498.4	497.2	496.1	494.9	493.7	492.7
140°	518.4	517.5	516.3	515.2	514.1	512.9	511.9	511.1	510.3	509.4	508.6
142.5°	532.1	531.3	529.9	528.6	527.4	526.0	525.0	524.2	523.5	522.8	522.0
145°	551.3	550.5	548.8	547.0	545.3	543.5	542.7	542.8	542.9	543.0	543.1
147.5°	568.0	567.5	565.7	564.0	562.2	560.5	559.8	560.3	560.6	561.0	561.4
150°	578.1	577.5	575.9	574.2	572.6	570.9	570.4	571.1	571.9	572.6	573.3
152.5°	587.5	586.8	585.2	583.7	582.1	580.5	580.1	580.9	581.8	582.6	583.4
155°	600.0	599.4	598.2	596.9	595.7	594.4	594.2	595.2	596.1	597.1	598.0
157.5°	610.5	609.8	608.9	608.1	607.2	606.4	606.3	607.1	607.9	608.7	609.4
160°	616.8	616.2	615.5	614.9	614.3	613.7	613.7	614.3	614.9	615.5	616.2
162.5°	622.4	621.7	621.2	620.6	620.1	619.6	619.6	620.2	620.8	621.4	622.1
165°	629.5	628.7	628.4	628.0	627.8	627.5	627.6	628.2	628.8	629.5	630.1
167.5°	635.3	634.5	634.3	634.0	633.6	633.4	633.6	634.2	634.8	635.4	636.1
170°	638.3	637.6	637.3	637.1	636.9	636.7	636.9	637.6	638.2	638.8	639.4
172.5°	640.5	639.8	639.5	639.4	639.2	638.9	639.2	639.8	640.4	641.1	641.7
175°	642.9	642.2	641.9	641.8	641.6	641.4	641.6	642.4	643.1	643.8	644.5
177.5°	643.4	642.7	642.7	642.6	642.5	642.4	642.7	643.3	643.8	644.4	645.0
180°	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1



TEST NUMBER: P331384-940

CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5
2.5°	1547.7	1550.0	1557.6	1565.1	1573.7	1576.0	1579.8	1576.5	1575.6	1584.6	1591.2
5°	1552.0	1562.6	1583.4	1602.3	1618.3	1629.5	1641.4	1646.1	1654.9	1667.4	1682.7
7.5°	1547.0	1567.7	1600.3	1627.9	1658.0	1679.5	1696.5	1710.9	1728.5	1752.0	1777.7
10°	1541.3	1569.1	1608.8	1642.5	1679.2	1707.0	1730.1	1752.6	1778.6	1811.2	1844.9
12.5°	1531.0	1564.0	1613.6	1653.4	1700.5	1727.9	1759.0	1807.5	1835.4	1880.8	1928.2
15°	1510.0	1546.7	1615.9	1665.0	1718.2	1770.3	1827.7	1873.9	1920.0	1946.7	2013.6
17.5°	1478.9	1532.8	1609.4	1666.7	1734.4	1816.4	1880.9	1933.1	1986.5	2029.6	2063.2
20°	1453.8	1512.3	1599.9	1668.6	1749.0	1837.2	1911.2	1964.4	2010.5	2046.7	2067.3
22.5°	1422.1	1495.8	1581.0	1661.4	1764.2	1851.4	1929.1	1971.0	2009.6	2027.2	2035.2
25°	1372.2	1460.9	1557.4	1655.6	1771.6	1863.9	1934.8	1960.2	1971.5	1954.4	1925.9
27.5°	1318.3	1417.2	1530.0	1644.4	1767.0	1855.7	1906.7	1902.6	1883.6	1828.1	1783.7
30°	1278.1	1387.0	1508.2	1633.1	1756.1	1842.5	1872.1	1842.5	1799.3	1737.2	1673.9
32.5°	1235.9	1348.6	1485.1	1616.9	1736.3	1812.2	1818.6	1767.7	1700.8	1630.2	1551.3
35°	1172.2	1294.1	1441.4	1581.0	1694.0	1742.0	1713.5	1623.6	1544.4	1447.9	1340.2
37.5°	1100.1	1234.7	1382.4	1528.3	1630.7	1643.2	1572.7	1478.0	1366.2	1252.9	1126.1
40°	1046.2	1188.7	1340.8	1488.1	1578.6	1565.6	1475.7	1371.5	1238.4	1099.9	982.2
42.5°	997.8	1140.4	1295.3	1439.8	1512.3	1476.6	1371.5	1243.8	1100.6	970.3	862.5
45°	914.2	1060.9	1219.5	1359.1	1400.5	1336.1	1197.0	1055.0	914.2	805.3	720.1
47.5°	832.9	978.0	1135.1	1257.8	1272.5	1185.7	1033.8	887.7	766.6	678.0	617.9
50°	773.4	918.9	1074.5	1184.0	1179.2	1074.5	918.3	779.3	678.1	606.5	566.2
52.5°	719.9	857.4	1006.8	1106.3	1081.3	967.1	818.0	694.6	611.4	555.4	518.9
55°	636.7	763.8	905.9	985.8	939.6	813.0	687.0	587.5	526.0	484.0	455.6
57.5°	554.0	673.3	794.9	844.1	793.1	676.2	571.1	499.0	452.7	421.6	403.1
60°	502.9	607.1	715.3	758.0	697.1	592.9	510.1	445.6	408.2	382.8	366.2
62.5°	451.8	545.1	647.2	670.4	614.7	526.6	453.3	399.7	369.0	346.3	330.7
65°	382.3	458.5	536.1	551.4	500.0	431.9	374.0	339.0	311.8	295.2	282.9
67.5°	313.4	374.8	429.7	442.1	397.0	349.8	307.9	277.5	259.0	245.3	234.8
70°	272.8	321.3	366.2	376.3	340.2	298.2	266.3	242.0	225.4	213.6	203.6
72.5°	229.7	270.2	307.6	314.3	284.8	252.8	226.5	207.4	192.8	185.2	175.6
75°	175.8	199.4	228.4	230.2	210.6	191.1	171.0	158.5	150.9	141.4	136.7
77.5°	124.0	142.6	159.2	162.4	150.8	137.5	126.3	116.5	109.9	105.6	101.2
80°	94.7	109.5	116.5	120.7	112.4	103.0	96.5	90.0	85.8	82.8	79.9
82.5°	67.7	76.8	83.5	86.6	82.1	76.4	69.9	66.3	63.0	60.5	59.6
85°	34.3	38.4	42.6	43.8	42.6	40.2	36.6	36.6	34.9	34.3	34.3
87.5°	12.1	14.3	14.5	16.1	15.4	15.6	15.7	15.4	15.2	14.7	14.4
90°	1.6	2.8	3.8	5.0	6.0	6.9	7.7	8.5	9.3	9.8	10.3
92.5°	9.3	9.2	9.1	9.0	9.2	9.5	10.0	10.3	10.8	11.1	11.3
95°	26.8	23.5	20.0	16.6	15.2	16.0	16.7	17.4	18.2	18.6	19.2
97.5°	50.4	40.8	31.2	21.6	17.6	19.3	21.0	22.6	24.3	24.7	25.1
100°	68.2	54.0	39.9	25.7	19.5	21.2	23.0	24.8	26.5	27.4	28.2
102.5°	104.0	100.9	97.9	95.0	86.1	71.4	56.7	42.0	27.3	28.4	29.4
105°	144.5	147.7	150.8	153.9	141.3	113.1	84.9	56.6	28.4	29.5	30.7
107.5°	183.3	185.8	188.3	190.8	175.1	141.3	107.5	73.6	39.8	38.6	37.5
110°	208.3	210.5	212.7	214.8	201.0	171.1	141.2	111.3	81.4	71.1	60.7



TEST NUMBER: P331384-940

CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	231.9	233.8	235.8	237.6	235.0	227.6	220.2	212.8	205.5	167.6	129.9
115°	269.3	271.1	272.9	274.6	276.8	279.4	282.0	284.5	287.1	239.2	191.4
117.5°	303.2	305.1	307.1	309.1	310.9	312.7	314.5	316.3	318.0	306.5	294.9
120°	327.3	328.9	330.4	332.0	333.7	335.6	337.4	339.2	341.1	342.3	343.6
122.5°	348.2	349.9	351.5	353.1	355.0	357.0	359.0	361.1	363.1	363.8	364.5
125°	379.7	381.0	382.4	383.7	385.4	387.4	389.3	391.3	393.2	394.0	394.7
127.5°	408.6	410.1	411.5	413.0	414.6	416.0	417.5	418.9	420.4	421.4	422.5
130°	427.0	428.6	430.3	431.9	433.4	434.5	435.6	436.8	437.9	439.1	440.1
132.5°	445.3	446.7	448.2	449.6	450.8	452.0	453.2	454.2	455.4	456.4	457.4
135°	469.8	471.4	473.1	474.7	476.1	477.0	478.0	478.8	479.7	480.8	481.9
137.5°	493.7	494.9	496.1	497.2	498.4	499.4	500.5	501.5	502.6	503.6	504.6
140°	509.4	510.3	511.1	511.9	512.9	514.1	515.2	516.3	517.5	518.4	519.3
142.5°	522.8	523.5	524.2	525.0	526.0	527.4	528.6	529.9	531.3	532.1	533.0
145°	543.0	542.9	542.8	542.7	543.5	545.3	547.0	548.8	550.5	551.3	552.0
147.5°	561.0	560.6	560.3	559.8	560.5	562.2	564.0	565.7	567.5	568.0	568.6
150°	572.6	571.9	571.1	570.4	570.9	572.6	574.2	575.9	577.5	578.1	578.7
152.5°	582.6	581.8	580.9	580.1	580.5	582.1	583.7	585.2	586.8	587.5	588.1
155°	597.1	596.1	595.2	594.2	594.4	595.7	596.9	598.2	599.4	600.0	600.7
157.5°	608.7	607.9	607.1	606.3	606.4	607.2	608.1	608.9	609.8	610.5	611.2
160°	615.5	614.9	614.3	613.7	613.7	614.3	614.9	615.5	616.2	616.8	617.3
162.5°	621.4	620.8	620.2	619.6	619.6	620.1	620.6	621.2	621.7	622.4	623.1
165°	629.5	628.8	628.2	627.6	627.5	627.8	628.0	628.4	628.7	629.5	630.2
167.5°	635.4	634.8	634.2	633.6	633.4	633.6	634.0	634.3	634.5	635.3	636.0
170°	638.8	638.2	637.6	636.9	636.7	636.9	637.1	637.3	637.6	638.3	639.0
172.5°	641.1	640.4	639.8	639.2	638.9	639.2	639.4	639.5	639.8	640.5	641.2
175°	643.8	643.1	642.4	641.6	641.4	641.6	641.8	641.9	642.2	642.9	643.6
177.5°	644.4	643.8	643.3	642.7	642.4	642.5	642.6	642.7	642.7	643.4	643.9
180°	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1	643.1



TEST NUMBER: P331384-940
 CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5	1539.5
2.5°	1596.9	1603.5	1603.5	1604.5	1612.0	1611.1	1610.6
5°	1699.3	1709.4	1710.6	1721.3	1728.3	1726.0	1719.5
7.5°	1796.0	1814.7	1828.9	1836.8	1846.2	1852.0	1849.4
10°	1872.7	1899.9	1916.5	1927.7	1941.3	1951.4	1947.9
12.5°	1942.3	1974.7	1997.4	2016.7	2018.5	2031.4	2022.7
15°	2050.8	2085.1	2088.7	2102.8	2114.2	2112.9	2113.5
17.5°	2086.7	2097.7	2099.9	2100.2	2100.4	2096.2	2087.2
20°	2073.9	2069.7	2059.7	2052.0	2038.4	2036.6	2024.8
22.5°	2013.3	2000.2	1975.0	1958.3	1937.1	1931.5	1928.2
25°	1894.0	1865.0	1824.8	1786.3	1775.7	1755.0	1760.9
27.5°	1730.4	1685.2	1641.6	1610.3	1582.1	1551.0	1560.0
30°	1615.3	1564.4	1502.9	1455.5	1425.4	1395.8	1390.4
32.5°	1478.0	1403.5	1334.9	1293.2	1247.0	1228.2	1207.7
35°	1241.4	1168.6	1100.5	1042.0	1008.3	982.2	958.5
37.5°	1028.5	944.7	889.7	842.3	818.0	803.1	806.8
40°	896.4	823.0	782.8	746.7	724.2	713.5	716.0
42.5°	789.4	734.5	701.4	676.6	660.8	654.9	653.4
45°	668.0	637.2	610.0	595.8	588.2	581.7	577.5
47.5°	585.1	560.1	544.7	536.3	529.6	522.9	522.8
50°	535.5	518.9	508.3	499.4	494.1	489.4	493.5
52.5°	497.6	482.5	471.8	463.9	461.9	457.6	457.5
55°	441.4	429.5	421.9	414.7	411.3	408.8	405.9
57.5°	390.3	379.1	371.9	367.5	360.7	358.3	357.4
60°	353.8	344.9	337.9	331.9	329.0	324.2	324.2
62.5°	320.2	311.4	304.7	300.2	295.3	293.5	294.0
65°	271.6	264.5	258.0	253.2	252.1	248.5	249.7
67.5°	226.9	222.1	215.3	212.7	210.4	208.5	207.1
70°	197.1	192.3	188.8	185.2	183.4	183.4	183.4
72.5°	171.9	166.3	164.2	159.6	160.7	158.8	156.9
75°	133.1	129.6	127.8	126.0	123.1	123.1	123.1
77.5°	98.0	96.9	94.8	92.9	92.2	91.6	91.8
80°	75.7	75.2	73.9	73.9	72.8	72.2	71.0
82.5°	58.2	56.7	56.0	55.5	55.3	55.1	54.9
85°	33.2	31.9	31.9	32.5	31.4	31.4	31.9
87.5°	15.0	15.1	14.6	14.7	15.2	14.8	14.8
90°	10.9	11.4	11.8	11.9	12.1	12.4	12.6
92.5°	11.6	11.9	12.0	12.2	12.3	12.5	12.6
95°	19.7	20.2	20.4	20.3	20.2	20.2	20.0
97.5°	25.5	25.9	26.2	26.3	26.5	26.6	26.8
100°	29.0	29.9	30.3	30.6	30.8	30.9	31.2
102.5°	30.5	31.6	32.3	32.5	32.8	33.1	33.4
105°	31.8	32.9	33.7	34.2	34.5	35.0	35.4
107.5°	36.3	35.1	34.8	35.1	35.6	35.9	36.4
110°	50.4	40.0	35.1	35.5	35.9	36.4	36.7



TEST NUMBER: P331384-940

CATALOG NUMBER: SA2XXDIP-C865D530U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	92.2	54.5	35.8	36.1	36.5	36.8	37.1
115°	143.5	95.6	67.9	60.5	53.1	45.6	38.2
117.5°	283.3	271.7	253.7	229.2	204.7	180.3	155.8
120°	344.8	346.1	339.7	325.7	311.8	297.8	283.8
122.5°	365.3	366.0	365.1	362.4	359.6	357.0	354.2
125°	395.4	396.1	396.6	397.0	397.3	397.6	397.9
127.5°	423.6	424.6	425.2	425.3	425.3	425.3	425.4
130°	441.3	442.5	443.0	442.8	442.7	442.6	442.6
132.5°	458.3	459.3	459.7	459.6	459.5	459.4	459.3
135°	482.9	483.9	484.4	484.1	483.9	483.8	483.5
137.5°	505.6	506.7	506.9	506.6	506.2	506.0	505.6
140°	520.2	521.2	521.4	520.8	520.4	519.9	519.3
142.5°	533.8	534.7	534.8	534.3	533.8	533.2	532.7
145°	552.7	553.4	553.5	553.0	552.5	552.0	551.4
147.5°	569.1	569.6	569.6	569.3	568.8	568.4	567.9
150°	579.3	580.0	580.1	579.5	579.0	578.5	578.0
152.5°	588.7	589.3	589.2	588.6	587.9	587.2	586.6
155°	601.3	601.9	601.7	600.9	600.1	599.3	598.4
157.5°	611.9	612.6	612.6	611.7	610.9	610.1	609.3
160°	618.0	618.6	618.6	617.9	617.2	616.4	615.6
162.5°	623.8	624.6	624.5	623.6	622.7	621.8	620.9
165°	630.9	631.6	631.6	630.9	630.2	629.5	628.7
167.5°	636.8	637.5	637.4	636.4	635.5	634.5	633.6
170°	639.7	640.4	640.3	639.4	638.5	637.6	636.6
172.5°	641.9	642.7	642.6	641.7	640.7	639.8	638.8
175°	644.4	645.1	645.0	643.9	642.8	641.9	640.8
177.5°	644.5	645.1	645.0	644.3	643.5	642.7	642.0
180°	643.1	643.1	643.1	643.1	643.1	643.1	643.1

(END OF REPORT)