

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331401-940

Luminaire Tested: **SA2XXDIP-C865D725U940-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P331401-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-16,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA2XXDIP-C865D725U940-4F0-1E-UDD-F4  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 865 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 725 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5656.3 lumens  
Efficiency: N/A  
Efficacy: 104.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.3  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 54.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331401-940  
CATALOG NUMBER: SA2XXDIP-C865D725U940-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

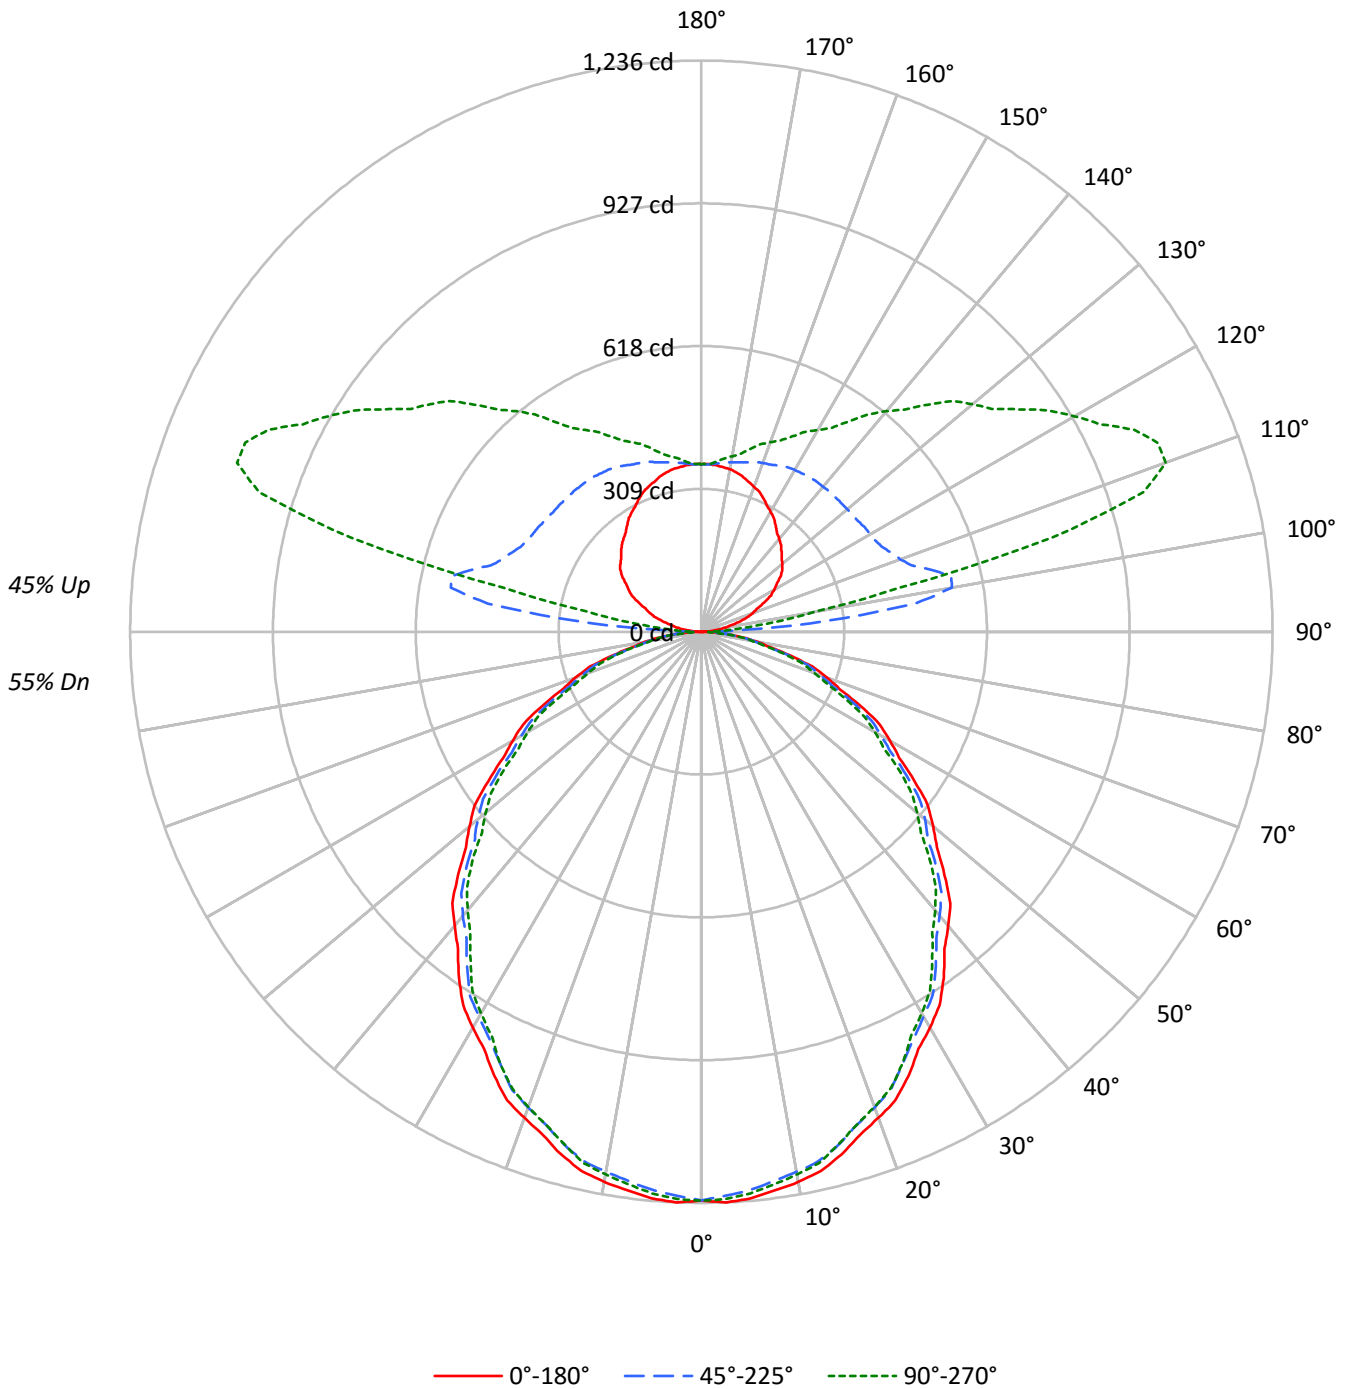



TEST NUMBER: P331401-940

CATALOG NUMBER: SA2XXDIP-C865D725U940-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	95	91	87	92	88	85	82	76	73	71	64	63	61	54	53	52	47
2	90	83	76	71	83	77	72	67	66	62	59	57	54	51	48	45	43	39
3	82	73	65	59	76	68	61	56	59	54	49	50	46	43	42	39	37	33
4	75	64	56	50	70	60	53	47	52	47	42	45	40	37	38	34	32	28
5	69	57	49	43	64	54	46	41	47	41	36	40	36	32	34	31	28	25
6	64	51	43	37	59	48	41	36	42	36	32	36	32	28	31	27	24	22
7	59	47	38	33	55	44	36	31	38	32	28	33	28	25	28	25	22	19
8	55	42	34	29	51	40	33	28	35	29	25	30	26	22	26	22	20	17
9	51	39	31	26	47	36	29	25	32	26	22	28	23	20	24	20	18	16
10	48	35	28	23	44	33	27	22	29	24	20	26	21	18	22	19	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	19869	19869	19869
5°	19945	19656	19772
10°	19825	19457	19556
15°	19580	19206	19184
20°	19234	18826	18806
25°	18887	18360	18360
30°	18442	17935	17780
35°	18027	17422	17164
40°	17506	16910	16583
45°	16993	16401	15995
50°	16435	15872	15307
55°	15854	15254	14688
60°	15206	14518	13986
65°	14514	13788	13154
70°	13629	12902	12288
75°	12402	11884	11584
80°	11000	10674	10126
85°	8985	8559	7669



TEST NUMBER: P331401-940

CATALOG NUMBER: SA2XXDIP-C865D725U940-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	115.7	2.0
10°-20°	325.6	5.8
20°-30°	478.6	8.5
30°-40°	555.9	9.8
40°-50°	555.3	9.8
50°-60°	484.3	8.6
60°-70°	358.1	6.3
70°-80°	202.8	3.6
80°-90°	57.8	1.0
90°-100°	144.9	2.6
100°-110°	491.8	8.7
110°-120°	522.5	9.2
120°-130°	430.1	7.6
130°-140°	345.4	6.1
140°-150°	261.0	4.6
150°-160°	183.4	3.2
160°-170°	108.0	1.9
170°-180°	35.1	0.6
0°-30°	919.9	16.3
0°-40°	1475.8	26.1
0°-60°	2515.4	44.5
0°-90°	3134.0	55.4
90°-120°	1159.2	20.5
90°-150°	2195.7	38.8
90°-180°	2522.0	44.6
0°-180°	5656.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1231	1231	1231	1231	1231	
5°	1231	1225	1213	1222	1220	117
15°	1171	1164	1149	1153	1148	330
25°	1060	1050	1031	1033	1031	488
35°	915	902	884	877	871	571
45°	744	735	718	706	700	574
55°	563	556	542	528	522	503
65°	380	372	361	350	344	376
75°	199	196	190	184	186	212
85°	48	47	46	43	41	56
90°	1	9	24	23	23	4
95°	24	60	273	103	80	26
105°	85	128	516	923	786	90
115°	150	189	432	892	1034	149
125°	209	247	415	722	839	186
135°	245	293	410	607	695	190
145°	280	322	408	507	555	176
155°	318	344	397	449	466	147
165°	347	358	380	403	409	98
175°	362	362	365	370	369	34
180°	362	362	362	362	362	



TEST NUMBER: P331401-940

CATALOG NUMBER: SA2XXDIP-C865D725U940-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6
2.5°	1236.3	1235.2	1234.1	1233.1	1232.1	1230.4	1228.1	1225.7	1223.4	1221.1	1223.2
5°	1230.6	1229.5	1228.5	1227.4	1226.4	1224.4	1221.6	1218.6	1215.8	1212.8	1215.0
7.5°	1219.7	1218.1	1216.5	1214.8	1213.2	1210.9	1207.9	1205.0	1202.0	1199.1	1201.2
10°	1209.2	1207.5	1205.6	1203.7	1201.9	1199.4	1196.2	1193.1	1190.0	1186.8	1188.9
12.5°	1195.1	1193.5	1191.9	1190.2	1188.6	1186.2	1183.0	1179.8	1176.7	1173.6	1175.0
15°	1171.4	1169.8	1168.2	1166.7	1165.1	1162.6	1159.2	1155.7	1152.4	1149.0	1150.0
17.5°	1141.1	1139.5	1138.0	1136.4	1134.8	1132.3	1128.8	1125.3	1121.9	1118.4	1119.6
20°	1119.4	1117.8	1116.2	1114.6	1113.0	1110.4	1106.7	1103.0	1099.4	1095.7	1096.4
22.5°	1097.6	1095.4	1093.1	1090.9	1088.8	1085.9	1082.4	1079.0	1075.5	1072.0	1072.2
25°	1060.2	1058.1	1056.0	1053.9	1051.8	1048.5	1044.0	1039.6	1035.1	1030.6	1031.2
27.5°	1017.6	1015.7	1013.8	1011.9	1010.0	1007.3	1003.8	1000.2	996.8	993.2	992.5
30°	989.2	987.1	985.0	982.9	980.8	977.8	973.8	969.9	965.9	962.0	961.2
32.5°	958.9	957.3	955.6	953.9	952.2	949.2	945.1	940.9	936.8	932.6	931.2
35°	914.6	912.0	909.4	906.8	904.1	900.7	896.5	892.3	888.1	883.9	882.3
37.5°	864.7	862.4	860.1	857.7	855.5	852.2	848.0	843.8	839.5	835.4	833.4
40°	830.6	828.6	826.4	824.3	822.2	819.0	814.8	810.7	806.5	802.3	799.9
42.5°	797.5	795.4	793.3	791.2	789.1	786.0	781.8	777.6	773.3	769.1	766.5
45°	744.2	742.4	740.6	738.8	736.9	734.0	730.0	726.1	722.2	718.3	715.3
47.5°	691.3	689.6	687.8	686.1	684.3	681.4	677.3	673.2	669.1	664.9	661.9
50°	654.3	653.0	651.8	650.4	649.1	646.6	642.9	639.2	635.5	631.9	628.2
52.5°	618.4	616.6	614.9	613.1	611.4	608.9	605.4	601.9	598.4	594.9	591.9
55°	563.2	561.7	560.1	558.5	556.9	554.6	551.4	548.2	545.1	541.9	538.8
57.5°	507.8	506.6	505.3	504.1	502.8	500.4	497.0	493.5	490.0	486.5	483.5
60°	470.9	469.8	468.9	467.8	466.7	464.4	460.7	457.0	453.3	449.6	446.7
62.5°	435.0	433.3	431.6	429.9	428.2	426.0	423.1	420.3	417.4	414.6	412.0
65°	379.9	378.3	376.7	375.1	373.5	371.4	368.8	366.1	363.6	360.9	358.6
67.5°	323.8	322.4	321.2	319.9	318.7	316.9	314.5	312.1	309.8	307.4	305.6
70°	288.7	287.7	286.6	285.5	284.5	282.8	280.4	278.0	275.7	273.3	271.5
72.5°	252.7	251.7	250.7	249.6	248.5	247.3	245.8	244.2	242.6	241.1	239.3
75°	198.8	198.2	197.7	197.2	196.7	195.7	194.5	193.1	191.8	190.5	189.0
77.5°	150.5	149.6	148.7	147.8	147.0	146.2	145.7	145.2	144.6	144.1	143.3
80°	118.3	118.1	117.8	117.5	117.3	116.9	116.4	115.8	115.3	114.8	114.0
82.5°	88.0	88.0	87.9	87.8	87.8	87.7	87.3	87.0	86.7	86.4	85.3
85°	48.5	48.2	48.0	47.7	47.4	47.2	46.9	46.6	46.4	46.2	45.4
87.5°	17.2	17.2	17.3	17.2	17.0	17.0	17.3	17.8	18.3	18.0	17.2
90°	0.7	2.8	5.6	7.0	8.4	10.4	13.9	18.8	23.0	23.7	23.0
92.5°	8.5	12.3	17.3	20.3	25.1	31.7	47.4	69.6	89.3	90.6	76.5
95°	24.4	27.2	34.2	40.4	51.5	68.3	100.4	161.0	241.9	273.2	239.1
97.5°	39.8	43.5	50.9	60.4	73.2	92.1	132.4	217.0	351.3	466.5	489.4
100°	53.7	55.7	62.1	73.2	87.1	106.6	143.6	228.6	379.2	550.6	651.0
102.5°	66.5	68.0	74.3	85.4	100.0	119.5	153.6	229.2	368.6	553.5	711.2
105°	85.1	87.8	92.7	103.2	118.5	138.0	170.8	232.8	347.9	516.5	702.0
107.5°	105.1	107.4	112.1	121.7	136.9	156.6	188.3	242.5	337.5	476.9	640.7
110°	118.5	121.3	125.5	134.6	149.2	169.4	200.0	250.2	335.3	458.0	602.3



TEST NUMBER: P331401-940

CATALOG NUMBER: SA2XXDIP-C865D725U940-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	130.7	133.6	138.3	146.8	160.9	181.6	211.2	258.6	335.8	445.7	575.5
115°	149.9	153.4	157.6	165.9	179.9	198.7	228.6	271.2	338.8	432.2	542.3
117.5°	169.7	172.5	176.6	184.0	197.4	217.0	244.7	284.5	343.8	425.6	521.4
120°	181.9	184.8	188.9	195.2	209.1	228.6	255.8	293.5	347.1	421.7	510.2
122.5°	193.7	195.9	200.0	206.9	220.8	240.9	266.4	301.3	351.1	419.5	500.8
125°	209.1	211.2	215.3	223.7	237.7	257.2	282.3	313.7	356.9	415.4	487.2
127.5°	221.4	224.2	230.1	239.2	252.6	272.7	297.1	325.2	362.9	413.0	474.7
130°	228.6	231.4	238.4	248.2	262.1	281.6	306.0	332.5	367.4	412.0	466.4
132.5°	235.3	238.7	246.2	256.5	271.0	290.5	313.8	339.7	371.8	411.4	459.7
135°	245.4	248.2	256.5	267.0	283.0	302.6	324.9	349.2	377.1	410.5	450.3
137.5°	254.9	258.2	266.5	277.7	293.6	311.7	333.8	356.5	381.8	410.5	443.7
140°	262.1	264.8	273.2	284.4	299.7	317.9	338.8	360.3	384.1	409.8	439.9
142.5°	269.3	271.6	279.4	290.5	305.3	322.4	342.7	363.7	385.8	409.8	436.0
145°	280.2	283.0	290.0	300.4	314.3	329.7	348.6	368.0	387.5	408.5	430.8
147.5°	291.9	294.0	300.7	310.3	321.9	335.6	353.3	370.4	388.2	406.0	425.5
150°	299.7	301.8	307.4	316.5	326.9	339.5	355.5	371.5	387.5	404.3	421.0
152.5°	307.6	308.5	314.1	322.0	331.9	343.4	357.8	372.1	386.5	401.5	417.1
155°	318.5	319.2	323.4	331.1	338.8	349.2	361.1	372.9	384.8	396.6	409.8
157.5°	327.8	328.4	331.8	338.5	344.6	353.4	363.5	372.9	381.6	391.6	403.1
160°	333.9	334.6	337.3	343.0	348.6	356.1	364.5	372.9	379.9	388.3	398.1
162.5°	340.0	339.6	342.4	346.9	351.9	357.8	365.2	372.4	378.3	385.5	393.5
165°	347.1	346.4	347.9	352.0	355.5	359.7	366.0	370.9	375.1	379.9	386.2
167.5°	353.0	352.1	353.4	356.1	358.6	361.2	365.8	369.9	371.8	375.1	378.9
170°	356.9	355.5	356.1	358.3	359.7	361.8	365.2	368.7	370.1	372.2	375.1
172.5°	359.1	358.3	357.8	360.0	360.8	362.3	364.7	367.0	367.9	368.9	371.1
175°	361.8	361.1	360.3	361.8	361.8	362.5	363.8	365.2	364.5	365.2	366.0
177.5°	363.0	361.9	361.3	362.5	362.5	362.5	363.0	364.2	363.0	362.5	363.0
180°	362.5	362.5	362.5	362.5	362.5	362.5	362.5	362.5	362.5	362.5	362.5



TEST NUMBER: P331401-940

CATALOG NUMBER: SA2XXDIP-C865D725U940-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6	1230.6
2.5°	1225.3	1227.4	1229.5	1230.4	1229.9	1229.5	1229.1	1228.7
5°	1217.0	1219.1	1221.3	1222.0	1221.6	1221.0	1220.5	1219.9
7.5°	1203.3	1205.4	1207.6	1208.3	1207.7	1207.1	1206.6	1205.9
10°	1191.0	1193.1	1195.2	1195.9	1195.1	1194.3	1193.5	1192.8
12.5°	1176.5	1177.9	1179.5	1179.9	1179.3	1178.8	1178.1	1177.6
15°	1151.0	1152.1	1153.2	1153.0	1151.7	1150.4	1149.1	1147.7
17.5°	1120.8	1122.0	1123.3	1123.2	1122.0	1120.7	1119.5	1118.2
20°	1097.3	1098.1	1098.9	1098.7	1097.7	1096.6	1095.6	1094.5
22.5°	1072.4	1072.5	1072.6	1072.5	1071.7	1071.1	1070.5	1069.9
25°	1031.7	1032.2	1032.7	1032.7	1032.2	1031.7	1031.2	1030.6
27.5°	991.7	990.9	990.1	989.1	987.7	986.5	985.3	984.0
30°	960.4	959.7	958.9	957.9	956.9	955.8	954.8	953.7
32.5°	929.8	928.4	926.9	925.7	924.7	923.6	922.6	921.5
35°	880.7	879.1	877.6	876.1	874.9	873.5	872.2	870.8
37.5°	831.5	829.6	827.6	826.0	824.7	823.5	822.2	820.9
40°	797.5	795.1	792.8	791.0	790.1	789.0	787.9	786.8
42.5°	763.9	761.3	758.8	756.8	755.3	753.9	752.3	750.9
45°	712.5	709.5	706.7	704.7	703.6	702.6	701.5	700.5
47.5°	658.9	655.9	652.8	650.5	649.0	647.5	646.0	644.4
50°	624.5	620.8	617.2	614.7	613.3	612.0	610.7	609.4
52.5°	588.8	585.8	582.7	580.3	578.6	576.8	575.2	573.4
55°	535.7	532.4	529.3	527.1	525.8	524.4	523.2	521.8
57.5°	480.4	477.2	474.1	472.1	471.1	470.1	469.1	468.1
60°	443.9	441.0	438.1	436.2	435.4	434.6	433.8	433.1
62.5°	409.2	406.5	403.9	402.1	401.0	400.0	399.0	398.1
65°	356.1	353.8	351.4	349.6	348.3	347.0	345.6	344.3
67.5°	303.7	301.8	300.1	298.6	297.6	296.5	295.4	294.4
70°	269.7	267.8	266.0	264.5	263.5	262.4	261.4	260.3
72.5°	237.5	235.6	233.8	232.5	231.6	230.8	229.9	229.1
75°	187.3	185.7	184.2	183.7	184.2	184.8	185.2	185.7
77.5°	142.6	141.8	141.0	140.2	139.5	138.8	138.0	137.2
80°	113.2	112.4	111.6	110.9	110.4	109.9	109.4	108.9
82.5°	84.4	83.4	82.4	81.9	81.7	81.6	81.5	81.4
85°	44.6	43.8	43.0	42.4	42.2	41.9	41.6	41.4
87.5°	16.4	15.5	15.2	14.9	14.7	14.4	14.3	14.1
90°	22.3	21.0	22.3	23.0	23.0	23.0	23.0	23.0
92.5°	60.8	52.2	46.3	42.0	41.4	39.1	39.8	38.6
95°	182.6	140.1	110.8	95.5	86.4	80.9	78.7	79.5
97.5°	426.1	348.7	273.2	222.9	189.6	172.5	162.3	156.4
100°	636.4	550.0	454.5	370.1	312.3	282.3	262.1	249.5
102.5°	774.2	754.7	684.7	595.4	532.5	481.3	456.1	439.2
105°	846.9	925.7	934.8	911.8	868.5	825.3	795.3	785.6
107.5°	794.5	913.1	985.6	1019.4	1024.8	1022.4	1016.5	1003.4
110°	749.3	874.1	963.3	1020.5	1050.4	1063.7	1070.0	1069.3





TEST NUMBER: P331401-940

CATALOG NUMBER: SA2XXDIP-C865D725U940-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	708.1	827.8	923.2	988.7	1030.4	1052.6	1064.4	1068.2
115°	657.3	764.6	856.0	927.7	977.2	1009.3	1027.4	1033.8
117.5°	619.1	713.4	796.2	863.5	914.0	947.9	967.0	972.2
120°	600.1	686.6	760.5	823.9	872.7	905.4	925.7	932.6
122.5°	585.1	664.3	734.2	791.6	835.4	867.5	885.6	891.4
125°	563.2	635.0	696.3	748.6	789.1	815.6	832.9	838.6
127.5°	541.6	606.5	664.4	712.7	748.0	772.8	787.8	792.3
130°	527.6	587.6	642.7	688.7	722.8	746.5	760.5	766.1
132.5°	514.2	569.8	620.4	663.6	697.2	720.9	733.7	738.7
135°	495.6	541.6	587.6	626.6	656.7	679.7	692.1	695.0
137.5°	480.7	519.2	555.7	589.7	617.1	636.9	647.8	652.0
140°	471.2	504.7	536.7	567.4	589.7	607.8	618.3	622.5
142.5°	463.4	491.9	519.4	545.1	566.3	582.7	592.1	592.9
145°	452.4	475.4	497.0	517.2	534.0	545.8	552.8	554.8
147.5°	443.9	462.0	478.8	493.7	507.5	516.9	521.7	522.9
150°	437.7	453.1	467.7	480.3	490.7	499.1	503.3	504.0
152.5°	431.6	445.9	458.3	469.1	477.3	484.6	487.7	487.8
155°	423.1	434.3	444.7	452.4	460.0	464.9	467.7	466.4
157.5°	413.2	422.6	431.3	437.3	442.7	446.8	448.1	448.1
160°	407.1	414.7	422.4	427.3	432.2	435.7	436.3	436.3
162.5°	400.9	407.5	414.0	417.9	422.7	425.1	425.8	425.2
165°	391.7	396.6	401.5	404.3	407.1	409.8	409.8	409.2
167.5°	383.0	386.7	390.0	392.6	393.9	395.4	395.2	394.4
170°	378.5	380.6	383.3	384.8	385.5	387.5	386.8	385.5
172.5°	373.4	375.1	377.3	378.1	378.8	379.8	379.1	378.3
175°	368.0	368.7	369.4	370.1	370.1	370.9	370.1	368.7
177.5°	364.2	364.2	364.7	364.7	364.7	364.7	364.2	363.0
180°	362.5	362.5	362.5	362.5	362.5	362.5	362.5	362.5

(END OF REPORT)