

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331745-940

Luminaire Tested: **SA2XXRDIP-C1005D530U940-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P331745-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA2XXRDIP-C1005D530U940-4F0-1E-UDD-F1  
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1005 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 530 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4793.1 lumens  
Efficiency: N/A  
Efficacy: 87.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular (W 0.17' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 55.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331745-940

CATALOG NUMBER: SA2XXRDIP-C1005D530U940-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

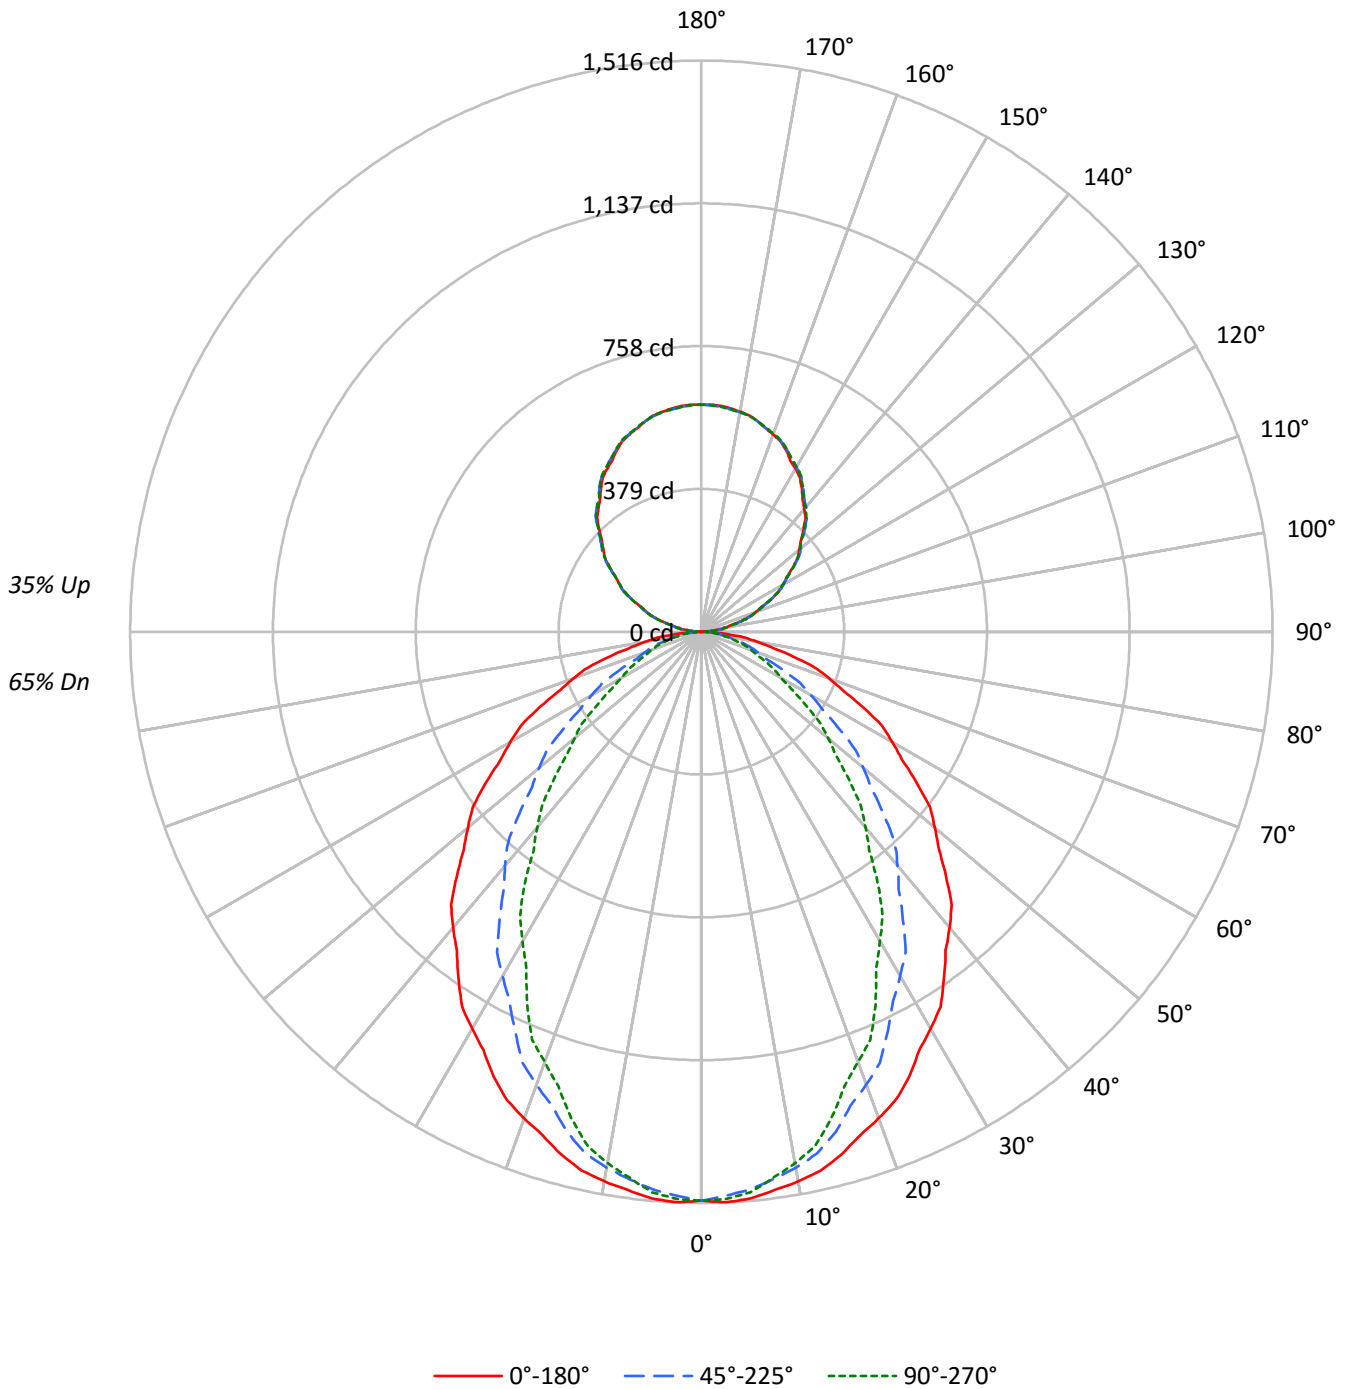



TEST NUMBER: P331745-940

CATALOG NUMBER: SA2XXRDIP-C1005D530U940-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	111	111	111	111	104	104	104	104	92	92	92	80	80	80	70	70	70	65				
1	102	98	94	90	96	92	89	86	81	79	77	72	70	68	63	61	60	56				
2	93	86	80	75	87	81	76	71	72	68	64	64	61	58	56	54	52	48				
3	85	76	69	63	80	72	66	60	64	59	55	57	53	50	50	47	45	41				
4	78	68	60	54	74	64	57	52	57	52	47	51	47	43	45	42	39	36				
5	72	61	53	47	68	58	50	45	52	46	41	46	42	38	41	37	34	32				
6	67	55	47	41	63	52	45	40	47	41	37	42	37	34	37	34	31	28				
7	62	50	42	36	58	47	40	35	43	37	33	38	34	30	34	30	28	25				
8	58	46	38	33	54	43	36	31	39	33	29	35	31	27	32	28	25	23				
9	54	42	34	29	51	40	33	28	36	30	26	33	28	25	29	26	23	21				
10	51	39	31	27	48	37	30	26	34	28	24	30	26	22	27	24	21	19				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	24380	24380	24380
5°	24473	24076	24209
10°	24287	23682	23481
15°	24008	22980	22318
20°	23622	21978	20874
25°	23225	20838	19475
30°	22676	19669	17682
35°	22141	18398	16109
40°	21602	17081	14286
45°	20970	15602	12638
50°	20321	14109	11017
55°	19657	12504	9464
60°	18887	10811	7857
65°	18010	9085	7156
70°	16966	7482	6581
75°	15689	6818	6138
80°	13845	6100	5588
85°	10893	4798	4798



TEST NUMBER: P331745-940

CATALOG NUMBER: SA2XXRDIP-C1005D530U940-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	141.3	2.9
10°-20°	388.1	8.1
20°-30°	545.0	11.4
30°-40°	594.3	12.4
40°-50°	546.4	11.4
50°-60°	429.2	9.0
60°-70°	279.8	5.8
70°-80°	144.3	3.0
80°-90°	39.8	0.8
90°-100°	38.2	0.8
100°-110°	118.6	2.5
110°-120°	202.7	4.2
120°-130°	266.6	5.6
130°-140°	299.2	6.2
140°-150°	293.4	6.1
150°-160°	246.1	5.1
160°-170°	163.2	3.4
170°-180°	57.0	1.2
0°-30°	1074.4	22.4
0°-40°	1668.7	34.8
0°-60°	2644.3	55.2
0°-90°	3108.2	64.8
90°-120°	359.5	7.5
90°-150°	1218.6	25.4
90°-180°	1685.0	35.2
0°-180°	4793.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1510	1510	1510	1510	1510	
5°	1510	1503	1486	1497	1494	143
15°	1436	1419	1375	1350	1335	404
25°	1304	1257	1170	1116	1093	599
35°	1123	1051	933	850	817	703
45°	918	824	683	590	554	709
55°	698	589	444	365	336	624
65°	471	360	238	194	187	467
75°	252	158	109	100	98	266
85°	59	31	26	26	26	69
90°	0	7	18	17	17	4
95°	26	31	32	32	32	30
105°	109	111	112	113	113	115
115°	203	206	206	205	203	201
125°	296	300	299	298	297	264
135°	383	388	390	389	387	296
145°	465	468	471	472	470	290
155°	531	533	534	537	536	244
165°	578	578	578	581	579	163
175°	602	600	599	602	600	57
180°	602	602	602	602	602	



TEST NUMBER: P331745-940

CATALOG NUMBER: SA2XXRDIP-C1005D530U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0
2.5°	1515.6	1514.3	1513.1	1511.9	1510.6	1508.7	1506.0	1503.4	1500.7	1498.1	1500.5
5°	1510.0	1508.5	1507.0	1505.5	1504.0	1501.3	1497.3	1493.3	1489.4	1485.5	1488.2
7.5°	1494.5	1492.6	1490.8	1488.8	1486.9	1483.7	1479.1	1474.4	1469.9	1465.3	1466.1
10°	1481.4	1479.3	1477.1	1475.0	1472.8	1468.7	1462.7	1456.6	1450.5	1444.5	1443.6
12.5°	1465.0	1462.3	1459.7	1457.1	1454.6	1449.3	1441.5	1433.8	1426.0	1418.3	1416.6
15°	1436.3	1432.9	1429.6	1426.2	1422.9	1416.0	1405.8	1395.4	1385.1	1374.8	1369.0
17.5°	1401.0	1395.9	1390.8	1385.7	1380.6	1371.5	1358.2	1345.0	1331.7	1318.5	1311.6
20°	1374.8	1368.7	1362.6	1356.6	1350.5	1339.9	1324.6	1309.5	1294.3	1279.1	1271.5
22.5°	1346.3	1339.5	1332.8	1326.0	1319.1	1307.2	1290.0	1272.9	1255.8	1238.7	1228.9
25°	1303.7	1294.0	1284.2	1274.5	1264.8	1250.0	1229.9	1209.9	1189.8	1169.7	1157.4
27.5°	1252.3	1241.8	1231.2	1220.7	1210.1	1193.5	1170.9	1148.3	1125.7	1103.1	1088.6
30°	1216.3	1204.7	1193.2	1181.6	1170.1	1152.2	1127.8	1103.6	1079.3	1055.0	1039.5
32.5°	1181.2	1167.8	1154.3	1140.9	1127.3	1108.2	1083.4	1058.6	1033.8	1009.1	991.4
35°	1123.3	1107.9	1092.3	1076.8	1061.4	1040.3	1013.5	986.9	960.1	933.4	914.3
37.5°	1065.4	1048.4	1031.4	1014.3	997.4	974.6	946.1	917.7	889.1	860.7	839.6
40°	1024.9	1006.7	988.5	970.3	952.1	928.2	898.8	869.3	839.8	810.4	788.8
42.5°	983.4	964.2	945.0	925.8	906.6	881.8	851.4	820.9	790.5	760.1	737.8
45°	918.4	898.0	877.6	857.3	837.0	810.8	778.9	747.1	715.2	683.3	661.7
47.5°	854.9	833.4	811.8	790.2	768.7	741.5	708.6	675.6	642.7	609.8	588.4
50°	809.0	787.5	765.9	744.3	722.7	695.3	661.9	628.5	595.0	561.7	540.7
52.5°	764.2	741.6	719.2	696.6	674.0	646.5	613.8	581.1	548.4	515.8	495.5
55°	698.3	674.7	650.9	627.2	603.6	575.3	542.5	509.7	477.0	444.2	425.9
57.5°	630.8	606.5	582.2	557.9	533.6	505.7	474.2	442.6	411.2	379.6	362.9
60°	584.9	560.6	536.3	512.0	487.7	459.9	428.6	397.3	366.0	334.8	319.3
62.5°	540.1	515.8	491.5	467.2	442.9	415.8	386.0	356.1	326.4	296.6	281.8
65°	471.4	446.8	422.3	397.7	373.1	347.1	319.8	292.5	265.1	237.8	227.5
67.5°	405.3	380.9	356.5	332.1	307.6	283.1	258.6	234.0	209.4	184.8	180.0
70°	359.4	335.7	312.0	288.4	264.7	242.4	221.4	200.5	179.5	158.5	155.5
72.5°	315.7	292.9	270.3	247.5	224.8	205.0	188.2	171.4	154.5	137.8	135.2
75°	251.5	230.2	208.9	187.7	166.4	150.6	140.3	130.0	119.7	109.3	107.2
77.5°	188.3	169.7	151.1	132.4	113.7	101.9	96.9	91.9	86.9	82.0	80.8
80°	148.9	133.5	118.0	102.5	87.0	77.8	74.7	71.7	68.7	65.6	64.4
82.5°	112.9	100.8	88.7	76.6	64.6	57.4	55.4	53.3	51.3	49.2	48.5
85°	58.8	52.3	46.0	39.6	33.3	29.6	28.7	27.8	26.8	25.9	25.9
87.5°	17.6	16.0	14.3	12.6	10.9	10.3	10.8	11.3	11.8	12.3	12.0
90°	0.5	1.9	3.2	4.5	6.0	7.8	10.3	12.8	15.3	17.8	17.6
92.5°	9.1	10.1	11.1	12.0	13.0	13.8	14.4	15.0	15.6	16.1	16.2
95°	26.5	27.6	28.7	29.9	30.9	31.7	31.8	32.1	32.3	32.5	32.5
97.5°	48.3	49.3	50.3	51.3	52.3	53.0	53.4	53.9	54.3	54.8	54.8
100°	64.6	65.5	66.3	67.3	68.2	68.8	69.2	69.5	69.8	70.2	70.2
102.5°	81.7	82.4	83.1	83.8	84.5	85.2	85.6	86.0	86.4	86.9	86.9
105°	109.3	109.7	110.0	110.3	110.7	110.9	111.2	111.4	111.6	111.9	112.1
107.5°	137.2	137.7	138.2	138.7	139.2	139.5	139.5	139.5	139.5	139.5	139.6
110°	155.1	155.8	156.4	157.1	157.8	158.1	158.1	158.1	158.1	158.1	158.1



TEST NUMBER: P331745-940

CATALOG NUMBER: SA2XXRDIP-C1005D530U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	174.6	175.3	175.9	176.6	177.4	177.6	177.5	177.5	177.4	177.3	177.0
115°	203.4	204.1	204.7	205.5	206.1	206.3	206.1	205.9	205.6	205.5	205.4
117.5°	232.1	233.0	233.9	234.8	235.7	235.9	235.2	234.5	233.9	233.3	233.0
120°	251.2	252.1	253.0	253.9	254.9	254.9	253.9	253.0	252.1	251.2	251.2
122.5°	268.7	269.7	270.9	272.0	273.0	273.2	272.6	272.0	271.3	270.7	270.5
125°	296.0	296.9	298.0	299.0	300.0	300.3	300.0	299.7	299.3	299.0	298.6
127.5°	322.4	323.8	325.0	326.4	327.6	328.1	327.7	327.3	326.9	326.5	326.0
130°	339.2	340.6	342.1	343.6	345.0	345.6	345.4	345.2	345.0	344.7	344.6
132.5°	357.8	359.1	360.3	361.5	362.7	363.3	363.4	363.4	363.5	363.5	363.0
135°	382.9	384.1	385.4	386.6	387.9	388.6	388.8	389.1	389.3	389.5	389.4
137.5°	409.2	410.3	411.3	412.3	413.3	413.9	414.3	414.6	414.8	415.1	415.0
140°	425.1	426.1	427.1	428.1	429.2	430.0	430.5	431.1	431.7	432.2	432.2
142.5°	441.4	442.4	443.4	444.4	445.4	446.1	446.6	446.9	447.3	447.6	447.7
145°	464.8	465.6	466.4	467.2	468.0	468.7	469.3	470.0	470.7	471.4	471.4
147.5°	485.6	486.5	487.5	488.5	489.4	490.1	490.5	491.0	491.4	492.0	492.1
150°	499.9	500.5	501.2	501.9	502.6	503.1	503.5	504.0	504.4	505.0	505.2
152.5°	512.5	513.2	513.8	514.5	515.1	515.8	516.3	516.8	517.4	518.0	518.4
155°	531.4	531.7	532.1	532.4	532.7	533.1	533.4	533.8	534.0	534.4	535.0
157.5°	547.5	547.8	548.0	548.2	548.5	548.7	548.8	549.1	549.3	549.5	550.3
160°	557.3	557.5	557.8	557.9	558.2	558.4	558.5	558.6	558.7	558.8	559.5
162.5°	566.2	566.3	566.3	566.4	566.4	566.5	566.6	566.8	566.9	566.9	567.8
165°	578.2	578.0	577.9	577.8	577.7	577.7	577.7	577.7	577.7	577.7	578.5
167.5°	588.1	587.8	587.5	587.1	586.7	586.6	586.6	586.6	586.5	586.5	587.3
170°	593.4	593.1	592.7	592.4	592.1	591.8	591.7	591.6	591.5	591.4	592.2
172.5°	597.1	596.7	596.4	596.0	595.8	595.5	595.4	595.3	595.1	595.0	595.8
175°	601.5	601.2	600.8	600.6	600.2	599.9	599.7	599.5	599.2	599.0	599.8
177.5°	603.4	603.1	602.8	602.5	602.3	602.1	601.9	601.7	601.5	601.4	601.9
180°	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5



TEST NUMBER: P331745-940

CATALOG NUMBER: SA2XXRDIP-C1005D530U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0	1510.0
2.5°	1502.9	1505.3	1507.8	1508.7	1508.2	1507.8	1507.3	1506.8
5°	1490.9	1493.7	1496.4	1497.3	1496.4	1495.5	1494.6	1493.7
7.5°	1466.8	1467.6	1468.4	1468.0	1466.4	1464.8	1463.3	1461.7
10°	1442.6	1441.7	1440.8	1439.5	1437.6	1435.8	1434.0	1432.2
12.5°	1415.0	1413.3	1411.7	1409.3	1406.3	1403.3	1400.3	1397.2
15°	1363.2	1357.5	1351.7	1347.3	1344.3	1341.2	1338.2	1335.2
17.5°	1304.8	1297.9	1291.0	1285.0	1279.8	1274.5	1269.3	1264.1
20°	1263.9	1256.3	1248.8	1241.6	1234.9	1228.2	1221.6	1214.9
22.5°	1219.1	1209.3	1199.5	1192.1	1187.2	1182.2	1177.2	1172.2
25°	1144.9	1132.5	1120.0	1111.5	1106.9	1102.3	1097.8	1093.2
27.5°	1074.1	1059.5	1045.0	1034.1	1026.9	1019.7	1012.4	1005.2
30°	1024.0	1008.5	993.0	981.2	973.0	964.8	956.6	948.4
32.5°	973.7	956.1	938.3	925.7	918.0	910.3	902.5	894.8
35°	895.1	876.0	856.8	843.9	837.2	830.5	823.9	817.3
37.5°	818.5	797.5	776.3	762.0	754.4	746.7	739.0	731.4
40°	767.2	745.6	724.2	709.4	701.5	693.6	685.7	677.8
42.5°	715.5	693.2	670.9	655.9	648.3	640.6	633.0	625.4
45°	640.2	618.6	597.0	582.6	575.3	568.0	560.7	553.5
47.5°	566.9	545.5	524.0	510.0	503.4	496.8	490.1	483.5
50°	519.8	498.8	477.9	464.1	457.8	451.4	445.1	438.6
52.5°	475.3	455.0	434.9	421.8	415.9	410.0	404.1	398.2
55°	407.7	389.5	371.2	359.3	353.5	347.7	342.0	336.2
57.5°	346.3	329.5	312.8	302.0	297.2	292.3	287.5	282.6
60°	303.8	288.4	272.9	262.7	257.8	253.0	248.1	243.3
62.5°	267.1	252.3	237.6	228.6	225.8	222.8	219.9	217.0
65°	217.1	206.8	196.4	190.8	189.9	189.0	188.2	187.3
67.5°	175.3	170.6	165.8	162.9	162.0	161.0	160.1	159.1
70°	152.5	149.5	146.4	144.3	143.0	141.8	140.6	139.4
72.5°	132.7	130.1	127.5	125.9	125.2	124.5	123.7	123.0
75°	105.0	103.0	100.9	99.6	99.3	99.0	98.7	98.4
77.5°	79.5	78.4	77.1	76.2	75.8	75.3	74.8	74.4
80°	63.1	62.0	60.7	60.1	60.1	60.1	60.1	60.1
82.5°	47.7	47.0	46.3	45.9	45.9	45.9	45.9	45.9
85°	25.9	25.9	25.9	25.9	25.9	25.9	25.9	25.9
87.5°	11.8	11.4	11.1	11.1	11.1	11.1	11.1	11.1
90°	17.4	17.1	16.9	16.9	16.9	17.0	17.2	17.3
92.5°	16.2	16.3	16.3	16.4	16.4	16.4	16.5	16.5
95°	32.5	32.5	32.5	32.5	32.2	32.0	31.7	31.6
97.5°	54.8	54.8	54.8	54.7	54.7	54.7	54.7	54.6
100°	70.2	70.2	70.2	70.1	70.0	69.9	69.8	69.6
102.5°	87.0	87.1	87.2	87.2	87.1	86.9	86.9	86.8
105°	112.4	112.5	112.8	112.9	112.9	112.9	112.9	112.9
107.5°	139.6	139.7	139.8	139.6	139.0	138.6	138.0	137.5
110°	158.1	158.1	158.1	158.0	157.7	157.3	156.9	156.6





TEST NUMBER: P331745-940

CATALOG NUMBER: SA2XXRDIP-C1005D530U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	176.7	176.5	176.2	175.9	175.7	175.4	175.1	175.0
115°	205.2	205.1	205.0	204.7	204.4	204.1	203.8	203.4
117.5°	232.7	232.5	232.2	231.9	231.6	231.2	230.9	230.5
120°	251.2	251.2	251.2	251.0	250.7	250.4	250.0	249.7
122.5°	270.2	269.9	269.7	269.4	269.1	268.9	268.7	268.4
125°	298.3	298.0	297.7	297.4	297.3	297.2	297.0	296.9
127.5°	325.7	325.2	324.9	324.4	324.0	323.7	323.3	323.0
130°	344.3	344.1	343.8	343.5	343.0	342.6	342.1	341.7
132.5°	362.5	361.9	361.5	361.1	360.7	360.3	360.0	359.6
135°	389.3	389.1	389.1	388.8	388.5	388.2	387.8	387.4
137.5°	414.9	414.8	414.7	414.5	414.0	413.6	413.1	412.7
140°	432.2	432.2	432.2	432.0	431.5	431.1	430.6	430.2
142.5°	447.8	447.9	448.0	447.8	447.4	446.9	446.5	446.0
145°	471.6	471.7	471.8	471.6	471.2	470.7	470.3	469.8
147.5°	492.4	492.7	492.9	492.8	492.4	492.0	491.5	491.1
150°	505.6	506.0	506.3	506.3	506.0	505.6	505.2	505.0
152.5°	518.8	519.2	519.7	519.7	519.2	518.8	518.4	518.0
155°	535.6	536.1	536.7	536.8	536.5	536.1	535.7	535.5
157.5°	551.0	551.8	552.6	552.7	552.1	551.6	551.1	550.5
160°	560.2	560.9	561.5	561.7	561.2	560.8	560.3	559.8
162.5°	568.5	569.3	570.1	570.2	569.6	569.1	568.6	568.0
165°	579.3	580.1	580.8	580.9	580.3	579.8	579.3	578.6
167.5°	588.1	588.9	589.7	589.8	589.2	588.6	588.0	587.4
170°	593.0	593.8	594.5	594.6	593.9	593.3	592.5	591.9
172.5°	596.6	597.4	598.2	598.2	597.6	596.9	596.2	595.6
175°	600.6	601.4	602.2	602.3	601.5	600.8	600.2	599.5
177.5°	602.4	603.0	603.5	603.5	603.0	602.4	601.9	601.4
180°	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5

(END OF REPORT)