

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331712-940

Luminaire Tested: **SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331712-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-8,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 530 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4630.1 lumens
Efficiency: N/A
Efficacy: 94.9 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 48.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331712-940
CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

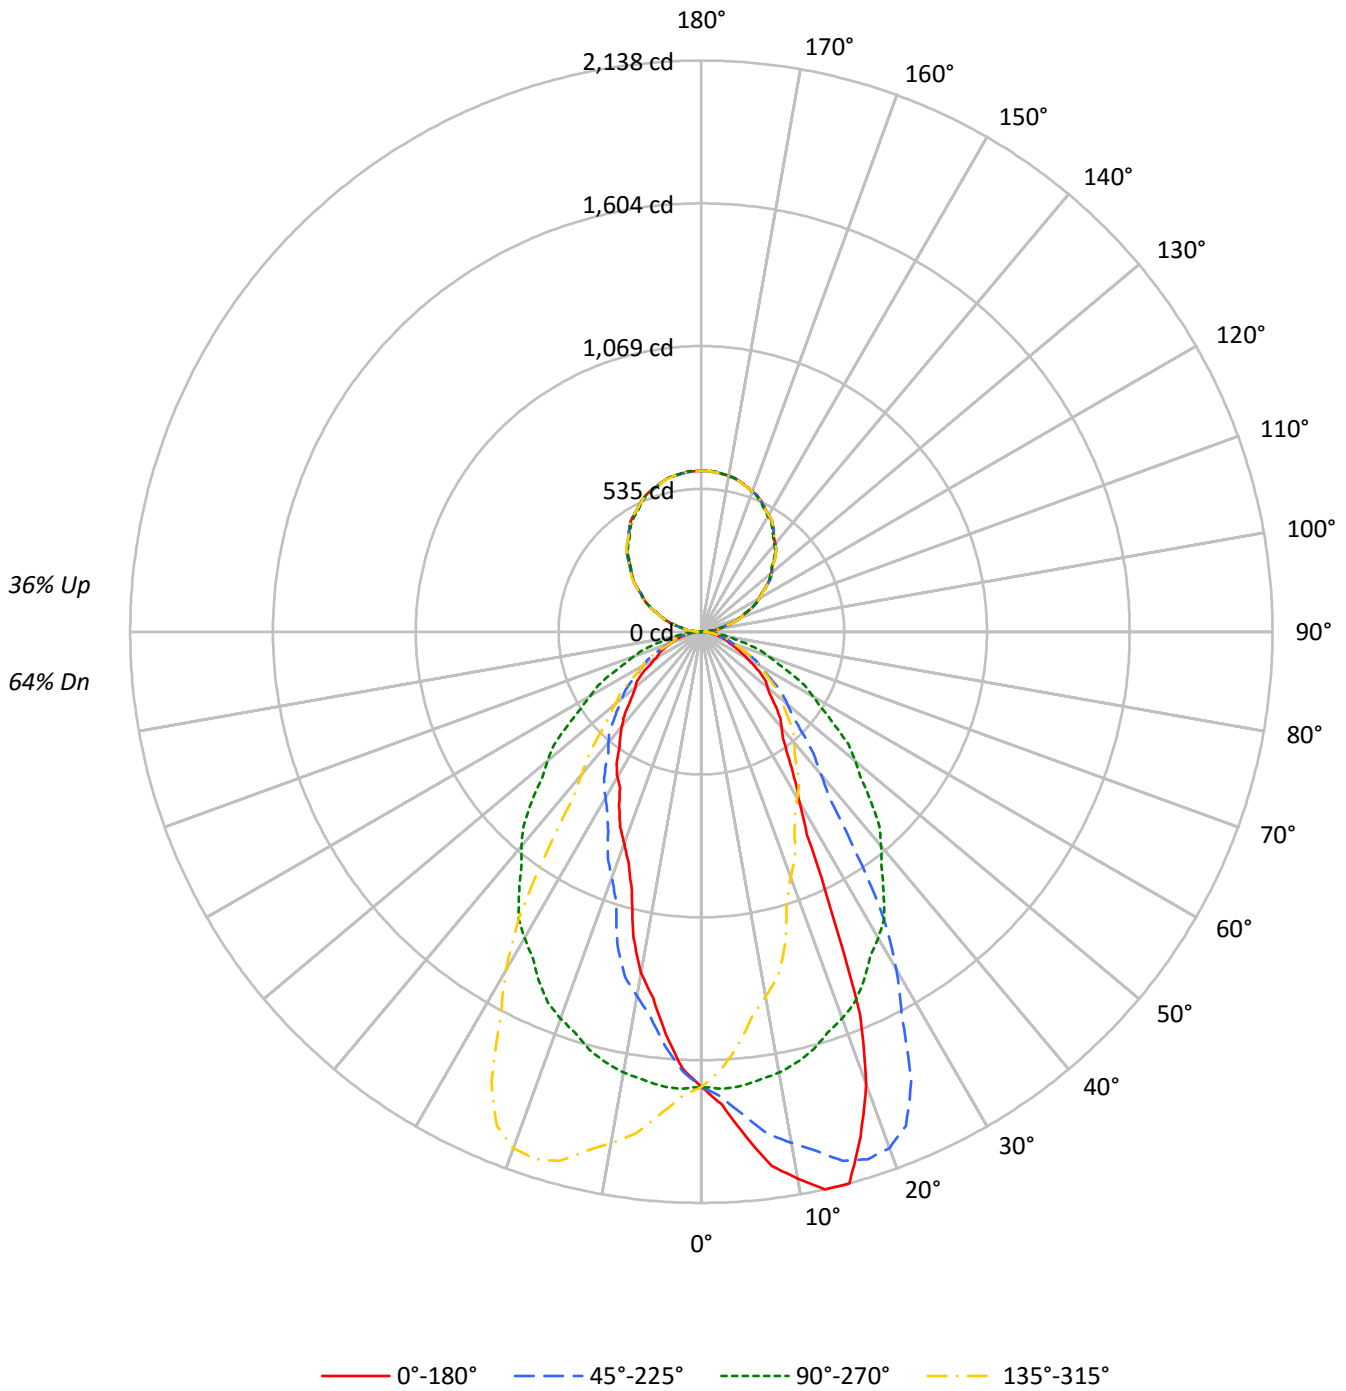



TEST NUMBER: P331712-940

CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	110	110	110	110	104	104	104	104	91	91	91	79	79	79	69	69	69	64				
1	102	98	94	91	95	92	89	86	81	79	77	71	70	68	62	61	60	56				
2	94	87	81	76	88	82	77	72	72	69	65	64	61	58	56	54	52	48				
3	86	77	70	65	81	73	67	62	65	60	56	57	54	51	51	48	46	42				
4	79	69	62	56	74	65	59	54	58	53	49	52	48	45	46	43	40	37				
5	73	62	55	49	69	59	52	47	53	47	43	47	43	39	42	39	36	33				
6	68	56	49	43	64	54	47	42	48	43	38	43	39	35	39	35	32	30				
7	63	52	44	38	60	49	42	37	44	39	34	40	35	32	36	32	29	27				
8	59	47	40	35	56	45	38	33	41	35	31	37	32	29	33	29	27	24				
9	55	43	36	31	52	42	35	30	38	32	28	34	30	26	31	27	24	22				
10	52	40	33	29	49	38	32	28	35	30	26	32	27	24	29	25	22	21				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	27493	27493	27493	27493
5°	30705	27665	24530	27665
10°	34067	27471	21263	27471
15°	35741	27067	16754	27067
20°	30986	26472	14496	26472
25°	20322	25655	12944	25655
30°	13679	24664	11714	24664
35°	11077	23416	10565	23416
40°	9851	22059	9778	22059
45°	8917	20466	8727	20466
50°	8116	18889	8083	18889
55°	7628	17140	7527	17140
60°	6381	15532	6307	15532
65°	5379	14105	6101	14105
70°	4971	12595	5755	12595
75°	4648	10967	5315	10967
80°	4296	9019	4733	9019
85°	3946	7114	4168	7114



TEST NUMBER: P331712-940

CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	161.4	3.5
10°-20°	449.8	9.7
20°-30°	579.6	12.5
30°-40°	550.8	11.9
40°-50°	471.8	10.2
50°-60°	359.3	7.8
60°-70°	227.1	4.9
70°-80°	113.4	2.4
80°-90°	31.9	0.7
90°-100°	38.2	0.8
100°-110°	118.6	2.6
110°-120°	202.7	4.4
120°-130°	266.6	5.8
130°-140°	299.2	6.5
140°-150°	293.4	6.3
150°-160°	246.1	5.3
160°-170°	163.2	3.5
170°-180°	57.0	1.2
0°-30°	1190.8	25.7
0°-40°	1741.6	37.6
0°-60°	2572.7	55.6
0°-90°	2945.2	63.6
90°-120°	359.5	7.8
90°-150°	1218.6	26.3
90°-180°	1685.0	36.4
0°-180°	4630.1	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1703	1703	1703	1703	1703	
5°	1894	1707	1514	1707	1894	187
15°	2138	1619	1002	1619	2138	577
25°	1141	1440	727	1440	1141	541
35°	562	1188	536	1188	562	360
45°	390	896	382	896	390	302
55°	271	609	267	609	271	238
65°	141	369	160	369	141	143
75°	74	176	85	176	74	79
85°	21	38	22	38	21	23
90°	17	0	17	0	17	9
95°	32	26	32	26	32	35
105°	113	109	113	109	113	119
115°	203	203	203	203	203	201
125°	297	296	297	296	297	265
135°	387	383	387	383	387	298
145°	470	465	470	465	470	293
155°	536	531	536	531	536	246
165°	579	578	579	578	579	163
175°	600	602	600	602	600	57
180°	602	602	602	602	602	



TEST NUMBER: P331712-940
 CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8
2.5°	1771.9	1773.3	1774.8	1771.4	1771.4	1768.6	1762.5	1757.7	1744.5	1742.6	1742.6
5°	1894.5	1893.3	1895.7	1888.0	1877.3	1875.0	1863.8	1849.0	1833.5	1816.4	1812.8
7.5°	2016.3	2014.6	2009.8	2008.6	2000.4	1982.5	1964.4	1945.2	1919.6	1894.6	1882.0
10°	2077.9	2097.4	2085.6	2064.8	2069.0	2041.2	2026.4	2001.0	1979.7	1942.4	1934.1
12.5°	2138.5	2146.2	2142.4	2130.7	2125.4	2106.0	2086.1	2064.0	2024.6	1991.2	1962.0
15°	2138.2	2149.5	2152.4	2148.9	2151.9	2150.7	2140.0	2121.6	2087.4	2050.7	2018.7
17.5°	1980.4	1988.2	2007.6	2020.7	2037.3	2072.3	2089.6	2096.3	2091.2	2070.3	2047.8
20°	1803.4	1790.4	1844.8	1872.6	1896.2	1955.4	2006.3	2025.9	2057.2	2056.6	2050.7
22.5°	1552.5	1555.6	1607.2	1640.2	1709.3	1768.4	1826.5	1900.0	1960.6	2000.7	2024.2
25°	1140.7	1163.2	1214.7	1259.6	1336.6	1446.6	1546.6	1662.6	1772.0	1858.4	1940.6
27.5°	856.8	858.4	899.2	940.8	986.4	1076.6	1202.5	1341.0	1497.0	1625.8	1773.9
30°	733.7	730.1	747.3	772.7	811.7	881.5	976.2	1112.3	1267.9	1462.0	1634.8
32.5°	646.6	646.8	659.7	678.5	711.0	758.0	822.9	933.4	1080.5	1271.2	1473.8
35°	562.0	561.5	571.0	584.5	598.2	628.3	672.7	730.7	831.9	1010.0	1217.0
37.5°	501.5	504.1	508.7	517.2	532.3	549.0	575.7	614.7	686.7	792.0	966.1
40°	467.4	468.6	475.1	482.2	491.1	504.1	526.0	557.3	610.0	694.0	821.2
42.5°	436.1	437.4	441.9	448.6	455.6	468.6	486.7	513.8	556.5	622.1	727.0
45°	390.5	390.5	394.7	397.6	405.3	417.1	431.9	454.4	483.9	532.5	602.4
47.5°	347.7	347.8	350.5	355.6	360.4	369.7	384.2	402.6	424.1	461.6	521.3
50°	323.1	323.6	325.4	329.6	332.5	340.8	352.0	368.0	390.5	419.5	469.2
52.5°	303.2	302.8	305.1	306.8	308.9	314.8	323.2	337.2	357.4	382.5	423.7
55°	271.0	268.6	272.2	275.1	276.9	279.3	284.0	292.8	310.0	331.4	362.1
57.5°	230.8	229.8	232.3	235.0	240.6	246.9	251.0	256.6	265.6	280.8	311.3
60°	197.6	197.6	203.0	204.7	211.2	219.5	227.8	232.6	241.4	251.5	273.9
62.5°	168.3	168.7	171.2	173.0	176.6	186.8	198.4	208.8	217.2	226.9	241.7
65°	140.8	142.0	142.0	143.2	145.5	147.9	152.7	161.0	175.8	189.3	200.5
67.5°	119.5	119.8	120.2	121.5	122.0	124.6	126.5	130.2	133.6	146.5	160.4
70°	105.3	107.1	106.5	107.7	108.3	109.4	111.8	113.6	119.0	121.9	130.2
72.5°	92.0	93.4	93.3	94.0	95.5	95.8	97.6	99.4	102.8	105.3	109.8
75°	74.5	73.9	74.5	75.7	76.3	77.0	77.0	79.3	81.1	83.5	86.4
77.5°	57.5	58.1	58.0	58.1	58.2	59.3	59.2	60.2	62.0	63.2	64.6
80°	46.2	46.7	46.2	46.7	47.3	47.9	47.3	47.9	49.7	50.9	50.9
82.5°	35.8	35.8	36.2	36.3	36.5	36.6	37.4	37.5	38.8	38.6	39.1
85°	21.3	20.7	20.7	20.7	21.3	21.8	21.3	21.3	21.8	21.8	21.8
87.5°	11.1	11.5	11.5	11.4	11.4	11.4	11.5	11.9	11.6	12.0	11.1
90°	17.3	17.2	17.0	16.9	16.9	16.9	17.1	17.4	17.6	17.8	15.3
92.5°	16.5	16.5	16.4	16.4	16.4	16.3	16.3	16.2	16.2	16.1	15.6
95°	31.6	31.7	32.0	32.2	32.5	32.5	32.5	32.5	32.5	32.5	32.3
97.5°	54.6	54.7	54.7	54.7	54.7	54.8	54.8	54.8	54.8	54.8	54.3
100°	69.6	69.8	69.9	70.0	70.1	70.2	70.2	70.2	70.2	70.2	69.8
102.5°	86.8	86.9	86.9	87.1	87.2	87.2	87.1	87.0	86.9	86.9	86.4
105°	112.9	112.9	112.9	112.9	112.9	112.8	112.5	112.4	112.1	111.9	111.6
107.5°	137.5	138.0	138.6	139.0	139.6	139.8	139.7	139.6	139.6	139.5	139.5
110°	156.6	156.9	157.3	157.7	158.0	158.1	158.1	158.1	158.1	158.1	158.1



TEST NUMBER: P331712-940

CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	175.0	175.1	175.4	175.7	175.9	176.2	176.5	176.7	177.0	177.3	177.4
115°	203.4	203.8	204.1	204.4	204.7	205.0	205.1	205.2	205.4	205.5	205.6
117.5°	230.5	230.9	231.2	231.6	231.9	232.2	232.5	232.7	233.0	233.3	233.9
120°	249.7	250.0	250.4	250.7	251.0	251.2	251.2	251.2	251.2	251.2	252.1
122.5°	268.4	268.7	268.9	269.1	269.4	269.7	269.9	270.2	270.5	270.7	271.3
125°	296.9	297.0	297.2	297.3	297.4	297.7	298.0	298.3	298.6	299.0	299.3
127.5°	323.0	323.3	323.7	324.0	324.4	324.9	325.2	325.7	326.0	326.5	326.9
130°	341.7	342.1	342.6	343.0	343.5	343.8	344.1	344.3	344.6	344.7	345.0
132.5°	359.6	360.0	360.3	360.7	361.1	361.5	361.9	362.5	363.0	363.5	363.5
135°	387.4	387.8	388.2	388.5	388.8	389.1	389.1	389.3	389.4	389.5	389.3
137.5°	412.7	413.1	413.6	414.0	414.5	414.7	414.8	414.9	415.0	415.1	414.8
140°	430.2	430.6	431.1	431.5	432.0	432.2	432.2	432.2	432.2	432.2	431.7
142.5°	446.0	446.5	446.9	447.4	447.8	448.0	447.9	447.8	447.7	447.6	447.3
145°	469.8	470.3	470.7	471.2	471.6	471.8	471.7	471.6	471.4	471.4	470.7
147.5°	491.1	491.5	492.0	492.4	492.8	492.9	492.7	492.4	492.1	492.0	491.4
150°	505.0	505.2	505.6	506.0	506.3	506.3	506.0	505.6	505.2	505.0	504.4
152.5°	518.0	518.4	518.8	519.2	519.7	519.7	519.2	518.8	518.4	518.0	517.4
155°	535.5	535.7	536.1	536.5	536.8	536.7	536.1	535.6	535.0	534.4	534.0
157.5°	550.5	551.1	551.6	552.1	552.7	552.6	551.8	551.0	550.3	549.5	549.3
160°	559.8	560.3	560.8	561.2	561.7	561.5	560.9	560.2	559.5	558.8	558.7
162.5°	568.0	568.6	569.1	569.6	570.2	570.1	569.3	568.5	567.8	566.9	566.9
165°	578.6	579.3	579.8	580.3	580.9	580.8	580.1	579.3	578.5	577.7	577.7
167.5°	587.4	588.0	588.6	589.2	589.8	589.7	588.9	588.1	587.3	586.5	586.5
170°	591.9	592.5	593.3	593.9	594.6	594.5	593.8	593.0	592.2	591.4	591.5
172.5°	595.6	596.2	596.9	597.6	598.2	598.2	597.4	596.6	595.8	595.0	595.1
175°	599.5	600.2	600.8	601.5	602.3	602.2	601.4	600.6	599.8	599.0	599.2
177.5°	601.4	601.9	602.4	603.0	603.5	603.5	603.0	602.4	601.9	601.4	601.5
180°	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5



TEST NUMBER: P331712-940

CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8
2.5°	1743.5	1739.7	1736.4	1727.9	1723.6	1714.1	1712.7	1712.3	1700.0	1688.1	1684.8
5°	1803.4	1793.9	1779.7	1763.2	1746.0	1728.2	1716.4	1706.9	1683.3	1660.8	1647.8
7.5°	1863.8	1843.3	1818.9	1787.5	1761.4	1732.1	1710.2	1690.7	1657.2	1625.0	1603.3
10°	1908.7	1875.5	1843.0	1799.8	1766.1	1733.0	1702.2	1675.6	1637.7	1595.1	1565.0
12.5°	1936.6	1900.1	1855.3	1813.1	1769.4	1727.2	1686.1	1651.9	1607.4	1563.4	1527.5
15°	1974.3	1935.3	1880.9	1820.5	1764.3	1709.3	1662.0	1619.3	1561.4	1508.7	1464.9
17.5°	2005.3	1951.5	1893.1	1823.3	1758.2	1688.3	1627.3	1572.9	1508.3	1444.8	1393.2
20°	2015.2	1961.9	1894.5	1824.7	1747.8	1665.5	1599.8	1540.7	1471.4	1402.2	1343.1
22.5°	2009.0	1967.6	1892.6	1809.0	1730.3	1644.2	1570.0	1501.4	1424.6	1354.0	1285.3
25°	1967.3	1953.0	1882.0	1790.9	1701.0	1601.1	1515.2	1440.1	1352.5	1276.8	1202.2
27.5°	1869.9	1900.5	1856.5	1759.4	1659.5	1552.3	1455.8	1370.3	1279.4	1194.2	1119.9
30°	1776.2	1846.6	1827.7	1737.7	1625.9	1520.5	1412.3	1322.9	1225.9	1138.4	1065.0
32.5°	1647.9	1764.2	1782.7	1707.4	1591.8	1476.0	1362.6	1273.7	1172.4	1080.1	1008.6
35°	1443.7	1617.6	1697.5	1649.6	1533.6	1408.7	1291.6	1188.0	1086.3	995.1	924.2
37.5°	1200.0	1436.9	1570.0	1573.4	1467.0	1337.1	1209.6	1106.8	1002.6	913.2	836.3
40°	1041.9	1298.7	1472.0	1510.5	1420.6	1280.3	1151.4	1046.6	944.9	857.3	769.2
42.5°	899.9	1155.7	1368.9	1435.7	1364.2	1224.9	1095.6	986.1	887.2	804.3	714.3
45°	727.7	951.4	1186.2	1305.8	1266.1	1137.2	1000.5	896.3	803.4	731.9	645.5
47.5°	613.9	771.5	998.8	1160.5	1159.8	1042.1	907.6	807.9	721.7	654.6	584.7
50°	549.0	686.3	878.6	1062.0	1077.4	978.6	850.8	752.0	671.5	601.1	544.9
52.5°	490.8	604.0	776.9	952.7	996.5	910.9	786.9	695.7	617.6	552.9	504.7
55°	414.7	502.3	633.6	798.2	864.4	804.1	694.0	608.9	545.5	491.1	449.7
57.5°	350.9	416.5	521.9	654.3	731.6	693.6	602.8	533.6	479.4	430.2	397.4
60°	310.6	364.4	453.8	564.5	649.6	623.0	545.5	481.0	434.9	392.3	361.5
62.5°	272.8	319.1	395.6	485.4	563.5	552.5	489.2	435.1	394.7	355.8	329.8
65°	219.5	253.2	313.0	383.4	446.1	451.5	405.9	369.2	333.1	302.4	279.3
67.5°	174.8	196.8	238.9	298.2	345.2	361.9	334.1	306.1	277.5	253.7	233.7
70°	147.3	165.1	195.8	243.8	287.0	304.7	288.7	266.8	242.0	222.5	205.3
72.5°	119.4	136.7	159.3	194.6	231.6	250.7	245.2	229.4	209.3	193.1	176.9
75°	90.0	95.2	110.7	134.3	163.3	179.9	184.0	175.8	159.7	147.3	137.9
77.5°	66.5	69.7	77.0	89.4	108.4	123.1	129.2	128.2	117.3	110.0	101.2
80°	53.2	55.0	58.6	63.9	78.1	92.9	97.0	97.0	89.3	86.4	77.5
82.5°	40.5	41.7	43.9	46.8	53.5	66.3	71.0	72.0	67.1	63.2	56.2
85°	23.1	22.5	23.6	25.4	26.7	30.1	37.3	38.4	37.3	32.5	30.8
87.5°	10.6	10.6	10.1	9.3	9.5	9.6	11.8	13.8	12.2	11.1	10.3
90°	12.8	10.3	7.8	6.0	4.5	3.2	1.9	0.5	1.9	3.2	4.5
92.5°	15.0	14.4	13.8	13.0	12.0	11.1	10.1	9.1	10.1	11.1	12.0
95°	32.1	31.8	31.7	30.9	29.9	28.7	27.6	26.5	27.6	28.7	29.9
97.5°	53.9	53.4	53.0	52.3	51.3	50.3	49.3	48.3	49.3	50.3	51.3
100°	69.5	69.2	68.8	68.2	67.3	66.3	65.5	64.6	65.5	66.3	67.3
102.5°	86.0	85.6	85.2	84.5	83.8	83.1	82.4	81.7	82.4	83.1	83.8
105°	111.4	111.2	110.9	110.7	110.3	110.0	109.7	109.3	109.7	110.0	110.3
107.5°	139.5	139.5	139.5	139.2	138.7	138.2	137.7	137.2	137.7	138.2	138.7
110°	158.1	158.1	158.1	157.8	157.1	156.4	155.8	155.1	155.8	156.4	157.1



TEST NUMBER: P331712-940

CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	177.5	177.5	177.6	177.4	176.6	175.9	175.3	174.6	175.3	175.9	176.6
115°	205.9	206.1	206.3	206.1	205.5	204.7	204.1	203.4	204.1	204.7	205.5
117.5°	234.5	235.2	235.9	235.7	234.8	233.9	233.0	232.1	233.0	233.9	234.8
120°	253.0	253.9	254.9	254.9	253.9	253.0	252.1	251.2	252.1	253.0	253.9
122.5°	272.0	272.6	273.2	273.0	272.0	270.9	269.7	268.7	269.7	270.9	272.0
125°	299.7	300.0	300.3	300.0	299.0	298.0	296.9	296.0	296.9	298.0	299.0
127.5°	327.3	327.7	328.1	327.6	326.4	325.0	323.8	322.4	323.8	325.0	326.4
130°	345.2	345.4	345.6	345.0	343.6	342.1	340.6	339.2	340.6	342.1	343.6
132.5°	363.4	363.4	363.3	362.7	361.5	360.3	359.1	357.8	359.1	360.3	361.5
135°	389.1	388.8	388.6	387.9	386.6	385.4	384.1	382.9	384.1	385.4	386.6
137.5°	414.6	414.3	413.9	413.3	412.3	411.3	410.3	409.2	410.3	411.3	412.3
140°	431.1	430.5	430.0	429.2	428.1	427.1	426.1	425.1	426.1	427.1	428.1
142.5°	446.9	446.6	446.1	445.4	444.4	443.4	442.4	441.4	442.4	443.4	444.4
145°	470.0	469.3	468.7	468.0	467.2	466.4	465.6	464.8	465.6	466.4	467.2
147.5°	491.0	490.5	490.1	489.4	488.5	487.5	486.5	485.6	486.5	487.5	488.5
150°	504.0	503.5	503.1	502.6	501.9	501.2	500.5	499.9	500.5	501.2	501.9
152.5°	516.8	516.3	515.8	515.1	514.5	513.8	513.2	512.5	513.2	513.8	514.5
155°	533.8	533.4	533.1	532.7	532.4	532.1	531.7	531.4	531.7	532.1	532.4
157.5°	549.1	548.8	548.7	548.5	548.2	548.0	547.8	547.5	547.8	548.0	548.2
160°	558.6	558.5	558.4	558.2	557.9	557.8	557.5	557.3	557.5	557.8	557.9
162.5°	566.8	566.6	566.5	566.4	566.4	566.3	566.3	566.2	566.3	566.3	566.4
165°	577.7	577.7	577.7	577.7	577.8	577.9	578.0	578.2	578.0	577.9	577.8
167.5°	586.6	586.6	586.6	586.7	587.1	587.5	587.8	588.1	587.8	587.5	587.1
170°	591.6	591.7	591.8	592.1	592.4	592.7	593.1	593.4	593.1	592.7	592.4
172.5°	595.3	595.4	595.5	595.8	596.0	596.4	596.7	597.1	596.7	596.4	596.0
175°	599.5	599.7	599.9	600.2	600.6	600.8	601.2	601.5	601.2	600.8	600.6
177.5°	601.7	601.9	602.1	602.3	602.5	602.8	603.1	603.4	603.1	602.8	602.5
180°	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5



TEST NUMBER: P331712-940

CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8
2.5°	1678.6	1675.3	1669.2	1659.7	1654.0	1644.1	1637.4	1641.3	1642.2	1641.3	1640.3
5°	1633.5	1621.1	1604.0	1587.4	1572.0	1555.5	1546.0	1541.9	1533.6	1528.8	1526.5
7.5°	1579.0	1557.6	1533.3	1504.5	1480.0	1454.3	1441.2	1434.7	1417.7	1408.5	1400.4
10°	1538.3	1504.6	1480.3	1442.4	1419.4	1385.6	1362.6	1363.2	1340.1	1327.0	1317.6
12.5°	1493.3	1456.3	1415.9	1381.9	1349.8	1322.7	1294.9	1283.6	1259.2	1246.6	1221.0
15°	1418.8	1375.6	1333.0	1286.8	1254.3	1212.3	1172.1	1122.9	1083.3	1049.0	1039.6
17.5°	1337.4	1283.9	1241.2	1187.0	1131.2	1060.6	1014.0	985.4	961.5	943.4	930.0
20°	1281.6	1227.1	1181.5	1099.9	1024.8	976.9	942.5	920.6	895.8	876.3	865.6
22.5°	1222.8	1166.0	1103.9	1012.8	954.2	915.8	885.2	860.1	843.2	828.0	818.2
25°	1139.5	1077.4	975.1	912.3	865.0	824.7	803.4	788.1	770.3	749.7	740.1
27.5°	1051.5	952.7	879.2	832.6	787.4	761.3	742.1	719.1	703.2	693.9	684.0
30°	985.7	886.9	829.5	778.6	746.6	717.6	695.2	682.2	666.8	650.9	644.4
32.5°	912.3	833.4	778.4	736.0	703.6	678.9	661.1	640.1	628.9	619.1	605.5
35°	821.2	761.4	711.1	676.9	646.1	626.0	605.3	592.8	572.7	564.5	559.1
37.5°	744.0	692.2	654.7	618.5	594.1	571.9	559.2	539.5	530.7	519.2	508.0
40°	700.5	649.6	613.6	584.0	556.8	540.2	524.2	508.3	495.3	489.9	476.3
42.5°	656.0	614.7	578.5	546.1	527.9	510.3	490.2	478.4	464.9	456.3	447.9
45°	594.6	557.9	527.2	500.5	480.5	462.1	449.1	429.5	421.9	404.7	397.6
47.5°	540.6	506.6	477.2	451.9	432.3	420.4	401.3	386.0	373.7	363.2	354.0
50°	502.3	473.9	445.5	423.0	405.3	388.2	368.6	360.9	342.0	336.6	331.4
52.5°	467.3	440.3	414.3	392.3	374.5	357.8	340.6	330.6	317.8	312.5	308.6
55°	418.3	392.3	367.4	347.9	330.1	313.0	302.4	289.9	284.0	279.8	275.1
57.5°	369.1	345.6	326.6	306.8	289.0	275.4	263.1	255.6	249.4	244.0	238.4
60°	337.9	315.3	298.2	279.8	261.5	250.3	240.8	231.9	224.8	216.5	214.2
62.5°	304.7	285.1	269.3	251.5	235.5	225.2	216.2	207.8	199.3	187.2	183.9
65°	259.1	243.8	227.2	212.4	198.2	188.2	175.1	165.7	162.1	161.0	160.3
67.5°	217.9	203.4	189.2	174.1	161.1	151.9	145.2	143.7	141.2	140.5	138.9
70°	190.5	176.9	162.7	148.5	136.1	134.3	132.0	129.6	126.6	125.5	124.2
72.5°	165.9	151.9	137.6	126.3	120.9	118.7	116.3	114.0	111.9	110.8	110.0
75°	127.2	114.2	104.7	100.6	97.6	95.9	92.3	90.5	89.3	87.6	86.9
77.5°	91.6	84.3	79.9	77.3	74.2	72.3	70.3	68.5	67.2	66.9	65.9
80°	69.8	66.3	63.3	59.7	58.6	56.2	55.6	53.9	54.4	52.7	52.7
82.5°	54.2	49.7	47.2	45.6	44.4	42.4	41.9	41.0	41.2	39.9	39.9
85°	27.8	26.7	25.4	24.3	24.3	22.5	23.1	22.5	22.5	21.3	20.7
87.5°	10.2	10.1	9.6	10.2	10.6	10.7	10.6	10.1	10.1	10.0	9.5
90°	6.0	7.8	10.3	12.8	15.3	17.8	17.6	17.4	17.1	16.9	16.9
92.5°	13.0	13.8	14.4	15.0	15.6	16.1	16.2	16.2	16.3	16.3	16.4
95°	30.9	31.7	31.8	32.1	32.3	32.5	32.5	32.5	32.5	32.5	32.5
97.5°	52.3	53.0	53.4	53.9	54.3	54.8	54.8	54.8	54.8	54.8	54.7
100°	68.2	68.8	69.2	69.5	69.8	70.2	70.2	70.2	70.2	70.2	70.1
102.5°	84.5	85.2	85.6	86.0	86.4	86.9	86.9	87.0	87.1	87.2	87.2
105°	110.7	110.9	111.2	111.4	111.6	111.9	112.1	112.4	112.5	112.8	112.9
107.5°	139.2	139.5	139.5	139.5	139.5	139.5	139.6	139.6	139.7	139.8	139.6
110°	157.8	158.1	158.1	158.1	158.1	158.1	158.1	158.1	158.1	158.1	158.0



TEST NUMBER: P331712-940

CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	177.4	177.6	177.5	177.5	177.4	177.3	177.0	176.7	176.5	176.2	175.9
115°	206.1	206.3	206.1	205.9	205.6	205.5	205.4	205.2	205.1	205.0	204.7
117.5°	235.7	235.9	235.2	234.5	233.9	233.3	233.0	232.7	232.5	232.2	231.9
120°	254.9	254.9	253.9	253.0	252.1	251.2	251.2	251.2	251.2	251.2	251.0
122.5°	273.0	273.2	272.6	272.0	271.3	270.7	270.5	270.2	269.9	269.7	269.4
125°	300.0	300.3	300.0	299.7	299.3	299.0	298.6	298.3	298.0	297.7	297.4
127.5°	327.6	328.1	327.7	327.3	326.9	326.5	326.0	325.7	325.2	324.9	324.4
130°	345.0	345.6	345.4	345.2	345.0	344.7	344.6	344.3	344.1	343.8	343.5
132.5°	362.7	363.3	363.4	363.4	363.5	363.5	363.0	362.5	361.9	361.5	361.1
135°	387.9	388.6	388.8	389.1	389.3	389.5	389.4	389.3	389.1	389.1	388.8
137.5°	413.3	413.9	414.3	414.6	414.8	415.1	415.0	414.9	414.8	414.7	414.5
140°	429.2	430.0	430.5	431.1	431.7	432.2	432.2	432.2	432.2	432.2	432.0
142.5°	445.4	446.1	446.6	446.9	447.3	447.6	447.7	447.8	447.9	448.0	447.8
145°	468.0	468.7	469.3	470.0	470.7	471.4	471.4	471.6	471.7	471.8	471.6
147.5°	489.4	490.1	490.5	491.0	491.4	492.0	492.1	492.4	492.7	492.9	492.8
150°	502.6	503.1	503.5	504.0	504.4	505.0	505.2	505.6	506.0	506.3	506.3
152.5°	515.1	515.8	516.3	516.8	517.4	518.0	518.4	518.8	519.2	519.7	519.7
155°	532.7	533.1	533.4	533.8	534.0	534.4	535.0	535.6	536.1	536.7	536.8
157.5°	548.5	548.7	548.8	549.1	549.3	549.5	550.3	551.0	551.8	552.6	552.7
160°	558.2	558.4	558.5	558.6	558.7	558.8	559.5	560.2	560.9	561.5	561.7
162.5°	566.4	566.5	566.6	566.8	566.9	566.9	567.8	568.5	569.3	570.1	570.2
165°	577.7	577.7	577.7	577.7	577.7	577.7	578.5	579.3	580.1	580.8	580.9
167.5°	586.7	586.6	586.6	586.6	586.5	586.5	587.3	588.1	588.9	589.7	589.8
170°	592.1	591.8	591.7	591.6	591.5	591.4	592.2	593.0	593.8	594.5	594.6
172.5°	595.8	595.5	595.4	595.3	595.1	595.0	595.8	596.6	597.4	598.2	598.2
175°	600.2	599.9	599.7	599.5	599.2	599.0	599.8	600.6	601.4	602.2	602.3
177.5°	602.3	602.1	601.9	601.7	601.5	601.4	601.9	602.4	603.0	603.5	603.5
180°	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5



TEST NUMBER: P331712-940

CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8
2.5°	1635.1	1636.0	1634.6	1635.6	1634.6	1636.0	1635.1	1640.3	1641.3	1642.2	1641.3
5°	1523.5	1516.4	1515.2	1513.5	1515.2	1516.4	1523.5	1526.5	1528.8	1533.6	1541.9
7.5°	1390.3	1389.2	1386.3	1382.2	1386.3	1389.2	1390.3	1400.4	1408.5	1417.7	1434.7
10°	1304.6	1301.6	1301.1	1296.9	1301.1	1301.6	1304.6	1317.6	1327.0	1340.1	1363.2
12.5°	1204.3	1185.2	1183.2	1172.9	1183.2	1185.2	1204.3	1221.0	1246.6	1259.2	1283.6
15°	1025.4	1021.8	1010.0	1002.3	1010.0	1021.8	1025.4	1039.6	1049.0	1083.3	1122.9
17.5°	923.1	911.5	907.9	906.2	907.9	911.5	923.1	930.0	943.4	961.5	985.4
20°	857.3	846.7	844.9	843.7	844.9	846.7	857.3	865.6	876.3	895.8	920.6
22.5°	811.9	800.8	796.1	792.6	796.1	800.8	811.9	818.2	828.0	843.2	860.1
25°	734.2	730.1	727.7	726.6	727.7	730.1	734.2	740.1	749.7	770.3	788.1
27.5°	673.5	664.4	662.6	659.6	662.6	664.4	673.5	684.0	693.9	703.2	719.1
30°	639.0	636.1	631.9	628.3	631.9	636.1	639.0	644.4	650.9	666.8	682.2
32.5°	598.2	595.8	592.1	590.5	592.1	595.8	598.2	605.5	619.1	628.9	640.1
35°	553.2	544.9	541.4	536.0	541.4	544.9	553.2	559.1	564.5	572.7	592.8
37.5°	505.5	501.1	496.1	497.9	496.1	501.1	505.5	508.0	519.2	530.7	539.5
40°	468.6	465.7	464.5	463.9	464.5	465.7	468.6	476.3	489.9	495.3	508.3
42.5°	439.3	431.1	428.0	427.8	428.0	431.1	439.3	447.9	456.3	464.9	478.4
45°	394.7	386.9	381.7	382.2	381.7	386.9	394.7	397.6	404.7	421.9	429.5
47.5°	348.9	348.7	345.4	346.5	345.4	348.7	348.9	354.0	363.2	373.7	386.0
50°	327.2	323.6	321.3	321.8	321.3	323.6	327.2	331.4	336.6	342.0	360.9
52.5°	306.4	303.3	301.4	303.9	301.4	303.3	306.4	308.6	312.5	317.8	330.6
55°	272.2	268.6	268.0	267.4	268.0	268.6	272.2	275.1	279.8	284.0	289.9
57.5°	234.0	231.6	228.0	226.5	228.0	231.6	234.0	238.4	244.0	249.4	255.6
60°	206.5	201.8	195.8	195.3	195.8	201.8	206.5	214.2	216.5	224.8	231.9
62.5°	181.4	180.5	179.2	179.1	179.2	180.5	181.4	183.9	187.2	199.3	207.8
65°	159.2	158.5	159.2	159.7	159.2	158.5	159.2	160.3	161.0	162.1	165.7
67.5°	138.7	137.6	136.5	137.1	136.5	137.6	138.7	138.9	140.5	141.2	143.7
70°	123.1	122.4	121.9	121.9	121.9	122.4	123.1	124.2	125.5	126.6	129.6
72.5°	107.9	107.8	107.2	106.7	107.2	107.8	107.9	110.0	110.8	111.9	114.0
75°	86.4	85.2	85.2	85.2	85.2	85.2	86.4	86.9	87.6	89.3	90.5
77.5°	65.8	65.2	64.6	64.1	64.6	65.2	65.8	65.9	66.9	67.2	68.5
80°	52.1	51.5	50.9	50.9	50.9	51.5	52.1	52.7	52.7	54.4	53.9
82.5°	39.8	39.1	39.1	38.6	39.1	39.1	39.8	39.9	39.9	41.2	41.0
85°	21.3	21.8	21.3	22.5	21.3	21.8	21.3	20.7	21.3	22.5	22.5
87.5°	9.5	9.1	9.6	9.1	9.6	9.1	9.5	9.5	10.0	10.1	10.1
90°	16.9	17.0	17.2	17.3	17.2	17.0	16.9	16.9	16.9	17.1	17.4
92.5°	16.4	16.4	16.5	16.5	16.5	16.4	16.4	16.4	16.3	16.3	16.2
95°	32.2	32.0	31.7	31.6	31.7	32.0	32.2	32.5	32.5	32.5	32.5
97.5°	54.7	54.7	54.7	54.6	54.7	54.7	54.7	54.7	54.8	54.8	54.8
100°	70.0	69.9	69.8	69.6	69.8	69.9	70.0	70.1	70.2	70.2	70.2
102.5°	87.1	86.9	86.9	86.8	86.9	86.9	87.1	87.2	87.2	87.1	87.0
105°	112.9	112.9	112.9	112.9	112.9	112.9	112.9	112.9	112.8	112.5	112.4
107.5°	139.0	138.6	138.0	137.5	138.0	138.6	139.0	139.6	139.8	139.7	139.6
110°	157.7	157.3	156.9	156.6	156.9	157.3	157.7	158.0	158.1	158.1	158.1



TEST NUMBER: P331712-940

CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	175.7	175.4	175.1	175.0	175.1	175.4	175.7	175.9	176.2	176.5	176.7
115°	204.4	204.1	203.8	203.4	203.8	204.1	204.4	204.7	205.0	205.1	205.2
117.5°	231.6	231.2	230.9	230.5	230.9	231.2	231.6	231.9	232.2	232.5	232.7
120°	250.7	250.4	250.0	249.7	250.0	250.4	250.7	251.0	251.2	251.2	251.2
122.5°	269.1	268.9	268.7	268.4	268.7	268.9	269.1	269.4	269.7	269.9	270.2
125°	297.3	297.2	297.0	296.9	297.0	297.2	297.3	297.4	297.7	298.0	298.3
127.5°	324.0	323.7	323.3	323.0	323.3	323.7	324.0	324.4	324.9	325.2	325.7
130°	343.0	342.6	342.1	341.7	342.1	342.6	343.0	343.5	343.8	344.1	344.3
132.5°	360.7	360.3	360.0	359.6	360.0	360.3	360.7	361.1	361.5	361.9	362.5
135°	388.5	388.2	387.8	387.4	387.8	388.2	388.5	388.8	389.1	389.1	389.3
137.5°	414.0	413.6	413.1	412.7	413.1	413.6	414.0	414.5	414.7	414.8	414.9
140°	431.5	431.1	430.6	430.2	430.6	431.1	431.5	432.0	432.2	432.2	432.2
142.5°	447.4	446.9	446.5	446.0	446.5	446.9	447.4	447.8	448.0	447.9	447.8
145°	471.2	470.7	470.3	469.8	470.3	470.7	471.2	471.6	471.8	471.7	471.6
147.5°	492.4	492.0	491.5	491.1	491.5	492.0	492.4	492.8	492.9	492.7	492.4
150°	506.0	505.6	505.2	505.0	505.2	505.6	506.0	506.3	506.3	506.0	505.6
152.5°	519.2	518.8	518.4	518.0	518.4	518.8	519.2	519.7	519.7	519.2	518.8
155°	536.5	536.1	535.7	535.5	535.7	536.1	536.5	536.8	536.7	536.1	535.6
157.5°	552.1	551.6	551.1	550.5	551.1	551.6	552.1	552.7	552.6	551.8	551.0
160°	561.2	560.8	560.3	559.8	560.3	560.8	561.2	561.7	561.5	560.9	560.2
162.5°	569.6	569.1	568.6	568.0	568.6	569.1	569.6	570.2	570.1	569.3	568.5
165°	580.3	579.8	579.3	578.6	579.3	579.8	580.3	580.9	580.8	580.1	579.3
167.5°	589.2	588.6	588.0	587.4	588.0	588.6	589.2	589.8	589.7	588.9	588.1
170°	593.9	593.3	592.5	591.9	592.5	593.3	593.9	594.6	594.5	593.8	593.0
172.5°	597.6	596.9	596.2	595.6	596.2	596.9	597.6	598.2	598.2	597.4	596.6
175°	601.5	600.8	600.2	599.5	600.2	600.8	601.5	602.3	602.2	601.4	600.6
177.5°	603.0	602.4	601.9	601.4	601.9	602.4	603.0	603.5	603.5	603.0	602.4
180°	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5



TEST NUMBER: P331712-940
 CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8
2.5°	1637.4	1644.1	1654.0	1659.7	1669.2	1675.3	1678.6	1684.8	1688.1	1700.0	1712.3
5°	1546.0	1555.5	1572.0	1587.4	1604.0	1621.1	1633.5	1647.8	1660.8	1683.3	1706.9
7.5°	1441.2	1454.3	1480.0	1504.5	1533.3	1557.6	1579.0	1603.3	1625.0	1657.2	1690.7
10°	1362.6	1385.6	1419.4	1442.4	1480.3	1504.6	1538.3	1565.0	1595.1	1637.7	1675.6
12.5°	1294.9	1322.7	1349.8	1381.9	1415.9	1456.3	1493.3	1527.5	1563.4	1607.4	1651.9
15°	1172.1	1212.3	1254.3	1286.8	1333.0	1375.6	1418.8	1464.9	1508.7	1561.4	1619.3
17.5°	1014.0	1060.6	1131.2	1187.0	1241.2	1283.9	1337.4	1393.2	1444.8	1508.3	1572.9
20°	942.5	976.9	1024.8	1099.9	1181.5	1227.1	1281.6	1343.1	1402.2	1471.4	1540.7
22.5°	885.2	915.8	954.2	1012.8	1103.9	1166.0	1222.8	1285.3	1354.0	1424.6	1501.4
25°	803.4	824.7	865.0	912.3	975.1	1077.4	1139.5	1202.2	1276.8	1352.5	1440.1
27.5°	742.1	761.3	787.4	832.6	879.2	952.7	1051.5	1119.9	1194.2	1279.4	1370.3
30°	695.2	717.6	746.6	778.6	829.5	886.9	985.7	1065.0	1138.4	1225.9	1322.9
32.5°	661.1	678.9	703.6	736.0	778.4	833.4	912.3	1008.6	1080.1	1172.4	1273.7
35°	605.3	626.0	646.1	676.9	711.1	761.4	821.2	924.2	995.1	1086.3	1188.0
37.5°	559.2	571.9	594.1	618.5	654.7	692.2	744.0	836.3	913.2	1002.6	1106.8
40°	524.2	540.2	556.8	584.0	613.6	649.6	700.5	769.2	857.3	944.9	1046.6
42.5°	490.2	510.3	527.9	546.1	578.5	614.7	656.0	714.3	804.3	887.2	986.1
45°	449.1	462.1	480.5	500.5	527.2	557.9	594.6	645.5	731.9	803.4	896.3
47.5°	401.3	420.4	432.3	451.9	477.2	506.6	540.6	584.7	654.6	721.7	807.9
50°	368.6	388.2	405.3	423.0	445.5	473.9	502.3	544.9	601.1	671.5	752.0
52.5°	340.6	357.8	374.5	392.3	414.3	440.3	467.3	504.7	552.9	617.6	695.7
55°	302.4	313.0	330.1	347.9	367.4	392.3	418.3	449.7	491.1	545.5	608.9
57.5°	263.1	275.4	289.0	306.8	326.6	345.6	369.1	397.4	430.2	479.4	533.6
60°	240.8	250.3	261.5	279.8	298.2	315.3	337.9	361.5	392.3	434.9	481.0
62.5°	216.2	225.2	235.5	251.5	269.3	285.1	304.7	329.8	355.8	394.7	435.1
65°	175.1	188.2	198.2	212.4	227.2	243.8	259.1	279.3	302.4	333.1	369.2
67.5°	145.2	151.9	161.1	174.1	189.2	203.4	217.9	233.7	253.7	277.5	306.1
70°	132.0	134.3	136.1	148.5	162.7	176.9	190.5	205.3	222.5	242.0	266.8
72.5°	116.3	118.7	120.9	126.3	137.6	151.9	165.9	176.9	193.1	209.3	229.4
75°	92.3	95.9	97.6	100.6	104.7	114.2	127.2	137.9	147.3	159.7	175.8
77.5°	70.3	72.3	74.2	77.3	79.9	84.3	91.6	101.2	110.0	117.3	128.2
80°	55.6	56.2	58.6	59.7	63.3	66.3	69.8	77.5	86.4	89.3	97.0
82.5°	41.9	42.4	44.4	45.6	47.2	49.7	54.2	56.2	63.2	67.1	72.0
85°	23.1	22.5	24.3	24.3	25.4	26.7	27.8	30.8	32.5	37.3	38.4
87.5°	10.6	10.7	10.6	10.2	9.6	10.1	10.2	10.3	11.1	12.2	13.8
90°	17.6	17.8	15.3	12.8	10.3	7.8	6.0	4.5	3.2	1.9	0.5
92.5°	16.2	16.1	15.6	15.0	14.4	13.8	13.0	12.0	11.1	10.1	9.1
95°	32.5	32.5	32.3	32.1	31.8	31.7	30.9	29.9	28.7	27.6	26.5
97.5°	54.8	54.8	54.3	53.9	53.4	53.0	52.3	51.3	50.3	49.3	48.3
100°	70.2	70.2	69.8	69.5	69.2	68.8	68.2	67.3	66.3	65.5	64.6
102.5°	86.9	86.9	86.4	86.0	85.6	85.2	84.5	83.8	83.1	82.4	81.7
105°	112.1	111.9	111.6	111.4	111.2	110.9	110.7	110.3	110.0	109.7	109.3
107.5°	139.6	139.5	139.5	139.5	139.5	139.5	139.2	138.7	138.2	137.7	137.2
110°	158.1	158.1	158.1	158.1	158.1	158.1	157.8	157.1	156.4	155.8	155.1



TEST NUMBER: P331712-940

CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	177.0	177.3	177.4	177.5	177.5	177.6	177.4	176.6	175.9	175.3	174.6
115°	205.4	205.5	205.6	205.9	206.1	206.3	206.1	205.5	204.7	204.1	203.4
117.5°	233.0	233.3	233.9	234.5	235.2	235.9	235.7	234.8	233.9	233.0	232.1
120°	251.2	251.2	252.1	253.0	253.9	254.9	254.9	253.9	253.0	252.1	251.2
122.5°	270.5	270.7	271.3	272.0	272.6	273.2	273.0	272.0	270.9	269.7	268.7
125°	298.6	299.0	299.3	299.7	300.0	300.3	300.0	299.0	298.0	296.9	296.0
127.5°	326.0	326.5	326.9	327.3	327.7	328.1	327.6	326.4	325.0	323.8	322.4
130°	344.6	344.7	345.0	345.2	345.4	345.6	345.0	343.6	342.1	340.6	339.2
132.5°	363.0	363.5	363.5	363.4	363.4	363.3	362.7	361.5	360.3	359.1	357.8
135°	389.4	389.5	389.3	389.1	388.8	388.6	387.9	386.6	385.4	384.1	382.9
137.5°	415.0	415.1	414.8	414.6	414.3	413.9	413.3	412.3	411.3	410.3	409.2
140°	432.2	432.2	431.7	431.1	430.5	430.0	429.2	428.1	427.1	426.1	425.1
142.5°	447.7	447.6	447.3	446.9	446.6	446.1	445.4	444.4	443.4	442.4	441.4
145°	471.4	471.4	470.7	470.0	469.3	468.7	468.0	467.2	466.4	465.6	464.8
147.5°	492.1	492.0	491.4	491.0	490.5	490.1	489.4	488.5	487.5	486.5	485.6
150°	505.2	505.0	504.4	504.0	503.5	503.1	502.6	501.9	501.2	500.5	499.9
152.5°	518.4	518.0	517.4	516.8	516.3	515.8	515.1	514.5	513.8	513.2	512.5
155°	535.0	534.4	534.0	533.8	533.4	533.1	532.7	532.4	532.1	531.7	531.4
157.5°	550.3	549.5	549.3	549.1	548.8	548.7	548.5	548.2	548.0	547.8	547.5
160°	559.5	558.8	558.7	558.6	558.5	558.4	558.2	557.9	557.8	557.5	557.3
162.5°	567.8	566.9	566.9	566.8	566.6	566.5	566.4	566.4	566.3	566.3	566.2
165°	578.5	577.7	577.7	577.7	577.7	577.7	577.7	577.8	577.9	578.0	578.2
167.5°	587.3	586.5	586.5	586.6	586.6	586.6	586.7	587.1	587.5	587.8	588.1
170°	592.2	591.4	591.5	591.6	591.7	591.8	592.1	592.4	592.7	593.1	593.4
172.5°	595.8	595.0	595.1	595.3	595.4	595.5	595.8	596.0	596.4	596.7	597.1
175°	599.8	599.0	599.2	599.5	599.7	599.9	600.2	600.6	600.8	601.2	601.5
177.5°	601.9	601.4	601.5	601.7	601.9	602.1	602.3	602.5	602.8	603.1	603.4
180°	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5



TEST NUMBER: P331712-940
 CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8
2.5°	1712.7	1714.1	1723.6	1727.9	1736.4	1739.7	1743.5	1742.6	1742.6	1744.5	1757.7
5°	1716.4	1728.2	1746.0	1763.2	1779.7	1793.9	1803.4	1812.8	1816.4	1833.5	1849.0
7.5°	1710.2	1732.1	1761.4	1787.5	1818.9	1843.3	1863.8	1882.0	1894.6	1919.6	1945.2
10°	1702.2	1733.0	1766.1	1799.8	1843.0	1875.5	1908.7	1934.1	1942.4	1979.7	2001.0
12.5°	1686.1	1727.2	1769.4	1813.1	1855.3	1900.1	1936.6	1962.0	1991.2	2024.6	2064.0
15°	1662.0	1709.3	1764.3	1820.5	1880.9	1935.3	1974.3	2018.7	2050.7	2087.4	2121.6
17.5°	1627.3	1688.3	1758.2	1823.3	1893.1	1951.5	2005.3	2047.8	2070.3	2091.2	2096.3
20°	1599.8	1665.5	1747.8	1824.7	1894.5	1961.9	2015.2	2050.7	2056.6	2057.2	2025.9
22.5°	1570.0	1644.2	1730.3	1809.0	1892.6	1967.6	2009.0	2024.2	2000.7	1960.6	1900.0
25°	1515.2	1601.1	1701.0	1790.9	1882.0	1953.0	1967.3	1940.6	1858.4	1772.0	1662.6
27.5°	1455.8	1552.3	1659.5	1759.4	1856.5	1900.5	1869.9	1773.9	1625.8	1497.0	1341.0
30°	1412.3	1520.5	1625.9	1737.7	1827.7	1846.6	1776.2	1634.8	1462.0	1267.9	1112.3
32.5°	1362.6	1476.0	1591.8	1707.4	1782.7	1764.2	1647.9	1473.8	1271.2	1080.5	933.4
35°	1291.6	1408.7	1533.6	1649.6	1697.5	1617.6	1443.7	1217.0	1010.0	831.9	730.7
37.5°	1209.6	1337.1	1467.0	1573.4	1570.0	1436.9	1200.0	966.1	792.0	686.7	614.7
40°	1151.4	1280.3	1420.6	1510.5	1472.0	1298.7	1041.9	821.2	694.0	610.0	557.3
42.5°	1095.6	1224.9	1364.2	1435.7	1368.9	1155.7	899.9	727.0	622.1	556.5	513.8
45°	1000.5	1137.2	1266.1	1305.8	1186.2	951.4	727.7	602.4	532.5	483.9	454.4
47.5°	907.6	1042.1	1159.8	1160.5	998.8	771.5	613.9	521.3	461.6	424.1	402.6
50°	850.8	978.6	1077.4	1062.0	878.6	686.3	549.0	469.2	419.5	390.5	368.0
52.5°	786.9	910.9	996.5	952.7	776.9	604.0	490.8	423.7	382.5	357.4	337.2
55°	694.0	804.1	864.4	798.2	633.6	502.3	414.7	362.1	331.4	310.0	292.8
57.5°	602.8	693.6	731.6	654.3	521.9	416.5	350.9	311.3	280.8	265.6	256.6
60°	545.5	623.0	649.6	564.5	453.8	364.4	310.6	273.9	251.5	241.4	232.6
62.5°	489.2	552.5	563.5	485.4	395.6	319.1	272.8	241.7	226.9	217.2	208.8
65°	405.9	451.5	446.1	383.4	313.0	253.2	219.5	200.5	189.3	175.8	161.0
67.5°	334.1	361.9	345.2	298.2	238.9	196.8	174.8	160.4	146.5	133.6	130.2
70°	288.7	304.7	287.0	243.8	195.8	165.1	147.3	130.2	121.9	119.0	113.6
72.5°	245.2	250.7	231.6	194.6	159.3	136.7	119.4	109.8	105.3	102.8	99.4
75°	184.0	179.9	163.3	134.3	110.7	95.2	90.0	86.4	83.5	81.1	79.3
77.5°	129.2	123.1	108.4	89.4	77.0	69.7	66.5	64.6	63.2	62.0	60.2
80°	97.0	92.9	78.1	63.9	58.6	55.0	53.2	50.9	50.9	49.7	47.9
82.5°	71.0	66.3	53.5	46.8	43.9	41.7	40.5	39.1	38.6	38.8	37.5
85°	37.3	30.1	26.7	25.4	23.6	22.5	23.1	21.8	21.8	21.8	21.3
87.5°	11.8	9.6	9.5	9.3	10.1	10.6	10.6	11.1	12.0	11.6	11.9
90°	1.9	3.2	4.5	6.0	7.8	10.3	12.8	15.3	17.8	17.6	17.4
92.5°	10.1	11.1	12.0	13.0	13.8	14.4	15.0	15.6	16.1	16.2	16.2
95°	27.6	28.7	29.9	30.9	31.7	31.8	32.1	32.3	32.5	32.5	32.5
97.5°	49.3	50.3	51.3	52.3	53.0	53.4	53.9	54.3	54.8	54.8	54.8
100°	65.5	66.3	67.3	68.2	68.8	69.2	69.5	69.8	70.2	70.2	70.2
102.5°	82.4	83.1	83.8	84.5	85.2	85.6	86.0	86.4	86.9	86.9	87.0
105°	109.7	110.0	110.3	110.7	110.9	111.2	111.4	111.6	111.9	112.1	112.4
107.5°	137.7	138.2	138.7	139.2	139.5	139.5	139.5	139.5	139.5	139.6	139.6
110°	155.8	156.4	157.1	157.8	158.1	158.1	158.1	158.1	158.1	158.1	158.1



TEST NUMBER: P331712-940

CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	175.3	175.9	176.6	177.4	177.6	177.5	177.5	177.4	177.3	177.0	176.7
115°	204.1	204.7	205.5	206.1	206.3	206.1	205.9	205.6	205.5	205.4	205.2
117.5°	233.0	233.9	234.8	235.7	235.9	235.2	234.5	233.9	233.3	233.0	232.7
120°	252.1	253.0	253.9	254.9	254.9	253.9	253.0	252.1	251.2	251.2	251.2
122.5°	269.7	270.9	272.0	273.0	273.2	272.6	272.0	271.3	270.7	270.5	270.2
125°	296.9	298.0	299.0	300.0	300.3	300.0	299.7	299.3	299.0	298.6	298.3
127.5°	323.8	325.0	326.4	327.6	328.1	327.7	327.3	326.9	326.5	326.0	325.7
130°	340.6	342.1	343.6	345.0	345.6	345.4	345.2	345.0	344.7	344.6	344.3
132.5°	359.1	360.3	361.5	362.7	363.3	363.4	363.4	363.5	363.5	363.0	362.5
135°	384.1	385.4	386.6	387.9	388.6	388.8	389.1	389.3	389.5	389.4	389.3
137.5°	410.3	411.3	412.3	413.3	413.9	414.3	414.6	414.8	415.1	415.0	414.9
140°	426.1	427.1	428.1	429.2	430.0	430.5	431.1	431.7	432.2	432.2	432.2
142.5°	442.4	443.4	444.4	445.4	446.1	446.6	446.9	447.3	447.6	447.7	447.8
145°	465.6	466.4	467.2	468.0	468.7	469.3	470.0	470.7	471.4	471.4	471.6
147.5°	486.5	487.5	488.5	489.4	490.1	490.5	491.0	491.4	492.0	492.1	492.4
150°	500.5	501.2	501.9	502.6	503.1	503.5	504.0	504.4	505.0	505.2	505.6
152.5°	513.2	513.8	514.5	515.1	515.8	516.3	516.8	517.4	518.0	518.4	518.8
155°	531.7	532.1	532.4	532.7	533.1	533.4	533.8	534.0	534.4	535.0	535.6
157.5°	547.8	548.0	548.2	548.5	548.7	548.8	549.1	549.3	549.5	550.3	551.0
160°	557.5	557.8	557.9	558.2	558.4	558.5	558.6	558.7	558.8	559.5	560.2
162.5°	566.3	566.3	566.4	566.4	566.5	566.6	566.8	566.9	566.9	567.8	568.5
165°	578.0	577.9	577.8	577.7	577.7	577.7	577.7	577.7	577.7	578.5	579.3
167.5°	587.8	587.5	587.1	586.7	586.6	586.6	586.6	586.5	586.5	587.3	588.1
170°	593.1	592.7	592.4	592.1	591.8	591.7	591.6	591.5	591.4	592.2	593.0
172.5°	596.7	596.4	596.0	595.8	595.5	595.4	595.3	595.1	595.0	595.8	596.6
175°	601.2	600.8	600.6	600.2	599.9	599.7	599.5	599.2	599.0	599.8	600.6
177.5°	603.1	602.8	602.5	602.3	602.1	601.9	601.7	601.5	601.4	601.9	602.4
180°	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5	602.5



TEST NUMBER: P331712-940

CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8
2.5°	1762.5	1768.6	1771.4	1771.4	1774.8	1773.3	1771.9
5°	1863.8	1875.0	1877.3	1888.0	1895.7	1893.3	1894.5
7.5°	1964.4	1982.5	2000.4	2008.6	2009.8	2014.6	2016.3
10°	2026.4	2041.2	2069.0	2064.8	2085.6	2097.4	2077.9
12.5°	2086.1	2106.0	2125.4	2130.7	2142.4	2146.2	2138.5
15°	2140.0	2150.7	2151.9	2148.9	2152.4	2149.5	2138.2
17.5°	2089.6	2072.3	2037.3	2020.7	2007.6	1988.2	1980.4
20°	2006.3	1955.4	1896.2	1872.6	1844.8	1790.4	1803.4
22.5°	1826.5	1768.4	1709.3	1640.2	1607.2	1555.6	1552.5
25°	1546.6	1446.6	1336.6	1259.6	1214.7	1163.2	1140.7
27.5°	1202.5	1076.6	986.4	940.8	899.2	858.4	856.8
30°	976.2	881.5	811.7	772.7	747.3	730.1	733.7
32.5°	822.9	758.0	711.0	678.5	659.7	646.8	646.6
35°	672.7	628.3	598.2	584.5	571.0	561.5	562.0
37.5°	575.7	549.0	532.3	517.2	508.7	504.1	501.5
40°	526.0	504.1	491.1	482.2	475.1	468.6	467.4
42.5°	486.7	468.6	455.6	448.6	441.9	437.4	436.1
45°	431.9	417.1	405.3	397.6	394.7	390.5	390.5
47.5°	384.2	369.7	360.4	355.6	350.5	347.8	347.7
50°	352.0	340.8	332.5	329.6	325.4	323.6	323.1
52.5°	323.2	314.8	308.9	306.8	305.1	302.8	303.2
55°	284.0	279.3	276.9	275.1	272.2	268.6	271.0
57.5°	251.0	246.9	240.6	235.0	232.3	229.8	230.8
60°	227.8	219.5	211.2	204.7	203.0	197.6	197.6
62.5°	198.4	186.8	176.6	173.0	171.2	168.7	168.3
65°	152.7	147.9	145.5	143.2	142.0	142.0	140.8
67.5°	126.5	124.6	122.0	121.5	120.2	119.8	119.5
70°	111.8	109.4	108.3	107.7	106.5	107.1	105.3
72.5°	97.6	95.8	95.5	94.0	93.3	93.4	92.0
75°	77.0	77.0	76.3	75.7	74.5	73.9	74.5
77.5°	59.2	59.3	58.2	58.1	58.0	58.1	57.5
80°	47.3	47.9	47.3	46.7	46.2	46.7	46.2
82.5°	37.4	36.6	36.5	36.3	36.2	35.8	35.8
85°	21.3	21.8	21.3	20.7	20.7	20.7	21.3
87.5°	11.5	11.4	11.4	11.4	11.5	11.5	11.1
90°	17.1	16.9	16.9	16.9	17.0	17.2	17.3
92.5°	16.3	16.3	16.4	16.4	16.4	16.5	16.5
95°	32.5	32.5	32.5	32.2	32.0	31.7	31.6
97.5°	54.8	54.8	54.7	54.7	54.7	54.7	54.6
100°	70.2	70.2	70.1	70.0	69.9	69.8	69.6
102.5°	87.1	87.2	87.2	87.1	86.9	86.9	86.8
105°	112.5	112.8	112.9	112.9	112.9	112.9	112.9
107.5°	139.7	139.8	139.6	139.0	138.6	138.0	137.5
110°	158.1	158.1	158.0	157.7	157.3	156.9	156.6



TEST NUMBER: P331712-940

CATALOG NUMBER: SA2XXRDIP-C865D530U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	176.5	176.2	175.9	175.7	175.4	175.1	175.0
115°	205.1	205.0	204.7	204.4	204.1	203.8	203.4
117.5°	232.5	232.2	231.9	231.6	231.2	230.9	230.5
120°	251.2	251.2	251.0	250.7	250.4	250.0	249.7
122.5°	269.9	269.7	269.4	269.1	268.9	268.7	268.4
125°	298.0	297.7	297.4	297.3	297.2	297.0	296.9
127.5°	325.2	324.9	324.4	324.0	323.7	323.3	323.0
130°	344.1	343.8	343.5	343.0	342.6	342.1	341.7
132.5°	361.9	361.5	361.1	360.7	360.3	360.0	359.6
135°	389.1	389.1	388.8	388.5	388.2	387.8	387.4
137.5°	414.8	414.7	414.5	414.0	413.6	413.1	412.7
140°	432.2	432.2	432.0	431.5	431.1	430.6	430.2
142.5°	447.9	448.0	447.8	447.4	446.9	446.5	446.0
145°	471.7	471.8	471.6	471.2	470.7	470.3	469.8
147.5°	492.7	492.9	492.8	492.4	492.0	491.5	491.1
150°	506.0	506.3	506.3	506.0	505.6	505.2	505.0
152.5°	519.2	519.7	519.7	519.2	518.8	518.4	518.0
155°	536.1	536.7	536.8	536.5	536.1	535.7	535.5
157.5°	551.8	552.6	552.7	552.1	551.6	551.1	550.5
160°	560.9	561.5	561.7	561.2	560.8	560.3	559.8
162.5°	569.3	570.1	570.2	569.6	569.1	568.6	568.0
165°	580.1	580.8	580.9	580.3	579.8	579.3	578.6
167.5°	588.9	589.7	589.8	589.2	588.6	588.0	587.4
170°	593.8	594.5	594.6	593.9	593.3	592.5	591.9
172.5°	597.4	598.2	598.2	597.6	596.9	596.2	595.6
175°	601.4	602.2	602.3	601.5	600.8	600.2	599.5
177.5°	603.0	603.5	603.5	603.0	602.4	601.9	601.4
180°	602.5	602.5	602.5	602.5	602.5	602.5	602.5

(END OF REPORT)