

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331723-940

Luminaire Tested: **SA2XXRDIP-C865D925U940-4F0-1E-UDD-A**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P331723-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-2,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A
Description: DEFINE 2 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 865 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 925 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6243.9 lumens
Efficiency: N/A
Efficacy: 103.2 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 1.16 / 1.02
Luminous Opening: Rectangular (W 4' x L: 0.17' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 60.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

Luminous Intensity Polar Plot

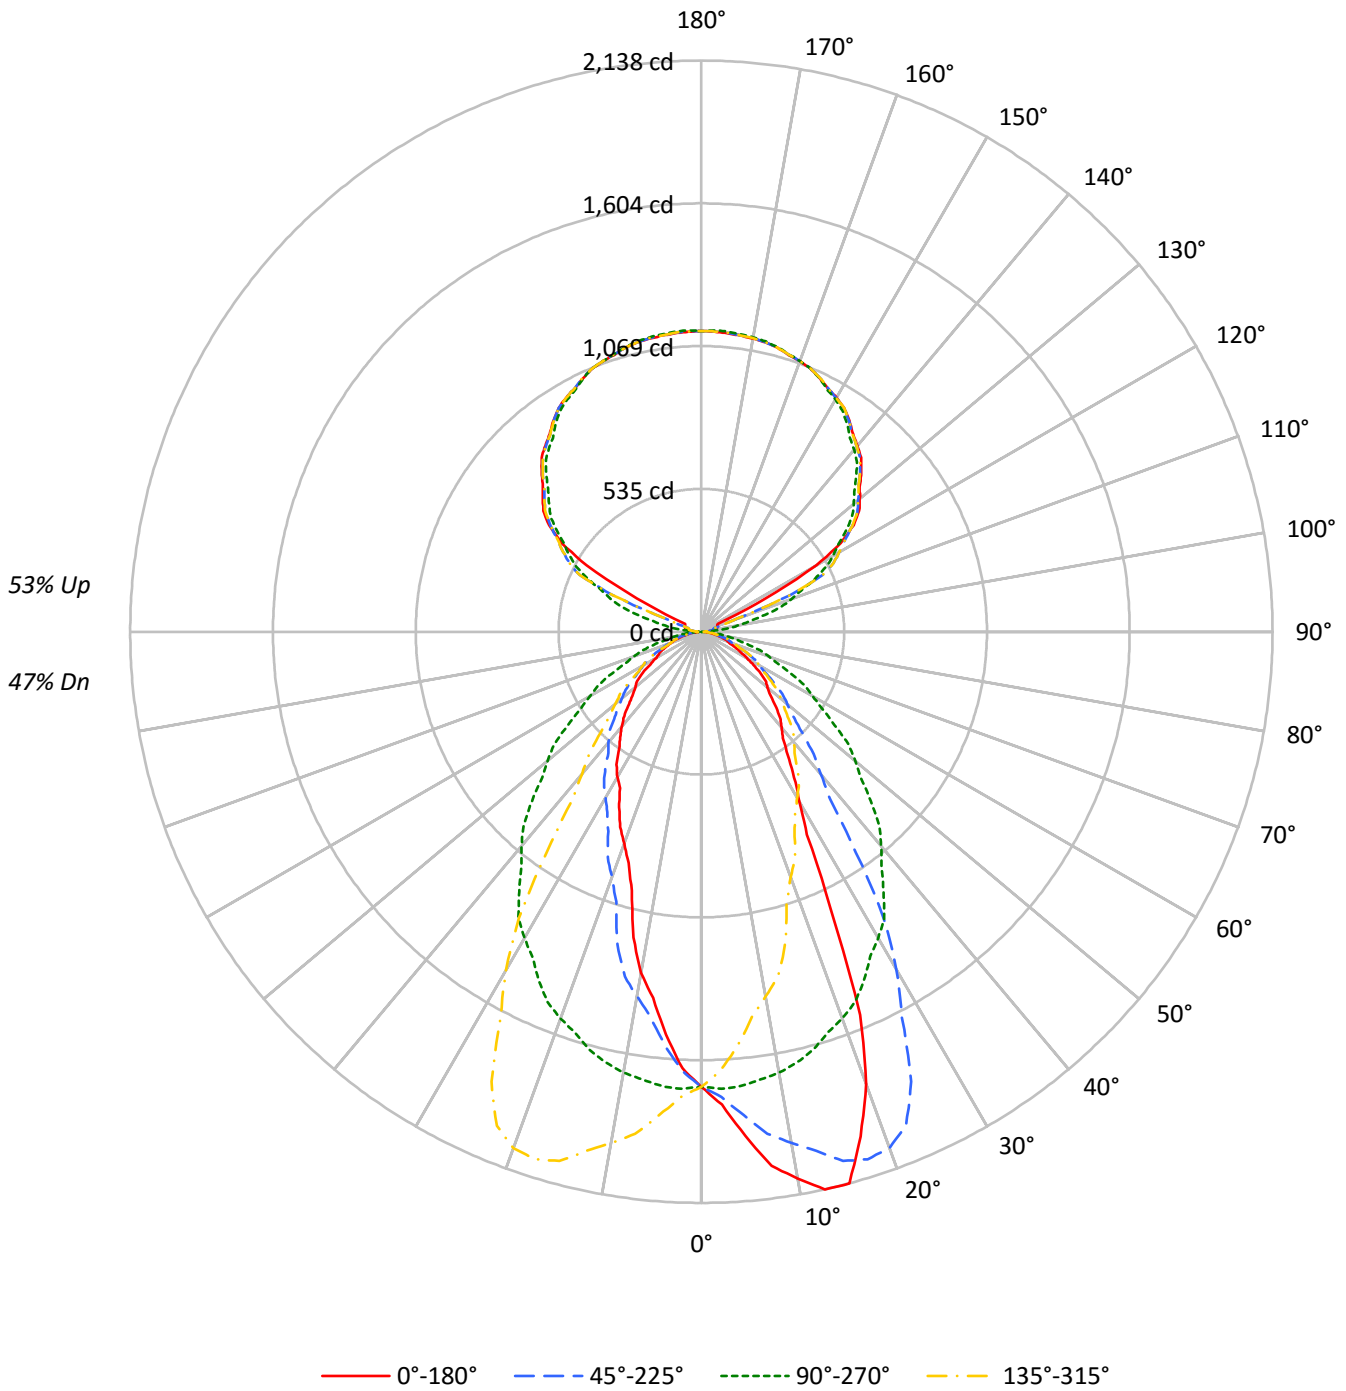



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	54	54	54	47				47
1	98	94	90	87	90	86	83	81	73	71	69	60	59	57	48	47	47	41				41
2	90	83	77	72	82	76	72	67	65	61	58	54	51	49	44	42	40	36				36
3	82	74	67	61	76	68	62	57	58	53	50	48	45	42	39	37	35	31				31
4	76	66	58	53	70	61	54	49	52	47	43	43	40	37	36	33	31	28				28
5	70	59	51	46	64	55	48	43	47	42	38	39	36	33	33	30	28	25				25
6	65	53	46	40	59	50	43	38	43	37	33	36	32	29	30	27	25	22				22
7	60	48	41	35	55	45	38	34	39	34	30	33	29	26	28	25	23	20				20
8	56	44	37	32	52	41	35	30	36	31	27	30	27	24	26	23	20	18				18
9	52	40	33	28	48	38	31	27	33	28	24	28	24	21	24	21	19	17				17
10	49	37	30	26	45	35	29	25	30	26	22	26	22	20	22	19	17	15				15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	27493	27493	27493	27493
5°	30705	27665	24530	27665
10°	34067	27471	21263	27471
15°	35741	27067	16754	27067
20°	30986	26472	14496	26472
25°	20322	25655	12944	25655
30°	13679	24664	11714	24664
35°	11077	23416	10565	23416
40°	9851	22059	9778	22059
45°	8917	20466	8727	20466
50°	8116	18889	8083	18889
55°	7628	17140	7527	17140
60°	6381	15532	6307	15532
65°	5379	14105	6101	14105
70°	4971	12595	5755	12595
75°	4648	10967	5315	10967
80°	4296	9019	4733	9019
85°	3946	7114	4168	7114



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	161.4	2.6
10°-20°	449.8	7.2
20°-30°	579.6	9.3
30°-40°	550.8	8.8
40°-50°	471.8	7.6
50°-60°	359.3	5.8
60°-70°	227.1	3.6
70°-80°	113.4	1.8
80°-90°	32.3	0.5
90°-100°	37.5	0.6
100°-110°	137.7	2.2
110°-120°	368.0	5.9
120°-130°	607.5	9.7
130°-140°	646.1	10.3
140°-150°	600.5	9.6
150°-160°	482.8	7.7
160°-170°	311.1	5.0
170°-180°	107.1	1.7
0°-30°	1190.8	19.1
0°-40°	1741.6	27.9
0°-60°	2572.7	41.2
0°-90°	2945.6	47.2
90°-120°	543.2	8.7
90°-150°	2397.3	38.4
90°-180°	3298.0	52.8
0°-180°	6243.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1703	1703	1703	1703	1703	
5°	1894	1707	1514	1707	1894	187
15°	2138	1619	1002	1619	2138	577
25°	1141	1440	727	1440	1141	541
35°	562	1188	536	1188	562	360
45°	390	896	382	896	390	302
55°	271	609	267	609	271	238
65°	141	369	160	369	141	143
75°	74	176	85	176	74	79
85°	21	38	22	38	21	23
90°	22	1	22	1	22	11
95°	35	53	35	53	35	33
105°	62	248	62	248	62	64
115°	67	468	67	468	67	167
125°	696	662	696	662	696	602
135°	846	819	846	819	846	652
145°	965	950	965	950	965	604
155°	1047	1046	1047	1046	1047	483
165°	1100	1103	1100	1103	1100	311
175°	1121	1128	1121	1128	1121	107
180°	1126	1126	1126	1126	1126	



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8
2.5°	1771.9	1773.3	1774.8	1771.4	1771.4	1768.6	1762.5	1757.7	1744.5	1742.6	1742.6
5°	1894.5	1893.3	1895.7	1888.0	1877.3	1875.0	1863.8	1849.0	1833.5	1816.4	1812.8
7.5°	2016.3	2014.6	2009.8	2008.6	2000.4	1982.5	1964.4	1945.2	1919.6	1894.6	1882.0
10°	2077.9	2097.4	2085.6	2064.8	2069.0	2041.2	2026.4	2001.0	1979.7	1942.4	1934.1
12.5°	2138.5	2146.2	2142.4	2130.7	2125.4	2106.0	2086.1	2064.0	2024.6	1991.2	1962.0
15°	2138.2	2149.5	2152.4	2148.9	2151.9	2150.7	2140.0	2121.6	2087.4	2050.7	2018.7
17.5°	1980.4	1988.2	2007.6	2020.7	2037.3	2072.3	2089.6	2096.3	2091.2	2070.3	2047.8
20°	1803.4	1790.4	1844.8	1872.6	1896.2	1955.4	2006.3	2025.9	2057.2	2056.6	2050.7
22.5°	1552.5	1555.6	1607.2	1640.2	1709.3	1768.4	1826.5	1900.0	1960.6	2000.7	2024.2
25°	1140.7	1163.2	1214.7	1259.6	1336.6	1446.6	1546.6	1662.6	1772.0	1858.4	1940.6
27.5°	856.8	858.4	899.2	940.8	986.4	1076.6	1202.5	1341.0	1497.0	1625.8	1773.9
30°	733.7	730.1	747.3	772.7	811.7	881.5	976.2	1112.3	1267.9	1462.0	1634.8
32.5°	646.6	646.8	659.7	678.5	711.0	758.0	822.9	933.4	1080.5	1271.2	1473.8
35°	562.0	561.5	571.0	584.5	598.2	628.3	672.7	730.7	831.9	1010.0	1217.0
37.5°	501.5	504.1	508.7	517.2	532.3	549.0	575.7	614.7	686.7	792.0	966.1
40°	467.4	468.6	475.1	482.2	491.1	504.1	526.0	557.3	610.0	694.0	821.2
42.5°	436.1	437.4	441.9	448.6	455.6	468.6	486.7	513.8	556.5	622.1	727.0
45°	390.5	390.5	394.7	397.6	405.3	417.1	431.9	454.4	483.9	532.5	602.4
47.5°	347.7	347.8	350.5	355.6	360.4	369.7	384.2	402.6	424.1	461.6	521.3
50°	323.1	323.6	325.4	329.6	332.5	340.8	352.0	368.0	390.5	419.5	469.2
52.5°	303.2	302.8	305.1	306.8	308.9	314.8	323.2	337.2	357.4	382.5	423.7
55°	271.0	268.6	272.2	275.1	276.9	279.3	284.0	292.8	310.0	331.4	362.1
57.5°	230.8	229.8	232.3	235.0	240.6	246.9	251.0	256.6	265.6	280.8	311.3
60°	197.6	197.6	203.0	204.7	211.2	219.5	227.8	232.6	241.4	251.5	273.9
62.5°	168.3	168.7	171.2	173.0	176.6	186.8	198.4	208.8	217.2	226.9	241.7
65°	140.8	142.0	142.0	143.2	145.5	147.9	152.7	161.0	175.8	189.3	200.5
67.5°	119.5	119.8	120.2	121.5	122.0	124.6	126.5	130.2	133.6	146.5	160.4
70°	105.3	107.1	106.5	107.7	108.3	109.4	111.8	113.6	119.0	121.9	130.2
72.5°	92.0	93.4	93.3	94.0	95.5	95.8	97.6	99.4	102.8	105.3	109.8
75°	74.5	73.9	74.5	75.7	76.3	77.0	77.0	79.3	81.1	83.5	86.4
77.5°	57.5	58.1	58.0	58.1	58.2	59.3	59.2	60.2	62.0	63.2	64.6
80°	46.2	46.7	46.2	46.7	47.3	47.9	47.3	47.9	49.7	50.9	50.9
82.5°	35.8	35.8	36.2	36.3	36.5	36.6	37.4	37.5	38.8	38.6	39.1
85°	21.3	20.7	20.7	20.7	21.3	21.8	21.3	21.3	21.8	21.8	21.8
87.5°	11.9	12.4	12.3	12.2	12.1	12.0	11.9	12.1	11.5	11.8	11.1
90°	22.0	21.7	21.2	20.9	20.5	19.9	19.0	18.1	17.2	16.3	14.8
92.5°	22.0	21.8	21.6	21.3	21.1	20.8	20.3	19.8	19.4	18.9	18.2
95°	35.0	35.2	35.4	35.6	35.8	35.4	34.5	33.5	32.6	31.7	30.5
97.5°	46.7	46.5	46.3	46.1	45.8	45.4	44.7	44.0	43.2	42.5	39.6
100°	54.6	54.2	53.9	53.5	53.1	52.3	50.7	49.3	47.9	46.5	43.3
102.5°	58.5	58.0	57.4	57.0	56.4	55.3	53.4	51.5	49.6	47.7	73.5
105°	61.9	61.2	60.5	59.7	59.0	57.6	55.6	53.7	51.6	49.7	99.1
107.5°	63.7	63.0	62.2	61.5	60.8	61.4	63.5	65.5	67.5	69.6	128.8
110°	64.4	63.6	62.9	62.2	61.4	70.1	88.2	106.3	124.4	142.5	194.8



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	65.0	64.4	63.8	63.2	62.7	95.4	161.4	227.5	293.5	359.4	372.4
115°	66.8	79.8	92.8	105.8	118.9	167.3	251.1	334.9	418.7	502.5	497.9
117.5°	272.7	315.5	358.3	401.1	443.9	475.5	495.8	516.0	536.3	556.5	553.5
120°	496.8	521.2	545.6	570.1	594.5	605.6	603.5	601.3	599.1	596.9	593.7
122.5°	619.9	624.6	629.4	634.2	638.9	640.6	639.3	638.0	636.7	635.4	631.9
125°	696.3	695.8	695.2	694.6	694.1	693.2	692.0	690.7	689.5	688.1	684.7
127.5°	744.5	744.4	744.3	744.2	744.0	743.2	741.3	739.4	737.5	735.8	733.2
130°	774.5	774.6	774.8	775.1	775.3	774.3	772.3	770.3	768.3	766.3	764.4
132.5°	803.8	804.0	804.1	804.3	804.5	803.8	802.1	800.4	798.7	796.9	795.0
135°	846.1	846.5	846.9	847.2	847.6	846.9	845.1	843.3	841.4	839.6	838.0
137.5°	884.8	885.4	886.0	886.6	887.3	886.6	884.8	883.1	881.3	879.6	877.7
140°	908.8	909.8	910.7	911.6	912.5	912.1	910.5	908.8	907.2	905.6	903.7
142.5°	932.3	933.3	934.2	935.0	935.9	935.7	934.2	932.6	931.2	929.7	927.5
145°	965.1	966.0	966.9	967.8	968.7	968.5	967.2	966.0	964.7	963.4	960.4
147.5°	993.9	994.6	995.4	996.1	996.9	996.8	995.9	995.0	994.0	993.1	990.1
150°	1011.5	1012.4	1013.3	1014.2	1015.1	1015.0	1014.0	1012.8	1011.7	1010.7	1007.8
152.5°	1026.4	1027.7	1028.9	1030.0	1031.3	1031.3	1030.2	1029.1	1028.1	1027.0	1024.2
155°	1047.3	1048.7	1050.2	1051.7	1053.1	1053.3	1052.2	1051.1	1050.0	1048.9	1046.8
157.5°	1066.4	1067.7	1069.2	1070.6	1072.0	1072.1	1070.9	1069.6	1068.4	1067.2	1065.7
160°	1077.5	1078.7	1080.0	1081.2	1082.5	1082.6	1081.6	1080.4	1079.3	1078.3	1077.2
162.5°	1086.5	1088.2	1089.7	1091.3	1092.8	1093.0	1091.7	1090.5	1089.2	1088.1	1087.1
165°	1100.3	1101.5	1102.8	1104.0	1105.3	1105.3	1104.0	1102.8	1101.5	1100.3	1099.7
167.5°	1108.8	1110.5	1112.1	1113.7	1115.4	1115.6	1114.3	1113.0	1111.8	1110.5	1110.0
170°	1114.1	1115.7	1117.3	1119.0	1120.6	1120.8	1119.5	1118.3	1117.0	1115.7	1115.4
172.5°	1118.0	1119.6	1121.2	1122.8	1124.5	1124.7	1123.5	1122.1	1120.9	1119.6	1119.3
175°	1121.4	1123.2	1125.1	1126.9	1128.6	1128.9	1127.7	1126.4	1125.2	1123.8	1123.5
177.5°	1123.6	1124.8	1126.1	1127.5	1128.7	1128.9	1127.9	1126.9	1125.9	1124.8	1124.7
180°	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8
2.5°	1743.5	1739.7	1736.4	1727.9	1723.6	1714.1	1712.7	1712.3	1700.0	1688.1	1684.8
5°	1803.4	1793.9	1779.7	1763.2	1746.0	1728.2	1716.4	1706.9	1683.3	1660.8	1647.8
7.5°	1863.8	1843.3	1818.9	1787.5	1761.4	1732.1	1710.2	1690.7	1657.2	1625.0	1603.3
10°	1908.7	1875.5	1843.0	1799.8	1766.1	1733.0	1702.2	1675.6	1637.7	1595.1	1565.0
12.5°	1936.6	1900.1	1855.3	1813.1	1769.4	1727.2	1686.1	1651.9	1607.4	1563.4	1527.5
15°	1974.3	1935.3	1880.9	1820.5	1764.3	1709.3	1662.0	1619.3	1561.4	1508.7	1464.9
17.5°	2005.3	1951.5	1893.1	1823.3	1758.2	1688.3	1627.3	1572.9	1508.3	1444.8	1393.2
20°	2015.2	1961.9	1894.5	1824.7	1747.8	1665.5	1599.8	1540.7	1471.4	1402.2	1343.1
22.5°	2009.0	1967.6	1892.6	1809.0	1730.3	1644.2	1570.0	1501.4	1424.6	1354.0	1285.3
25°	1967.3	1953.0	1882.0	1790.9	1701.0	1601.1	1515.2	1440.1	1352.5	1276.8	1202.2
27.5°	1869.9	1900.5	1856.5	1759.4	1659.5	1552.3	1455.8	1370.3	1279.4	1194.2	1119.9
30°	1776.2	1846.6	1827.7	1737.7	1625.9	1520.5	1412.3	1322.9	1225.9	1138.4	1065.0
32.5°	1647.9	1764.2	1782.7	1707.4	1591.8	1476.0	1362.6	1273.7	1172.4	1080.1	1008.6
35°	1443.7	1617.6	1697.5	1649.6	1533.6	1408.7	1291.6	1188.0	1086.3	995.1	924.2
37.5°	1200.0	1436.9	1570.0	1573.4	1467.0	1337.1	1209.6	1106.8	1002.6	913.2	836.3
40°	1041.9	1298.7	1472.0	1510.5	1420.6	1280.3	1151.4	1046.6	944.9	857.3	769.2
42.5°	899.9	1155.7	1368.9	1435.7	1364.2	1224.9	1095.6	986.1	887.2	804.3	714.3
45°	727.7	951.4	1186.2	1305.8	1266.1	1137.2	1000.5	896.3	803.4	731.9	645.5
47.5°	613.9	771.5	998.8	1160.5	1159.8	1042.1	907.6	807.9	721.7	654.6	584.7
50°	549.0	686.3	878.6	1062.0	1077.4	978.6	850.8	752.0	671.5	601.1	544.9
52.5°	490.8	604.0	776.9	952.7	996.5	910.9	786.9	695.7	617.6	552.9	504.7
55°	414.7	502.3	633.6	798.2	864.4	804.1	694.0	608.9	545.5	491.1	449.7
57.5°	350.9	416.5	521.9	654.3	731.6	693.6	602.8	533.6	479.4	430.2	397.4
60°	310.6	364.4	453.8	564.5	649.6	623.0	545.5	481.0	434.9	392.3	361.5
62.5°	272.8	319.1	395.6	485.4	563.5	552.5	489.2	435.1	394.7	355.8	329.8
65°	219.5	253.2	313.0	383.4	446.1	451.5	405.9	369.2	333.1	302.4	279.3
67.5°	174.8	196.8	238.9	298.2	345.2	361.9	334.1	306.1	277.5	253.7	233.7
70°	147.3	165.1	195.8	243.8	287.0	304.7	288.7	266.8	242.0	222.5	205.3
72.5°	119.4	136.7	159.3	194.6	231.6	250.7	245.2	229.4	209.3	193.1	176.9
75°	90.0	95.2	110.7	134.3	163.3	179.9	184.0	175.8	159.7	147.3	137.9
77.5°	66.5	69.7	77.0	89.4	108.4	123.1	129.2	128.2	117.3	110.0	101.2
80°	53.2	55.0	58.6	63.9	78.1	92.9	97.0	97.0	89.3	86.4	77.5
82.5°	40.5	41.7	43.9	46.8	53.5	66.3	71.0	72.0	67.1	63.2	56.2
85°	23.1	22.5	23.6	25.4	26.7	30.1	37.3	38.4	37.3	32.5	30.8
87.5°	10.7	10.9	10.6	9.8	9.9	10.0	11.9	13.9	12.4	11.4	10.8
90°	13.4	11.9	10.5	8.7	6.8	4.8	2.8	0.8	2.8	4.8	6.8
92.5°	17.5	16.8	16.0	15.7	15.9	16.1	16.2	16.4	16.2	16.1	15.9
95°	29.2	28.0	26.7	29.1	35.0	41.0	47.0	53.0	47.0	41.0	35.0
97.5°	36.6	33.7	30.8	37.7	54.6	71.4	88.2	105.0	88.2	71.4	54.6
100°	40.3	37.2	34.2	44.9	69.7	94.5	119.3	144.2	119.3	94.5	69.7
102.5°	99.2	124.9	150.7	166.1	171.4	176.6	181.9	187.2	181.9	176.6	171.4
105°	148.5	197.9	247.3	269.3	263.9	258.4	253.0	247.5	253.0	258.4	263.9
107.5°	188.1	247.3	306.6	334.0	329.6	325.2	320.8	316.5	320.8	325.2	329.6
110°	247.1	299.4	351.7	375.9	372.2	368.4	364.6	360.8	364.6	368.4	372.2



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	385.3	398.2	411.2	415.9	412.6	409.2	405.8	402.4	405.8	409.2	412.6
115°	493.5	488.9	484.4	480.5	477.5	474.4	471.4	468.2	471.4	474.4	477.5
117.5°	550.4	547.2	544.1	540.8	537.4	534.0	530.5	527.1	530.5	534.0	537.4
120°	590.4	587.2	583.9	580.9	578.2	575.5	572.7	570.1	572.7	575.5	578.2
122.5°	628.3	624.7	621.2	618.0	615.1	612.2	609.4	606.5	609.4	612.2	615.1
125°	681.3	677.9	674.4	671.5	669.1	666.8	664.4	662.1	664.4	666.8	669.1
127.5°	730.6	728.0	725.4	722.8	720.2	717.6	715.1	712.4	715.1	717.6	720.2
130°	762.3	760.4	758.4	755.9	753.0	750.1	747.3	744.4	747.3	750.1	753.0
132.5°	793.0	791.0	789.0	786.8	784.3	781.9	779.4	776.9	779.4	781.9	784.3
135°	836.4	834.7	833.1	830.9	828.0	825.1	822.2	819.3	822.2	825.1	828.0
137.5°	875.8	874.0	872.2	870.2	868.2	866.2	864.2	862.1	864.2	866.2	868.2
140°	901.6	899.6	897.7	895.9	894.5	893.0	891.6	890.1	891.6	893.0	894.5
142.5°	925.1	922.8	920.6	918.8	917.5	916.2	914.9	913.6	914.9	916.2	917.5
145°	957.3	954.2	951.1	949.7	949.9	950.0	950.2	950.4	950.2	950.0	949.9
147.5°	987.0	983.9	980.9	979.7	980.4	981.1	981.8	982.5	981.8	981.1	980.4
150°	1004.9	1002.0	999.1	998.3	999.5	1000.8	1002.1	1003.4	1002.1	1000.8	999.5
152.5°	1021.5	1018.7	1015.9	1015.3	1016.7	1018.1	1019.5	1020.9	1019.5	1018.1	1016.7
155°	1044.6	1042.4	1040.3	1040.0	1041.6	1043.2	1044.9	1046.5	1044.9	1043.2	1041.6
157.5°	1064.2	1062.7	1061.1	1061.0	1062.4	1063.8	1065.1	1066.5	1065.1	1063.8	1062.4
160°	1076.1	1075.0	1073.9	1073.9	1075.0	1076.1	1077.2	1078.3	1077.2	1076.1	1075.0
162.5°	1086.1	1085.2	1084.2	1084.3	1085.4	1086.5	1087.6	1088.7	1087.6	1086.5	1085.4
165°	1099.1	1098.6	1098.1	1098.3	1099.4	1100.5	1101.6	1102.7	1101.6	1100.5	1099.4
167.5°	1109.5	1109.0	1108.5	1108.8	1109.8	1111.0	1112.1	1113.1	1112.1	1111.0	1109.8
170°	1115.0	1114.6	1114.3	1114.6	1115.7	1116.8	1117.8	1119.0	1117.8	1116.8	1115.7
172.5°	1118.9	1118.6	1118.2	1118.6	1119.6	1120.7	1121.8	1122.8	1121.8	1120.7	1119.6
175°	1123.1	1122.8	1122.4	1122.8	1124.1	1125.4	1126.7	1127.9	1126.7	1125.4	1124.1
177.5°	1124.5	1124.4	1124.3	1124.7	1125.7	1126.8	1127.7	1128.7	1127.7	1126.8	1125.7
180°	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8
2.5°	1678.6	1675.3	1669.2	1659.7	1654.0	1644.1	1637.4	1641.3	1642.2	1641.3	1640.3
5°	1633.5	1621.1	1604.0	1587.4	1572.0	1555.5	1546.0	1541.9	1533.6	1528.8	1526.5
7.5°	1579.0	1557.6	1533.3	1504.5	1480.0	1454.3	1441.2	1434.7	1417.7	1408.5	1400.4
10°	1538.3	1504.6	1480.3	1442.4	1419.4	1385.6	1362.6	1363.2	1340.1	1327.0	1317.6
12.5°	1493.3	1456.3	1415.9	1381.9	1349.8	1322.7	1294.9	1283.6	1259.2	1246.6	1221.0
15°	1418.8	1375.6	1333.0	1286.8	1254.3	1212.3	1172.1	1122.9	1083.3	1049.0	1039.6
17.5°	1337.4	1283.9	1241.2	1187.0	1131.2	1060.6	1014.0	985.4	961.5	943.4	930.0
20°	1281.6	1227.1	1181.5	1099.9	1024.8	976.9	942.5	920.6	895.8	876.3	865.6
22.5°	1222.8	1166.0	1103.9	1012.8	954.2	915.8	885.2	860.1	843.2	828.0	818.2
25°	1139.5	1077.4	975.1	912.3	865.0	824.7	803.4	788.1	770.3	749.7	740.1
27.5°	1051.5	952.7	879.2	832.6	787.4	761.3	742.1	719.1	703.2	693.9	684.0
30°	985.7	886.9	829.5	778.6	746.6	717.6	695.2	682.2	666.8	650.9	644.4
32.5°	912.3	833.4	778.4	736.0	703.6	678.9	661.1	640.1	628.9	619.1	605.5
35°	821.2	761.4	711.1	676.9	646.1	626.0	605.3	592.8	572.7	564.5	559.1
37.5°	744.0	692.2	654.7	618.5	594.1	571.9	559.2	539.5	530.7	519.2	508.0
40°	700.5	649.6	613.6	584.0	556.8	540.2	524.2	508.3	495.3	489.9	476.3
42.5°	656.0	614.7	578.5	546.1	527.9	510.3	490.2	478.4	464.9	456.3	447.9
45°	594.6	557.9	527.2	500.5	480.5	462.1	449.1	429.5	421.9	404.7	397.6
47.5°	540.6	506.6	477.2	451.9	432.3	420.4	401.3	386.0	373.7	363.2	354.0
50°	502.3	473.9	445.5	423.0	405.3	388.2	368.6	360.9	342.0	336.6	331.4
52.5°	467.3	440.3	414.3	392.3	374.5	357.8	340.6	330.6	317.8	312.5	308.6
55°	418.3	392.3	367.4	347.9	330.1	313.0	302.4	289.9	284.0	279.8	275.1
57.5°	369.1	345.6	326.6	306.8	289.0	275.4	263.1	255.6	249.4	244.0	238.4
60°	337.9	315.3	298.2	279.8	261.5	250.3	240.8	231.9	224.8	216.5	214.2
62.5°	304.7	285.1	269.3	251.5	235.5	225.2	216.2	207.8	199.3	187.2	183.9
65°	259.1	243.8	227.2	212.4	198.2	188.2	175.1	165.7	162.1	161.0	160.3
67.5°	217.9	203.4	189.2	174.1	161.1	151.9	145.2	143.7	141.2	140.5	138.9
70°	190.5	176.9	162.7	148.5	136.1	134.3	132.0	129.6	126.6	125.5	124.2
72.5°	165.9	151.9	137.6	126.3	120.9	118.7	116.3	114.0	111.9	110.8	110.0
75°	127.2	114.2	104.7	100.6	97.6	95.9	92.3	90.5	89.3	87.6	86.9
77.5°	91.6	84.3	79.9	77.3	74.2	72.3	70.3	68.5	67.2	66.9	65.9
80°	69.8	66.3	63.3	59.7	58.6	56.2	55.6	53.9	54.4	52.7	52.7
82.5°	54.2	49.7	47.2	45.6	44.4	42.4	41.9	41.0	41.2	39.9	39.9
85°	27.8	26.7	25.4	24.3	24.3	22.5	23.1	22.5	22.5	21.3	20.7
87.5°	10.8	10.6	10.0	10.3	10.5	10.3	10.5	10.3	10.4	10.6	10.3
90°	8.7	10.5	11.9	13.4	14.8	16.3	17.2	18.1	19.0	19.9	20.5
92.5°	15.7	16.0	16.8	17.5	18.2	18.9	19.4	19.8	20.3	20.8	21.1
95°	29.1	26.7	28.0	29.2	30.5	31.7	32.6	33.5	34.5	35.4	35.8
97.5°	37.7	30.8	33.7	36.6	39.6	42.5	43.2	44.0	44.7	45.4	45.8
100°	44.9	34.2	37.2	40.3	43.3	46.5	47.9	49.3	50.7	52.3	53.1
102.5°	166.1	150.7	124.9	99.2	73.5	47.7	49.6	51.5	53.4	55.3	56.4
105°	269.3	247.3	197.9	148.5	99.1	49.7	51.6	53.7	55.6	57.6	59.0
107.5°	334.0	306.6	247.3	188.1	128.8	69.6	67.5	65.5	63.5	61.4	60.8
110°	375.9	351.7	299.4	247.1	194.8	142.5	124.4	106.3	88.2	70.1	61.4



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	415.9	411.2	398.2	385.3	372.4	359.4	293.5	227.5	161.4	95.4	62.7
115°	480.5	484.4	488.9	493.5	497.9	502.5	418.7	334.9	251.1	167.3	118.9
117.5°	540.8	544.1	547.2	550.4	553.5	556.5	536.3	516.0	495.8	475.5	443.9
120°	580.9	583.9	587.2	590.4	593.7	596.9	599.1	601.3	603.5	605.6	594.5
122.5°	618.0	621.2	624.7	628.3	631.9	635.4	636.7	638.0	639.3	640.6	638.9
125°	671.5	674.4	677.9	681.3	684.7	688.1	689.5	690.7	692.0	693.2	694.1
127.5°	722.8	725.4	728.0	730.6	733.2	735.8	737.5	739.4	741.3	743.2	744.0
130°	755.9	758.4	760.4	762.3	764.4	766.3	768.3	770.3	772.3	774.3	775.3
132.5°	786.8	789.0	791.0	793.0	795.0	796.9	798.7	800.4	802.1	803.8	804.5
135°	830.9	833.1	834.7	836.4	838.0	839.6	841.4	843.3	845.1	846.9	847.6
137.5°	870.2	872.2	874.0	875.8	877.7	879.6	881.3	883.1	884.8	886.6	887.3
140°	895.9	897.7	899.6	901.6	903.7	905.6	907.2	908.8	910.5	912.1	912.5
142.5°	918.8	920.6	922.8	925.1	927.5	929.7	931.2	932.6	934.2	935.7	935.9
145°	949.7	951.1	954.2	957.3	960.4	963.4	964.7	966.0	967.2	968.5	968.7
147.5°	979.7	980.9	983.9	987.0	990.1	993.1	994.0	995.0	995.9	996.8	996.9
150°	998.3	999.1	1002.0	1004.9	1007.8	1010.7	1011.7	1012.8	1014.0	1015.0	1015.1
152.5°	1015.3	1015.9	1018.7	1021.5	1024.2	1027.0	1028.1	1029.1	1030.2	1031.3	1031.3
155°	1040.0	1040.3	1042.4	1044.6	1046.8	1048.9	1050.0	1051.1	1052.2	1053.3	1053.1
157.5°	1061.0	1061.1	1062.7	1064.2	1065.7	1067.2	1068.4	1069.6	1070.9	1072.1	1072.0
160°	1073.9	1073.9	1075.0	1076.1	1077.2	1078.3	1079.3	1080.4	1081.6	1082.6	1082.5
162.5°	1084.3	1084.2	1085.2	1086.1	1087.1	1088.1	1089.2	1090.5	1091.7	1093.0	1092.8
165°	1098.3	1098.1	1098.6	1099.1	1099.7	1100.3	1101.5	1102.8	1104.0	1105.3	1105.3
167.5°	1108.8	1108.5	1109.0	1109.5	1110.0	1110.5	1111.8	1113.0	1114.3	1115.6	1115.4
170°	1114.6	1114.3	1114.6	1115.0	1115.4	1115.7	1117.0	1118.3	1119.5	1120.8	1120.6
172.5°	1118.6	1118.2	1118.6	1118.9	1119.3	1119.6	1120.9	1122.1	1123.5	1124.7	1124.5
175°	1122.8	1122.4	1122.8	1123.1	1123.5	1123.8	1125.2	1126.4	1127.7	1128.9	1128.6
177.5°	1124.7	1124.3	1124.4	1124.5	1124.7	1124.8	1125.9	1126.9	1127.9	1128.9	1128.7
180°	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8
2.5°	1635.1	1636.0	1634.6	1635.6	1634.6	1636.0	1635.1	1640.3	1641.3	1642.2	1641.3
5°	1523.5	1516.4	1515.2	1513.5	1515.2	1516.4	1523.5	1526.5	1528.8	1533.6	1541.9
7.5°	1390.3	1389.2	1386.3	1382.2	1386.3	1389.2	1390.3	1400.4	1408.5	1417.7	1434.7
10°	1304.6	1301.6	1301.1	1296.9	1301.1	1301.6	1304.6	1317.6	1327.0	1340.1	1363.2
12.5°	1204.3	1185.2	1183.2	1172.9	1183.2	1185.2	1204.3	1221.0	1246.6	1259.2	1283.6
15°	1025.4	1021.8	1010.0	1002.3	1010.0	1021.8	1025.4	1039.6	1049.0	1083.3	1122.9
17.5°	923.1	911.5	907.9	906.2	907.9	911.5	923.1	930.0	943.4	961.5	985.4
20°	857.3	846.7	844.9	843.7	844.9	846.7	857.3	865.6	876.3	895.8	920.6
22.5°	811.9	800.8	796.1	792.6	796.1	800.8	811.9	818.2	828.0	843.2	860.1
25°	734.2	730.1	727.7	726.6	727.7	730.1	734.2	740.1	749.7	770.3	788.1
27.5°	673.5	664.4	662.6	659.6	662.6	664.4	673.5	684.0	693.9	703.2	719.1
30°	639.0	636.1	631.9	628.3	631.9	636.1	639.0	644.4	650.9	666.8	682.2
32.5°	598.2	595.8	592.1	590.5	592.1	595.8	598.2	605.5	619.1	628.9	640.1
35°	553.2	544.9	541.4	536.0	541.4	544.9	553.2	559.1	564.5	572.7	592.8
37.5°	505.5	501.1	496.1	497.9	496.1	501.1	505.5	508.0	519.2	530.7	539.5
40°	468.6	465.7	464.5	463.9	464.5	465.7	468.6	476.3	489.9	495.3	508.3
42.5°	439.3	431.1	428.0	427.8	428.0	431.1	439.3	447.9	456.3	464.9	478.4
45°	394.7	386.9	381.7	382.2	381.7	386.9	394.7	397.6	404.7	421.9	429.5
47.5°	348.9	348.7	345.4	346.5	345.4	348.7	348.9	354.0	363.2	373.7	386.0
50°	327.2	323.6	321.3	321.8	321.3	323.6	327.2	331.4	336.6	342.0	360.9
52.5°	306.4	303.3	301.4	303.9	301.4	303.3	306.4	308.6	312.5	317.8	330.6
55°	272.2	268.6	268.0	267.4	268.0	268.6	272.2	275.1	279.8	284.0	289.9
57.5°	234.0	231.6	228.0	226.5	228.0	231.6	234.0	238.4	244.0	249.4	255.6
60°	206.5	201.8	195.8	195.3	195.8	201.8	206.5	214.2	216.5	224.8	231.9
62.5°	181.4	180.5	179.2	179.1	179.2	180.5	181.4	183.9	187.2	199.3	207.8
65°	159.2	158.5	159.2	159.7	159.2	158.5	159.2	160.3	161.0	162.1	165.7
67.5°	138.7	137.6	136.5	137.1	136.5	137.6	138.7	138.9	140.5	141.2	143.7
70°	123.1	122.4	121.9	121.9	121.9	122.4	123.1	124.2	125.5	126.6	129.6
72.5°	107.9	107.8	107.2	106.7	107.2	107.8	107.9	110.0	110.8	111.9	114.0
75°	86.4	85.2	85.2	85.2	85.2	85.2	86.4	86.9	87.6	89.3	90.5
77.5°	65.8	65.2	64.6	64.1	64.6	65.2	65.8	65.9	66.9	67.2	68.5
80°	52.1	51.5	50.9	50.9	50.9	51.5	52.1	52.7	52.7	54.4	53.9
82.5°	39.8	39.1	39.1	38.6	39.1	39.1	39.8	39.9	39.9	41.2	41.0
85°	21.3	21.8	21.3	22.5	21.3	21.8	21.3	20.7	21.3	22.5	22.5
87.5°	10.3	9.9	10.5	10.1	10.5	9.9	10.3	10.3	10.6	10.4	10.3
90°	20.9	21.2	21.7	22.0	21.7	21.2	20.9	20.5	19.9	19.0	18.1
92.5°	21.3	21.6	21.8	22.0	21.8	21.6	21.3	21.1	20.8	20.3	19.8
95°	35.6	35.4	35.2	35.0	35.2	35.4	35.6	35.8	35.4	34.5	33.5
97.5°	46.1	46.3	46.5	46.7	46.5	46.3	46.1	45.8	45.4	44.7	44.0
100°	53.5	53.9	54.2	54.6	54.2	53.9	53.5	53.1	52.3	50.7	49.3
102.5°	57.0	57.4	58.0	58.5	58.0	57.4	57.0	56.4	55.3	53.4	51.5
105°	59.7	60.5	61.2	61.9	61.2	60.5	59.7	59.0	57.6	55.6	53.7
107.5°	61.5	62.2	63.0	63.7	63.0	62.2	61.5	60.8	61.4	63.5	65.5
110°	62.2	62.9	63.6	64.4	63.6	62.9	62.2	61.4	70.1	88.2	106.3



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	63.2	63.8	64.4	65.0	64.4	63.8	63.2	62.7	95.4	161.4	227.5
115°	105.8	92.8	79.8	66.8	79.8	92.8	105.8	118.9	167.3	251.1	334.9
117.5°	401.1	358.3	315.5	272.7	315.5	358.3	401.1	443.9	475.5	495.8	516.0
120°	570.1	545.6	521.2	496.8	521.2	545.6	570.1	594.5	605.6	603.5	601.3
122.5°	634.2	629.4	624.6	619.9	624.6	629.4	634.2	638.9	640.6	639.3	638.0
125°	694.6	695.2	695.8	696.3	695.8	695.2	694.6	694.1	693.2	692.0	690.7
127.5°	744.2	744.3	744.4	744.5	744.4	744.3	744.2	744.0	743.2	741.3	739.4
130°	775.1	774.8	774.6	774.5	774.6	774.8	775.1	775.3	774.3	772.3	770.3
132.5°	804.3	804.1	804.0	803.8	804.0	804.1	804.3	804.5	803.8	802.1	800.4
135°	847.2	846.9	846.5	846.1	846.5	846.9	847.2	847.6	846.9	845.1	843.3
137.5°	886.6	886.0	885.4	884.8	885.4	886.0	886.6	887.3	886.6	884.8	883.1
140°	911.6	910.7	909.8	908.8	909.8	910.7	911.6	912.5	912.1	910.5	908.8
142.5°	935.0	934.2	933.3	932.3	933.3	934.2	935.0	935.9	935.7	934.2	932.6
145°	967.8	966.9	966.0	965.1	966.0	966.9	967.8	968.7	968.5	967.2	966.0
147.5°	996.1	995.4	994.6	993.9	994.6	995.4	996.1	996.9	996.8	995.9	995.0
150°	1014.2	1013.3	1012.4	1011.5	1012.4	1013.3	1014.2	1015.1	1015.0	1014.0	1012.8
152.5°	1030.0	1028.9	1027.7	1026.4	1027.7	1028.9	1030.0	1031.3	1031.3	1030.2	1029.1
155°	1051.7	1050.2	1048.7	1047.3	1048.7	1050.2	1051.7	1053.1	1053.3	1052.2	1051.1
157.5°	1070.6	1069.2	1067.7	1066.4	1067.7	1069.2	1070.6	1072.0	1072.1	1070.9	1069.6
160°	1081.2	1080.0	1078.7	1077.5	1078.7	1080.0	1081.2	1082.5	1082.6	1081.6	1080.4
162.5°	1091.3	1089.7	1088.2	1086.5	1088.2	1089.7	1091.3	1092.8	1093.0	1091.7	1090.5
165°	1104.0	1102.8	1101.5	1100.3	1101.5	1102.8	1104.0	1105.3	1105.3	1104.0	1102.8
167.5°	1113.7	1112.1	1110.5	1108.8	1110.5	1112.1	1113.7	1115.4	1115.6	1114.3	1113.0
170°	1119.0	1117.3	1115.7	1114.1	1115.7	1117.3	1119.0	1120.6	1120.8	1119.5	1118.3
172.5°	1122.8	1121.2	1119.6	1118.0	1119.6	1121.2	1122.8	1124.5	1124.7	1123.5	1122.1
175°	1126.9	1125.1	1123.2	1121.4	1123.2	1125.1	1126.9	1128.6	1128.9	1127.7	1126.4
177.5°	1127.5	1126.1	1124.8	1123.6	1124.8	1126.1	1127.5	1128.7	1128.9	1127.9	1126.9
180°	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8
2.5°	1637.4	1644.1	1654.0	1659.7	1669.2	1675.3	1678.6	1684.8	1688.1	1700.0	1712.3
5°	1546.0	1555.5	1572.0	1587.4	1604.0	1621.1	1633.5	1647.8	1660.8	1683.3	1706.9
7.5°	1441.2	1454.3	1480.0	1504.5	1533.3	1557.6	1579.0	1603.3	1625.0	1657.2	1690.7
10°	1362.6	1385.6	1419.4	1442.4	1480.3	1504.6	1538.3	1565.0	1595.1	1637.7	1675.6
12.5°	1294.9	1322.7	1349.8	1381.9	1415.9	1456.3	1493.3	1527.5	1563.4	1607.4	1651.9
15°	1172.1	1212.3	1254.3	1286.8	1333.0	1375.6	1418.8	1464.9	1508.7	1561.4	1619.3
17.5°	1014.0	1060.6	1131.2	1187.0	1241.2	1283.9	1337.4	1393.2	1444.8	1508.3	1572.9
20°	942.5	976.9	1024.8	1099.9	1181.5	1227.1	1281.6	1343.1	1402.2	1471.4	1540.7
22.5°	885.2	915.8	954.2	1012.8	1103.9	1166.0	1222.8	1285.3	1354.0	1424.6	1501.4
25°	803.4	824.7	865.0	912.3	975.1	1077.4	1139.5	1202.2	1276.8	1352.5	1440.1
27.5°	742.1	761.3	787.4	832.6	879.2	952.7	1051.5	1119.9	1194.2	1279.4	1370.3
30°	695.2	717.6	746.6	778.6	829.5	886.9	985.7	1065.0	1138.4	1225.9	1322.9
32.5°	661.1	678.9	703.6	736.0	778.4	833.4	912.3	1008.6	1080.1	1172.4	1273.7
35°	605.3	626.0	646.1	676.9	711.1	761.4	821.2	924.2	995.1	1086.3	1188.0
37.5°	559.2	571.9	594.1	618.5	654.7	692.2	744.0	836.3	913.2	1002.6	1106.8
40°	524.2	540.2	556.8	584.0	613.6	649.6	700.5	769.2	857.3	944.9	1046.6
42.5°	490.2	510.3	527.9	546.1	578.5	614.7	656.0	714.3	804.3	887.2	986.1
45°	449.1	462.1	480.5	500.5	527.2	557.9	594.6	645.5	731.9	803.4	896.3
47.5°	401.3	420.4	432.3	451.9	477.2	506.6	540.6	584.7	654.6	721.7	807.9
50°	368.6	388.2	405.3	423.0	445.5	473.9	502.3	544.9	601.1	671.5	752.0
52.5°	340.6	357.8	374.5	392.3	414.3	440.3	467.3	504.7	552.9	617.6	695.7
55°	302.4	313.0	330.1	347.9	367.4	392.3	418.3	449.7	491.1	545.5	608.9
57.5°	263.1	275.4	289.0	306.8	326.6	345.6	369.1	397.4	430.2	479.4	533.6
60°	240.8	250.3	261.5	279.8	298.2	315.3	337.9	361.5	392.3	434.9	481.0
62.5°	216.2	225.2	235.5	251.5	269.3	285.1	304.7	329.8	355.8	394.7	435.1
65°	175.1	188.2	198.2	212.4	227.2	243.8	259.1	279.3	302.4	333.1	369.2
67.5°	145.2	151.9	161.1	174.1	189.2	203.4	217.9	233.7	253.7	277.5	306.1
70°	132.0	134.3	136.1	148.5	162.7	176.9	190.5	205.3	222.5	242.0	266.8
72.5°	116.3	118.7	120.9	126.3	137.6	151.9	165.9	176.9	193.1	209.3	229.4
75°	92.3	95.9	97.6	100.6	104.7	114.2	127.2	137.9	147.3	159.7	175.8
77.5°	70.3	72.3	74.2	77.3	79.9	84.3	91.6	101.2	110.0	117.3	128.2
80°	55.6	56.2	58.6	59.7	63.3	66.3	69.8	77.5	86.4	89.3	97.0
82.5°	41.9	42.4	44.4	45.6	47.2	49.7	54.2	56.2	63.2	67.1	72.0
85°	23.1	22.5	24.3	24.3	25.4	26.7	27.8	30.8	32.5	37.3	38.4
87.5°	10.5	10.3	10.5	10.3	10.0	10.6	10.8	10.8	11.4	12.4	13.9
90°	17.2	16.3	14.8	13.4	11.9	10.5	8.7	6.8	4.8	2.8	0.8
92.5°	19.4	18.9	18.2	17.5	16.8	16.0	15.7	15.9	16.1	16.2	16.4
95°	32.6	31.7	30.5	29.2	28.0	26.7	29.1	35.0	41.0	47.0	53.0
97.5°	43.2	42.5	39.6	36.6	33.7	30.8	37.7	54.6	71.4	88.2	105.0
100°	47.9	46.5	43.3	40.3	37.2	34.2	44.9	69.7	94.5	119.3	144.2
102.5°	49.6	47.7	73.5	99.2	124.9	150.7	166.1	171.4	176.6	181.9	187.2
105°	51.6	49.7	99.1	148.5	197.9	247.3	269.3	263.9	258.4	253.0	247.5
107.5°	67.5	69.6	128.8	188.1	247.3	306.6	334.0	329.6	325.2	320.8	316.5
110°	124.4	142.5	194.8	247.1	299.4	351.7	375.9	372.2	368.4	364.6	360.8



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	293.5	359.4	372.4	385.3	398.2	411.2	415.9	412.6	409.2	405.8	402.4
115°	418.7	502.5	497.9	493.5	488.9	484.4	480.5	477.5	474.4	471.4	468.2
117.5°	536.3	556.5	553.5	550.4	547.2	544.1	540.8	537.4	534.0	530.5	527.1
120°	599.1	596.9	593.7	590.4	587.2	583.9	580.9	578.2	575.5	572.7	570.1
122.5°	636.7	635.4	631.9	628.3	624.7	621.2	618.0	615.1	612.2	609.4	606.5
125°	689.5	688.1	684.7	681.3	677.9	674.4	671.5	669.1	666.8	664.4	662.1
127.5°	737.5	735.8	733.2	730.6	728.0	725.4	722.8	720.2	717.6	715.1	712.4
130°	768.3	766.3	764.4	762.3	760.4	758.4	755.9	753.0	750.1	747.3	744.4
132.5°	798.7	796.9	795.0	793.0	791.0	789.0	786.8	784.3	781.9	779.4	776.9
135°	841.4	839.6	838.0	836.4	834.7	833.1	830.9	828.0	825.1	822.2	819.3
137.5°	881.3	879.6	877.7	875.8	874.0	872.2	870.2	868.2	866.2	864.2	862.1
140°	907.2	905.6	903.7	901.6	899.6	897.7	895.9	894.5	893.0	891.6	890.1
142.5°	931.2	929.7	927.5	925.1	922.8	920.6	918.8	917.5	916.2	914.9	913.6
145°	964.7	963.4	960.4	957.3	954.2	951.1	949.7	949.9	950.0	950.2	950.4
147.5°	994.0	993.1	990.1	987.0	983.9	980.9	979.7	980.4	981.1	981.8	982.5
150°	1011.7	1010.7	1007.8	1004.9	1002.0	999.1	998.3	999.5	1000.8	1002.1	1003.4
152.5°	1028.1	1027.0	1024.2	1021.5	1018.7	1015.9	1015.3	1016.7	1018.1	1019.5	1020.9
155°	1050.0	1048.9	1046.8	1044.6	1042.4	1040.3	1040.0	1041.6	1043.2	1044.9	1046.5
157.5°	1068.4	1067.2	1065.7	1064.2	1062.7	1061.1	1061.0	1062.4	1063.8	1065.1	1066.5
160°	1079.3	1078.3	1077.2	1076.1	1075.0	1073.9	1073.9	1075.0	1076.1	1077.2	1078.3
162.5°	1089.2	1088.1	1087.1	1086.1	1085.2	1084.2	1084.3	1085.4	1086.5	1087.6	1088.7
165°	1101.5	1100.3	1099.7	1099.1	1098.6	1098.1	1098.3	1099.4	1100.5	1101.6	1102.7
167.5°	1111.8	1110.5	1110.0	1109.5	1109.0	1108.5	1108.8	1109.8	1111.0	1112.1	1113.1
170°	1117.0	1115.7	1115.4	1115.0	1114.6	1114.3	1114.6	1115.7	1116.8	1117.8	1119.0
172.5°	1120.9	1119.6	1119.3	1118.9	1118.6	1118.2	1118.6	1119.6	1120.7	1121.8	1122.8
175°	1125.2	1123.8	1123.5	1123.1	1122.8	1122.4	1122.8	1124.1	1125.4	1126.7	1127.9
177.5°	1125.9	1124.8	1124.7	1124.5	1124.4	1124.3	1124.7	1125.7	1126.8	1127.7	1128.7
180°	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8
2.5°	1712.7	1714.1	1723.6	1727.9	1736.4	1739.7	1743.5	1742.6	1742.6	1744.5	1757.7
5°	1716.4	1728.2	1746.0	1763.2	1779.7	1793.9	1803.4	1812.8	1816.4	1833.5	1849.0
7.5°	1710.2	1732.1	1761.4	1787.5	1818.9	1843.3	1863.8	1882.0	1894.6	1919.6	1945.2
10°	1702.2	1733.0	1766.1	1799.8	1843.0	1875.5	1908.7	1934.1	1942.4	1979.7	2001.0
12.5°	1686.1	1727.2	1769.4	1813.1	1855.3	1900.1	1936.6	1962.0	1991.2	2024.6	2064.0
15°	1662.0	1709.3	1764.3	1820.5	1880.9	1935.3	1974.3	2018.7	2050.7	2087.4	2121.6
17.5°	1627.3	1688.3	1758.2	1823.3	1893.1	1951.5	2005.3	2047.8	2070.3	2091.2	2096.3
20°	1599.8	1665.5	1747.8	1824.7	1894.5	1961.9	2015.2	2050.7	2056.6	2057.2	2025.9
22.5°	1570.0	1644.2	1730.3	1809.0	1892.6	1967.6	2009.0	2024.2	2000.7	1960.6	1900.0
25°	1515.2	1601.1	1701.0	1790.9	1882.0	1953.0	1967.3	1940.6	1858.4	1772.0	1662.6
27.5°	1455.8	1552.3	1659.5	1759.4	1856.5	1900.5	1869.9	1773.9	1625.8	1497.0	1341.0
30°	1412.3	1520.5	1625.9	1737.7	1827.7	1846.6	1776.2	1634.8	1462.0	1267.9	1112.3
32.5°	1362.6	1476.0	1591.8	1707.4	1782.7	1764.2	1647.9	1473.8	1271.2	1080.5	933.4
35°	1291.6	1408.7	1533.6	1649.6	1697.5	1617.6	1443.7	1217.0	1010.0	831.9	730.7
37.5°	1209.6	1337.1	1467.0	1573.4	1570.0	1436.9	1200.0	966.1	792.0	686.7	614.7
40°	1151.4	1280.3	1420.6	1510.5	1472.0	1298.7	1041.9	821.2	694.0	610.0	557.3
42.5°	1095.6	1224.9	1364.2	1435.7	1368.9	1155.7	899.9	727.0	622.1	556.5	513.8
45°	1000.5	1137.2	1266.1	1305.8	1186.2	951.4	727.7	602.4	532.5	483.9	454.4
47.5°	907.6	1042.1	1159.8	1160.5	998.8	771.5	613.9	521.3	461.6	424.1	402.6
50°	850.8	978.6	1077.4	1062.0	878.6	686.3	549.0	469.2	419.5	390.5	368.0
52.5°	786.9	910.9	996.5	952.7	776.9	604.0	490.8	423.7	382.5	357.4	337.2
55°	694.0	804.1	864.4	798.2	633.6	502.3	414.7	362.1	331.4	310.0	292.8
57.5°	602.8	693.6	731.6	654.3	521.9	416.5	350.9	311.3	280.8	265.6	256.6
60°	545.5	623.0	649.6	564.5	453.8	364.4	310.6	273.9	251.5	241.4	232.6
62.5°	489.2	552.5	563.5	485.4	395.6	319.1	272.8	241.7	226.9	217.2	208.8
65°	405.9	451.5	446.1	383.4	313.0	253.2	219.5	200.5	189.3	175.8	161.0
67.5°	334.1	361.9	345.2	298.2	238.9	196.8	174.8	160.4	146.5	133.6	130.2
70°	288.7	304.7	287.0	243.8	195.8	165.1	147.3	130.2	121.9	119.0	113.6
72.5°	245.2	250.7	231.6	194.6	159.3	136.7	119.4	109.8	105.3	102.8	99.4
75°	184.0	179.9	163.3	134.3	110.7	95.2	90.0	86.4	83.5	81.1	79.3
77.5°	129.2	123.1	108.4	89.4	77.0	69.7	66.5	64.6	63.2	62.0	60.2
80°	97.0	92.9	78.1	63.9	58.6	55.0	53.2	50.9	50.9	49.7	47.9
82.5°	71.0	66.3	53.5	46.8	43.9	41.7	40.5	39.1	38.6	38.8	37.5
85°	37.3	30.1	26.7	25.4	23.6	22.5	23.1	21.8	21.8	21.8	21.3
87.5°	11.9	10.0	9.9	9.8	10.6	10.9	10.7	11.1	11.8	11.5	12.1
90°	2.8	4.8	6.8	8.7	10.5	11.9	13.4	14.8	16.3	17.2	18.1
92.5°	16.2	16.1	15.9	15.7	16.0	16.8	17.5	18.2	18.9	19.4	19.8
95°	47.0	41.0	35.0	29.1	26.7	28.0	29.2	30.5	31.7	32.6	33.5
97.5°	88.2	71.4	54.6	37.7	30.8	33.7	36.6	39.6	42.5	43.2	44.0
100°	119.3	94.5	69.7	44.9	34.2	37.2	40.3	43.3	46.5	47.9	49.3
102.5°	181.9	176.6	171.4	166.1	150.7	124.9	99.2	73.5	47.7	49.6	51.5
105°	253.0	258.4	263.9	269.3	247.3	197.9	148.5	99.1	49.7	51.6	53.7
107.5°	320.8	325.2	329.6	334.0	306.6	247.3	188.1	128.8	69.6	67.5	65.5
110°	364.6	368.4	372.2	375.9	351.7	299.4	247.1	194.8	142.5	124.4	106.3



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	405.8	409.2	412.6	415.9	411.2	398.2	385.3	372.4	359.4	293.5	227.5
115°	471.4	474.4	477.5	480.5	484.4	488.9	493.5	497.9	502.5	418.7	334.9
117.5°	530.5	534.0	537.4	540.8	544.1	547.2	550.4	553.5	556.5	536.3	516.0
120°	572.7	575.5	578.2	580.9	583.9	587.2	590.4	593.7	596.9	599.1	601.3
122.5°	609.4	612.2	615.1	618.0	621.2	624.7	628.3	631.9	635.4	636.7	638.0
125°	664.4	666.8	669.1	671.5	674.4	677.9	681.3	684.7	688.1	689.5	690.7
127.5°	715.1	717.6	720.2	722.8	725.4	728.0	730.6	733.2	735.8	737.5	739.4
130°	747.3	750.1	753.0	755.9	758.4	760.4	762.3	764.4	766.3	768.3	770.3
132.5°	779.4	781.9	784.3	786.8	789.0	791.0	793.0	795.0	796.9	798.7	800.4
135°	822.2	825.1	828.0	830.9	833.1	834.7	836.4	838.0	839.6	841.4	843.3
137.5°	864.2	866.2	868.2	870.2	872.2	874.0	875.8	877.7	879.6	881.3	883.1
140°	891.6	893.0	894.5	895.9	897.7	899.6	901.6	903.7	905.6	907.2	908.8
142.5°	914.9	916.2	917.5	918.8	920.6	922.8	925.1	927.5	929.7	931.2	932.6
145°	950.2	950.0	949.9	949.7	951.1	954.2	957.3	960.4	963.4	964.7	966.0
147.5°	981.8	981.1	980.4	979.7	980.9	983.9	987.0	990.1	993.1	994.0	995.0
150°	1002.1	1000.8	999.5	998.3	999.1	1002.0	1004.9	1007.8	1010.7	1011.7	1012.8
152.5°	1019.5	1018.1	1016.7	1015.3	1015.9	1018.7	1021.5	1024.2	1027.0	1028.1	1029.1
155°	1044.9	1043.2	1041.6	1040.0	1040.3	1042.4	1044.6	1046.8	1048.9	1050.0	1051.1
157.5°	1065.1	1063.8	1062.4	1061.0	1061.1	1062.7	1064.2	1065.7	1067.2	1068.4	1069.6
160°	1077.2	1076.1	1075.0	1073.9	1073.9	1075.0	1076.1	1077.2	1078.3	1079.3	1080.4
162.5°	1087.6	1086.5	1085.4	1084.3	1084.2	1085.2	1086.1	1087.1	1088.1	1089.2	1090.5
165°	1101.6	1100.5	1099.4	1098.3	1098.1	1098.6	1099.1	1099.7	1100.3	1101.5	1102.8
167.5°	1112.1	1111.0	1109.8	1108.8	1108.5	1109.0	1109.5	1110.0	1110.5	1111.8	1113.0
170°	1117.8	1116.8	1115.7	1114.6	1114.3	1114.6	1115.0	1115.4	1115.7	1117.0	1118.3
172.5°	1121.8	1120.7	1119.6	1118.6	1118.2	1118.6	1118.9	1119.3	1119.6	1120.9	1122.1
175°	1126.7	1125.4	1124.1	1122.8	1122.4	1122.8	1123.1	1123.5	1123.8	1125.2	1126.4
177.5°	1127.7	1126.8	1125.7	1124.7	1124.3	1124.4	1124.5	1124.7	1124.8	1125.9	1126.9
180°	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8	1702.8
2.5°	1762.5	1768.6	1771.4	1771.4	1774.8	1773.3	1771.9
5°	1863.8	1875.0	1877.3	1888.0	1895.7	1893.3	1894.5
7.5°	1964.4	1982.5	2000.4	2008.6	2009.8	2014.6	2016.3
10°	2026.4	2041.2	2069.0	2064.8	2085.6	2097.4	2077.9
12.5°	2086.1	2106.0	2125.4	2130.7	2142.4	2146.2	2138.5
15°	2140.0	2150.7	2151.9	2148.9	2152.4	2149.5	2138.2
17.5°	2089.6	2072.3	2037.3	2020.7	2007.6	1988.2	1980.4
20°	2006.3	1955.4	1896.2	1872.6	1844.8	1790.4	1803.4
22.5°	1826.5	1768.4	1709.3	1640.2	1607.2	1555.6	1552.5
25°	1546.6	1446.6	1336.6	1259.6	1214.7	1163.2	1140.7
27.5°	1202.5	1076.6	986.4	940.8	899.2	858.4	856.8
30°	976.2	881.5	811.7	772.7	747.3	730.1	733.7
32.5°	822.9	758.0	711.0	678.5	659.7	646.8	646.6
35°	672.7	628.3	598.2	584.5	571.0	561.5	562.0
37.5°	575.7	549.0	532.3	517.2	508.7	504.1	501.5
40°	526.0	504.1	491.1	482.2	475.1	468.6	467.4
42.5°	486.7	468.6	455.6	448.6	441.9	437.4	436.1
45°	431.9	417.1	405.3	397.6	394.7	390.5	390.5
47.5°	384.2	369.7	360.4	355.6	350.5	347.8	347.7
50°	352.0	340.8	332.5	329.6	325.4	323.6	323.1
52.5°	323.2	314.8	308.9	306.8	305.1	302.8	303.2
55°	284.0	279.3	276.9	275.1	272.2	268.6	271.0
57.5°	251.0	246.9	240.6	235.0	232.3	229.8	230.8
60°	227.8	219.5	211.2	204.7	203.0	197.6	197.6
62.5°	198.4	186.8	176.6	173.0	171.2	168.7	168.3
65°	152.7	147.9	145.5	143.2	142.0	142.0	140.8
67.5°	126.5	124.6	122.0	121.5	120.2	119.8	119.5
70°	111.8	109.4	108.3	107.7	106.5	107.1	105.3
72.5°	97.6	95.8	95.5	94.0	93.3	93.4	92.0
75°	77.0	77.0	76.3	75.7	74.5	73.9	74.5
77.5°	59.2	59.3	58.2	58.1	58.0	58.1	57.5
80°	47.3	47.9	47.3	46.7	46.2	46.7	46.2
82.5°	37.4	36.6	36.5	36.3	36.2	35.8	35.8
85°	21.3	21.8	21.3	20.7	20.7	20.7	21.3
87.5°	11.9	12.0	12.1	12.2	12.3	12.4	11.9
90°	19.0	19.9	20.5	20.9	21.2	21.7	22.0
92.5°	20.3	20.8	21.1	21.3	21.6	21.8	22.0
95°	34.5	35.4	35.8	35.6	35.4	35.2	35.0
97.5°	44.7	45.4	45.8	46.1	46.3	46.5	46.7
100°	50.7	52.3	53.1	53.5	53.9	54.2	54.6
102.5°	53.4	55.3	56.4	57.0	57.4	58.0	58.5
105°	55.6	57.6	59.0	59.7	60.5	61.2	61.9
107.5°	63.5	61.4	60.8	61.5	62.2	63.0	63.7
110°	88.2	70.1	61.4	62.2	62.9	63.6	64.4



TEST NUMBER: P331723-940

CATALOG NUMBER: SA2XXRDIP-C865D925U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	161.4	95.4	62.7	63.2	63.8	64.4	65.0
115°	251.1	167.3	118.9	105.8	92.8	79.8	66.8
117.5°	495.8	475.5	443.9	401.1	358.3	315.5	272.7
120°	603.5	605.6	594.5	570.1	545.6	521.2	496.8
122.5°	639.3	640.6	638.9	634.2	629.4	624.6	619.9
125°	692.0	693.2	694.1	694.6	695.2	695.8	696.3
127.5°	741.3	743.2	744.0	744.2	744.3	744.4	744.5
130°	772.3	774.3	775.3	775.1	774.8	774.6	774.5
132.5°	802.1	803.8	804.5	804.3	804.1	804.0	803.8
135°	845.1	846.9	847.6	847.2	846.9	846.5	846.1
137.5°	884.8	886.6	887.3	886.6	886.0	885.4	884.8
140°	910.5	912.1	912.5	911.6	910.7	909.8	908.8
142.5°	934.2	935.7	935.9	935.0	934.2	933.3	932.3
145°	967.2	968.5	968.7	967.8	966.9	966.0	965.1
147.5°	995.9	996.8	996.9	996.1	995.4	994.6	993.9
150°	1014.0	1015.0	1015.1	1014.2	1013.3	1012.4	1011.5
152.5°	1030.2	1031.3	1031.3	1030.0	1028.9	1027.7	1026.4
155°	1052.2	1053.3	1053.1	1051.7	1050.2	1048.7	1047.3
157.5°	1070.9	1072.1	1072.0	1070.6	1069.2	1067.7	1066.4
160°	1081.6	1082.6	1082.5	1081.2	1080.0	1078.7	1077.5
162.5°	1091.7	1093.0	1092.8	1091.3	1089.7	1088.2	1086.5
165°	1104.0	1105.3	1105.3	1104.0	1102.8	1101.5	1100.3
167.5°	1114.3	1115.6	1115.4	1113.7	1112.1	1110.5	1108.8
170°	1119.5	1120.8	1120.6	1119.0	1117.3	1115.7	1114.1
172.5°	1123.5	1124.7	1124.5	1122.8	1121.2	1119.6	1118.0
175°	1127.7	1128.9	1128.6	1126.9	1125.1	1123.2	1121.4
177.5°	1127.9	1128.9	1128.7	1127.5	1126.1	1124.8	1123.6
180°	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5	1125.5

(END OF REPORT)