

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332667-927

Luminaire Tested: **SA4XXDIP-C1020D1205U927-4F0-1E-UDD-F**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332667-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXDIP-C1020D1205U927-4F0-1E-UDD-F  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1205 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 7318.1 lumens  
Efficiency: N/A  
Efficacy: 111.9 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 65.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332667-927  
CATALOG NUMBER: SA4XXDIP-C1020D1205U927-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

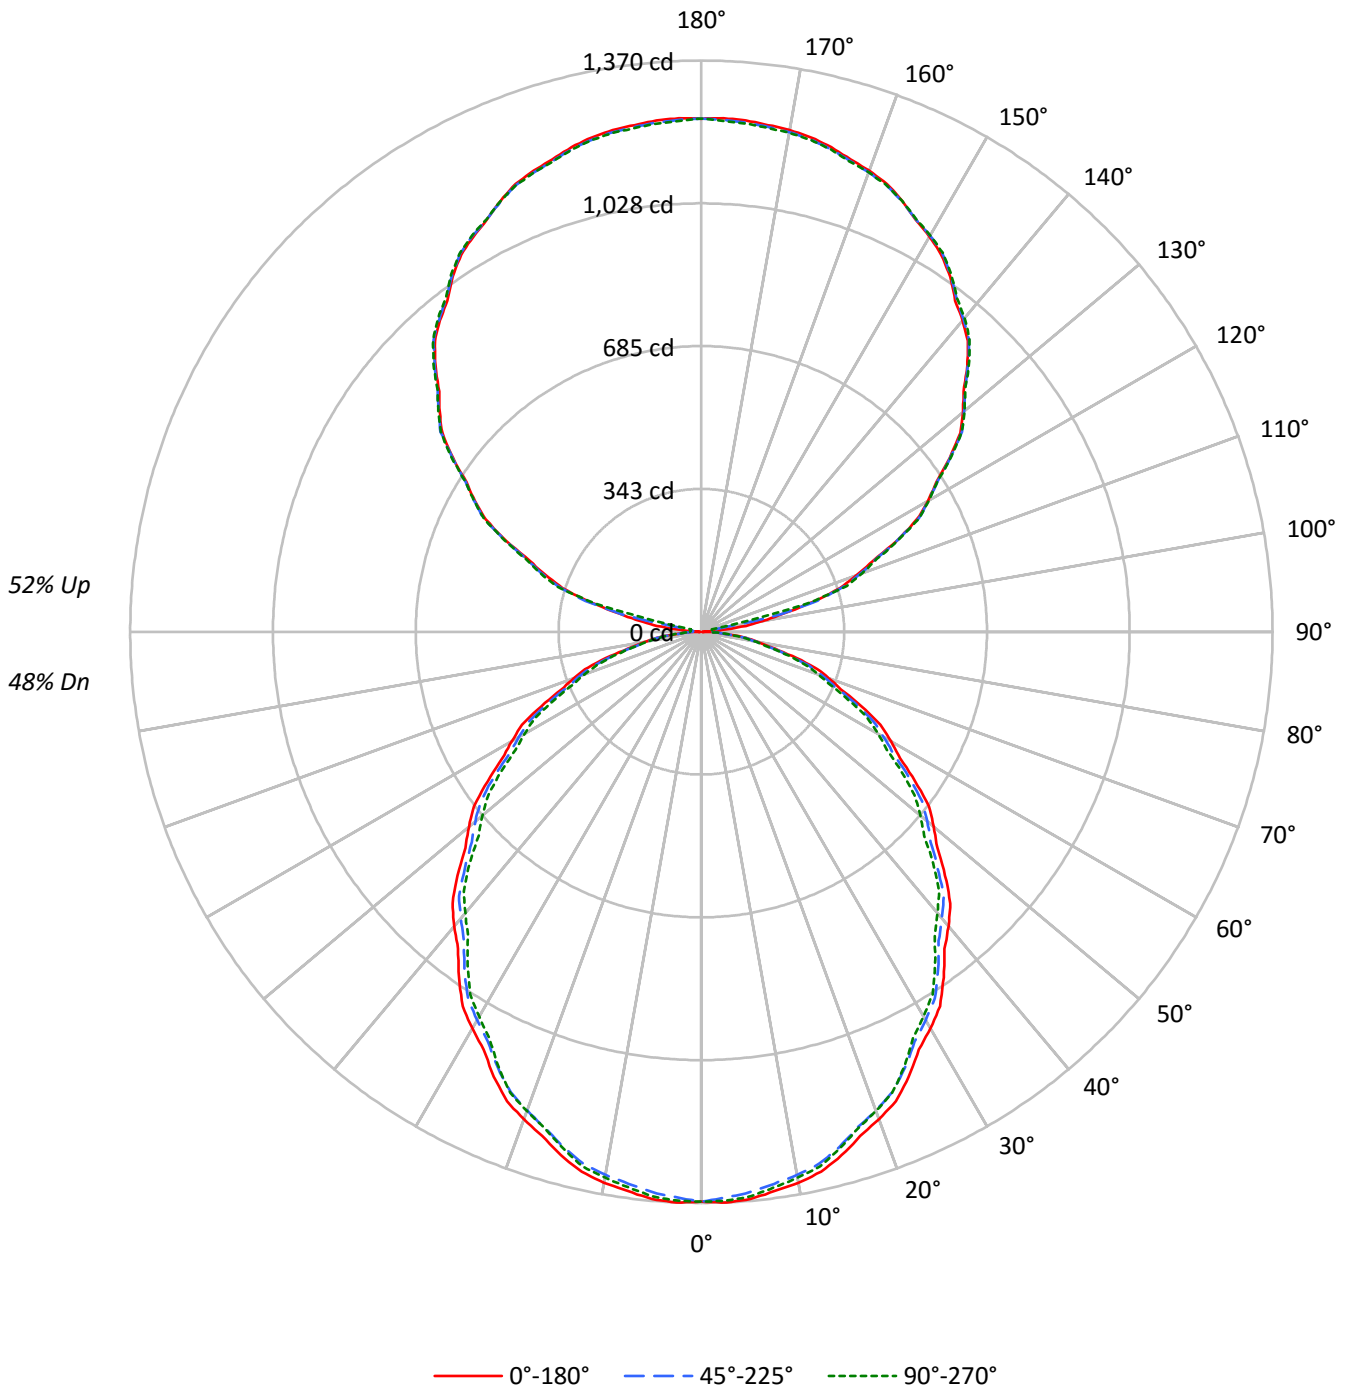



TEST NUMBER: P332667-927

CATALOG NUMBER: SA4XXDIP-C1020D1205U927-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	54	54	54	48
1	97	93	89	86	89	86	82	79	72	70	67	59	58	56	48	47	46	40
2	89	81	75	70	81	75	70	65	63	59	56	52	49	47	42	40	38	34
3	81	71	64	58	74	66	59	54	56	51	47	46	43	40	37	35	33	29
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	31	28	25
5	68	56	48	42	62	52	45	40	44	39	34	37	33	29	30	27	25	21
6	62	50	42	36	57	47	40	34	40	34	30	33	29	26	27	24	22	19
7	58	45	38	32	53	42	35	30	36	30	26	30	26	23	25	22	19	17
8	54	41	34	28	49	38	31	27	33	27	23	28	23	20	23	20	17	15
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	16	13
10	47	35	27	23	43	32	26	21	28	23	19	24	19	17	20	16	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	11035	11035	11035
5°	11068	10935	11015
10°	10999	10846	10900
15°	10866	10692	10719
20°	10689	10501	10510
25°	10488	10283	10253
30°	10241	10026	9934
35°	9984	9758	9629
40°	9720	9454	9280
45°	9442	9154	8978
50°	9134	8887	8611
55°	8802	8541	8263
60°	8472	8152	7905
65°	8097	7782	7469
70°	7678	7291	7006
75°	7037	6697	6525
80°	6267	6007	5858
85°	5483	5280	5169



TEST NUMBER: P332667-927

CATALOG NUMBER: SA4XXDIP-C1020D1205U927-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	128.7	1.8
10°-20°	362.7	5.0
20°-30°	533.8	7.3
30°-40°	620.6	8.5
40°-50°	620.6	8.5
50°-60°	542.9	7.4
60°-70°	403.2	5.5
70°-80°	229.1	3.1
80°-90°	69.7	1.0
90°-100°	42.1	0.6
100°-110°	268.4	3.7
110°-120°	513.4	7.0
120°-130°	651.7	8.9
130°-140°	697.3	9.5
140°-150°	652.1	8.9
150°-160°	525.8	7.2
160°-170°	339.2	4.6
170°-180°	116.9	1.6
0°-30°	1025.2	14.0
0°-40°	1645.9	22.5
0°-60°	2809.4	38.4
0°-90°	3511.3	48.0
90°-120°	823.9	11.3
90°-150°	2825.0	38.6
90°-180°	3807.0	52.0
0°-180°	7318.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1367	1367	1367	1367	1367	
5°	1366	1361	1349	1361	1359	129
15°	1300	1295	1279	1285	1282	366
25°	1177	1169	1154	1155	1151	541
35°	1013	1005	990	983	977	633
45°	827	819	802	790	786	637
55°	625	621	607	594	587	560
65°	424	418	407	397	391	420
75°	226	220	215	210	209	240
85°	59	59	57	57	56	65
90°	3	13	20	26	28	6
95°	51	21	20	26	27	65
105°	277	282	287	293	262	290
115°	517	520	519	521	521	509
125°	727	731	729	732	733	649
135°	902	901	905	907	908	695
145°	1040	1043	1043	1044	1046	650
155°	1140	1141	1139	1142	1140	526
165°	1203	1199	1198	1205	1198	340
175°	1231	1226	1226	1233	1223	117
180°	1231	1231	1231	1231	1231	



TEST NUMBER: P332667-927

CATALOG NUMBER: SA4XXDIP-C1020D1205U927-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9
2.5°	1370.4	1369.8	1369.2	1368.7	1368.1	1366.7	1364.5	1362.4	1360.3	1358.1	1360.1
5°	1365.8	1364.9	1363.9	1362.9	1361.9	1360.1	1357.4	1354.7	1352.1	1349.4	1352.1
7.5°	1353.1	1352.1	1351.1	1350.2	1349.2	1347.3	1344.3	1341.3	1338.3	1335.4	1337.5
10°	1341.7	1340.8	1339.7	1338.8	1337.8	1335.8	1332.6	1329.4	1326.3	1323.1	1325.0
12.5°	1326.8	1325.9	1324.8	1323.9	1322.9	1320.7	1317.4	1314.1	1310.7	1307.3	1309.5
15°	1300.1	1299.1	1298.1	1297.2	1296.2	1293.9	1290.2	1286.6	1282.9	1279.3	1280.7
17.5°	1267.9	1266.7	1265.4	1264.2	1263.1	1260.7	1257.2	1253.8	1250.3	1246.9	1247.8
20°	1244.2	1243.0	1241.8	1240.6	1239.4	1236.9	1233.3	1229.6	1226.0	1222.3	1223.1
22.5°	1218.9	1217.2	1215.6	1214.0	1212.4	1209.7	1206.1	1202.5	1198.8	1195.2	1196.5
25°	1177.4	1175.8	1174.0	1172.3	1170.6	1168.1	1164.7	1161.3	1157.9	1154.4	1154.7
27.5°	1130.1	1128.4	1126.6	1124.8	1123.1	1120.6	1117.5	1114.3	1111.1	1107.9	1107.4
30°	1098.6	1096.6	1094.6	1092.7	1090.8	1088.2	1085.1	1081.9	1078.7	1075.5	1074.6
32.5°	1065.2	1063.5	1061.8	1060.0	1058.3	1055.7	1052.3	1049.0	1045.6	1042.3	1041.1
35°	1013.1	1011.5	1009.7	1008.1	1006.3	1003.8	1000.4	997.0	993.6	990.1	988.4
37.5°	958.1	956.6	955.1	953.5	951.9	949.4	945.6	942.0	938.3	934.7	932.9
40°	922.3	920.3	918.3	916.4	914.4	911.6	908.0	904.4	900.7	897.1	894.6
42.5°	883.7	882.5	881.3	880.2	879.0	876.4	872.4	868.3	864.3	860.2	857.4
45°	827.0	825.2	823.6	821.8	820.1	817.3	813.4	809.5	805.6	801.8	799.1
47.5°	767.5	766.4	765.2	764.1	762.9	760.5	756.9	753.3	749.7	746.1	743.1
50°	727.3	726.3	725.3	724.4	723.3	721.2	717.8	714.4	711.0	707.6	704.2
52.5°	687.9	686.7	685.5	684.4	683.2	680.8	677.2	673.6	669.9	666.4	663.4
55°	625.4	624.6	623.9	623.2	622.5	620.4	617.0	613.6	610.2	606.8	603.9
57.5°	565.9	565.0	564.2	563.3	562.5	560.4	557.1	553.7	550.3	547.0	544.2
60°	524.7	523.4	522.2	521.0	519.8	517.6	514.4	511.3	508.1	504.9	502.7
62.5°	484.3	483.3	482.3	481.3	480.2	478.1	474.7	471.3	467.9	464.6	462.6
65°	423.9	422.6	421.4	420.3	419.0	417.2	414.7	412.3	409.9	407.4	405.0
67.5°	363.0	361.9	360.8	359.7	358.5	356.8	354.4	352.1	349.7	347.5	345.1
70°	325.3	323.6	321.9	320.2	318.5	316.6	314.7	312.8	310.9	308.9	306.9
72.5°	285.0	283.3	281.6	279.9	278.2	276.6	275.0	273.5	271.9	270.3	268.8
75°	225.6	224.4	223.2	222.0	220.8	219.5	218.3	217.1	215.9	214.7	213.7
77.5°	168.9	168.3	167.8	167.3	166.8	166.0	164.9	163.8	162.7	161.7	161.4
80°	134.8	134.0	133.2	132.5	131.8	131.2	130.7	130.2	129.8	129.2	128.7
82.5°	101.4	101.1	100.8	100.4	100.1	99.8	99.7	99.7	99.6	99.4	99.2
85°	59.2	59.2	59.2	59.2	59.2	58.9	58.4	57.9	57.4	57.0	57.0
87.5°	23.4	23.6	23.8	24.1	24.3	24.6	24.7	24.8	25.0	25.1	25.3
90°	2.8	5.0	7.3	9.5	11.7	13.7	15.4	17.0	18.6	20.3	21.5
92.5°	11.6	11.7	11.9	12.0	12.1	13.0	14.6	16.2	17.9	19.5	20.8
95°	50.6	43.6	36.7	29.8	22.8	19.4	19.6	19.8	20.0	20.3	21.5
97.5°	107.5	111.9	116.2	120.5	124.8	115.6	92.8	69.9	47.1	24.3	24.4
100°	151.0	154.6	158.4	162.0	165.7	153.4	125.2	97.0	68.8	40.5	37.0
102.5°	199.6	202.2	204.9	207.6	210.3	209.8	206.2	202.5	198.8	195.1	157.6
105°	277.0	278.3	279.5	280.7	281.9	283.1	284.2	285.1	286.1	287.2	289.1
107.5°	349.0	349.7	350.3	350.9	351.5	352.5	353.9	355.3	356.6	358.1	358.9
110°	397.7	398.2	398.9	399.5	400.1	401.0	402.3	403.5	404.7	405.9	406.3



TEST NUMBER: P332667-927

CATALOG NUMBER: SA4XXDIP-C1020D1205U927-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	444.8	445.9	446.9	448.1	449.2	450.0	450.6	451.1	451.8	452.3	452.3
115°	517.3	517.9	518.6	519.1	519.8	520.0	519.8	519.6	519.4	519.1	519.6
117.5°	582.7	583.4	584.3	585.1	585.9	586.5	587.0	587.5	588.0	588.4	588.3
120°	626.9	627.6	628.5	629.3	630.1	630.4	630.3	630.0	629.8	629.6	630.0
122.5°	668.0	668.6	669.1	669.6	670.0	670.4	670.7	671.0	671.3	671.6	671.8
125°	727.1	728.0	728.8	729.6	730.5	730.6	730.2	729.8	729.4	729.0	729.6
127.5°	783.2	783.3	783.5	783.8	783.9	784.5	785.4	786.4	787.3	788.3	788.1
130°	819.2	819.4	819.7	819.8	820.1	820.5	821.1	821.7	822.3	822.9	823.1
132.5°	852.4	852.7	853.1	853.5	853.8	854.4	855.2	856.0	856.7	857.5	857.7
135°	902.1	901.9	901.7	901.4	901.3	901.6	902.4	903.2	904.0	904.8	905.2
137.5°	946.1	946.2	946.3	946.3	946.4	946.9	947.8	948.7	949.6	950.5	950.9
140°	974.8	975.2	975.6	976.0	976.4	976.8	977.2	977.6	978.0	978.5	979.1
142.5°	1000.5	1001.3	1002.0	1002.7	1003.5	1004.0	1004.2	1004.5	1004.7	1005.0	1005.4
145°	1040.1	1040.8	1041.4	1042.0	1042.6	1042.9	1042.9	1042.9	1042.9	1042.9	1043.1
147.5°	1071.6	1072.8	1073.9	1075.1	1076.2	1076.7	1076.5	1076.3	1076.0	1075.9	1076.0
150°	1094.5	1095.3	1096.1	1096.9	1097.7	1098.0	1097.8	1097.6	1097.4	1097.2	1097.2
152.5°	1113.6	1114.3	1114.9	1115.6	1116.2	1116.3	1116.0	1115.6	1115.2	1114.9	1115.2
155°	1140.5	1140.7	1140.9	1141.1	1141.3	1141.1	1140.5	1139.9	1139.2	1138.6	1139.5
157.5°	1163.1	1163.0	1162.8	1162.8	1162.6	1162.2	1161.5	1160.9	1160.2	1159.4	1160.5
160°	1176.4	1175.8	1175.1	1174.6	1173.9	1173.5	1173.3	1173.1	1172.9	1172.7	1173.9
162.5°	1188.1	1187.4	1186.6	1185.8	1185.0	1184.6	1184.3	1184.2	1183.9	1183.8	1184.9
165°	1203.1	1202.1	1201.0	1200.0	1199.0	1198.5	1198.5	1198.5	1198.5	1198.5	1200.1
167.5°	1214.8	1213.8	1212.8	1211.6	1210.6	1210.0	1209.9	1209.7	1209.7	1209.5	1211.3
170°	1221.5	1220.3	1219.0	1217.8	1216.6	1216.1	1216.2	1216.5	1216.6	1216.9	1218.5
172.5°	1225.9	1224.6	1223.4	1222.2	1221.0	1220.4	1220.7	1220.9	1221.1	1221.3	1222.9
175°	1230.7	1229.5	1228.2	1227.0	1225.7	1225.3	1225.4	1225.7	1225.9	1226.1	1227.9
177.5°	1232.9	1231.8	1230.6	1229.5	1228.3	1227.9	1228.2	1228.5	1228.9	1229.2	1230.5
180°	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7



TEST NUMBER: P332667-927

CATALOG NUMBER: SA4XXDIP-C1020D1205U927-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9
2.5°	1362.0	1364.0	1366.0	1366.8	1366.6	1366.4	1366.2	1366.0
5°	1354.7	1357.4	1360.1	1361.2	1360.7	1360.2	1359.7	1359.2
7.5°	1339.7	1341.8	1343.9	1344.9	1344.6	1344.3	1343.9	1343.7
10°	1327.0	1329.0	1330.9	1331.6	1331.1	1330.6	1330.2	1329.7
12.5°	1311.6	1313.8	1315.9	1316.6	1316.0	1315.3	1314.5	1313.9
15°	1282.2	1283.7	1285.2	1285.5	1284.8	1284.0	1283.3	1282.5
17.5°	1248.7	1249.7	1250.5	1250.8	1250.3	1249.8	1249.4	1248.8
20°	1223.8	1224.6	1225.3	1225.3	1224.9	1224.4	1223.9	1223.4
22.5°	1197.8	1199.1	1200.4	1200.6	1199.8	1198.9	1198.0	1197.1
25°	1154.9	1155.2	1155.4	1155.0	1154.1	1153.1	1152.1	1151.1
27.5°	1106.8	1106.2	1105.6	1104.8	1103.5	1102.3	1101.1	1099.9
30°	1073.6	1072.6	1071.7	1070.6	1069.4	1068.1	1066.9	1065.7
32.5°	1039.9	1038.8	1037.6	1036.4	1035.1	1034.0	1032.8	1031.5
35°	986.7	985.0	983.3	981.8	980.6	979.5	978.2	977.0
37.5°	931.0	929.2	927.3	925.6	924.0	922.3	920.8	919.2
40°	892.2	889.7	887.3	885.5	884.2	883.0	881.9	880.6
42.5°	854.6	851.8	848.9	847.1	846.3	845.4	844.6	843.8
45°	796.4	793.7	791.0	789.3	788.6	787.9	787.1	786.4
47.5°	740.1	737.0	734.0	731.6	729.8	727.9	726.0	724.2
50°	700.8	697.4	694.0	691.5	690.0	688.6	687.1	685.6
52.5°	660.4	657.3	654.3	651.9	650.0	648.2	646.3	644.4
55°	600.9	598.0	595.1	592.9	591.4	590.0	588.5	587.1
57.5°	541.5	538.7	535.9	533.8	532.3	531.0	529.6	528.1
60°	500.6	498.4	496.1	494.5	493.2	492.0	490.8	489.6
62.5°	460.7	458.6	456.6	455.0	453.8	452.6	451.4	450.2
65°	402.6	400.1	397.7	395.9	394.7	393.5	392.2	391.0
67.5°	342.8	340.4	338.1	336.8	336.4	336.0	335.7	335.4
70°	305.0	303.0	301.1	299.8	299.0	298.3	297.5	296.8
72.5°	267.2	265.6	264.1	262.9	262.2	261.5	260.8	260.0
75°	212.7	211.8	210.8	210.2	209.9	209.7	209.5	209.2
77.5°	161.1	160.8	160.5	160.0	159.4	158.8	158.1	157.5
80°	128.3	127.8	127.3	126.9	126.7	126.4	126.2	126.0
82.5°	98.9	98.5	98.3	98.0	97.8	97.5	97.3	97.0
85°	57.0	57.0	57.0	56.8	56.6	56.3	56.1	55.8
87.5°	25.6	25.8	26.1	26.2	26.3	26.4	26.5	26.5
90°	22.7	23.9	25.2	26.0	26.4	26.8	27.2	27.6
92.5°	21.9	23.2	24.4	25.1	25.2	25.3	25.3	25.4
95°	22.7	23.9	25.2	25.9	26.1	26.3	26.5	26.7
97.5°	24.6	24.6	24.8	25.0	25.2	25.3	25.6	25.7
100°	33.5	30.1	26.6	25.0	25.2	25.3	25.6	25.7
102.5°	120.1	82.6	45.1	26.4	26.4	26.5	26.5	26.5
105°	290.9	292.7	294.5	291.8	284.4	277.0	269.7	262.4
107.5°	359.9	360.8	361.6	362.5	363.3	364.1	364.8	365.6
110°	406.8	407.2	407.6	408.1	408.7	409.3	410.0	410.5





TEST NUMBER: P332667-927

CATALOG NUMBER: SA4XXDIP-C1020D1205U927-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	452.2	452.1	452.0	452.3	453.1	453.9	454.7	455.4
115°	520.0	520.4	520.8	521.0	521.0	521.0	521.0	521.0
117.5°	588.2	588.1	588.0	588.0	587.9	587.8	587.7	587.6
120°	630.4	630.8	631.2	631.2	630.8	630.4	630.0	629.6
122.5°	672.1	672.3	672.6	672.5	672.1	671.7	671.2	670.8
125°	730.2	730.9	731.5	731.9	732.1	732.3	732.5	732.7
127.5°	788.1	787.9	787.8	787.7	787.5	787.3	787.2	787.0
130°	823.3	823.6	823.7	823.8	823.8	823.8	823.8	823.8
132.5°	857.9	858.2	858.3	858.3	858.2	858.0	857.9	857.7
135°	905.6	906.0	906.5	906.9	907.3	907.7	908.1	908.5
137.5°	951.4	951.8	952.3	952.4	952.4	952.2	952.0	952.0
140°	979.7	980.3	981.0	981.4	981.5	981.8	981.9	982.1
142.5°	1005.9	1006.3	1006.8	1007.0	1007.1	1007.1	1007.2	1007.2
145°	1043.3	1043.5	1043.7	1044.0	1044.4	1044.8	1045.3	1045.7
147.5°	1076.2	1076.3	1076.5	1076.7	1076.9	1077.1	1077.3	1077.5
150°	1097.2	1097.2	1097.2	1097.3	1097.5	1097.7	1098.0	1098.1
152.5°	1115.6	1115.9	1116.2	1116.3	1116.2	1116.0	1115.9	1115.8
155°	1140.3	1141.1	1141.9	1142.0	1141.4	1140.7	1140.2	1139.6
157.5°	1161.6	1162.6	1163.7	1163.7	1162.6	1161.6	1160.5	1159.4
160°	1175.1	1176.4	1177.6	1177.6	1176.4	1175.1	1173.9	1172.7
162.5°	1186.2	1187.4	1188.7	1188.6	1187.2	1185.8	1184.4	1183.0
165°	1201.7	1203.4	1205.0	1204.9	1203.1	1201.2	1199.4	1197.5
167.5°	1213.1	1214.9	1216.7	1216.6	1214.6	1212.5	1210.5	1208.4
170°	1220.1	1221.8	1223.4	1223.2	1221.1	1219.1	1217.1	1215.0
172.5°	1224.6	1226.2	1227.8	1227.6	1225.3	1223.1	1220.9	1218.7
175°	1229.8	1231.6	1233.4	1233.1	1230.7	1228.2	1225.7	1223.3
177.5°	1231.8	1233.1	1234.5	1234.1	1232.2	1230.2	1228.2	1226.3
180°	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7

(END OF REPORT)