

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332642-927

Luminaire Tested: **SA4XXDIP-C1020D590U927-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332642-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXDIP-C1020D590U927-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 590 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5181.9 lumens
Efficiency: N/A
Efficacy: 106.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 48.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332642-927
CATALOG NUMBER: SA4XXDIP-C1020D590U927-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

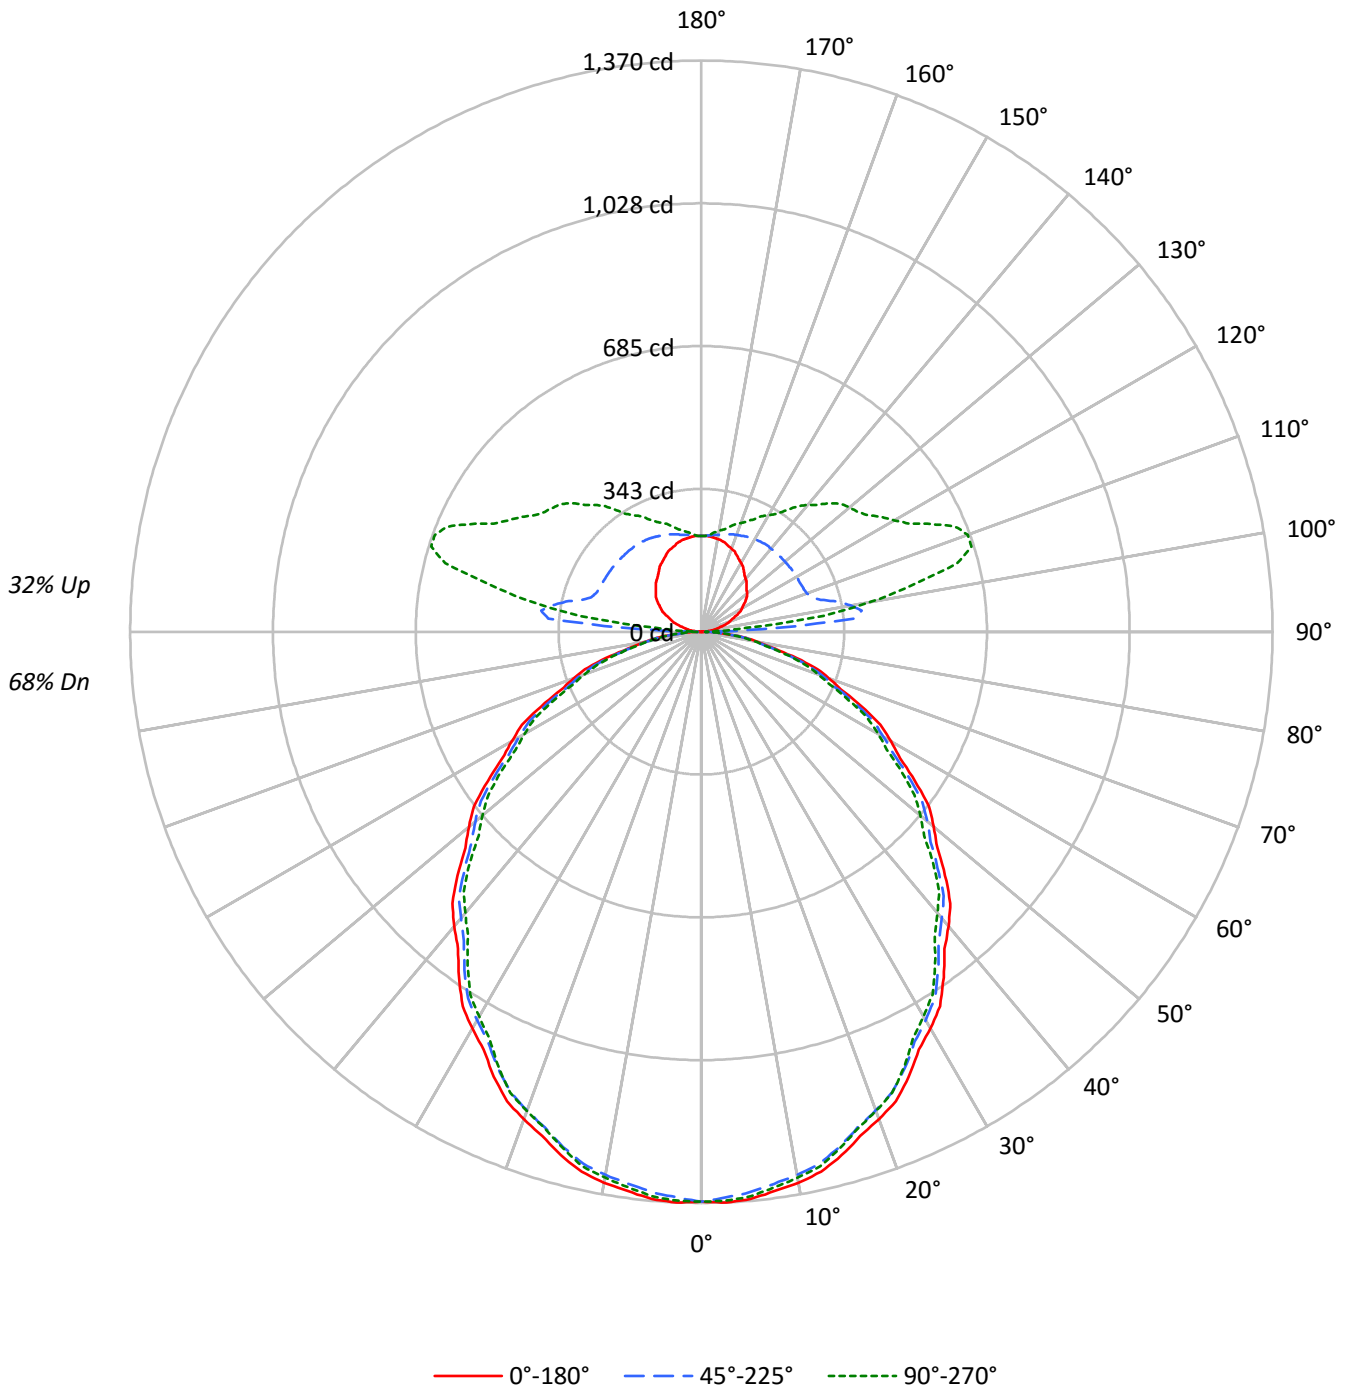



TEST NUMBER: P332642-927

CATALOG NUMBER: SA4XXDIP-C1020D590U927-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	72	72	72	68				
1	102	97	93	90	96	92	88	85	82	79	77	72	70	69	64	62	61	57				
2	93	85	79	73	87	80	75	70	72	67	63	64	60	57	56	54	51	48				
3	85	75	67	61	79	71	64	58	63	58	53	56	52	48	50	47	44	40				
4	77	66	58	52	73	63	55	50	56	50	46	50	45	42	45	41	38	35				
5	71	59	51	44	67	56	48	43	50	44	39	45	40	36	40	36	33	30				
6	66	53	45	39	62	50	43	37	46	39	34	41	36	32	36	32	29	26				
7	61	48	40	34	57	46	38	33	41	35	30	37	32	28	33	29	26	23				
8	56	44	36	30	53	42	34	29	38	32	27	34	29	25	31	26	23	21				
9	53	40	32	27	50	38	31	26	35	29	24	31	26	23	28	24	21	19				
10	49	37	29	24	47	35	28	24	32	26	22	29	24	21	26	22	19	17				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11035	11035	11035
5°	11068	10935	11015
10°	10999	10846	10900
15°	10866	10692	10719
20°	10689	10501	10510
25°	10488	10283	10253
30°	10241	10026	9934
35°	9984	9758	9629
40°	9720	9454	9280
45°	9442	9154	8978
50°	9134	8887	8611
55°	8802	8541	8263
60°	8472	8152	7905
65°	8097	7782	7469
70°	7678	7291	7006
75°	7037	6697	6525
80°	6267	6007	5858
85°	5483	5280	5169



TEST NUMBER: P332642-927

CATALOG NUMBER: SA4XXDIP-C1020D590U927-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	128.7	2.5
10°-20°	362.7	7.0
20°-30°	533.8	10.3
30°-40°	620.6	12.0
40°-50°	620.6	12.0
50°-60°	542.9	10.5
60°-70°	403.2	7.8
70°-80°	229.1	4.4
80°-90°	67.4	1.3
90°-100°	166.1	3.2
100°-110°	345.8	6.7
110°-120°	309.7	6.0
120°-130°	260.5	5.0
130°-140°	217.2	4.2
140°-150°	166.0	3.2
150°-160°	116.6	2.3
160°-170°	68.6	1.3
170°-180°	22.3	0.4
0°-30°	1025.2	19.8
0°-40°	1645.9	31.8
0°-60°	2809.4	54.2
0°-90°	3509.0	67.7
90°-120°	821.6	15.9
90°-150°	1465.3	28.3
90°-180°	1673.0	32.3
0°-180°	5181.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1367	1367	1367	1367	1367	
5°	1366	1361	1349	1361	1359	129
15°	1300	1295	1279	1285	1282	366
25°	1177	1169	1154	1155	1151	541
35°	1013	1005	990	983	977	633
45°	827	819	802	790	786	637
55°	625	621	607	594	587	560
65°	424	418	407	397	391	420
75°	226	220	215	210	209	240
85°	59	59	57	57	56	65
90°	0	4	8	9	10	4
95°	15	47	368	182	110	17
105°	53	77	296	638	636	56
115°	93	117	264	508	610	92
125°	130	154	263	432	487	115
135°	154	183	261	384	436	119
145°	178	203	259	324	356	111
155°	202	218	252	286	298	93
165°	220	227	242	256	260	62
175°	230	230	232	235	234	22
180°	230	230	230	230	230	



TEST NUMBER: P332642-927

CATALOG NUMBER: SA4XXDIP-C1020D590U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9
2.5°	1370.4	1369.8	1369.2	1368.7	1368.1	1366.7	1364.5	1362.4	1360.3	1358.1	1360.1
5°	1365.8	1364.9	1363.9	1362.9	1361.9	1360.1	1357.4	1354.7	1352.1	1349.4	1352.1
7.5°	1353.1	1352.1	1351.1	1350.2	1349.2	1347.3	1344.3	1341.3	1338.3	1335.4	1337.5
10°	1341.7	1340.8	1339.7	1338.8	1337.8	1335.8	1332.6	1329.4	1326.3	1323.1	1325.0
12.5°	1326.8	1325.9	1324.8	1323.9	1322.9	1320.7	1317.4	1314.1	1310.7	1307.3	1309.5
15°	1300.1	1299.1	1298.1	1297.2	1296.2	1293.9	1290.2	1286.6	1282.9	1279.3	1280.7
17.5°	1267.9	1266.7	1265.4	1264.2	1263.1	1260.7	1257.2	1253.8	1250.3	1246.9	1247.8
20°	1244.2	1243.0	1241.8	1240.6	1239.4	1236.9	1233.3	1229.6	1226.0	1222.3	1223.1
22.5°	1218.9	1217.2	1215.6	1214.0	1212.4	1209.7	1206.1	1202.5	1198.8	1195.2	1196.5
25°	1177.4	1175.8	1174.0	1172.3	1170.6	1168.1	1164.7	1161.3	1157.9	1154.4	1154.7
27.5°	1130.1	1128.4	1126.6	1124.8	1123.1	1120.6	1117.5	1114.3	1111.1	1107.9	1107.4
30°	1098.6	1096.6	1094.6	1092.7	1090.8	1088.2	1085.1	1081.9	1078.7	1075.5	1074.6
32.5°	1065.2	1063.5	1061.8	1060.0	1058.3	1055.7	1052.3	1049.0	1045.6	1042.3	1041.1
35°	1013.1	1011.5	1009.7	1008.1	1006.3	1003.8	1000.4	997.0	993.6	990.1	988.4
37.5°	958.1	956.6	955.1	953.5	951.9	949.4	945.6	942.0	938.3	934.7	932.9
40°	922.3	920.3	918.3	916.4	914.4	911.6	908.0	904.4	900.7	897.1	894.6
42.5°	883.7	882.5	881.3	880.2	879.0	876.4	872.4	868.3	864.3	860.2	857.4
45°	827.0	825.2	823.6	821.8	820.1	817.3	813.4	809.5	805.6	801.8	799.1
47.5°	767.5	766.4	765.2	764.1	762.9	760.5	756.9	753.3	749.7	746.1	743.1
50°	727.3	726.3	725.3	724.4	723.3	721.2	717.8	714.4	711.0	707.6	704.2
52.5°	687.9	686.7	685.5	684.4	683.2	680.8	677.2	673.6	669.9	666.4	663.4
55°	625.4	624.6	623.9	623.2	622.5	620.4	617.0	613.6	610.2	606.8	603.9
57.5°	565.9	565.0	564.2	563.3	562.5	560.4	557.1	553.7	550.3	547.0	544.2
60°	524.7	523.4	522.2	521.0	519.8	517.6	514.4	511.3	508.1	504.9	502.7
62.5°	484.3	483.3	482.3	481.3	480.2	478.1	474.7	471.3	467.9	464.6	462.6
65°	423.9	422.6	421.4	420.3	419.0	417.2	414.7	412.3	409.9	407.4	405.0
67.5°	363.0	361.9	360.8	359.7	358.5	356.8	354.4	352.1	349.7	347.5	345.1
70°	325.3	323.6	321.9	320.2	318.5	316.6	314.7	312.8	310.9	308.9	306.9
72.5°	285.0	283.3	281.6	279.9	278.2	276.6	275.0	273.5	271.9	270.3	268.8
75°	225.6	224.4	223.2	222.0	220.8	219.5	218.3	217.1	215.9	214.7	213.7
77.5°	168.9	168.3	167.8	167.3	166.8	166.0	164.9	163.8	162.7	161.7	161.4
80°	134.8	134.0	133.2	132.5	131.8	131.2	130.7	130.2	129.8	129.2	128.7
82.5°	101.4	101.1	100.8	100.4	100.1	99.8	99.7	99.7	99.6	99.4	99.2
85°	59.2	59.2	59.2	59.2	59.2	58.9	58.4	57.9	57.4	57.0	57.0
87.5°	22.9	22.9	23.0	22.8	22.7	22.5	22.9	22.7	22.7	22.7	22.6
90°	0.5	1.3	2.7	3.2	3.6	3.6	6.3	6.3	7.2	8.2	7.7
92.5°	5.1	7.5	11.7	17.3	23.8	33.3	56.2	91.3	125.5	143.3	119.4
95°	14.9	16.2	20.8	26.7	37.5	56.5	95.8	169.9	277.9	368.3	378.7
97.5°	26.8	26.8	30.7	36.0	45.4	61.3	91.6	152.7	260.2	387.9	475.8
100°	34.4	34.4	37.5	42.9	51.5	66.0	92.6	143.7	235.9	363.3	479.0
102.5°	41.6	42.3	45.1	50.1	58.4	72.1	96.3	141.2	219.6	332.6	451.9
105°	52.8	54.3	56.5	61.9	70.0	83.2	104.8	142.4	205.7	296.4	402.7
107.5°	65.4	66.2	68.5	74.3	82.1	95.0	114.9	149.0	203.1	276.2	362.9
110°	73.7	74.5	76.8	82.2	90.4	102.6	122.5	154.1	203.8	269.3	343.0



TEST NUMBER: P332642-927

CATALOG NUMBER: SA4XXDIP-C1020D590U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	81.6	82.5	85.2	90.2	98.3	110.5	129.7	159.5	206.0	266.1	331.8
115°	93.1	94.4	97.6	102.1	110.7	122.9	141.0	168.1	210.2	264.4	321.3
117.5°	105.0	106.3	109.1	114.1	122.1	134.8	151.9	176.9	214.5	263.9	316.6
120°	113.0	113.9	117.0	122.0	129.7	142.4	159.5	183.0	217.9	263.9	314.1
122.5°	120.2	121.1	124.3	128.9	137.3	149.6	166.8	188.8	221.1	263.6	311.2
125°	129.7	131.5	134.2	139.2	147.7	160.4	176.7	197.5	225.9	263.0	306.4
127.5°	138.1	139.6	142.8	148.5	157.4	170.2	185.9	205.0	229.8	262.0	300.0
130°	142.8	144.6	148.2	155.0	163.6	176.7	192.0	209.7	232.7	261.7	296.0
132.5°	147.5	148.9	153.7	160.1	169.4	181.7	197.1	214.4	235.3	261.3	292.4
135°	154.1	155.9	160.4	168.1	177.6	189.3	204.2	220.5	239.1	260.7	286.9
137.5°	160.7	162.4	167.4	174.7	184.6	195.7	209.7	224.9	241.3	260.6	282.3
140°	165.4	166.8	171.7	179.4	188.9	199.7	213.3	227.8	243.1	260.3	279.7
142.5°	170.5	171.8	176.4	183.7	192.9	203.4	216.6	229.9	244.5	260.3	277.6
145°	177.6	179.0	183.5	189.8	198.4	208.3	220.1	232.3	245.4	259.4	273.9
147.5°	185.6	186.1	190.0	196.5	203.7	212.7	223.7	234.3	245.8	257.8	270.5
150°	190.7	191.2	194.8	200.2	207.0	215.6	225.5	235.4	245.8	256.7	268.0
152.5°	195.4	195.5	199.1	204.1	210.2	218.1	227.0	236.1	245.1	254.8	265.1
155°	202.0	202.5	205.2	209.7	214.7	221.4	229.1	236.8	244.0	252.2	260.7
157.5°	208.4	208.4	211.0	214.4	218.8	224.1	230.7	236.8	242.9	249.4	256.4
160°	212.4	212.4	214.2	217.4	220.9	225.9	231.4	236.8	241.8	247.2	253.1
162.5°	216.0	215.6	217.1	219.9	223.2	227.0	232.1	236.8	240.7	245.0	250.2
165°	220.1	220.1	220.9	223.2	225.5	228.2	232.3	235.9	238.6	241.8	245.4
167.5°	224.1	223.7	224.1	225.9	227.1	229.2	232.2	234.8	236.5	238.5	241.1
170°	225.9	225.5	225.9	227.3	228.2	229.6	231.8	234.1	235.0	236.3	238.1
172.5°	227.8	227.3	227.4	228.4	228.9	229.9	231.5	233.4	233.5	234.2	235.6
175°	229.6	229.1	229.1	229.6	230.0	230.0	230.9	232.3	231.8	231.8	232.7
177.5°	230.4	230.0	229.7	230.0	230.0	230.0	230.4	231.1	230.4	230.4	230.8
180°	230.0	230.0	230.0	230.0	230.0	230.0	230.0	230.0	230.0	230.0	230.0



TEST NUMBER: P332642-927

CATALOG NUMBER: SA4XXDIP-C1020D590U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9	1366.9
2.5°	1362.0	1364.0	1366.0	1366.8	1366.6	1366.4	1366.2	1366.0
5°	1354.7	1357.4	1360.1	1361.2	1360.7	1360.2	1359.7	1359.2
7.5°	1339.7	1341.8	1343.9	1344.9	1344.6	1344.3	1343.9	1343.7
10°	1327.0	1329.0	1330.9	1331.6	1331.1	1330.6	1330.2	1329.7
12.5°	1311.6	1313.8	1315.9	1316.6	1316.0	1315.3	1314.5	1313.9
15°	1282.2	1283.7	1285.2	1285.5	1284.8	1284.0	1283.3	1282.5
17.5°	1248.7	1249.7	1250.5	1250.8	1250.3	1249.8	1249.4	1248.8
20°	1223.8	1224.6	1225.3	1225.3	1224.9	1224.4	1223.9	1223.4
22.5°	1197.8	1199.1	1200.4	1200.6	1199.8	1198.9	1198.0	1197.1
25°	1154.9	1155.2	1155.4	1155.0	1154.1	1153.1	1152.1	1151.1
27.5°	1106.8	1106.2	1105.6	1104.8	1103.5	1102.3	1101.1	1099.9
30°	1073.6	1072.6	1071.7	1070.6	1069.4	1068.1	1066.9	1065.7
32.5°	1039.9	1038.8	1037.6	1036.4	1035.1	1034.0	1032.8	1031.5
35°	986.7	985.0	983.3	981.8	980.6	979.5	978.2	977.0
37.5°	931.0	929.2	927.3	925.6	924.0	922.3	920.8	919.2
40°	892.2	889.7	887.3	885.5	884.2	883.0	881.9	880.6
42.5°	854.6	851.8	848.9	847.1	846.3	845.4	844.6	843.8
45°	796.4	793.7	791.0	789.3	788.6	787.9	787.1	786.4
47.5°	740.1	737.0	734.0	731.6	729.8	727.9	726.0	724.2
50°	700.8	697.4	694.0	691.5	690.0	688.6	687.1	685.6
52.5°	660.4	657.3	654.3	651.9	650.0	648.2	646.3	644.4
55°	600.9	598.0	595.1	592.9	591.4	590.0	588.5	587.1
57.5°	541.5	538.7	535.9	533.8	532.3	531.0	529.6	528.1
60°	500.6	498.4	496.1	494.5	493.2	492.0	490.8	489.6
62.5°	460.7	458.6	456.6	455.0	453.8	452.6	451.4	450.2
65°	402.6	400.1	397.7	395.9	394.7	393.5	392.2	391.0
67.5°	342.8	340.4	338.1	336.8	336.4	336.0	335.7	335.4
70°	305.0	303.0	301.1	299.8	299.0	298.3	297.5	296.8
72.5°	267.2	265.6	264.1	262.9	262.2	261.5	260.8	260.0
75°	212.7	211.8	210.8	210.2	209.9	209.7	209.5	209.2
77.5°	161.1	160.8	160.5	160.0	159.4	158.8	158.1	157.5
80°	128.3	127.8	127.3	126.9	126.7	126.4	126.2	126.0
82.5°	98.9	98.5	98.3	98.0	97.8	97.5	97.3	97.0
85°	57.0	57.0	57.0	56.8	56.6	56.3	56.1	55.8
87.5°	22.7	22.7	22.8	22.8	22.9	23.1	22.9	22.9
90°	8.2	8.6	9.0	9.0	9.5	9.9	9.5	9.5
92.5°	88.7	66.8	53.2	44.1	38.7	36.4	34.8	34.8
95°	334.9	264.8	204.2	160.4	138.3	124.3	116.1	110.3
97.5°	494.7	468.7	424.5	377.3	344.9	317.7	304.1	294.7
100°	545.0	554.1	531.9	498.4	459.1	431.6	418.0	414.4
102.5°	542.5	587.3	593.7	579.8	555.6	535.7	521.4	518.5
105°	506.1	584.3	629.1	647.6	648.5	644.8	638.5	635.8
107.5°	454.6	537.7	600.8	641.0	663.4	673.7	678.2	679.4
110°	423.4	501.6	567.1	616.9	649.0	667.9	676.0	680.1



TEST NUMBER: P332642-927

CATALOG NUMBER: SA4XXDIP-C1020D590U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	400.7	469.8	531.7	581.4	617.8	640.8	652.2	658.8
115°	377.8	433.4	486.2	529.7	565.3	592.5	606.9	610.5
117.5°	366.5	412.6	454.2	490.9	521.4	544.2	558.8	561.7
120°	361.6	403.5	439.7	471.7	497.6	517.5	529.2	534.2
122.5°	357.2	397.8	430.6	458.8	480.5	497.6	507.5	512.5
125°	349.7	388.6	419.8	444.7	462.7	475.9	484.4	487.1
127.5°	340.7	377.9	409.0	432.5	450.8	462.4	469.6	472.3
130°	333.5	369.2	399.9	423.9	442.4	453.7	461.0	463.7
132.5°	325.9	359.4	389.4	413.4	431.6	444.3	451.1	453.9
135°	315.4	344.8	372.3	395.0	413.0	425.7	432.9	435.6
137.5°	305.9	330.8	354.0	374.5	391.3	403.9	409.8	413.0
140°	300.5	321.8	342.1	361.1	376.9	386.8	393.2	396.8
142.5°	295.5	314.2	331.6	348.1	362.0	371.3	376.9	379.4
145°	288.3	303.6	317.3	329.9	341.2	348.9	353.4	355.6
147.5°	282.4	294.6	305.5	315.4	323.8	330.3	333.7	334.6
150°	278.8	289.2	298.3	306.4	313.6	319.5	322.2	322.7
152.5°	274.8	283.8	292.1	298.8	304.9	309.7	311.3	311.8
155°	268.9	276.1	282.9	288.3	292.9	296.4	297.8	297.8
157.5°	262.4	268.5	274.2	278.5	282.0	284.7	285.5	285.5
160°	258.5	263.5	268.4	272.0	274.7	277.5	277.9	277.9
162.5°	254.5	258.7	262.6	265.9	267.9	270.6	271.1	270.7
165°	249.0	251.7	254.8	257.1	259.0	260.7	260.3	259.8
167.5°	243.7	245.7	248.3	249.6	250.6	251.7	251.6	251.3
170°	240.4	241.8	243.6	244.9	245.8	246.3	245.8	245.8
172.5°	237.5	238.5	239.6	240.6	241.1	241.6	241.1	240.4
175°	233.6	234.1	235.0	235.0	235.0	235.9	235.0	234.1
177.5°	231.1	231.5	231.5	231.8	231.5	231.8	231.1	230.4
180°	230.0	230.0	230.0	230.0	230.0	230.0	230.0	230.0

(END OF REPORT)