

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332686-927

Luminaire Tested: **SA4XXDIP-C1195D590U927-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332686-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXDIP-C1195D590U927-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 590 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5673.7 lumens
Efficiency: N/A
Efficacy: 103.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 55.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332686-927
CATALOG NUMBER: SA4XXDIP-C1195D590U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

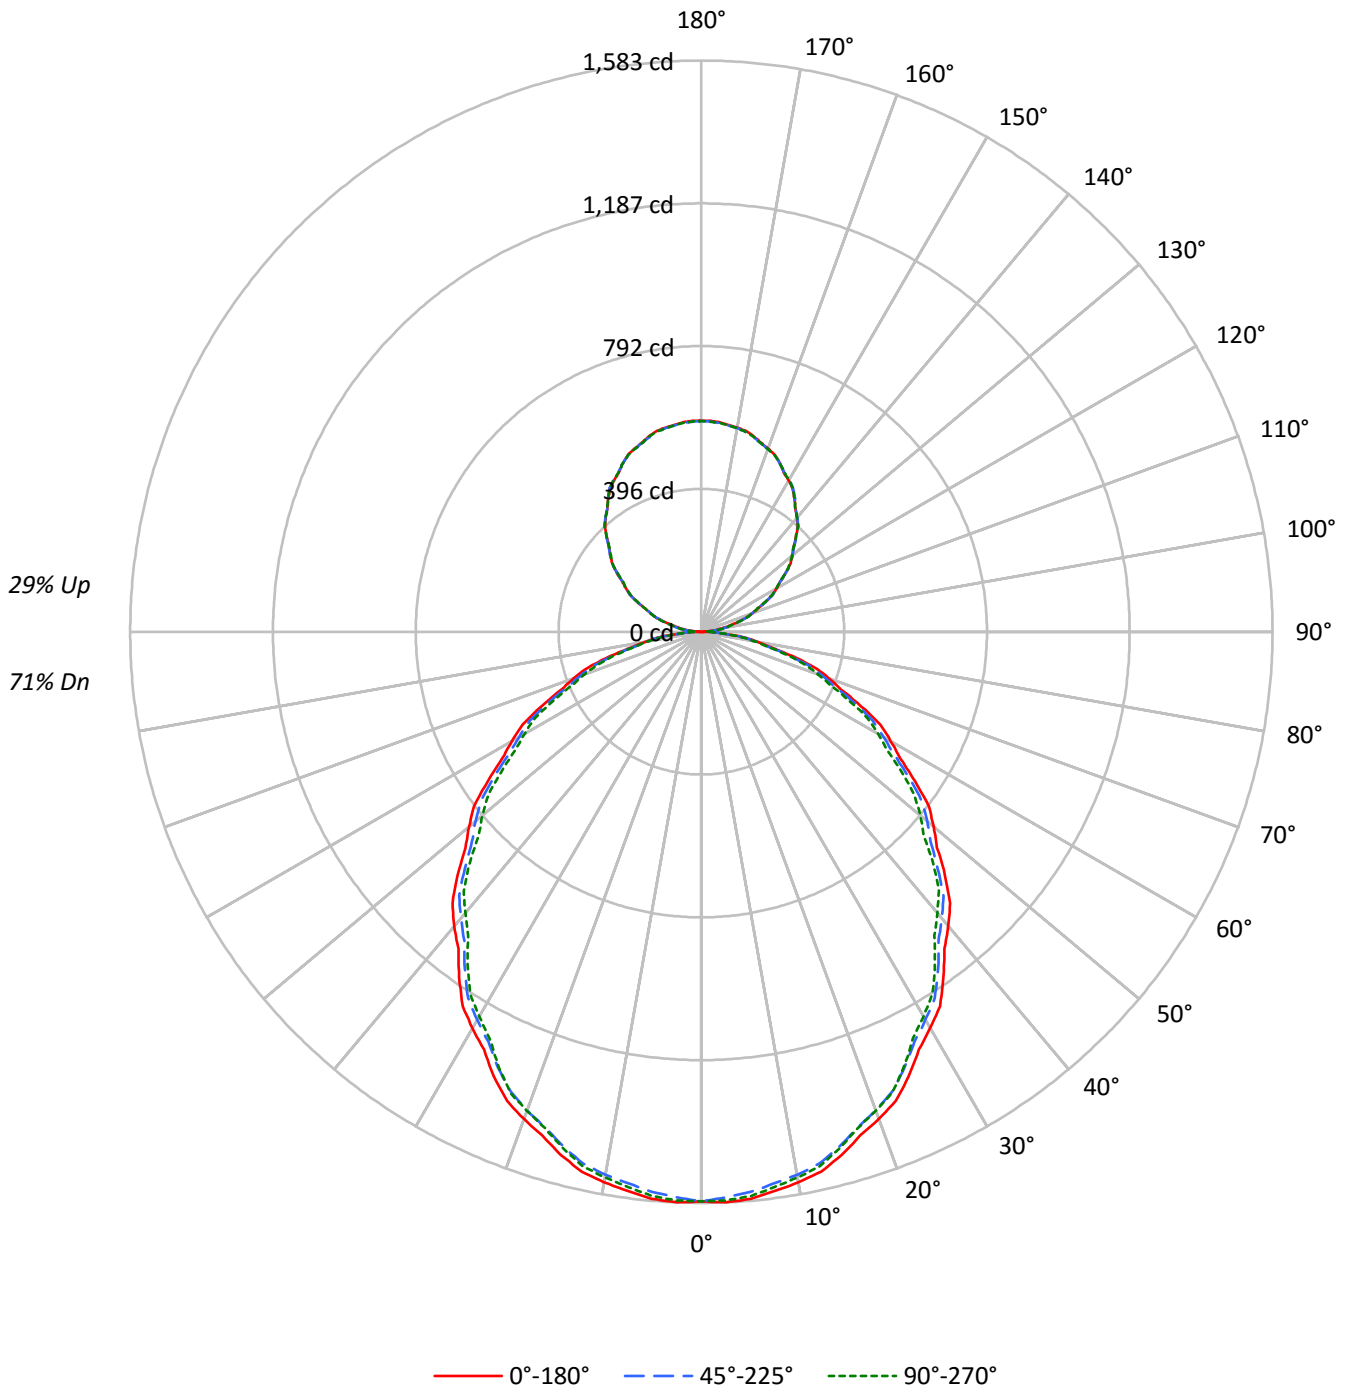



TEST NUMBER: P332686-927

CATALOG NUMBER: SA4XXDIP-C1195D590U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76	76	76	76	71	
1	103	98	94	90	97	93	89	86	84	81	78	75	73	71	67	65	64	64	64	64	60	
2	93	86	79	74	88	81	76	71	73	69	65	66	62	59	59	56	54	54	54	54	50	
3	85	75	68	62	80	72	65	59	65	59	55	58	54	50	52	49	46	46	46	46	43	
4	78	67	59	52	74	64	56	50	58	51	47	52	47	43	47	43	40	40	40	40	37	
5	72	60	51	45	68	57	49	43	52	45	40	47	41	37	42	38	34	34	34	34	32	
6	66	54	45	39	62	51	43	38	47	40	35	42	37	33	38	34	30	30	30	30	28	
7	61	49	40	34	58	46	39	33	42	36	31	39	33	29	35	30	27	27	27	27	25	
8	57	44	36	31	54	42	35	30	39	32	28	35	30	26	32	28	24	24	24	24	22	
9	53	41	33	27	50	39	32	27	36	29	25	33	27	24	30	25	22	22	22	22	20	
10	50	37	30	25	47	36	29	24	33	27	23	30	25	21	28	23	20	20	20	20	18	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12745	12745	12745
5°	12783	12630	12721
10°	12703	12527	12588
15°	12549	12349	12380
20°	12345	12128	12138
25°	12113	11875	11843
30°	11828	11580	11473
35°	11532	11269	11121
40°	11225	10918	10718
45°	10904	10572	10369
50°	10550	10262	9946
55°	10166	9864	9543
60°	9783	9415	9131
65°	9352	8990	8627
70°	8868	8419	8091
75°	8125	7735	7536
80°	7234	6936	6760
85°	6326	6095	5974



TEST NUMBER: P332686-927

CATALOG NUMBER: SA4XXDIP-C1195D590U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	148.7	2.6
10°-20°	418.9	7.4
20°-30°	616.5	10.9
30°-40°	716.7	12.6
40°-50°	716.8	12.6
50°-60°	627.0	11.1
60°-70°	465.6	8.2
70°-80°	264.5	4.7
80°-90°	78.1	1.4
90°-100°	38.5	0.7
100°-110°	114.1	2.0
110°-120°	193.7	3.4
120°-130°	255.5	4.5
130°-140°	286.9	5.1
140°-150°	281.9	5.0
150°-160°	237.1	4.2
160°-170°	157.8	2.8
170°-180°	55.2	1.0
0°-30°	1184.1	20.9
0°-40°	1900.8	33.5
0°-60°	3244.6	57.2
0°-90°	4052.9	71.4
90°-120°	346.4	6.1
90°-150°	1170.7	20.6
90°-180°	1621.0	28.6
0°-180°	5673.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1579	1579	1579	1579	1579	
5°	1577	1572	1558	1571	1570	150
15°	1502	1496	1478	1484	1481	423
25°	1360	1350	1333	1334	1330	625
35°	1170	1161	1144	1135	1128	731
45°	955	946	926	913	908	736
55°	722	718	701	686	678	647
65°	490	483	471	458	452	485
75°	260	254	248	243	242	277
85°	68	68	66	66	64	75
90°	1	6	10	13	14	5
95°	27	31	34	36	36	30
105°	105	106	108	109	110	112
115°	197	197	196	196	195	194
125°	287	287	286	286	285	256
135°	370	373	373	372	370	286
145°	450	451	452	451	450	281
155°	515	515	515	516	515	237
165°	561	559	558	561	559	158
175°	583	581	581	583	581	55
180°	584	584	584	584	584	



TEST NUMBER: P332686-927

CATALOG NUMBER: SA4XXDIP-C1195D590U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7
2.5°	1582.7	1582.1	1581.4	1580.7	1580.0	1578.4	1576.0	1573.5	1571.1	1568.6	1570.8
5°	1577.4	1576.3	1575.2	1574.1	1573.0	1570.8	1567.7	1564.6	1561.5	1558.5	1561.5
7.5°	1562.7	1561.6	1560.5	1559.3	1558.2	1556.0	1552.5	1549.1	1545.7	1542.2	1544.8
10°	1549.6	1548.5	1547.4	1546.2	1545.1	1542.7	1539.1	1535.4	1531.8	1528.1	1530.3
12.5°	1532.4	1531.3	1530.1	1529.0	1527.9	1525.3	1521.5	1517.7	1513.8	1509.9	1512.4
15°	1501.5	1500.4	1499.3	1498.2	1497.0	1494.4	1490.1	1485.9	1481.7	1477.5	1479.2
17.5°	1464.3	1462.9	1461.5	1460.2	1458.7	1456.0	1452.0	1448.0	1444.1	1440.0	1441.1
20°	1437.0	1435.6	1434.2	1432.8	1431.4	1428.5	1424.3	1420.1	1415.9	1411.7	1412.5
22.5°	1407.6	1405.8	1404.0	1402.1	1400.3	1397.2	1393.0	1388.8	1384.6	1380.3	1381.9
25°	1359.9	1357.9	1355.9	1353.9	1351.9	1349.0	1345.0	1341.2	1337.2	1333.2	1333.6
27.5°	1305.2	1303.1	1301.2	1299.1	1297.1	1294.3	1290.6	1287.0	1283.3	1279.6	1279.0
30°	1268.8	1266.5	1264.2	1262.0	1259.8	1256.8	1253.2	1249.5	1245.9	1242.2	1241.1
32.5°	1230.3	1228.3	1226.3	1224.2	1222.2	1219.2	1215.4	1211.5	1207.6	1203.7	1202.4
35°	1170.1	1168.2	1166.2	1164.2	1162.2	1159.3	1155.3	1151.4	1147.5	1143.5	1141.5
37.5°	1106.6	1104.8	1103.0	1101.2	1099.4	1096.4	1092.2	1088.0	1083.7	1079.5	1077.4
40°	1065.1	1062.9	1060.6	1058.4	1056.1	1052.9	1048.7	1044.4	1040.2	1036.0	1033.2
42.5°	1020.6	1019.2	1017.9	1016.5	1015.2	1012.2	1007.5	1002.8	998.1	993.5	990.2
45°	955.1	953.1	951.1	949.1	947.2	944.0	939.4	934.9	930.4	926.0	922.9
47.5°	886.5	885.1	883.8	882.4	881.1	878.4	874.2	870.1	865.9	861.7	858.3
50°	840.0	838.8	837.7	836.5	835.4	832.9	828.9	825.1	821.1	817.1	813.3
52.5°	794.4	793.1	791.7	790.4	789.0	786.2	782.1	777.9	773.8	769.6	766.1
55°	722.3	721.4	720.6	719.8	718.9	716.5	712.6	708.7	704.7	700.8	697.4
57.5°	653.5	652.5	651.6	650.6	649.7	647.2	643.3	639.4	635.6	631.7	628.5
60°	605.9	604.5	603.1	601.7	600.3	597.8	594.1	590.5	586.8	583.1	580.6
62.5°	559.4	558.2	557.0	555.8	554.7	552.2	548.3	544.4	540.5	536.6	534.3
65°	489.6	488.1	486.7	485.3	483.9	481.8	479.0	476.2	473.4	470.6	467.8
67.5°	419.2	418.0	416.6	415.3	414.1	412.0	409.3	406.6	403.9	401.2	398.5
70°	375.7	373.8	371.8	369.8	367.8	365.8	363.5	361.2	358.9	356.7	354.5
72.5°	329.2	327.2	325.2	323.2	321.3	319.4	317.6	315.8	314.0	312.2	310.4
75°	260.5	259.2	257.8	256.4	254.9	253.6	252.2	250.7	249.4	248.0	246.8
77.5°	195.0	194.4	193.8	193.2	192.6	191.6	190.4	189.2	188.0	186.7	186.4
80°	155.6	154.7	153.9	153.0	152.3	151.5	151.0	150.4	149.8	149.2	148.7
82.5°	117.2	116.8	116.4	116.0	115.6	115.3	115.2	115.1	114.9	114.9	114.5
85°	68.3	68.3	68.3	68.3	68.3	68.0	67.5	66.9	66.3	65.8	65.8
87.5°	26.6	26.6	26.5	26.5	26.5	26.5	26.5	26.4	26.3	26.3	26.4
90°	1.3	2.5	3.6	4.7	5.8	6.7	7.5	8.3	9.1	9.9	10.5
92.5°	9.7	10.9	12.2	13.5	14.7	15.6	16.2	16.8	17.3	17.9	18.2
95°	27.1	28.0	28.9	29.8	30.7	31.5	32.2	33.0	33.7	34.3	34.6
97.5°	47.4	48.1	48.8	49.5	50.2	51.0	51.8	52.7	53.5	54.3	54.7
100°	63.2	63.7	64.1	64.5	64.9	65.5	66.4	67.3	68.2	69.2	69.3
102.5°	79.9	80.0	80.2	80.3	80.5	81.0	81.8	82.6	83.5	84.3	84.6
105°	105.3	105.4	105.4	105.6	105.7	105.9	106.3	106.7	107.1	107.5	107.8
107.5°	131.9	132.1	132.1	132.3	132.5	132.5	132.5	132.6	132.7	132.8	133.0
110°	150.0	150.2	150.4	150.6	150.8	150.8	150.8	150.7	150.6	150.4	150.3



TEST NUMBER: P332686-927

CATALOG NUMBER: SA4XXDIP-C1195D590U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	168.8	168.8	168.9	168.9	169.0	168.9	168.7	168.5	168.3	168.2	168.1
115°	197.0	197.0	197.0	197.0	197.0	196.9	196.7	196.5	196.3	196.1	196.0
117.5°	223.6	223.6	223.7	223.8	223.9	223.9	223.7	223.6	223.4	223.3	222.9
120°	241.3	241.7	242.1	242.5	242.9	243.0	242.6	242.3	242.0	241.7	241.2
122.5°	259.7	259.8	260.0	260.2	260.3	260.4	260.2	260.1	259.9	259.8	259.4
125°	286.9	286.9	286.9	286.9	286.9	286.8	286.8	286.7	286.5	286.5	286.2
127.5°	311.6	311.9	312.2	312.5	312.8	312.8	312.7	312.5	312.4	312.2	312.0
130°	328.9	329.2	329.5	329.9	330.1	330.3	330.3	330.3	330.3	330.3	330.1
132.5°	346.7	346.9	347.1	347.3	347.5	347.6	347.5	347.5	347.4	347.3	347.1
135°	370.0	370.7	371.2	371.9	372.5	372.7	372.7	372.7	372.7	372.7	372.6
137.5°	395.5	395.8	396.1	396.3	396.6	396.9	397.0	397.2	397.4	397.5	397.3
140°	412.5	412.7	412.9	413.1	413.3	413.4	413.4	413.4	413.4	413.4	413.3
142.5°	428.0	428.3	428.5	428.6	428.9	428.9	428.8	428.7	428.6	428.6	428.6
145°	449.6	450.0	450.4	450.8	451.1	451.4	451.5	451.6	451.7	451.8	451.7
147.5°	470.9	471.3	471.8	472.3	472.9	473.0	472.9	472.9	472.8	472.7	472.6
150°	483.9	484.3	484.7	485.1	485.5	485.7	485.7	485.7	485.7	485.7	485.7
152.5°	496.2	496.5	496.7	496.9	497.2	497.3	497.4	497.5	497.6	497.6	497.9
155°	515.1	515.1	515.1	515.1	515.1	515.0	514.9	514.8	514.8	514.6	515.0
157.5°	531.0	530.8	530.6	530.4	530.3	530.1	530.1	530.1	530.1	530.0	530.4
160°	540.3	540.3	540.2	540.1	540.0	539.9	539.8	539.7	539.6	539.5	539.8
162.5°	549.1	548.8	548.5	548.3	548.0	547.8	547.7	547.6	547.6	547.4	548.0
165°	560.7	560.4	560.1	559.8	559.5	559.3	559.0	558.9	558.6	558.5	559.0
167.5°	569.7	569.3	568.8	568.4	568.0	567.8	567.8	567.8	567.8	567.8	568.5
170°	574.7	574.3	573.7	573.2	572.7	572.5	572.6	572.7	572.8	572.9	573.5
172.5°	578.3	577.9	577.5	577.1	576.6	576.5	576.5	576.5	576.5	576.6	577.2
175°	583.3	582.8	582.3	581.8	581.3	581.0	580.9	580.8	580.7	580.6	581.3
177.5°	584.9	584.6	584.2	583.8	583.3	583.1	583.1	583.1	583.1	583.1	583.7
180°	584.2	584.2	584.2	584.2	584.2	584.2	584.2	584.2	584.2	584.2	584.2



TEST NUMBER: P332686-927

CATALOG NUMBER: SA4XXDIP-C1195D590U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7	1578.7
2.5°	1573.0	1575.3	1577.6	1578.6	1578.3	1578.1	1577.9	1577.6
5°	1564.6	1567.7	1570.8	1572.1	1571.5	1571.0	1570.4	1569.8
7.5°	1547.2	1549.7	1552.1	1553.2	1552.9	1552.5	1552.2	1551.9
10°	1532.6	1534.9	1537.1	1537.9	1537.4	1536.8	1536.2	1535.6
12.5°	1514.8	1517.3	1519.8	1520.6	1519.8	1519.0	1518.2	1517.4
15°	1480.8	1482.6	1484.2	1484.6	1483.8	1483.0	1482.1	1481.3
17.5°	1442.2	1443.3	1444.3	1444.5	1444.0	1443.4	1442.9	1442.3
20°	1413.4	1414.2	1415.1	1415.2	1414.7	1414.1	1413.6	1412.9
22.5°	1383.4	1384.9	1386.4	1386.6	1385.7	1384.7	1383.6	1382.6
25°	1333.9	1334.1	1334.4	1334.0	1332.8	1331.7	1330.6	1329.5
27.5°	1278.3	1277.6	1276.9	1275.9	1274.5	1273.1	1271.7	1270.3
30°	1239.9	1238.8	1237.7	1236.4	1235.0	1233.7	1232.2	1230.8
32.5°	1201.0	1199.7	1198.3	1197.0	1195.6	1194.1	1192.8	1191.4
35°	1139.6	1137.7	1135.7	1134.0	1132.6	1131.2	1129.7	1128.4
37.5°	1075.2	1073.1	1071.0	1069.0	1067.1	1065.2	1063.4	1061.5
40°	1030.4	1027.5	1024.8	1022.6	1021.3	1019.9	1018.4	1017.0
42.5°	987.0	983.7	980.5	978.3	977.4	976.4	975.5	974.5
45°	919.8	916.7	913.6	911.6	910.8	909.9	909.1	908.2
47.5°	854.8	851.3	847.8	844.9	842.8	840.7	838.5	836.4
50°	809.3	805.3	801.5	798.6	796.9	795.3	793.5	791.9
52.5°	762.6	759.1	755.7	752.9	750.8	748.6	746.5	744.3
55°	694.0	690.7	687.3	684.8	683.1	681.4	679.7	678.0
57.5°	625.3	622.1	618.9	616.5	614.9	613.2	611.6	610.0
60°	578.1	575.6	573.1	571.1	569.7	568.2	566.9	565.5
62.5°	532.0	529.7	527.4	525.5	524.1	522.7	521.3	519.9
65°	464.9	462.2	459.3	457.2	455.8	454.4	453.0	451.6
67.5°	395.9	393.2	390.5	388.9	388.5	388.1	387.7	387.3
70°	352.2	350.0	347.7	346.2	345.3	344.5	343.6	342.8
72.5°	308.6	306.8	305.0	303.6	302.9	302.0	301.1	300.3
75°	245.7	244.5	243.4	242.7	242.5	242.2	241.9	241.6
77.5°	186.0	185.7	185.4	184.8	184.1	183.4	182.6	181.9
80°	148.1	147.6	147.0	146.6	146.3	146.0	145.8	145.4
82.5°	114.2	113.8	113.5	113.2	112.9	112.6	112.3	112.1
85°	65.8	65.8	65.8	65.7	65.4	65.0	64.8	64.5
87.5°	26.5	26.6	26.8	26.9	26.9	26.9	26.9	27.0
90°	11.2	11.7	12.4	12.8	13.0	13.2	13.4	13.5
92.5°	18.6	19.0	19.3	19.6	19.7	19.8	20.0	20.0
95°	34.9	35.3	35.6	35.7	35.7	35.7	35.7	35.7
97.5°	55.1	55.4	55.8	55.9	55.9	55.9	55.9	55.9
100°	69.6	69.7	69.9	70.0	70.0	70.0	70.0	70.0
102.5°	84.8	85.2	85.4	85.6	85.7	85.8	85.9	86.0
105°	108.1	108.4	108.8	109.0	109.3	109.6	110.0	110.3
107.5°	133.3	133.6	133.9	134.0	134.0	134.0	134.0	134.0
110°	150.0	149.9	149.6	149.7	150.0	150.3	150.6	150.9



TEST NUMBER: P332686-927

CATALOG NUMBER: SA4XXDIP-C1195D590U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	168.1	168.0	168.0	168.0	168.1	168.1	168.2	168.3
115°	195.9	195.8	195.7	195.6	195.5	195.4	195.3	195.2
117.5°	222.6	222.3	221.9	221.7	221.4	221.3	221.0	220.9
120°	240.7	240.2	239.7	239.6	239.8	240.0	240.2	240.3
122.5°	259.1	258.8	258.4	258.1	257.7	257.4	257.0	256.7
125°	286.1	285.8	285.7	285.4	285.3	285.0	284.9	284.6
127.5°	311.8	311.6	311.4	311.2	311.1	310.9	310.8	310.6
130°	329.9	329.7	329.5	329.2	328.8	328.4	328.0	327.6
132.5°	346.9	346.7	346.5	346.3	346.1	345.9	345.8	345.6
135°	372.3	372.2	371.9	371.7	371.4	371.1	370.8	370.5
137.5°	397.0	396.7	396.5	396.3	396.4	396.5	396.6	396.6
140°	413.2	413.1	413.0	412.9	412.8	412.7	412.6	412.5
142.5°	428.6	428.6	428.5	428.5	428.5	428.5	428.4	428.4
145°	451.6	451.5	451.4	451.2	450.9	450.6	450.3	450.0
147.5°	472.5	472.5	472.4	472.3	472.2	472.1	472.0	471.9
150°	485.7	485.7	485.7	485.7	485.5	485.4	485.4	485.3
152.5°	498.1	498.4	498.6	498.6	498.4	498.0	497.8	497.6
155°	515.4	515.8	516.3	516.3	515.8	515.4	515.0	514.6
157.5°	530.7	531.0	531.3	531.2	530.9	530.6	530.2	529.9
160°	540.1	540.3	540.7	540.6	540.1	539.6	539.1	538.6
162.5°	548.5	549.1	549.6	549.6	549.1	548.6	548.1	547.6
165°	559.7	560.2	560.9	560.9	560.5	560.2	559.8	559.4
167.5°	569.0	569.7	570.3	570.2	569.7	569.0	568.4	567.8
170°	574.1	574.7	575.3	575.3	574.6	573.9	573.1	572.4
172.5°	577.9	578.6	579.2	579.2	578.5	577.8	577.1	576.5
175°	582.0	582.7	583.4	583.4	582.7	582.0	581.3	580.6
177.5°	584.2	584.8	585.3	585.3	584.7	584.1	583.4	582.7
180°	584.2	584.2	584.2	584.2	584.2	584.2	584.2	584.2

(END OF REPORT)