

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332525-927

Luminaire Tested: **SA4XXDIP-C350D1035U927-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332525-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXDIP-C350D1035U927-4F0-1E-UDD-F4  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1035 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4130.7 lumens  
Efficiency: N/A  
Efficacy: 110.7 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: Semi-Indirect

Input Watts (W): 37.3  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332525-927  
CATALOG NUMBER: SA4XXDIP-C350D1035U927-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

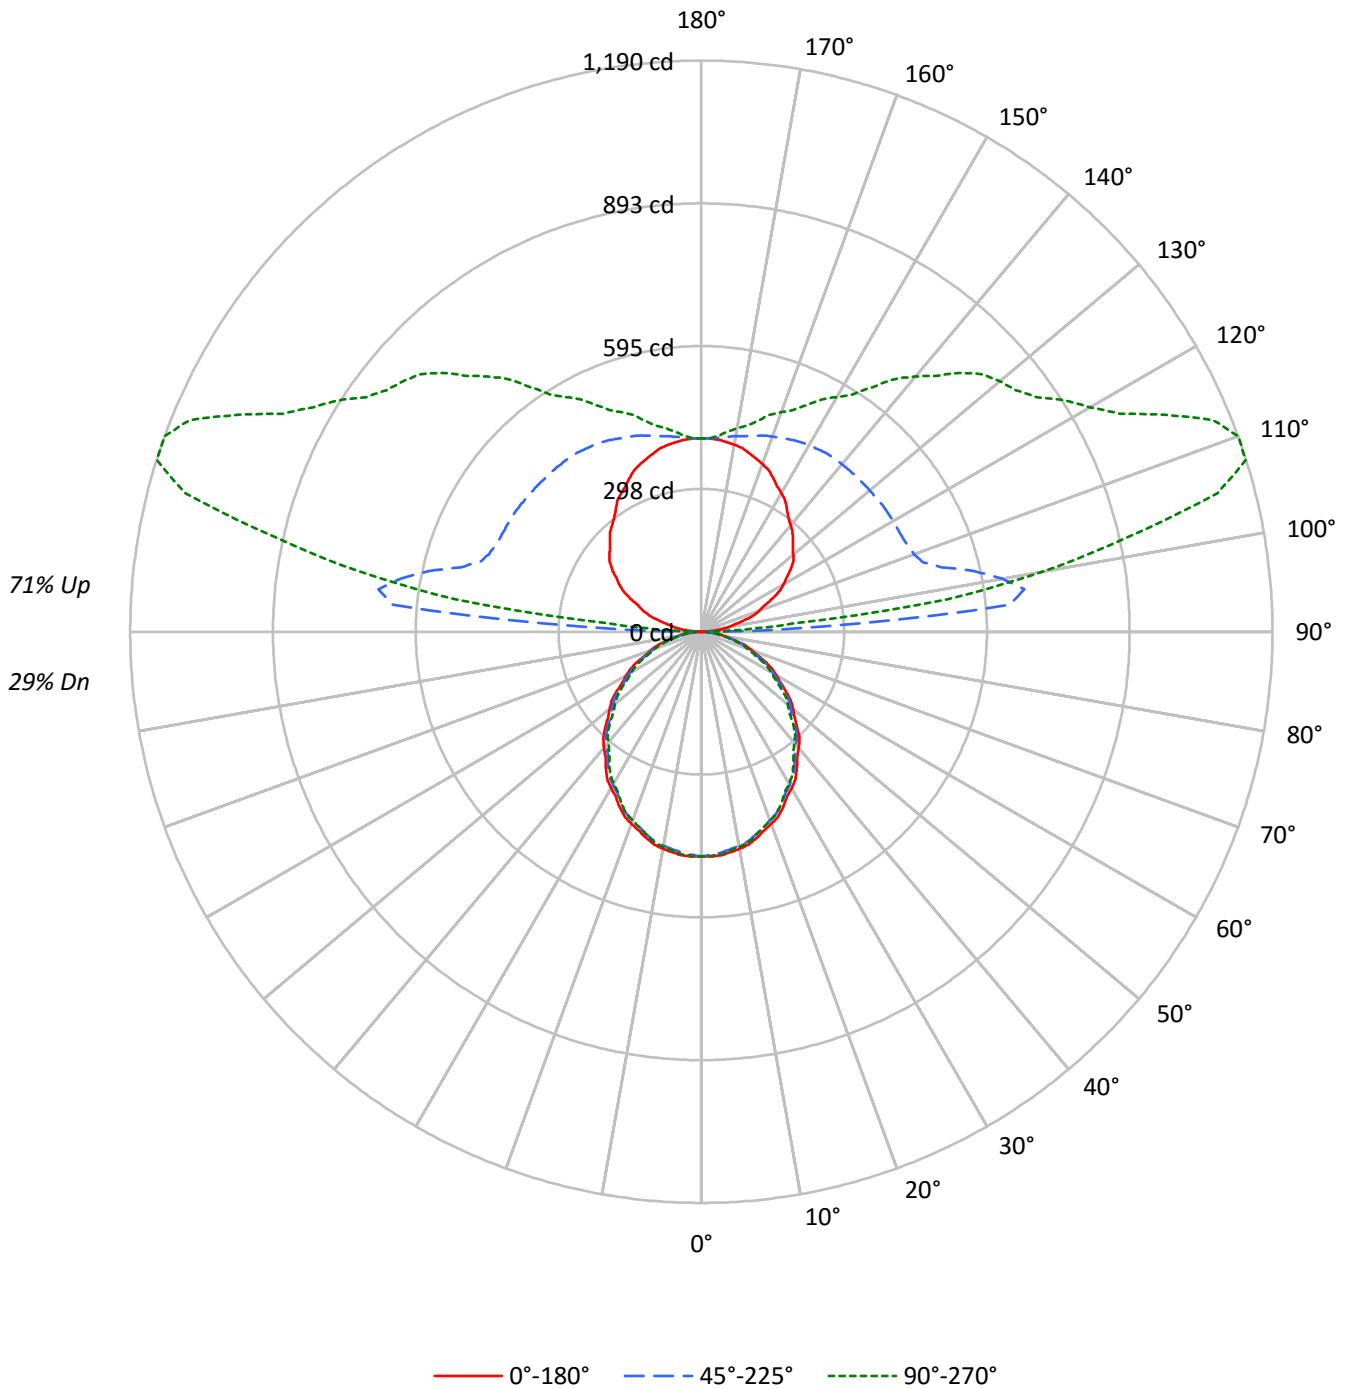



TEST NUMBER: P332525-927

CATALOG NUMBER: SA4XXDIP-C350D1035U927-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	37	37	37	29				
1	93	89	85	82	83	80	77	74	63	61	59	47	46	44	33	32	31	24				
2	85	78	72	67	76	70	65	60	55	51	48	41	39	37	29	27	26	20				
3	77	68	61	55	69	61	55	50	48	44	41	36	34	31	25	24	22	17				
4	71	60	53	47	63	54	48	43	43	38	35	32	29	27	23	21	19	15				
5	65	53	46	40	58	48	41	36	38	33	30	29	26	23	20	18	17	13				
6	59	48	40	34	53	43	36	31	34	29	26	26	23	20	18	16	15	11				
7	55	43	35	30	49	39	32	27	31	26	23	24	20	18	17	15	13	10				
8	51	39	31	26	45	35	29	24	28	23	20	22	18	16	15	13	12	9				
9	47	35	28	23	42	32	26	21	26	21	18	20	16	14	14	12	10	8				
10	44	32	25	21	39	29	23	19	24	19	16	18	15	13	13	11	9	7				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3777	3777	3777
5°	3789	3743	3771
10°	3765	3713	3731
15°	3719	3661	3670
20°	3660	3594	3598
25°	3591	3520	3510
30°	3506	3432	3402
35°	3418	3341	3297
40°	3327	3236	3177
45°	3232	3134	3075
50°	3127	3042	2948
55°	3013	2923	2829
60°	2900	2792	2706
65°	2772	2665	2558
70°	2629	2497	2398
75°	2408	2293	2233
80°	2143	2060	2004
85°	1880	1806	1769



TEST NUMBER: P332525-927

CATALOG NUMBER: SA4XXDIP-C350D1035U927-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	44.1	1.1
10°-20°	124.2	3.0
20°-30°	182.8	4.4
30°-40°	212.5	5.1
40°-50°	212.5	5.1
50°-60°	185.9	4.5
60°-70°	138.0	3.3
70°-80°	78.4	1.9
80°-90°	24.9	0.6
90°-100°	290.8	7.0
100°-110°	605.1	14.6
110°-120°	542.0	13.1
120°-130°	455.9	11.0
130°-140°	380.1	9.2
140°-150°	290.4	7.0
150°-160°	204.1	4.9
160°-170°	120.1	2.9
170°-180°	39.1	0.9
0°-30°	351.0	8.5
0°-40°	563.5	13.6
0°-60°	961.8	23.3
0°-90°	1203.1	29.1
90°-120°	1437.9	34.8
90°-150°	2564.4	62.1
90°-180°	2928.0	70.9
0°-180°	4130.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	468	468	468	468	468	
5°	468	466	462	466	465	44
15°	445	443	438	440	439	125
25°	403	400	395	396	394	185
35°	347	344	339	336	334	217
45°	283	280	274	270	269	218
55°	214	213	208	203	201	192
65°	145	143	140	136	134	144
75°	77	75	74	72	72	82
85°	20	20	20	20	19	22
90°	1	6	14	16	17	3
95°	26	82	644	319	193	29
105°	92	134	519	1117	1113	99
115°	163	204	463	889	1068	162
125°	227	270	460	756	852	202
135°	270	321	456	671	762	208
145°	311	356	454	566	622	195
155°	354	382	441	500	521	163
165°	385	397	423	448	455	109
175°	402	402	406	411	410	38
180°	402	402	402	402	402	



TEST NUMBER: P332525-927

CATALOG NUMBER: SA4XXDIP-C350D1035U927-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	467.9	467.9	467.9	467.9	467.9	467.9	467.9	467.9	467.9	467.9	467.9
2.5°	469.1	469.0	468.7	468.6	468.3	467.9	467.1	466.4	465.7	464.9	465.6
5°	467.5	467.2	466.9	466.6	466.3	465.6	464.7	463.8	462.9	461.9	462.9
7.5°	463.3	462.9	462.6	462.2	461.9	461.2	460.2	459.2	458.2	457.2	457.9
10°	459.3	459.0	458.7	458.4	458.0	457.3	456.2	455.1	454.1	453.0	453.6
12.5°	454.2	453.9	453.6	453.2	452.9	452.2	451.0	449.9	448.7	447.6	448.3
15°	445.0	444.7	444.4	444.1	443.8	443.0	441.7	440.5	439.2	438.0	438.5
17.5°	434.0	433.6	433.2	432.8	432.4	431.6	430.4	429.2	428.0	426.8	427.1
20°	426.0	425.6	425.2	424.7	424.3	423.5	422.2	421.0	419.7	418.4	418.7
22.5°	417.2	416.7	416.1	415.6	415.0	414.2	412.9	411.7	410.4	409.2	409.6
25°	403.1	402.5	402.0	401.3	400.8	399.9	398.7	397.5	396.4	395.2	395.3
27.5°	386.9	386.3	385.7	385.1	384.5	383.7	382.5	381.5	380.4	379.3	379.1
30°	376.1	375.4	374.8	374.1	373.4	372.6	371.5	370.3	369.3	368.2	367.9
32.5°	364.7	364.1	363.5	362.9	362.3	361.4	360.3	359.1	358.0	356.8	356.4
35°	346.8	346.3	345.7	345.1	344.5	343.6	342.5	341.3	340.2	339.0	338.4
37.5°	328.0	327.5	326.9	326.5	325.9	325.0	323.8	322.5	321.2	320.0	319.3
40°	315.7	315.1	314.4	313.7	313.1	312.1	310.9	309.6	308.3	307.1	306.3
42.5°	302.5	302.1	301.7	301.3	301.0	300.0	298.7	297.2	295.9	294.5	293.5
45°	283.1	282.5	281.9	281.4	280.7	279.8	278.5	277.1	275.8	274.5	273.5
47.5°	262.8	262.4	262.0	261.6	261.2	260.4	259.1	257.9	256.7	255.4	254.4
50°	249.0	248.7	248.3	248.0	247.6	246.9	245.7	244.5	243.4	242.2	241.1
52.5°	235.5	235.0	234.6	234.2	233.9	233.1	231.8	230.6	229.3	228.1	227.1
55°	214.1	213.9	213.6	213.3	213.1	212.4	211.2	210.1	208.9	207.7	206.8
57.5°	193.7	193.5	193.1	192.9	192.6	191.9	190.7	189.6	188.4	187.3	186.3
60°	179.6	179.2	178.8	178.3	177.9	177.2	176.1	175.0	174.0	172.9	172.1
62.5°	165.8	165.5	165.1	164.8	164.4	163.7	162.5	161.4	160.2	159.1	158.4
65°	145.1	144.7	144.3	143.9	143.5	142.8	142.0	141.2	140.3	139.5	138.6
67.5°	124.3	123.9	123.5	123.1	122.7	122.2	121.4	120.6	119.8	118.9	118.1
70°	111.4	110.7	110.2	109.6	109.0	108.4	107.7	107.1	106.4	105.8	105.0
72.5°	97.6	97.0	96.4	95.9	95.2	94.7	94.1	93.6	93.1	92.5	92.0
75°	77.2	76.8	76.4	76.0	75.6	75.2	74.8	74.3	73.9	73.5	73.2
77.5°	57.8	57.7	57.4	57.3	57.1	56.8	56.5	56.1	55.7	55.4	55.2
80°	46.1	45.9	45.6	45.4	45.2	44.9	44.8	44.6	44.4	44.3	44.0
82.5°	34.7	34.6	34.5	34.4	34.2	34.1	34.1	34.1	34.1	34.1	34.0
85°	20.3	20.3	20.3	20.3	20.3	20.2	20.0	19.8	19.6	19.5	19.5
87.5°	7.9	8.2	8.6	8.7	8.8	8.7	9.6	9.6	9.8	10.1	9.9
90°	0.8	2.4	4.8	5.5	6.3	6.3	11.1	11.1	12.7	14.3	13.5
92.5°	9.0	13.2	20.6	30.2	41.7	58.2	98.4	159.8	219.5	250.9	209.0
95°	26.1	28.4	36.4	46.7	65.7	98.9	167.6	297.4	486.4	644.5	662.7
97.5°	46.8	46.8	53.6	63.1	79.4	107.3	160.3	267.3	455.2	678.8	832.6
100°	60.1	60.1	65.7	75.1	90.2	115.5	162.2	251.5	412.8	635.8	838.3
102.5°	72.7	74.0	78.9	87.8	102.2	126.2	168.4	247.1	384.4	582.1	790.8
105°	92.5	94.9	98.9	108.4	122.6	145.5	183.5	249.1	359.8	518.8	704.6
107.5°	114.4	116.0	119.9	130.0	143.6	166.2	201.1	260.8	355.4	483.4	635.0
110°	128.9	130.5	134.4	143.9	158.2	179.5	214.3	269.7	356.6	471.3	600.2



TEST NUMBER: P332525-927

CATALOG NUMBER: SA4XXDIP-C350D1035U927-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	142.8	144.4	149.0	157.9	172.1	193.5	227.0	279.2	360.4	465.6	580.7
115°	163.0	165.2	170.8	178.7	193.8	215.1	246.8	294.2	367.7	462.6	562.3
117.5°	183.8	186.0	190.9	199.6	213.7	235.8	265.9	309.5	375.5	461.8	554.1
120°	197.7	199.3	204.9	213.5	227.0	249.1	279.2	320.3	381.2	461.8	549.6
122.5°	210.4	211.9	217.5	225.5	240.3	261.7	291.8	330.4	386.9	461.2	544.5
125°	227.0	230.1	234.9	243.6	258.6	280.7	309.2	345.6	395.5	460.3	536.2
127.5°	241.7	244.2	249.9	259.8	275.5	297.9	325.3	358.7	402.2	458.5	525.0
130°	249.9	253.1	259.4	271.2	286.3	309.2	336.1	366.9	407.3	457.9	518.0
132.5°	258.1	260.6	268.9	280.1	296.4	318.1	345.0	375.2	411.7	457.2	511.7
135°	269.7	272.8	280.7	294.2	310.8	331.4	357.4	386.0	418.4	456.3	502.2
137.5°	281.2	284.2	292.9	305.7	323.0	342.6	366.9	393.6	422.3	456.1	493.9
140°	289.5	291.8	300.6	313.9	330.6	349.6	373.3	398.5	425.5	455.5	489.6
142.5°	298.3	300.7	308.7	321.5	337.5	355.8	379.0	402.3	428.0	455.5	485.8
145°	310.8	313.1	321.1	332.2	347.2	364.6	385.2	406.5	429.4	453.9	479.3
147.5°	324.9	325.7	332.6	344.0	356.5	372.2	391.5	410.1	430.2	451.1	473.4
150°	333.7	334.5	340.9	350.4	362.2	377.2	394.7	412.0	430.2	449.2	469.0
152.5°	342.0	342.1	348.5	357.3	367.9	381.7	397.2	413.3	429.0	446.0	463.9
155°	353.5	354.3	359.0	366.9	375.7	387.5	400.9	414.4	427.1	441.3	456.3
157.5°	364.7	364.7	369.2	375.3	382.9	392.3	403.6	414.4	425.0	436.4	448.5
160°	371.7	371.7	374.9	380.4	386.7	395.5	404.9	414.4	423.1	432.6	442.9
162.5°	378.0	377.4	379.9	384.8	390.5	397.4	406.2	414.4	421.2	428.8	437.8
165°	385.2	385.2	386.7	390.7	394.7	399.3	406.5	412.8	417.6	423.1	429.4
167.5°	392.3	391.5	392.3	395.3	397.5	401.1	406.3	410.9	413.8	417.4	421.8
170°	395.5	394.7	395.5	397.8	399.3	401.7	405.7	409.6	411.2	413.6	416.8
172.5°	398.5	397.8	397.9	399.7	400.6	402.3	405.0	408.4	408.7	409.8	412.3
175°	401.7	400.9	400.9	401.7	402.5	402.5	404.1	406.5	405.7	405.7	407.3
177.5°	403.1	402.5	401.9	402.5	402.5	402.5	403.1	404.4	403.1	403.1	403.8
180°	402.5	402.5	402.5	402.5	402.5	402.5	402.5	402.5	402.5	402.5	402.5



TEST NUMBER: P332525-927

CATALOG NUMBER: SA4XXDIP-C350D1035U927-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	467.9	467.9	467.9	467.9	467.9	467.9	467.9	467.9
2.5°	466.3	467.0	467.6	467.9	467.9	467.8	467.7	467.6
5°	463.8	464.7	465.6	466.0	465.8	465.6	465.5	465.3
7.5°	458.6	459.4	460.1	460.4	460.3	460.2	460.1	460.0
10°	454.3	455.0	455.7	455.9	455.7	455.5	455.3	455.2
12.5°	449.0	449.7	450.5	450.8	450.5	450.3	450.0	449.8
15°	438.9	439.4	440.0	440.1	439.8	439.6	439.3	439.1
17.5°	427.5	427.8	428.1	428.2	428.0	427.9	427.7	427.5
20°	419.0	419.2	419.5	419.5	419.3	419.1	419.0	418.8
22.5°	410.0	410.5	411.0	411.1	410.7	410.4	410.1	409.9
25°	395.4	395.5	395.5	395.5	395.1	394.7	394.4	394.1
27.5°	378.9	378.7	378.5	378.2	377.8	377.4	376.9	376.5
30°	367.6	367.3	366.9	366.5	366.1	365.7	365.3	364.9
32.5°	356.0	355.6	355.2	354.8	354.4	353.9	353.6	353.2
35°	337.8	337.2	336.6	336.1	335.7	335.3	334.9	334.5
37.5°	318.7	318.1	317.4	316.9	316.3	315.8	315.2	314.7
40°	305.5	304.6	303.8	303.2	302.7	302.3	301.9	301.5
42.5°	292.6	291.6	290.7	290.0	289.7	289.5	289.1	288.9
45°	272.7	271.7	270.8	270.2	270.0	269.7	269.5	269.3
47.5°	253.3	252.3	251.3	250.5	249.9	249.2	248.6	248.0
50°	239.9	238.8	237.6	236.7	236.2	235.8	235.2	234.7
52.5°	226.1	225.1	224.0	223.2	222.5	221.9	221.3	220.6
55°	205.7	204.7	203.7	203.0	202.5	202.0	201.5	201.0
57.5°	185.4	184.4	183.5	182.8	182.3	181.8	181.3	180.8
60°	171.3	170.6	169.8	169.3	168.9	168.4	168.0	167.6
62.5°	157.7	157.0	156.3	155.7	155.3	155.0	154.6	154.1
65°	137.8	137.0	136.2	135.5	135.1	134.7	134.3	133.9
67.5°	117.3	116.5	115.7	115.3	115.2	115.0	114.9	114.8
70°	104.4	103.8	103.1	102.6	102.3	102.1	101.9	101.6
72.5°	91.5	90.9	90.4	90.0	89.8	89.5	89.3	89.0
75°	72.8	72.5	72.2	71.9	71.9	71.8	71.7	71.6
77.5°	55.1	55.1	55.0	54.8	54.6	54.3	54.1	53.9
80°	43.9	43.7	43.6	43.5	43.3	43.3	43.2	43.1
82.5°	33.8	33.7	33.7	33.6	33.5	33.4	33.3	33.2
85°	19.5	19.5	19.5	19.5	19.4	19.3	19.2	19.1
87.5°	10.1	10.2	10.4	10.4	10.5	10.7	10.5	10.5
90°	14.3	15.1	15.8	15.8	16.6	17.4	16.6	16.6
92.5°	155.3	116.9	93.0	77.2	67.9	63.6	60.9	60.9
95°	586.0	463.4	357.4	280.7	242.0	217.5	203.3	193.0
97.5°	865.9	820.2	742.9	660.4	603.6	556.0	532.3	515.8
100°	953.8	969.6	930.8	872.3	803.5	755.3	731.5	725.2
102.5°	949.4	1027.8	1039.0	1014.6	972.4	937.5	912.5	907.4
105°	885.7	1022.5	1100.8	1133.3	1134.9	1128.5	1117.5	1112.7
107.5°	795.4	941.1	1051.4	1121.9	1160.9	1179.0	1186.9	1189.0
110°	741.0	877.8	992.5	1079.5	1135.7	1168.9	1183.1	1190.3





TEST NUMBER: P332525-927

CATALOG NUMBER: SA4XXDIP-C350D1035U927-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	701.2	822.1	930.5	1017.5	1081.2	1121.4	1141.4	1152.9
115°	661.2	758.4	851.0	926.9	989.4	1036.8	1062.1	1068.4
117.5°	641.5	722.1	794.8	859.2	912.5	952.4	977.9	982.9
120°	632.6	706.2	769.5	825.6	870.7	905.5	926.1	934.8
122.5°	625.1	696.1	753.7	802.9	841.0	870.7	888.1	896.8
125°	612.1	680.1	734.7	778.2	809.8	832.7	847.8	852.5
127.5°	596.3	661.3	715.7	757.0	788.8	809.2	821.8	826.6
130°	583.7	646.1	699.9	741.8	774.2	794.0	806.7	811.4
132.5°	570.4	629.1	681.5	723.5	755.3	777.5	789.6	794.3
135°	552.0	603.4	651.6	691.2	722.9	745.0	757.6	762.4
137.5°	535.4	578.9	619.6	655.3	684.8	706.7	717.2	722.9
140°	525.9	563.1	598.7	631.8	659.6	677.0	688.0	694.3
142.5°	517.1	549.8	580.4	609.1	633.6	649.7	659.6	664.0
145°	504.5	531.5	555.2	577.3	597.1	610.5	618.5	622.4
147.5°	494.2	515.6	534.6	552.0	566.6	578.1	584.2	585.5
150°	488.0	506.1	522.0	536.2	548.8	559.1	563.9	564.7
152.5°	481.0	496.6	511.2	522.9	533.7	542.0	544.9	545.7
155°	470.6	483.2	495.0	504.5	512.5	518.8	521.2	521.2
157.5°	459.3	469.9	479.9	487.5	493.5	498.2	499.6	499.6
160°	452.3	461.1	469.8	476.1	480.9	485.6	486.4	486.4
162.5°	445.4	452.8	459.6	465.3	468.8	473.6	474.4	473.7
165°	435.8	440.5	446.0	450.0	453.1	456.3	455.5	454.7
167.5°	426.4	430.1	434.5	436.9	438.5	440.5	440.4	439.7
170°	420.7	423.1	426.3	428.6	430.2	431.0	430.2	430.2
172.5°	415.7	417.4	419.3	421.0	422.0	422.8	422.0	420.7
175°	408.8	409.6	411.2	411.2	411.2	412.8	411.2	409.6
177.5°	404.4	405.0	405.0	405.7	405.0	405.7	404.4	403.1
180°	402.5	402.5	402.5	402.5	402.5	402.5	402.5	402.5

(END OF REPORT)