

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332508-927

Luminaire Tested: **SA4XXDIP-C350D810U927-4F0-1E-UDD-A**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332508-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXDIP-C350D810U927-4F0-1E-UDD-A  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 350 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 810 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 3812.8 lumens  
Efficiency: N/A  
Efficacy: 122.2 lumens/watt  
Spacing Criteria (0/90/45): 1.31 / 1.23 / 1.41  
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')  
CIE Type: Semi-Indirect

Input Watts (W): 31.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332508-927  
CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

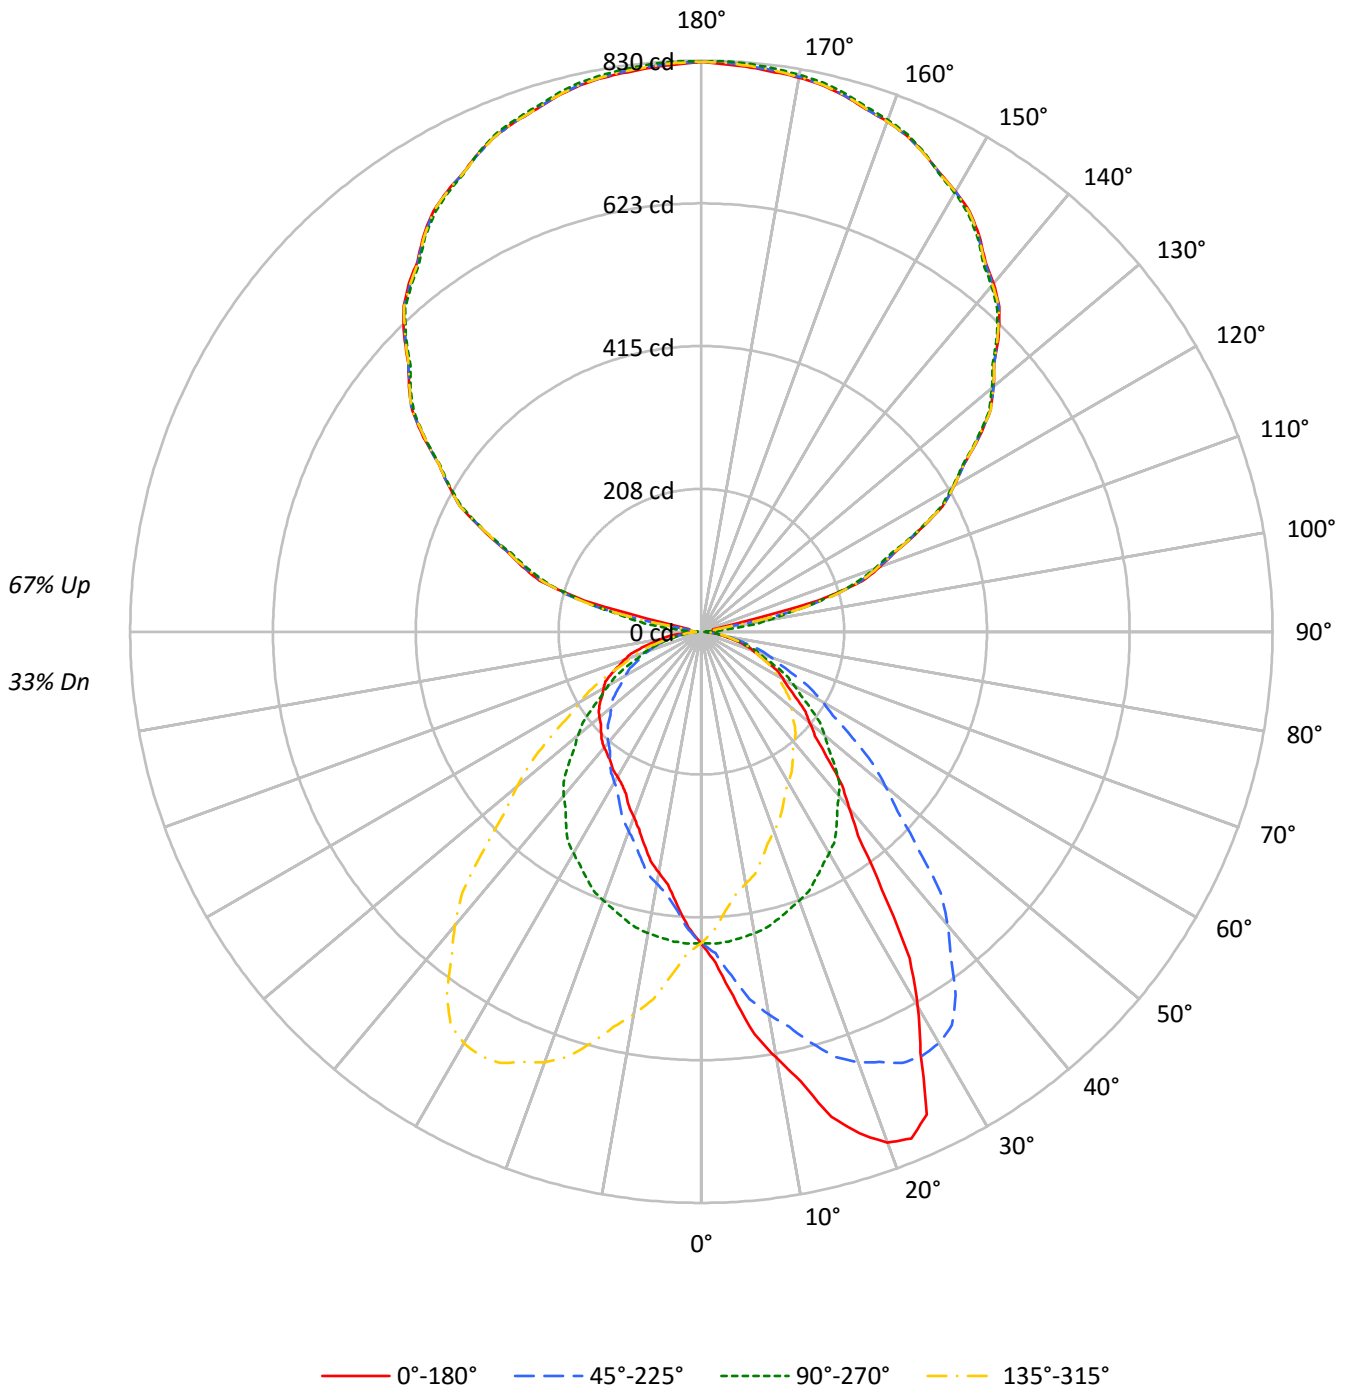



TEST NUMBER: P332508-927

CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40	33				
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34	28				
2	86	79	73	68	77	71	66	62	57	53	50	44	42	39	32	30	29	24				
3	78	69	62	57	70	63	57	52	50	46	43	39	36	34	28	26	25	20				
4	72	61	54	48	64	56	49	44	45	40	36	35	31	29	25	23	22	17				
5	66	55	47	41	59	49	43	38	40	35	31	31	28	25	23	21	19	15				
6	60	49	41	35	54	44	38	33	36	31	27	28	25	22	21	18	17	13				
7	56	44	36	31	50	40	33	29	33	28	24	26	22	19	19	17	15	12				
8	52	40	32	27	47	36	30	25	30	25	21	23	20	17	17	15	13	11				
9	48	36	29	24	43	33	27	22	27	22	19	21	18	15	16	14	12	10				
10	45	33	26	22	40	30	24	20	25	20	17	20	16	14	15	13	11	9				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	3654	3654	3654	3654
5°	4302	3663	3233	3663
10°	5151	3647	2911	3647
15°	6095	3611	2674	3611
20°	6787	3572	2461	3572
25°	6897	3517	2314	3517
30°	5868	3464	2269	3464
35°	4512	3377	2269	3377
40°	3517	3276	2312	3276
45°	2932	3123	2351	3123
50°	2581	2936	2430	2936
55°	2365	2712	2528	2712
60°	2215	2512	2645	2512
65°	2063	2288	2743	2288
70°	1886	2065	2804	2065
75°	1684	1818	2773	1818
80°	1409	1492	2687	1492
85°	1074	1074	2566	1074



TEST NUMBER: P332508-927

CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	44.1	1.2
10°-20°	135.9	3.6
20°-30°	215.5	5.7
30°-40°	239.8	6.3
40°-50°	218.3	5.7
50°-60°	178.4	4.7
60°-70°	127.4	3.3
70°-80°	70.1	1.8
80°-90°	21.5	0.6
90°-100°	28.3	0.7
100°-110°	180.6	4.7
110°-120°	345.5	9.1
120°-130°	438.6	11.5
130°-140°	469.2	12.3
140°-150°	438.8	11.5
150°-160°	353.8	9.3
160°-170°	228.2	6.0
170°-180°	78.7	2.1
0°-30°	395.5	10.4
0°-40°	635.3	16.7
0°-60°	1032.1	27.1
0°-90°	1251.1	32.8
90°-120°	554.4	14.5
90°-150°	1901.0	49.9
90°-180°	2562.0	67.2
0°-180°	3812.8	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	453	453	453	453	453	
5°	531	452	399	452	531	54
15°	729	432	320	432	729	206
25°	774	395	260	395	774	341
35°	458	343	230	343	458	291
45°	257	274	206	274	257	202
55°	168	193	180	193	168	152
65°	108	120	144	120	108	107
75°	54	58	89	58	54	57
85°	11	12	28	12	11	14
90°	19	2	19	2	19	8
95°	18	34	18	34	18	14
105°	176	186	176	186	176	154
115°	351	348	351	348	351	347
125°	493	489	493	489	493	439
135°	611	607	611	607	611	471
145°	704	700	704	700	704	440
155°	767	768	767	768	767	354
165°	806	810	806	810	806	228
175°	823	828	823	828	823	78
180°	828	828	828	828	828	



TEST NUMBER: P332508-927

CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6
2.5°	481.6	481.6	480.1	479.7	478.7	477.4	477.1	474.6	469.8	467.5	467.0
5°	530.9	534.7	529.8	528.9	528.3	522.1	519.0	515.2	506.6	501.5	497.6
7.5°	589.8	590.2	588.0	586.4	581.5	576.2	568.1	559.4	549.1	538.5	530.4
10°	628.4	629.9	627.5	627.2	617.6	611.6	599.6	589.5	577.8	564.9	553.1
12.5°	669.2	667.2	665.9	657.9	656.1	645.2	631.2	620.8	602.9	588.0	572.3
15°	729.3	725.2	722.5	711.5	706.1	690.9	676.0	664.6	641.2	618.9	602.0
17.5°	764.5	768.7	762.6	758.0	744.0	733.3	718.2	694.2	675.9	648.2	626.9
20°	790.0	790.4	787.0	782.4	771.3	757.8	741.3	715.1	693.2	665.6	636.3
22.5°	796.9	797.0	795.6	791.2	782.8	771.9	755.3	733.3	706.8	676.8	647.5
25°	774.3	773.6	775.2	780.1	777.0	773.6	764.0	747.7	722.9	691.3	659.7
27.5°	690.1	695.4	704.9	716.8	728.4	737.2	739.7	736.3	721.0	695.0	661.9
30°	629.5	636.0	643.1	655.1	678.3	691.7	706.2	717.3	711.1	690.3	659.6
32.5°	563.0	564.6	575.1	588.7	610.1	635.6	658.9	681.4	688.8	677.9	652.2
35°	457.8	460.5	471.9	485.4	511.4	542.8	577.7	608.8	634.5	644.8	631.6
37.5°	373.6	381.1	389.2	403.7	426.7	454.9	491.1	531.4	569.7	595.3	599.7
40°	333.7	338.4	344.2	355.3	374.8	402.5	433.6	479.7	520.5	557.2	569.2
42.5°	302.2	305.0	308.6	318.5	333.4	361.0	389.4	430.0	470.8	514.8	534.9
45°	256.8	259.7	265.7	271.5	282.7	301.8	328.3	361.6	402.7	445.0	482.2
47.5°	224.1	225.9	229.4	235.7	245.3	257.9	279.3	307.2	345.2	386.4	426.0
50°	205.5	207.0	209.8	215.4	222.8	234.0	251.6	277.7	307.4	348.9	387.7
52.5°	190.8	191.4	193.5	197.3	203.1	212.5	227.0	248.6	276.3	313.2	351.9
55°	168.0	168.7	170.6	173.4	178.5	184.5	195.5	211.7	235.8	267.9	301.5
57.5°	149.2	149.8	151.3	152.4	156.6	161.4	170.0	181.5	199.8	227.0	257.0
60°	137.2	136.9	138.7	139.7	142.5	146.6	153.2	164.2	180.1	202.1	229.7
62.5°	125.6	125.0	126.6	127.9	129.4	132.9	138.3	146.9	159.9	179.7	203.6
65°	108.0	107.3	108.2	109.7	111.1	113.0	117.0	124.7	135.0	149.2	167.4
67.5°	90.4	91.2	91.3	92.1	92.9	95.5	98.2	103.6	110.9	122.3	137.7
70°	79.9	80.1	80.8	80.8	81.4	83.7	85.9	89.0	96.2	106.7	119.2
72.5°	69.4	70.2	69.9	70.4	70.9	72.4	74.0	77.1	83.1	90.9	101.6
75°	54.0	54.6	54.6	54.7	55.3	55.8	57.2	59.4	63.8	69.6	76.8
77.5°	39.4	39.5	39.7	40.4	40.4	41.3	42.2	44.0	46.2	50.1	54.7
80°	30.3	30.7	30.6	31.0	31.0	31.7	32.1	34.3	35.3	37.9	41.4
82.5°	22.3	22.7	22.6	23.1	23.4	23.6	24.1	25.0	26.0	28.3	29.7
85°	11.2	11.6	11.2	11.6	12.2	12.4	12.9	13.2	13.9	14.4	15.8
87.5°	7.1	7.4	7.4	7.4	7.7	7.8	7.7	7.4	7.8	7.8	8.2
90°	18.6	18.3	18.1	17.7	17.5	17.0	16.1	15.3	14.4	13.6	12.5
92.5°	17.1	17.0	17.0	17.0	16.9	16.4	15.6	14.8	13.9	13.2	12.0
95°	18.0	17.8	17.7	17.6	17.4	17.0	16.1	15.3	14.4	13.6	13.5
97.5°	17.3	17.2	17.0	17.0	16.8	16.7	16.6	16.6	16.4	16.3	31.7
100°	17.3	17.2	17.0	17.0	16.8	17.9	20.2	22.6	24.9	27.3	46.3
102.5°	17.8	17.8	17.7	17.7	17.7	30.3	55.6	80.8	106.1	131.3	133.8
105°	176.5	181.5	186.4	191.4	196.4	198.2	196.9	195.7	194.5	193.2	192.6
107.5°	246.1	245.5	244.9	244.5	243.9	243.4	242.7	242.2	241.5	241.0	240.0
110°	276.2	275.8	275.4	275.0	274.6	274.3	274.0	273.7	273.5	273.1	272.4



TEST NUMBER: P332508-927

CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	306.5	305.9	305.5	304.9	304.4	304.1	304.2	304.3	304.4	304.4	304.0
115°	350.6	350.6	350.6	350.6	350.6	350.5	350.1	349.9	349.6	349.4	349.5
117.5°	395.5	395.5	395.5	395.6	395.6	395.7	395.8	395.8	395.9	395.9	395.6
120°	423.7	424.0	424.2	424.5	424.8	424.8	424.5	424.2	424.0	423.7	423.8
122.5°	451.4	451.7	451.9	452.3	452.5	452.6	452.4	452.3	452.1	451.9	451.7
125°	493.1	492.9	492.7	492.7	492.5	492.2	491.8	491.4	491.0	490.6	490.8
127.5°	529.6	529.7	529.8	529.9	530.0	530.1	530.2	530.3	530.4	530.4	529.8
130°	554.4	554.4	554.4	554.4	554.4	554.3	554.1	554.1	553.9	553.7	553.3
132.5°	577.2	577.3	577.3	577.5	577.6	577.6	577.4	577.3	577.2	577.0	576.5
135°	611.3	611.1	610.8	610.5	610.2	610.0	609.7	609.4	609.1	608.9	608.3
137.5°	640.6	640.6	640.7	640.8	640.9	640.8	640.5	640.2	639.9	639.6	639.0
140°	660.9	660.8	660.6	660.5	660.4	660.0	659.7	659.3	658.9	658.4	658.1
142.5°	677.7	677.7	677.7	677.6	677.6	677.5	677.2	676.8	676.6	676.3	676.1
145°	703.6	703.4	703.1	702.8	702.5	702.3	702.2	702.0	702.0	701.8	701.8
147.5°	725.1	724.9	724.8	724.7	724.5	724.4	724.3	724.2	724.1	724.0	724.1
150°	738.9	738.8	738.6	738.6	738.4	738.3	738.3	738.3	738.3	738.3	738.5
152.5°	750.8	750.9	751.0	751.1	751.1	751.1	750.9	750.7	750.4	750.2	750.4
155°	766.8	767.2	767.6	768.0	768.5	768.4	767.9	767.3	766.8	766.2	766.6
157.5°	780.2	780.9	781.6	782.4	783.1	783.1	782.4	781.6	780.9	780.2	780.7
160°	789.1	790.0	790.8	791.6	792.4	792.4	791.6	790.8	790.0	789.1	789.3
162.5°	796.1	797.0	797.9	798.8	799.8	799.9	799.0	798.2	797.4	796.5	796.7
165°	805.8	807.1	808.3	809.5	810.8	810.9	809.8	808.7	807.6	806.4	806.4
167.5°	813.2	814.5	815.9	817.3	818.6	818.7	817.5	816.3	815.1	813.9	814.0
170°	817.6	819.0	820.4	821.7	823.1	823.2	822.1	821.0	819.9	818.9	818.7
172.5°	820.1	821.6	823.1	824.6	826.0	826.2	825.1	824.0	822.9	821.8	821.7
175°	823.2	824.8	826.5	828.1	829.8	830.0	828.8	827.5	826.2	825.1	824.9
177.5°	825.1	826.5	827.8	829.1	830.4	830.7	829.8	828.9	828.0	827.1	827.0
180°	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1



TEST NUMBER: P332508-927

CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6
2.5°	467.1	465.0	463.5	462.3	459.1	457.1	455.6	453.5	451.1	448.5	445.4
5°	493.6	487.3	482.6	475.5	468.7	463.1	457.2	452.0	445.7	438.7	433.6
7.5°	521.5	512.0	499.9	489.3	477.4	467.1	458.0	448.5	438.7	429.1	420.4
10°	539.2	527.0	513.5	497.6	482.6	469.3	456.9	444.9	433.2	421.7	411.7
12.5°	558.3	543.0	523.1	504.5	487.7	469.8	455.0	440.2	426.2	414.0	402.4
15°	583.8	561.9	538.8	513.9	491.8	471.0	450.5	432.0	416.2	400.1	388.8
17.5°	599.5	572.4	546.1	520.0	493.2	466.9	444.9	423.5	403.8	387.8	373.6
20°	609.9	582.9	550.1	524.0	492.2	465.2	439.7	415.8	395.2	378.2	363.5
22.5°	618.9	587.7	554.8	520.5	488.9	460.2	432.3	408.4	387.3	369.3	355.3
25°	623.8	588.0	552.3	518.2	482.2	448.3	422.9	394.8	372.3	353.4	338.4
27.5°	624.3	586.0	545.7	507.8	470.6	439.0	407.1	381.9	358.6	338.6	324.2
30°	622.7	582.7	539.4	498.4	461.1	426.7	398.9	371.6	347.8	327.9	312.9
32.5°	617.3	575.8	531.3	487.8	449.2	415.6	387.0	360.9	337.7	318.1	302.4
35°	602.2	561.1	513.7	468.5	429.0	395.1	369.2	342.7	319.5	301.0	285.7
37.5°	578.5	541.4	493.1	446.4	407.5	373.4	347.8	323.9	302.9	284.1	268.5
40°	557.8	525.1	476.7	431.2	389.2	356.8	332.8	310.9	290.0	272.2	257.4
42.5°	533.9	505.5	460.9	412.6	372.1	339.5	316.2	296.4	276.9	260.4	245.6
45°	491.4	472.6	430.6	386.0	343.8	313.1	290.8	273.5	257.1	240.9	228.5
47.5°	442.5	433.2	397.8	355.5	315.4	285.1	265.8	249.9	235.4	221.7	210.8
50°	409.6	405.1	374.6	333.7	295.5	267.0	247.5	233.8	221.4	209.5	199.1
52.5°	377.2	377.1	349.5	312.1	276.7	249.3	229.9	217.1	206.4	196.7	187.4
55°	327.7	333.0	311.4	278.1	246.4	221.6	204.1	192.7	185.2	177.2	170.2
57.5°	282.3	291.0	273.1	243.8	217.3	194.6	179.4	170.8	162.8	157.9	152.8
60°	252.5	260.8	246.9	222.2	197.3	177.8	163.3	155.6	148.7	145.3	141.7
62.5°	226.2	233.5	223.2	200.3	178.6	159.9	147.7	140.3	135.6	132.0	129.6
65°	188.5	194.6	185.8	169.1	150.5	135.5	125.6	119.8	115.3	113.8	111.1
67.5°	152.3	158.0	153.2	139.0	124.1	112.7	105.0	99.4	96.7	95.5	93.6
70°	130.9	136.5	131.4	119.1	107.6	98.1	90.7	87.5	84.8	84.2	81.6
72.5°	112.7	116.5	111.5	101.8	92.1	84.0	78.3	74.9	73.5	72.5	71.1
75°	84.5	87.9	84.5	77.1	70.1	64.5	59.7	58.3	56.6	56.1	55.1
77.5°	59.8	62.7	60.2	55.5	50.3	45.9	43.3	41.7	41.3	40.3	40.8
80°	45.7	47.6	45.2	42.0	37.9	34.9	33.0	32.1	31.0	30.6	31.3
82.5°	32.9	33.7	32.4	30.3	27.3	25.3	24.0	22.9	22.7	22.7	22.7
85°	17.0	16.9	16.7	14.8	13.9	12.6	11.8	11.6	11.4	11.8	12.2
87.5°	8.0	7.9	7.5	6.7	5.9	5.1	4.8	4.3	4.8	5.1	5.6
90°	11.4	10.3	9.2	7.9	6.4	4.9	3.4	1.8	3.4	4.9	6.4
92.5°	10.9	9.8	8.7	8.2	8.1	8.0	7.9	7.8	7.9	8.0	8.1
95°	13.4	13.2	13.1	15.4	20.0	24.7	29.4	34.1	29.4	24.7	20.0
97.5°	47.1	62.4	77.8	84.1	81.1	78.2	75.3	72.3	75.3	78.2	81.1
100°	65.3	84.2	103.2	111.5	109.0	106.5	104.1	101.6	104.1	106.5	109.0
102.5°	136.3	138.7	141.2	141.6	139.7	137.9	136.1	134.3	136.1	137.9	139.7
105°	191.9	191.2	190.5	189.7	188.9	188.1	187.3	186.4	187.3	188.1	188.9
107.5°	239.1	238.1	237.2	236.5	236.1	235.7	235.3	234.9	235.3	235.7	236.1
110°	271.5	270.7	269.8	269.3	268.8	268.4	268.0	267.6	268.0	268.4	268.8





TEST NUMBER: P332508-927

CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	303.6	303.2	302.9	302.3	301.5	300.8	300.0	299.3	300.0	300.8	301.5
115°	349.6	349.7	349.9	349.7	349.4	349.0	348.5	348.1	348.5	349.0	349.4
117.5°	395.3	395.0	394.7	394.3	393.7	393.2	392.6	392.1	392.6	393.2	393.7
120°	424.0	424.1	424.2	424.0	423.5	422.9	422.4	421.8	422.4	422.9	423.5
122.5°	451.5	451.3	451.1	450.9	450.5	450.2	449.9	449.6	449.9	450.2	450.5
125°	491.2	491.4	491.6	491.5	491.0	490.4	489.9	489.3	489.9	490.4	491.0
127.5°	529.2	528.5	527.9	527.5	527.4	527.3	527.1	527.0	527.1	527.3	527.4
130°	552.9	552.5	552.1	551.8	551.7	551.5	551.4	551.3	551.4	551.5	551.7
132.5°	576.0	575.4	575.0	574.6	574.3	574.1	573.8	573.5	573.8	574.1	574.3
135°	607.8	607.2	606.7	606.5	606.6	606.7	606.9	607.0	606.9	606.7	606.6
137.5°	638.4	637.8	637.2	636.8	636.8	636.8	636.7	636.6	636.7	636.8	636.8
140°	657.9	657.6	657.4	657.0	656.8	656.5	656.2	655.9	656.2	656.5	656.8
142.5°	676.0	675.7	675.6	675.3	674.8	674.3	673.8	673.3	673.8	674.3	674.8
145°	701.8	701.8	701.8	701.6	701.2	700.8	700.4	699.9	700.4	700.8	701.2
147.5°	724.2	724.4	724.5	724.2	723.4	722.6	721.9	721.1	721.9	722.6	723.4
150°	738.6	738.7	738.9	738.6	738.2	737.6	737.0	736.5	737.0	737.6	738.2
152.5°	750.8	751.0	751.2	751.1	750.7	750.2	749.8	749.3	749.8	750.2	750.7
155°	767.0	767.5	767.9	768.0	767.9	767.7	767.5	767.5	767.5	767.7	767.9
157.5°	781.2	781.6	782.0	782.4	782.4	782.5	782.6	782.7	782.6	782.5	782.4
160°	789.4	789.6	789.6	790.0	790.4	790.8	791.2	791.6	791.2	790.8	790.4
162.5°	796.9	796.9	797.1	797.4	798.0	798.4	799.0	799.5	799.0	798.4	798.0
165°	806.4	806.4	806.4	806.8	807.5	808.2	808.9	809.5	808.9	808.2	807.5
167.5°	814.0	814.1	814.2	814.6	815.3	816.0	816.7	817.5	816.7	816.0	815.3
170°	818.6	818.4	818.3	818.6	819.4	820.3	821.1	822.0	821.1	820.3	819.4
172.5°	821.6	821.4	821.3	821.7	822.4	823.2	824.1	824.9	824.1	823.2	822.4
175°	824.7	824.7	824.5	824.8	825.7	826.5	827.3	828.1	827.3	826.5	825.7
177.5°	826.7	826.5	826.2	826.6	827.3	828.1	828.9	829.7	828.9	828.1	827.3
180°	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1



TEST NUMBER: P332508-927

CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6
2.5°	443.9	442.5	440.6	437.9	435.6	433.2	432.6	431.7	433.6	432.1	431.6
5°	429.4	425.4	420.3	414.5	411.1	406.3	405.4	403.5	401.6	401.4	399.5
7.5°	413.9	408.1	401.5	395.6	390.1	384.8	381.3	380.6	377.8	376.1	374.3
10°	404.0	396.9	389.2	383.6	377.2	371.6	367.7	365.4	363.5	361.5	359.6
12.5°	392.4	384.8	378.4	372.3	364.8	360.5	354.0	350.1	349.7	349.7	344.9
15°	378.7	371.2	361.5	352.8	348.7	340.5	336.9	332.4	329.6	326.8	324.6
17.5°	363.1	353.8	346.2	336.3	328.4	321.9	317.2	314.5	310.2	306.3	303.4
20°	353.4	343.5	335.4	324.9	316.3	308.2	304.3	300.6	297.4	294.0	290.8
22.5°	343.5	333.1	323.3	313.1	305.1	296.5	292.7	287.6	284.6	282.7	279.6
25°	327.9	316.6	305.4	295.6	287.4	279.9	274.9	270.9	267.5	266.0	264.0
27.5°	310.9	299.8	288.9	277.8	268.5	263.0	259.0	256.0	254.1	252.1	251.1
30°	300.2	288.5	276.9	266.6	258.0	252.5	248.8	246.8	245.3	244.3	243.4
32.5°	289.2	277.7	265.5	256.1	248.3	243.5	240.7	238.6	237.9	237.6	237.2
35°	271.6	260.1	248.8	240.3	233.1	231.2	228.7	227.6	227.2	228.5	229.1
37.5°	254.7	243.9	233.5	225.4	220.5	217.9	217.0	217.1	218.4	219.5	220.9
40°	243.8	233.2	223.5	216.3	211.8	210.2	209.8	210.7	212.2	213.6	215.1
42.5°	233.1	222.8	213.9	207.2	204.1	202.5	202.7	203.7	205.8	207.4	209.6
45°	216.6	207.9	199.3	193.8	191.2	191.6	191.6	193.3	195.4	197.8	200.3
47.5°	201.0	192.3	185.2	180.6	179.3	179.0	180.0	182.2	185.1	188.1	191.5
50°	190.5	182.2	176.0	171.9	170.4	171.0	172.5	174.5	178.1	181.9	185.4
52.5°	179.8	172.3	166.6	162.8	161.7	162.7	164.2	167.5	170.6	174.7	179.0
55°	163.3	156.9	152.4	149.6	149.2	149.8	151.5	155.0	159.5	164.6	168.7
57.5°	146.9	141.5	137.4	135.5	135.6	136.2	138.9	143.1	148.0	153.4	158.7
60°	135.7	130.9	127.5	126.0	126.2	127.3	130.7	134.6	140.6	145.8	151.5
62.5°	125.2	121.0	117.7	116.4	116.1	118.6	121.8	125.9	131.9	137.8	143.9
65°	108.4	105.0	102.3	101.6	102.2	104.1	108.2	113.6	118.7	124.8	131.3
67.5°	91.9	89.1	87.3	87.6	88.3	91.1	94.5	99.2	105.0	111.4	117.6
70°	81.4	78.7	77.2	77.4	78.6	81.9	84.9	89.6	95.8	102.3	107.6
72.5°	70.6	68.8	67.5	68.3	69.4	71.7	75.5	80.2	85.6	91.7	97.3
75°	54.2	54.2	53.5	54.0	55.7	57.9	60.8	65.6	71.1	76.0	80.4
77.5°	40.2	39.8	40.2	41.0	41.9	44.6	47.8	51.3	55.4	60.3	64.0
80°	30.7	31.0	31.8	33.0	33.4	35.4	38.8	42.0	45.2	49.3	52.8
82.5°	23.1	23.3	23.8	25.2	25.6	27.8	29.9	33.1	36.0	38.8	41.7
85°	12.6	12.6	13.5	14.1	15.0	16.5	17.8	19.7	22.3	24.2	27.0
87.5°	6.4	6.7	7.4	8.0	8.6	9.6	10.1	11.9	12.7	13.5	15.1
90°	7.9	9.2	10.3	11.4	12.5	13.6	14.4	15.3	16.1	17.0	17.5
92.5°	8.2	8.7	9.8	10.9	12.0	13.2	13.9	14.8	15.6	16.4	16.9
95°	15.4	13.1	13.2	13.4	13.5	13.6	14.4	15.3	16.1	17.0	17.4
97.5°	84.1	77.8	62.4	47.1	31.7	16.3	16.4	16.6	16.6	16.7	16.8
100°	111.5	103.2	84.2	65.3	46.3	27.3	24.9	22.6	20.2	17.9	16.8
102.5°	141.6	141.2	138.7	136.3	133.8	131.3	106.1	80.8	55.6	30.3	17.7
105°	189.7	190.5	191.2	191.9	192.6	193.2	194.5	195.7	196.9	198.2	196.4
107.5°	236.5	237.2	238.1	239.1	240.0	241.0	241.5	242.2	242.7	243.4	243.9
110°	269.3	269.8	270.7	271.5	272.4	273.1	273.5	273.7	274.0	274.3	274.6



TEST NUMBER: P332508-927

CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	302.3	302.9	303.2	303.6	304.0	304.4	304.4	304.3	304.2	304.1	304.4
115°	349.7	349.9	349.7	349.6	349.5	349.4	349.6	349.9	350.1	350.5	350.6
117.5°	394.3	394.7	395.0	395.3	395.6	395.9	395.9	395.8	395.8	395.7	395.6
120°	424.0	424.2	424.1	424.0	423.8	423.7	424.0	424.2	424.5	424.8	424.8
122.5°	450.9	451.1	451.3	451.5	451.7	451.9	452.1	452.3	452.4	452.6	452.5
125°	491.5	491.6	491.4	491.2	490.8	490.6	491.0	491.4	491.8	492.2	492.5
127.5°	527.5	527.9	528.5	529.2	529.8	530.4	530.4	530.3	530.2	530.1	530.0
130°	551.8	552.1	552.5	552.9	553.3	553.7	553.9	554.1	554.1	554.3	554.4
132.5°	574.6	575.0	575.4	576.0	576.5	577.0	577.2	577.3	577.4	577.6	577.6
135°	606.5	606.7	607.2	607.8	608.3	608.9	609.1	609.4	609.7	610.0	610.2
137.5°	636.8	637.2	637.8	638.4	639.0	639.6	639.9	640.2	640.5	640.8	640.9
140°	657.0	657.4	657.6	657.9	658.1	658.4	658.9	659.3	659.7	660.0	660.4
142.5°	675.3	675.6	675.7	676.0	676.1	676.3	676.6	676.8	677.2	677.5	677.6
145°	701.6	701.8	701.8	701.8	701.8	701.8	702.0	702.0	702.2	702.3	702.5
147.5°	724.2	724.5	724.4	724.2	724.1	724.0	724.1	724.2	724.3	724.4	724.5
150°	738.6	738.9	738.7	738.6	738.5	738.3	738.3	738.3	738.3	738.3	738.4
152.5°	751.1	751.2	751.0	750.8	750.4	750.2	750.4	750.7	750.9	751.1	751.1
155°	768.0	767.9	767.5	767.0	766.6	766.2	766.8	767.3	767.9	768.4	768.5
157.5°	782.4	782.0	781.6	781.2	780.7	780.2	780.9	781.6	782.4	783.1	783.1
160°	790.0	789.6	789.6	789.4	789.3	789.1	790.0	790.8	791.6	792.4	792.4
162.5°	797.4	797.1	796.9	796.9	796.7	796.5	797.4	798.2	799.0	799.9	799.8
165°	806.8	806.4	806.4	806.4	806.4	806.4	807.6	808.7	809.8	810.9	810.8
167.5°	814.6	814.2	814.1	814.0	814.0	813.9	815.1	816.3	817.5	818.7	818.6
170°	818.6	818.3	818.4	818.6	818.7	818.9	819.9	821.0	822.1	823.2	823.1
172.5°	821.7	821.3	821.4	821.6	821.7	821.8	822.9	824.0	825.1	826.2	826.0
175°	824.8	824.5	824.7	824.7	824.9	825.1	826.2	827.5	828.8	830.0	829.8
177.5°	826.6	826.2	826.5	826.7	827.0	827.1	828.0	828.9	829.8	830.7	830.4
180°	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1



TEST NUMBER: P332508-927

CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6
2.5°	431.3	431.0	429.9	429.8	429.9	431.0	431.3	431.6	432.1	433.6	431.7
5°	398.4	397.4	396.9	398.9	396.9	397.4	398.4	399.5	401.4	401.6	403.5
7.5°	373.6	372.9	371.2	370.7	371.2	372.9	373.6	374.3	376.1	377.8	380.6
10°	357.7	357.0	355.5	355.1	355.5	357.0	357.7	359.6	361.5	363.5	365.4
12.5°	342.4	341.0	340.6	341.0	340.6	341.0	342.4	344.9	349.7	349.7	350.1
15°	322.1	321.3	319.2	319.9	319.2	321.3	322.1	324.6	326.8	329.6	332.4
17.5°	302.1	301.2	298.7	300.9	298.7	301.2	302.1	303.4	306.3	310.2	314.5
20°	289.5	288.0	286.7	286.5	286.7	288.0	289.5	290.8	294.0	297.4	300.6
22.5°	277.5	276.2	276.0	274.8	276.0	276.2	277.5	279.6	282.7	284.6	287.6
25°	262.4	261.2	260.8	259.8	260.8	261.2	262.4	264.0	266.0	267.5	270.9
27.5°	251.0	250.3	249.6	249.9	249.6	250.3	251.0	251.1	252.1	254.1	256.0
30°	243.9	243.8	243.4	243.4	243.4	243.8	243.9	243.4	244.3	245.3	246.8
32.5°	238.1	238.1	238.3	238.3	238.3	238.1	238.1	237.2	237.6	237.9	238.6
35°	229.9	230.4	230.8	230.2	230.8	230.4	229.9	229.1	228.5	227.2	227.6
37.5°	222.4	223.0	223.6	224.2	223.6	223.0	222.4	220.9	219.5	218.4	217.1
40°	216.7	218.0	218.4	219.4	218.4	218.0	216.7	215.1	213.6	212.2	210.7
42.5°	211.4	212.8	213.7	214.0	213.7	212.8	211.4	209.6	207.4	205.8	203.7
45°	203.0	204.5	205.9	205.9	205.9	204.5	203.0	200.3	197.8	195.4	193.3
47.5°	194.5	196.6	198.0	198.3	198.0	196.6	194.5	191.5	188.1	185.1	182.2
50°	188.6	191.2	192.6	193.5	192.6	191.2	188.6	185.4	181.9	178.1	174.5
52.5°	182.9	185.5	187.3	187.7	187.3	185.5	182.9	179.0	174.7	170.6	167.5
55°	173.0	176.8	178.9	179.6	178.9	176.8	173.0	168.7	164.6	159.5	155.0
57.5°	163.7	167.2	169.6	170.2	169.6	167.2	163.7	158.7	153.4	148.0	143.1
60°	156.5	160.3	163.3	163.8	163.3	160.3	156.5	151.5	145.8	140.6	134.6
62.5°	149.2	153.1	155.8	157.2	155.8	153.1	149.2	143.9	137.8	131.9	125.9
65°	136.5	140.5	143.1	143.6	143.1	140.5	136.5	131.3	124.8	118.7	113.6
67.5°	122.6	126.6	128.3	129.4	128.3	126.6	122.6	117.6	111.4	105.0	99.2
70°	112.9	116.1	118.0	118.8	118.0	116.1	112.9	107.6	102.3	95.8	89.6
72.5°	101.8	105.1	107.3	107.5	107.3	105.1	101.8	97.3	91.7	85.6	80.2
75°	84.8	87.8	88.9	88.9	88.9	87.8	84.8	80.4	76.0	71.1	65.6
77.5°	67.1	68.6	70.0	70.3	70.0	68.6	67.1	64.0	60.3	55.4	51.3
80°	55.7	56.6	57.8	57.8	57.8	56.6	55.7	52.8	49.3	45.2	42.0
82.5°	44.0	44.8	45.9	45.7	45.9	44.8	44.0	41.7	38.8	36.0	33.1
85°	26.6	28.3	28.1	27.7	28.1	28.3	26.6	27.0	24.2	22.3	19.7
87.5°	15.5	15.8	16.2	16.6	16.2	15.8	15.5	15.1	13.5	12.7	11.9
90°	17.7	18.1	18.3	18.6	18.3	18.1	17.7	17.5	17.0	16.1	15.3
92.5°	17.0	17.0	17.0	17.1	17.0	17.0	17.0	16.9	16.4	15.6	14.8
95°	17.6	17.7	17.8	18.0	17.8	17.7	17.6	17.4	17.0	16.1	15.3
97.5°	17.0	17.0	17.2	17.3	17.2	17.0	17.0	16.8	16.7	16.6	16.6
100°	17.0	17.0	17.2	17.3	17.2	17.0	17.0	16.8	17.9	20.2	22.6
102.5°	17.7	17.7	17.8	17.8	17.8	17.7	17.7	17.7	30.3	55.6	80.8
105°	191.4	186.4	181.5	176.5	181.5	186.4	191.4	196.4	198.2	196.9	195.7
107.5°	244.5	244.9	245.5	246.1	245.5	244.9	244.5	243.9	243.4	242.7	242.2
110°	275.0	275.4	275.8	276.2	275.8	275.4	275.0	274.6	274.3	274.0	273.7



TEST NUMBER: P332508-927

CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	304.9	305.5	305.9	306.5	305.9	305.5	304.9	304.4	304.1	304.2	304.3
115°	350.6	350.6	350.6	350.6	350.6	350.6	350.6	350.6	350.5	350.1	349.9
117.5°	395.6	395.5	395.5	395.5	395.5	395.5	395.6	395.6	395.7	395.8	395.8
120°	424.5	424.2	424.0	423.7	424.0	424.2	424.5	424.8	424.8	424.5	424.2
122.5°	452.3	451.9	451.7	451.4	451.7	451.9	452.3	452.5	452.6	452.4	452.3
125°	492.7	492.7	492.9	493.1	492.9	492.7	492.7	492.5	492.2	491.8	491.4
127.5°	529.9	529.8	529.7	529.6	529.7	529.8	529.9	530.0	530.1	530.2	530.3
130°	554.4	554.4	554.4	554.4	554.4	554.4	554.4	554.4	554.3	554.1	554.1
132.5°	577.5	577.3	577.3	577.2	577.3	577.3	577.5	577.6	577.6	577.4	577.3
135°	610.5	610.8	611.1	611.3	611.1	610.8	610.5	610.2	610.0	609.7	609.4
137.5°	640.8	640.7	640.6	640.6	640.6	640.7	640.8	640.9	640.8	640.5	640.2
140°	660.5	660.6	660.8	660.9	660.8	660.6	660.5	660.4	660.0	659.7	659.3
142.5°	677.6	677.7	677.7	677.7	677.7	677.7	677.6	677.6	677.5	677.2	676.8
145°	702.8	703.1	703.4	703.6	703.4	703.1	702.8	702.5	702.3	702.2	702.0
147.5°	724.7	724.8	724.9	725.1	724.9	724.8	724.7	724.5	724.4	724.3	724.2
150°	738.6	738.6	738.8	738.9	738.8	738.6	738.6	738.4	738.3	738.3	738.3
152.5°	751.1	751.0	750.9	750.8	750.9	751.0	751.1	751.1	751.1	750.9	750.7
155°	768.0	767.6	767.2	766.8	767.2	767.6	768.0	768.5	768.4	767.9	767.3
157.5°	782.4	781.6	780.9	780.2	780.9	781.6	782.4	783.1	783.1	782.4	781.6
160°	791.6	790.8	790.0	789.1	790.0	790.8	791.6	792.4	792.4	791.6	790.8
162.5°	798.8	797.9	797.0	796.1	797.0	797.9	798.8	799.8	799.9	799.0	798.2
165°	809.5	808.3	807.1	805.8	807.1	808.3	809.5	810.8	810.9	809.8	808.7
167.5°	817.3	815.9	814.5	813.2	814.5	815.9	817.3	818.6	818.7	817.5	816.3
170°	821.7	820.4	819.0	817.6	819.0	820.4	821.7	823.1	823.2	822.1	821.0
172.5°	824.6	823.1	821.6	820.1	821.6	823.1	824.6	826.0	826.2	825.1	824.0
175°	828.1	826.5	824.8	823.2	824.8	826.5	828.1	829.8	830.0	828.8	827.5
177.5°	829.1	827.8	826.5	825.1	826.5	827.8	829.1	830.4	830.7	829.8	828.9
180°	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1



TEST NUMBER: P332508-927

CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6
2.5°	432.6	433.2	435.6	437.9	440.6	442.5	443.9	445.4	448.5	451.1	453.5
5°	405.4	406.3	411.1	414.5	420.3	425.4	429.4	433.6	438.7	445.7	452.0
7.5°	381.3	384.8	390.1	395.6	401.5	408.1	413.9	420.4	429.1	438.7	448.5
10°	367.7	371.6	377.2	383.6	389.2	396.9	404.0	411.7	421.7	433.2	444.9
12.5°	354.0	360.5	364.8	372.3	378.4	384.8	392.4	402.4	414.0	426.2	440.2
15°	336.9	340.5	348.7	352.8	361.5	371.2	378.7	388.8	400.1	416.2	432.0
17.5°	317.2	321.9	328.4	336.3	346.2	353.8	363.1	373.6	387.8	403.8	423.5
20°	304.3	308.2	316.3	324.9	335.4	343.5	353.4	363.5	378.2	395.2	415.8
22.5°	292.7	296.5	305.1	313.1	323.3	333.1	343.5	355.3	369.3	387.3	408.4
25°	274.9	279.9	287.4	295.6	305.4	316.6	327.9	338.4	353.4	372.3	394.8
27.5°	259.0	263.0	268.5	277.8	288.9	299.8	310.9	324.2	338.6	358.6	381.9
30°	248.8	252.5	258.0	266.6	276.9	288.5	300.2	312.9	327.9	347.8	371.6
32.5°	240.7	243.5	248.3	256.1	265.5	277.7	289.2	302.4	318.1	337.7	360.9
35°	228.7	231.2	233.1	240.3	248.8	260.1	271.6	285.7	301.0	319.5	342.7
37.5°	217.0	217.9	220.5	225.4	233.5	243.9	254.7	268.5	284.1	302.9	323.9
40°	209.8	210.2	211.8	216.3	223.5	233.2	243.8	257.4	272.2	290.0	310.9
42.5°	202.7	202.5	204.1	207.2	213.9	222.8	233.1	245.6	260.4	276.9	296.4
45°	191.6	191.6	191.2	193.8	199.3	207.9	216.6	228.5	240.9	257.1	273.5
47.5°	180.0	179.0	179.3	180.6	185.2	192.3	201.0	210.8	221.7	235.4	249.9
50°	172.5	171.0	170.4	171.9	176.0	182.2	190.5	199.1	209.5	221.4	233.8
52.5°	164.2	162.7	161.7	162.8	166.6	172.3	179.8	187.4	196.7	206.4	217.1
55°	151.5	149.8	149.2	149.6	152.4	156.9	163.3	170.2	177.2	185.2	192.7
57.5°	138.9	136.2	135.6	135.5	137.4	141.5	146.9	152.8	157.9	162.8	170.8
60°	130.7	127.3	126.2	126.0	127.5	130.9	135.7	141.7	145.3	148.7	155.6
62.5°	121.8	118.6	116.1	116.4	117.7	121.0	125.2	129.6	132.0	135.6	140.3
65°	108.2	104.1	102.2	101.6	102.3	105.0	108.4	111.1	113.8	115.3	119.8
67.5°	94.5	91.1	88.3	87.6	87.3	89.1	91.9	93.6	95.5	96.7	99.4
70°	84.9	81.9	78.6	77.4	77.2	78.7	81.4	81.6	84.2	84.8	87.5
72.5°	75.5	71.7	69.4	68.3	67.5	68.8	70.6	71.1	72.5	73.5	74.9
75°	60.8	57.9	55.7	54.0	53.5	54.2	54.2	55.1	56.1	56.6	58.3
77.5°	47.8	44.6	41.9	41.0	40.2	39.8	40.2	40.8	40.3	41.3	41.7
80°	38.8	35.4	33.4	33.0	31.8	31.0	30.7	31.3	30.6	31.0	32.1
82.5°	29.9	27.8	25.6	25.2	23.8	23.3	23.1	22.7	22.7	22.7	22.9
85°	17.8	16.5	15.0	14.1	13.5	12.6	12.6	12.2	11.8	11.4	11.6
87.5°	10.1	9.6	8.6	8.0	7.4	6.7	6.4	5.6	5.1	4.8	4.3
90°	14.4	13.6	12.5	11.4	10.3	9.2	7.9	6.4	4.9	3.4	1.8
92.5°	13.9	13.2	12.0	10.9	9.8	8.7	8.2	8.1	8.0	7.9	7.8
95°	14.4	13.6	13.5	13.4	13.2	13.1	15.4	20.0	24.7	29.4	34.1
97.5°	16.4	16.3	31.7	47.1	62.4	77.8	84.1	81.1	78.2	75.3	72.3
100°	24.9	27.3	46.3	65.3	84.2	103.2	111.5	109.0	106.5	104.1	101.6
102.5°	106.1	131.3	133.8	136.3	138.7	141.2	141.6	139.7	137.9	136.1	134.3
105°	194.5	193.2	192.6	191.9	191.2	190.5	189.7	188.9	188.1	187.3	186.4
107.5°	241.5	241.0	240.0	239.1	238.1	237.2	236.5	236.1	235.7	235.3	234.9
110°	273.5	273.1	272.4	271.5	270.7	269.8	269.3	268.8	268.4	268.0	267.6



TEST NUMBER: P332508-927

CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	304.4	304.4	304.0	303.6	303.2	302.9	302.3	301.5	300.8	300.0	299.3
115°	349.6	349.4	349.5	349.6	349.7	349.9	349.7	349.4	349.0	348.5	348.1
117.5°	395.9	395.9	395.6	395.3	395.0	394.7	394.3	393.7	393.2	392.6	392.1
120°	424.0	423.7	423.8	424.0	424.1	424.2	424.0	423.5	422.9	422.4	421.8
122.5°	452.1	451.9	451.7	451.5	451.3	451.1	450.9	450.5	450.2	449.9	449.6
125°	491.0	490.6	490.8	491.2	491.4	491.6	491.5	491.0	490.4	489.9	489.3
127.5°	530.4	530.4	529.8	529.2	528.5	527.9	527.5	527.4	527.3	527.1	527.0
130°	553.9	553.7	553.3	552.9	552.5	552.1	551.8	551.7	551.5	551.4	551.3
132.5°	577.2	577.0	576.5	576.0	575.4	575.0	574.6	574.3	574.1	573.8	573.5
135°	609.1	608.9	608.3	607.8	607.2	606.7	606.5	606.6	606.7	606.9	607.0
137.5°	639.9	639.6	639.0	638.4	637.8	637.2	636.8	636.8	636.8	636.7	636.6
140°	658.9	658.4	658.1	657.9	657.6	657.4	657.0	656.8	656.5	656.2	655.9
142.5°	676.6	676.3	676.1	676.0	675.7	675.6	675.3	674.8	674.3	673.8	673.3
145°	702.0	701.8	701.8	701.8	701.8	701.8	701.6	701.2	700.8	700.4	699.9
147.5°	724.1	724.0	724.1	724.2	724.4	724.5	724.2	723.4	722.6	721.9	721.1
150°	738.3	738.3	738.5	738.6	738.7	738.9	738.6	738.2	737.6	737.0	736.5
152.5°	750.4	750.2	750.4	750.8	751.0	751.2	751.1	750.7	750.2	749.8	749.3
155°	766.8	766.2	766.6	767.0	767.5	767.9	768.0	767.9	767.7	767.5	767.5
157.5°	780.9	780.2	780.7	781.2	781.6	782.0	782.4	782.4	782.5	782.6	782.7
160°	790.0	789.1	789.3	789.4	789.6	789.6	790.0	790.4	790.8	791.2	791.6
162.5°	797.4	796.5	796.7	796.9	796.9	797.1	797.4	798.0	798.4	799.0	799.5
165°	807.6	806.4	806.4	806.4	806.4	806.4	806.8	807.5	808.2	808.9	809.5
167.5°	815.1	813.9	814.0	814.0	814.1	814.2	814.6	815.3	816.0	816.7	817.5
170°	819.9	818.9	818.7	818.6	818.4	818.3	818.6	819.4	820.3	821.1	822.0
172.5°	822.9	821.8	821.7	821.6	821.4	821.3	821.7	822.4	823.2	824.1	824.9
175°	826.2	825.1	824.9	824.7	824.7	824.5	824.8	825.7	826.5	827.3	828.1
177.5°	828.0	827.1	827.0	826.7	826.5	826.2	826.6	827.3	828.1	828.9	829.7
180°	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1



TEST NUMBER: P332508-927

CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6	452.6
2.5°	455.6	457.1	459.1	462.3	463.5	465.0	467.1	467.0	467.5	469.8	474.6
5°	457.2	463.1	468.7	475.5	482.6	487.3	493.6	497.6	501.5	506.6	515.2
7.5°	458.0	467.1	477.4	489.3	499.9	512.0	521.5	530.4	538.5	549.1	559.4
10°	456.9	469.3	482.6	497.6	513.5	527.0	539.2	553.1	564.9	577.8	589.5
12.5°	455.0	469.8	487.7	504.5	523.1	543.0	558.3	572.3	588.0	602.9	620.8
15°	450.5	471.0	491.8	513.9	538.8	561.9	583.8	602.0	618.9	641.2	664.6
17.5°	444.9	466.9	493.2	520.0	546.1	572.4	599.5	626.9	648.2	675.9	694.2
20°	439.7	465.2	492.2	524.0	550.1	582.9	609.9	636.3	665.6	693.2	715.1
22.5°	432.3	460.2	488.9	520.5	554.8	587.7	618.9	647.5	676.8	706.8	733.3
25°	422.9	448.3	482.2	518.2	552.3	588.0	623.8	659.7	691.3	722.9	747.7
27.5°	407.1	439.0	470.6	507.8	545.7	586.0	624.3	661.9	695.0	721.0	736.3
30°	398.9	426.7	461.1	498.4	539.4	582.7	622.7	659.6	690.3	711.1	717.3
32.5°	387.0	415.6	449.2	487.8	531.3	575.8	617.3	652.2	677.9	688.8	681.4
35°	369.2	395.1	429.0	468.5	513.7	561.1	602.2	631.6	644.8	634.5	608.8
37.5°	347.8	373.4	407.5	446.4	493.1	541.4	578.5	599.7	595.3	569.7	531.4
40°	332.8	356.8	389.2	431.2	476.7	525.1	557.8	569.2	557.2	520.5	479.7
42.5°	316.2	339.5	372.1	412.6	460.9	505.5	533.9	534.9	514.8	470.8	430.0
45°	290.8	313.1	343.8	386.0	430.6	472.6	491.4	482.2	445.0	402.7	361.6
47.5°	265.8	285.1	315.4	355.5	397.8	433.2	442.5	426.0	386.4	345.2	307.2
50°	247.5	267.0	295.5	333.7	374.6	405.1	409.6	387.7	348.9	307.4	277.7
52.5°	229.9	249.3	276.7	312.1	349.5	377.1	377.2	351.9	313.2	276.3	248.6
55°	204.1	221.6	246.4	278.1	311.4	333.0	327.7	301.5	267.9	235.8	211.7
57.5°	179.4	194.6	217.3	243.8	273.1	291.0	282.3	257.0	227.0	199.8	181.5
60°	163.3	177.8	197.3	222.2	246.9	260.8	252.5	229.7	202.1	180.1	164.2
62.5°	147.7	159.9	178.6	200.3	223.2	233.5	226.2	203.6	179.7	159.9	146.9
65°	125.6	135.5	150.5	169.1	185.8	194.6	188.5	167.4	149.2	135.0	124.7
67.5°	105.0	112.7	124.1	139.0	153.2	158.0	152.3	137.7	122.3	110.9	103.6
70°	90.7	98.1	107.6	119.1	131.4	136.5	130.9	119.2	106.7	96.2	89.0
72.5°	78.3	84.0	92.1	101.8	111.5	116.5	112.7	101.6	90.9	83.1	77.1
75°	59.7	64.5	70.1	77.1	84.5	87.9	84.5	76.8	69.6	63.8	59.4
77.5°	43.3	45.9	50.3	55.5	60.2	62.7	59.8	54.7	50.1	46.2	44.0
80°	33.0	34.9	37.9	42.0	45.2	47.6	45.7	41.4	37.9	35.3	34.3
82.5°	24.0	25.3	27.3	30.3	32.4	33.7	32.9	29.7	28.3	26.0	25.0
85°	11.8	12.6	13.9	14.8	16.7	16.9	17.0	15.8	14.4	13.9	13.2
87.5°	4.8	5.1	5.9	6.7	7.5	7.9	8.0	8.2	7.8	7.8	7.4
90°	3.4	4.9	6.4	7.9	9.2	10.3	11.4	12.5	13.6	14.4	15.3
92.5°	7.9	8.0	8.1	8.2	8.7	9.8	10.9	12.0	13.2	13.9	14.8
95°	29.4	24.7	20.0	15.4	13.1	13.2	13.4	13.5	13.6	14.4	15.3
97.5°	75.3	78.2	81.1	84.1	77.8	62.4	47.1	31.7	16.3	16.4	16.6
100°	104.1	106.5	109.0	111.5	103.2	84.2	65.3	46.3	27.3	24.9	22.6
102.5°	136.1	137.9	139.7	141.6	141.2	138.7	136.3	133.8	131.3	106.1	80.8
105°	187.3	188.1	188.9	189.7	190.5	191.2	191.9	192.6	193.2	194.5	195.7
107.5°	235.3	235.7	236.1	236.5	237.2	238.1	239.1	240.0	241.0	241.5	242.2
110°	268.0	268.4	268.8	269.3	269.8	270.7	271.5	272.4	273.1	273.5	273.7





TEST NUMBER: P332508-927

CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	300.0	300.8	301.5	302.3	302.9	303.2	303.6	304.0	304.4	304.4	304.3
115°	348.5	349.0	349.4	349.7	349.9	349.7	349.6	349.5	349.4	349.6	349.9
117.5°	392.6	393.2	393.7	394.3	394.7	395.0	395.3	395.6	395.9	395.9	395.8
120°	422.4	422.9	423.5	424.0	424.2	424.1	424.0	423.8	423.7	424.0	424.2
122.5°	449.9	450.2	450.5	450.9	451.1	451.3	451.5	451.7	451.9	452.1	452.3
125°	489.9	490.4	491.0	491.5	491.6	491.4	491.2	490.8	490.6	491.0	491.4
127.5°	527.1	527.3	527.4	527.5	527.9	528.5	529.2	529.8	530.4	530.4	530.3
130°	551.4	551.5	551.7	551.8	552.1	552.5	552.9	553.3	553.7	553.9	554.1
132.5°	573.8	574.1	574.3	574.6	575.0	575.4	576.0	576.5	577.0	577.2	577.3
135°	606.9	606.7	606.6	606.5	606.7	607.2	607.8	608.3	608.9	609.1	609.4
137.5°	636.7	636.8	636.8	636.8	637.2	637.8	638.4	639.0	639.6	639.9	640.2
140°	656.2	656.5	656.8	657.0	657.4	657.6	657.9	658.1	658.4	658.9	659.3
142.5°	673.8	674.3	674.8	675.3	675.6	675.7	676.0	676.1	676.3	676.6	676.8
145°	700.4	700.8	701.2	701.6	701.8	701.8	701.8	701.8	701.8	702.0	702.0
147.5°	721.9	722.6	723.4	724.2	724.5	724.4	724.2	724.1	724.0	724.1	724.2
150°	737.0	737.6	738.2	738.6	738.9	738.7	738.6	738.5	738.3	738.3	738.3
152.5°	749.8	750.2	750.7	751.1	751.2	751.0	750.8	750.4	750.2	750.4	750.7
155°	767.5	767.7	767.9	768.0	767.9	767.5	767.0	766.6	766.2	766.8	767.3
157.5°	782.6	782.5	782.4	782.4	782.0	781.6	781.2	780.7	780.2	780.9	781.6
160°	791.2	790.8	790.4	790.0	789.6	789.6	789.4	789.3	789.1	790.0	790.8
162.5°	799.0	798.4	798.0	797.4	797.1	796.9	796.9	796.7	796.5	797.4	798.2
165°	808.9	808.2	807.5	806.8	806.4	806.4	806.4	806.4	806.4	807.6	808.7
167.5°	816.7	816.0	815.3	814.6	814.2	814.1	814.0	814.0	813.9	815.1	816.3
170°	821.1	820.3	819.4	818.6	818.3	818.4	818.6	818.7	818.9	819.9	821.0
172.5°	824.1	823.2	822.4	821.7	821.3	821.4	821.6	821.7	821.8	822.9	824.0
175°	827.3	826.5	825.7	824.8	824.5	824.7	824.7	824.9	825.1	826.2	827.5
177.5°	828.9	828.1	827.3	826.6	826.2	826.5	826.7	827.0	827.1	828.0	828.9
180°	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1	828.1



TEST NUMBER: P332508-927

CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	452.6	452.6	452.6	452.6	452.6	452.6	452.6
2.5°	477.1	477.4	478.7	479.7	480.1	481.6	481.6
5°	519.0	522.1	528.3	528.9	529.8	534.7	530.9
7.5°	568.1	576.2	581.5	586.4	588.0	590.2	589.8
10°	599.6	611.6	617.6	627.2	627.5	629.9	628.4
12.5°	631.2	645.2	656.1	657.9	665.9	667.2	669.2
15°	676.0	690.9	706.1	711.5	722.5	725.2	729.3
17.5°	718.2	733.3	744.0	758.0	762.6	768.7	764.5
20°	741.3	757.8	771.3	782.4	787.0	790.4	790.0
22.5°	755.3	771.9	782.8	791.2	795.6	797.0	796.9
25°	764.0	773.6	777.0	780.1	775.2	773.6	774.3
27.5°	739.7	737.2	728.4	716.8	704.9	695.4	690.1
30°	706.2	691.7	678.3	655.1	643.1	636.0	629.5
32.5°	658.9	635.6	610.1	588.7	575.1	564.6	563.0
35°	577.7	542.8	511.4	485.4	471.9	460.5	457.8
37.5°	491.1	454.9	426.7	403.7	389.2	381.1	373.6
40°	433.6	402.5	374.8	355.3	344.2	338.4	333.7
42.5°	389.4	361.0	333.4	318.5	308.6	305.0	302.2
45°	328.3	301.8	282.7	271.5	265.7	259.7	256.8
47.5°	279.3	257.9	245.3	235.7	229.4	225.9	224.1
50°	251.6	234.0	222.8	215.4	209.8	207.0	205.5
52.5°	227.0	212.5	203.1	197.3	193.5	191.4	190.8
55°	195.5	184.5	178.5	173.4	170.6	168.7	168.0
57.5°	170.0	161.4	156.6	152.4	151.3	149.8	149.2
60°	153.2	146.6	142.5	139.7	138.7	136.9	137.2
62.5°	138.3	132.9	129.4	127.9	126.6	125.0	125.6
65°	117.0	113.0	111.1	109.7	108.2	107.3	108.0
67.5°	98.2	95.5	92.9	92.1	91.3	91.2	90.4
70°	85.9	83.7	81.4	80.8	80.8	80.1	79.9
72.5°	74.0	72.4	70.9	70.4	69.9	70.2	69.4
75°	57.2	55.8	55.3	54.7	54.6	54.6	54.0
77.5°	42.2	41.3	40.4	40.4	39.7	39.5	39.4
80°	32.1	31.7	31.0	31.0	30.6	30.7	30.3
82.5°	24.1	23.6	23.4	23.1	22.6	22.7	22.3
85°	12.9	12.4	12.2	11.6	11.2	11.6	11.2
87.5°	7.7	7.8	7.7	7.4	7.4	7.4	7.1
90°	16.1	17.0	17.5	17.7	18.1	18.3	18.6
92.5°	15.6	16.4	16.9	17.0	17.0	17.0	17.1
95°	16.1	17.0	17.4	17.6	17.7	17.8	18.0
97.5°	16.6	16.7	16.8	17.0	17.0	17.2	17.3
100°	20.2	17.9	16.8	17.0	17.0	17.2	17.3
102.5°	55.6	30.3	17.7	17.7	17.7	17.8	17.8
105°	196.9	198.2	196.4	191.4	186.4	181.5	176.5
107.5°	242.7	243.4	243.9	244.5	244.9	245.5	246.1
110°	274.0	274.3	274.6	275.0	275.4	275.8	276.2



TEST NUMBER: P332508-927

CATALOG NUMBER: SA4XXDIP-C350D810U927-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	304.2	304.1	304.4	304.9	305.5	305.9	306.5
115°	350.1	350.5	350.6	350.6	350.6	350.6	350.6
117.5°	395.8	395.7	395.6	395.6	395.5	395.5	395.5
120°	424.5	424.8	424.8	424.5	424.2	424.0	423.7
122.5°	452.4	452.6	452.5	452.3	451.9	451.7	451.4
125°	491.8	492.2	492.5	492.7	492.7	492.9	493.1
127.5°	530.2	530.1	530.0	529.9	529.8	529.7	529.6
130°	554.1	554.3	554.4	554.4	554.4	554.4	554.4
132.5°	577.4	577.6	577.6	577.5	577.3	577.3	577.2
135°	609.7	610.0	610.2	610.5	610.8	611.1	611.3
137.5°	640.5	640.8	640.9	640.8	640.7	640.6	640.6
140°	659.7	660.0	660.4	660.5	660.6	660.8	660.9
142.5°	677.2	677.5	677.6	677.6	677.7	677.7	677.7
145°	702.2	702.3	702.5	702.8	703.1	703.4	703.6
147.5°	724.3	724.4	724.5	724.7	724.8	724.9	725.1
150°	738.3	738.3	738.4	738.6	738.6	738.8	738.9
152.5°	750.9	751.1	751.1	751.1	751.0	750.9	750.8
155°	767.9	768.4	768.5	768.0	767.6	767.2	766.8
157.5°	782.4	783.1	783.1	782.4	781.6	780.9	780.2
160°	791.6	792.4	792.4	791.6	790.8	790.0	789.1
162.5°	799.0	799.9	799.8	798.8	797.9	797.0	796.1
165°	809.8	810.9	810.8	809.5	808.3	807.1	805.8
167.5°	817.5	818.7	818.6	817.3	815.9	814.5	813.2
170°	822.1	823.2	823.1	821.7	820.4	819.0	817.6
172.5°	825.1	826.2	826.0	824.6	823.1	821.6	820.1
175°	828.8	830.0	829.8	828.1	826.5	824.8	823.2
177.5°	829.8	830.7	830.4	829.1	827.8	826.5	825.1
180°	828.1	828.1	828.1	828.1	828.1	828.1	828.1

(END OF REPORT)