

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332965-927

Luminaire Tested: **SA4XXRDIP-C1020D590U927-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332965-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C1020D590U927-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 590 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4927.5 lumens
Efficiency: N/A
Efficacy: 101.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 48.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332965-927

CATALOG NUMBER: SA4XXRDIP-C1020D590U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

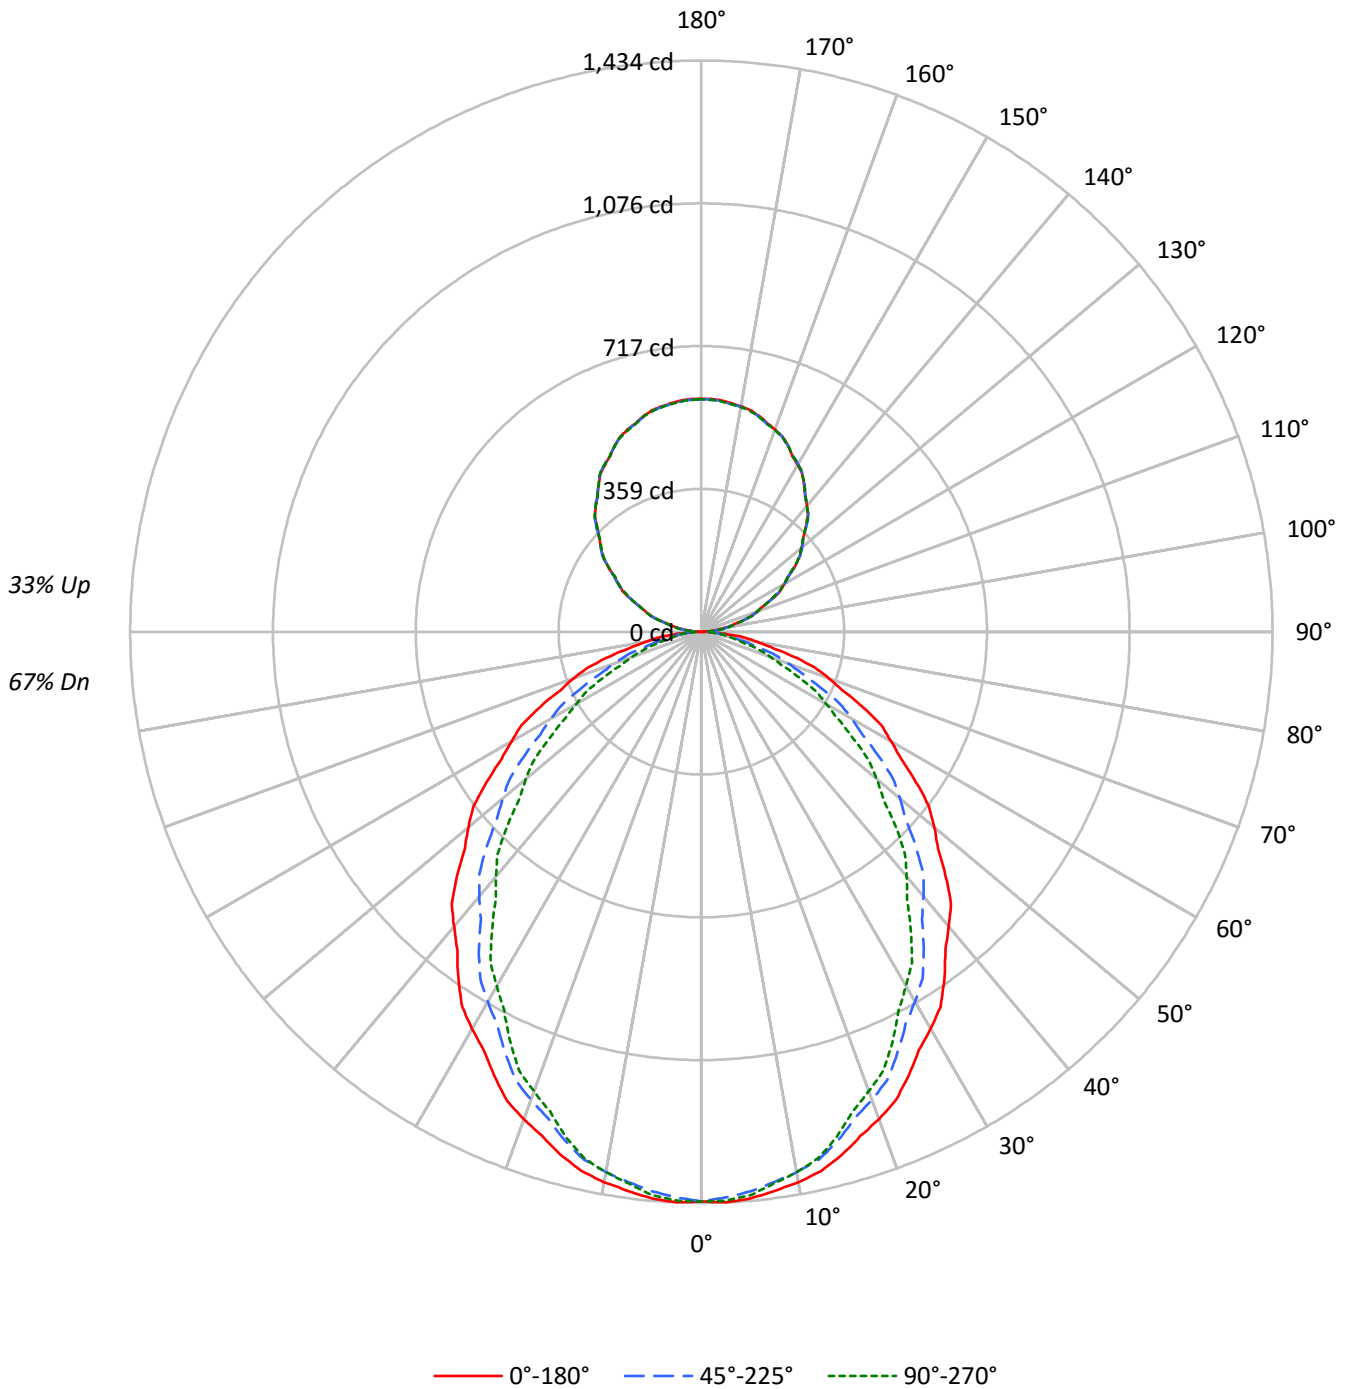



TEST NUMBER: P332965-927

CATALOG NUMBER: SA4XXRDIP-C1020D590U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	72	72	72	67				
1	102	98	94	90	96	92	89	86	82	80	77	73	71	69	64	63	61	57				
2	93	86	80	74	88	81	76	71	72	68	64	64	61	58	57	54	52	49				
3	85	76	68	62	80	72	65	60	64	59	55	57	53	50	51	48	45	41				
4	78	67	59	53	73	64	57	51	57	51	47	51	47	43	45	42	39	36				
5	72	60	52	46	68	57	50	44	51	45	41	46	41	37	41	37	34	31				
6	66	54	46	40	63	52	44	39	47	40	36	42	37	33	37	33	30	28				
7	62	49	41	35	58	47	39	34	42	36	32	38	33	29	34	30	27	25				
8	57	45	37	32	54	43	36	31	39	33	28	35	30	26	32	27	24	22				
9	53	41	33	28	50	39	32	27	36	30	26	32	27	24	29	25	22	20				
10	50	38	30	26	47	36	29	25	33	27	23	30	25	22	27	23	20	18				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11548	11548	11548
5°	11574	11432	11503
10°	11501	11294	11294
15°	11369	11058	10975
20°	11188	10746	10548
25°	10956	10381	10117
30°	10730	9996	9577
35°	10481	9596	9034
40°	10181	9141	8450
45°	9903	8691	7854
50°	9588	8171	7222
55°	9250	7631	6536
60°	8879	7038	5837
65°	8537	6298	5146
70°	8039	5481	4369
75°	7414	4545	3553
80°	6467	3464	3259
85°	5483	3149	2946



TEST NUMBER: P332965-927

CATALOG NUMBER: SA4XXRDIP-C1020D590U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	134.4	2.7
10°-20°	374.7	7.6
20°-30°	541.1	11.0
30°-40°	613.3	12.4
40°-50°	592.3	12.0
50°-60°	492.5	10.0
60°-70°	340.1	6.9
70°-80°	172.4	3.5
80°-90°	46.0	0.9
90°-100°	38.5	0.8
100°-110°	114.1	2.3
110°-120°	193.7	3.9
120°-130°	255.5	5.2
130°-140°	286.9	5.8
140°-150°	281.9	5.7
150°-160°	237.1	4.8
160°-170°	157.8	3.2
170°-180°	55.2	1.1
0°-30°	1050.1	21.3
0°-40°	1663.5	33.8
0°-60°	2748.2	55.8
0°-90°	3306.6	67.1
90°-120°	346.4	7.0
90°-150°	1170.7	23.8
90°-180°	1621.0	32.9
0°-180°	4927.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1430	1430	1430	1430	1430	
5°	1428	1423	1411	1421	1420	135
15°	1360	1349	1323	1321	1313	383
25°	1230	1209	1165	1147	1136	566
35°	1064	1027	974	937	917	664
45°	867	826	761	709	688	669
55°	657	612	542	487	464	588
65°	447	398	330	284	269	441
75°	238	197	146	122	114	251
85°	59	38	34	32	32	67
90°	1	6	10	13	14	4
95°	27	31	34	36	36	30
105°	105	106	108	109	110	112
115°	197	197	196	196	195	194
125°	287	287	286	286	285	256
135°	370	373	373	372	370	286
145°	450	451	452	451	450	281
155°	515	515	515	516	515	237
165°	561	559	558	561	559	158
175°	583	581	581	583	581	55
180°	584	584	584	584	584	



TEST NUMBER: P332965-927

CATALOG NUMBER: SA4XXRDIP-C1020D590U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4
2.5°	1433.9	1433.1	1432.3	1431.6	1430.8	1429.3	1427.2	1425.1	1422.9	1420.8	1422.9
5°	1428.2	1427.3	1426.3	1425.3	1424.3	1422.4	1419.5	1416.6	1413.6	1410.7	1413.2
7.5°	1415.3	1414.3	1413.3	1412.2	1411.2	1408.8	1405.0	1401.2	1397.4	1393.6	1395.2
10°	1403.0	1401.8	1400.6	1399.4	1398.2	1395.3	1391.0	1386.6	1382.2	1377.8	1378.8
12.5°	1387.3	1385.8	1384.4	1383.1	1381.6	1378.3	1373.2	1368.0	1362.9	1357.7	1358.3
15°	1360.3	1358.1	1356.0	1353.8	1351.5	1347.4	1341.3	1335.2	1329.2	1323.1	1322.6
17.5°	1327.7	1324.5	1321.4	1318.2	1315.0	1309.8	1302.5	1295.2	1287.9	1280.6	1279.2
20°	1302.3	1299.1	1295.9	1292.8	1289.6	1283.9	1275.7	1267.3	1259.1	1250.8	1248.9
22.5°	1274.2	1270.7	1267.1	1263.6	1260.0	1253.8	1245.0	1236.1	1227.2	1218.4	1215.4
25°	1230.0	1225.6	1221.2	1216.9	1212.4	1205.3	1195.3	1185.3	1175.4	1165.4	1161.3
27.5°	1183.5	1178.1	1172.6	1167.0	1161.6	1153.5	1142.8	1132.2	1121.5	1110.8	1105.7
30°	1151.1	1145.0	1139.0	1132.9	1126.8	1118.0	1106.6	1095.1	1083.7	1072.3	1066.2
32.5°	1117.0	1110.1	1103.2	1096.4	1089.5	1080.1	1068.3	1056.5	1044.7	1032.8	1025.8
35°	1063.5	1055.7	1047.9	1040.1	1032.4	1022.4	1010.2	998.1	985.9	973.7	965.4
37.5°	1006.3	998.3	990.3	982.2	974.2	963.5	950.0	936.5	923.0	909.5	900.2
40°	966.1	958.0	950.0	941.9	933.9	923.0	909.1	895.2	881.3	867.4	857.2
42.5°	927.5	919.1	910.6	902.2	893.8	882.3	867.9	853.4	839.0	824.5	814.1
45°	867.4	858.5	849.5	840.4	831.4	819.6	805.0	790.4	775.8	761.2	749.3
47.5°	805.5	796.1	786.9	777.6	768.3	756.1	740.8	725.6	710.4	695.3	682.9
50°	763.4	753.9	744.4	734.9	725.4	712.9	697.4	681.8	666.1	650.6	638.4
52.5°	720.5	711.1	701.9	692.6	683.3	670.7	654.7	638.7	622.7	606.8	594.5
55°	657.2	647.5	637.7	628.0	618.2	605.5	589.6	573.8	558.0	542.2	529.5
57.5°	594.5	584.4	574.3	564.1	554.1	541.1	525.6	510.0	494.4	478.9	466.0
60°	549.9	540.1	530.4	520.6	510.9	498.2	482.7	467.1	451.5	435.9	423.3
62.5°	509.5	499.4	489.3	479.1	469.1	456.0	440.0	424.1	408.1	392.1	380.4
65°	446.9	436.4	426.0	415.5	405.0	392.0	376.4	360.8	345.2	329.7	319.2
67.5°	381.8	371.8	361.8	351.7	341.7	329.5	315.0	300.6	286.1	271.6	262.6
70°	340.6	330.4	320.2	310.0	299.8	287.7	273.9	259.9	246.1	232.2	224.2
72.5°	296.8	287.6	278.3	269.1	259.8	248.7	235.6	222.4	209.4	196.3	189.4
75°	237.7	228.7	219.7	210.6	201.7	191.4	180.0	168.6	157.1	145.7	140.1
77.5°	177.7	170.0	162.4	154.7	147.1	138.6	129.4	120.2	110.9	101.6	98.4
80°	139.1	132.1	125.0	118.0	110.9	103.7	96.4	89.1	81.8	74.5	73.8
82.5°	105.8	99.3	92.8	86.3	79.9	74.5	70.4	66.2	62.0	57.8	57.3
85°	59.2	54.3	49.4	44.5	39.7	36.8	36.1	35.4	34.7	34.0	33.4
87.5°	20.4	19.1	17.7	16.4	15.1	14.4	14.3	14.3	14.3	14.3	14.2
90°	1.3	2.5	3.6	4.7	5.8	6.7	7.5	8.3	9.1	9.9	10.5
92.5°	9.7	10.9	12.2	13.5	14.7	15.6	16.2	16.8	17.3	17.9	18.2
95°	27.1	28.0	28.9	29.8	30.7	31.5	32.2	33.0	33.7	34.3	34.6
97.5°	47.4	48.1	48.8	49.5	50.2	51.0	51.8	52.7	53.5	54.3	54.7
100°	63.2	63.7	64.1	64.5	64.9	65.5	66.4	67.3	68.2	69.2	69.3
102.5°	79.9	80.0	80.2	80.3	80.5	81.0	81.8	82.6	83.5	84.3	84.6
105°	105.3	105.4	105.4	105.6	105.7	105.9	106.3	106.7	107.1	107.5	107.8
107.5°	131.9	132.1	132.1	132.3	132.5	132.5	132.5	132.6	132.7	132.8	133.0
110°	150.0	150.2	150.4	150.6	150.8	150.8	150.8	150.7	150.6	150.4	150.3



TEST NUMBER: P332965-927

CATALOG NUMBER: SA4XXRDIP-C1020D590U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	168.8	168.8	168.9	168.9	169.0	168.9	168.7	168.5	168.3	168.2	168.1
115°	197.0	197.0	197.0	197.0	197.0	196.9	196.7	196.5	196.3	196.1	196.0
117.5°	223.6	223.6	223.7	223.8	223.9	223.9	223.7	223.6	223.4	223.3	222.9
120°	241.3	241.7	242.1	242.5	242.9	243.0	242.6	242.3	242.0	241.7	241.2
122.5°	259.7	259.8	260.0	260.2	260.3	260.4	260.2	260.1	259.9	259.8	259.4
125°	286.9	286.9	286.9	286.9	286.9	286.8	286.8	286.7	286.5	286.5	286.2
127.5°	311.6	311.9	312.2	312.5	312.8	312.8	312.7	312.5	312.4	312.2	312.0
130°	328.9	329.2	329.5	329.9	330.1	330.3	330.3	330.3	330.3	330.3	330.1
132.5°	346.7	346.9	347.1	347.3	347.5	347.6	347.5	347.5	347.4	347.3	347.1
135°	370.0	370.7	371.2	371.9	372.5	372.7	372.7	372.7	372.7	372.7	372.6
137.5°	395.5	395.8	396.1	396.3	396.6	396.9	397.0	397.2	397.4	397.5	397.3
140°	412.5	412.7	412.9	413.1	413.3	413.4	413.4	413.4	413.4	413.4	413.3
142.5°	428.0	428.3	428.5	428.6	428.9	428.9	428.8	428.7	428.6	428.6	428.6
145°	449.6	450.0	450.4	450.8	451.1	451.4	451.5	451.6	451.7	451.8	451.7
147.5°	470.9	471.3	471.8	472.3	472.9	473.0	472.9	472.9	472.8	472.7	472.6
150°	483.9	484.3	484.7	485.1	485.5	485.7	485.7	485.7	485.7	485.7	485.7
152.5°	496.2	496.5	496.7	496.9	497.2	497.3	497.4	497.5	497.6	497.6	497.9
155°	515.1	515.1	515.1	515.1	515.1	515.0	514.9	514.8	514.8	514.6	515.0
157.5°	531.0	530.8	530.6	530.4	530.3	530.1	530.1	530.1	530.1	530.0	530.4
160°	540.3	540.3	540.2	540.1	540.0	539.9	539.8	539.7	539.6	539.5	539.8
162.5°	549.1	548.8	548.5	548.3	548.0	547.8	547.7	547.6	547.6	547.4	548.0
165°	560.7	560.4	560.1	559.8	559.5	559.3	559.0	558.9	558.6	558.5	559.0
167.5°	569.7	569.3	568.8	568.4	568.0	567.8	567.8	567.8	567.8	567.8	568.5
170°	574.7	574.3	573.7	573.2	572.7	572.5	572.6	572.7	572.8	572.9	573.5
172.5°	578.3	577.9	577.5	577.1	576.6	576.5	576.5	576.5	576.5	576.6	577.2
175°	583.3	582.8	582.3	581.8	581.3	581.0	580.9	580.8	580.7	580.6	581.3
177.5°	584.9	584.6	584.2	583.8	583.3	583.1	583.1	583.1	583.1	583.1	583.7
180°	584.2	584.2	584.2	584.2	584.2	584.2	584.2	584.2	584.2	584.2	584.2



TEST NUMBER: P332965-927

CATALOG NUMBER: SA4XXRDIP-C1020D590U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4
2.5°	1425.1	1427.2	1429.3	1430.4	1430.1	1430.0	1429.7	1429.6
5°	1415.6	1418.0	1420.5	1421.4	1420.9	1420.5	1420.0	1419.5
7.5°	1396.8	1398.3	1399.9	1400.3	1399.5	1398.7	1397.9	1397.1
10°	1379.8	1380.8	1381.7	1381.7	1380.8	1379.8	1378.8	1377.8
12.5°	1358.8	1359.5	1360.0	1359.6	1358.3	1356.9	1355.6	1354.2
15°	1322.2	1321.6	1321.1	1320.0	1318.3	1316.6	1314.9	1313.2
17.5°	1277.9	1276.5	1275.2	1273.2	1270.6	1268.0	1265.4	1262.8
20°	1246.9	1245.0	1243.0	1240.5	1237.3	1234.1	1231.0	1227.8
22.5°	1212.5	1209.6	1206.7	1204.0	1201.3	1198.8	1196.2	1193.7
25°	1157.1	1152.9	1148.8	1145.5	1143.1	1140.7	1138.2	1135.8
27.5°	1100.6	1095.5	1090.4	1086.1	1082.6	1079.0	1075.5	1072.1
30°	1060.1	1054.0	1047.9	1042.9	1039.0	1035.1	1031.3	1027.4
32.5°	1018.7	1011.7	1004.6	999.3	995.5	991.8	988.2	984.4
35°	957.1	948.9	940.6	934.3	929.9	925.5	921.1	916.7
37.5°	891.0	881.8	872.5	865.7	861.3	856.9	852.5	848.2
40°	847.0	836.8	826.6	819.3	814.9	810.5	806.1	801.8
42.5°	803.7	793.3	782.8	775.4	770.8	766.2	761.6	757.1
45°	737.4	725.4	713.5	705.4	701.0	696.6	692.2	687.9
47.5°	670.6	658.2	645.8	637.2	632.4	627.6	622.7	618.0
50°	626.2	614.1	601.9	593.5	588.9	584.2	579.6	575.0
52.5°	582.0	569.7	557.3	548.7	543.9	539.1	534.2	529.5
55°	516.8	504.2	491.5	482.9	478.2	473.6	469.1	464.4
57.5°	453.1	440.3	427.5	419.3	415.7	412.3	408.8	405.3
60°	410.6	397.9	385.3	377.0	373.1	369.2	365.4	361.5
62.5°	368.8	357.0	345.4	337.9	334.9	331.8	328.6	325.5
65°	308.7	298.3	287.8	281.1	278.2	275.3	272.4	269.4
67.5°	253.6	244.6	235.6	229.5	226.2	223.1	219.8	216.7
70°	216.1	208.1	200.1	194.8	192.4	190.0	187.5	185.1
72.5°	182.5	175.7	168.8	164.3	162.0	159.8	157.6	155.3
75°	134.5	128.9	123.3	119.8	118.3	116.8	115.3	113.9
77.5°	95.1	91.9	88.6	86.7	86.3	85.9	85.4	85.0
80°	73.0	72.3	71.5	71.1	70.8	70.6	70.3	70.1
82.5°	56.7	56.2	55.7	55.3	55.1	54.8	54.6	54.3
85°	33.0	32.5	32.0	31.8	31.8	31.8	31.8	31.8
87.5°	14.1	14.0	13.9	14.0	14.3	14.5	14.7	15.0
90°	11.2	11.7	12.4	12.8	13.0	13.2	13.4	13.5
92.5°	18.6	19.0	19.3	19.6	19.7	19.8	20.0	20.0
95°	34.9	35.3	35.6	35.7	35.7	35.7	35.7	35.7
97.5°	55.1	55.4	55.8	55.9	55.9	55.9	55.9	55.9
100°	69.6	69.7	69.9	70.0	70.0	70.0	70.0	70.0
102.5°	84.8	85.2	85.4	85.6	85.7	85.8	85.9	86.0
105°	108.1	108.4	108.8	109.0	109.3	109.6	110.0	110.3
107.5°	133.3	133.6	133.9	134.0	134.0	134.0	134.0	134.0
110°	150.0	149.9	149.6	149.7	150.0	150.3	150.6	150.9



TEST NUMBER: P332965-927

CATALOG NUMBER: SA4XXRDIP-C1020D590U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	168.1	168.0	168.0	168.0	168.1	168.1	168.2	168.3
115°	195.9	195.8	195.7	195.6	195.5	195.4	195.3	195.2
117.5°	222.6	222.3	221.9	221.7	221.4	221.3	221.0	220.9
120°	240.7	240.2	239.7	239.6	239.8	240.0	240.2	240.3
122.5°	259.1	258.8	258.4	258.1	257.7	257.4	257.0	256.7
125°	286.1	285.8	285.7	285.4	285.3	285.0	284.9	284.6
127.5°	311.8	311.6	311.4	311.2	311.1	310.9	310.8	310.6
130°	329.9	329.7	329.5	329.2	328.8	328.4	328.0	327.6
132.5°	346.9	346.7	346.5	346.3	346.1	345.9	345.8	345.6
135°	372.3	372.2	371.9	371.7	371.4	371.1	370.8	370.5
137.5°	397.0	396.7	396.5	396.3	396.4	396.5	396.6	396.6
140°	413.2	413.1	413.0	412.9	412.8	412.7	412.6	412.5
142.5°	428.6	428.6	428.5	428.5	428.5	428.5	428.4	428.4
145°	451.6	451.5	451.4	451.2	450.9	450.6	450.3	450.0
147.5°	472.5	472.5	472.4	472.3	472.2	472.1	472.0	471.9
150°	485.7	485.7	485.7	485.7	485.5	485.4	485.4	485.3
152.5°	498.1	498.4	498.6	498.6	498.4	498.0	497.8	497.6
155°	515.4	515.8	516.3	516.3	515.8	515.4	515.0	514.6
157.5°	530.7	531.0	531.3	531.2	530.9	530.6	530.2	529.9
160°	540.1	540.3	540.7	540.6	540.1	539.6	539.1	538.6
162.5°	548.5	549.1	549.6	549.6	549.1	548.6	548.1	547.6
165°	559.7	560.2	560.9	560.9	560.5	560.2	559.8	559.4
167.5°	569.0	569.7	570.3	570.2	569.7	569.0	568.4	567.8
170°	574.1	574.7	575.3	575.3	574.6	573.9	573.1	572.4
172.5°	577.9	578.6	579.2	579.2	578.5	577.8	577.1	576.5
175°	582.0	582.7	583.4	583.4	582.7	582.0	581.3	580.6
177.5°	584.2	584.8	585.3	585.3	584.7	584.1	583.4	582.7
180°	584.2	584.2	584.2	584.2	584.2	584.2	584.2	584.2

(END OF REPORT)