

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332972-927

Luminaire Tested: **SA4XXRDIP-C1020D810U927-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332972-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C1020D810U927-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 810 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5599.7 lumens
Efficiency: N/A
Efficacy: 102.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332972-927

CATALOG NUMBER: SA4XXRDIP-C1020D810U927-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

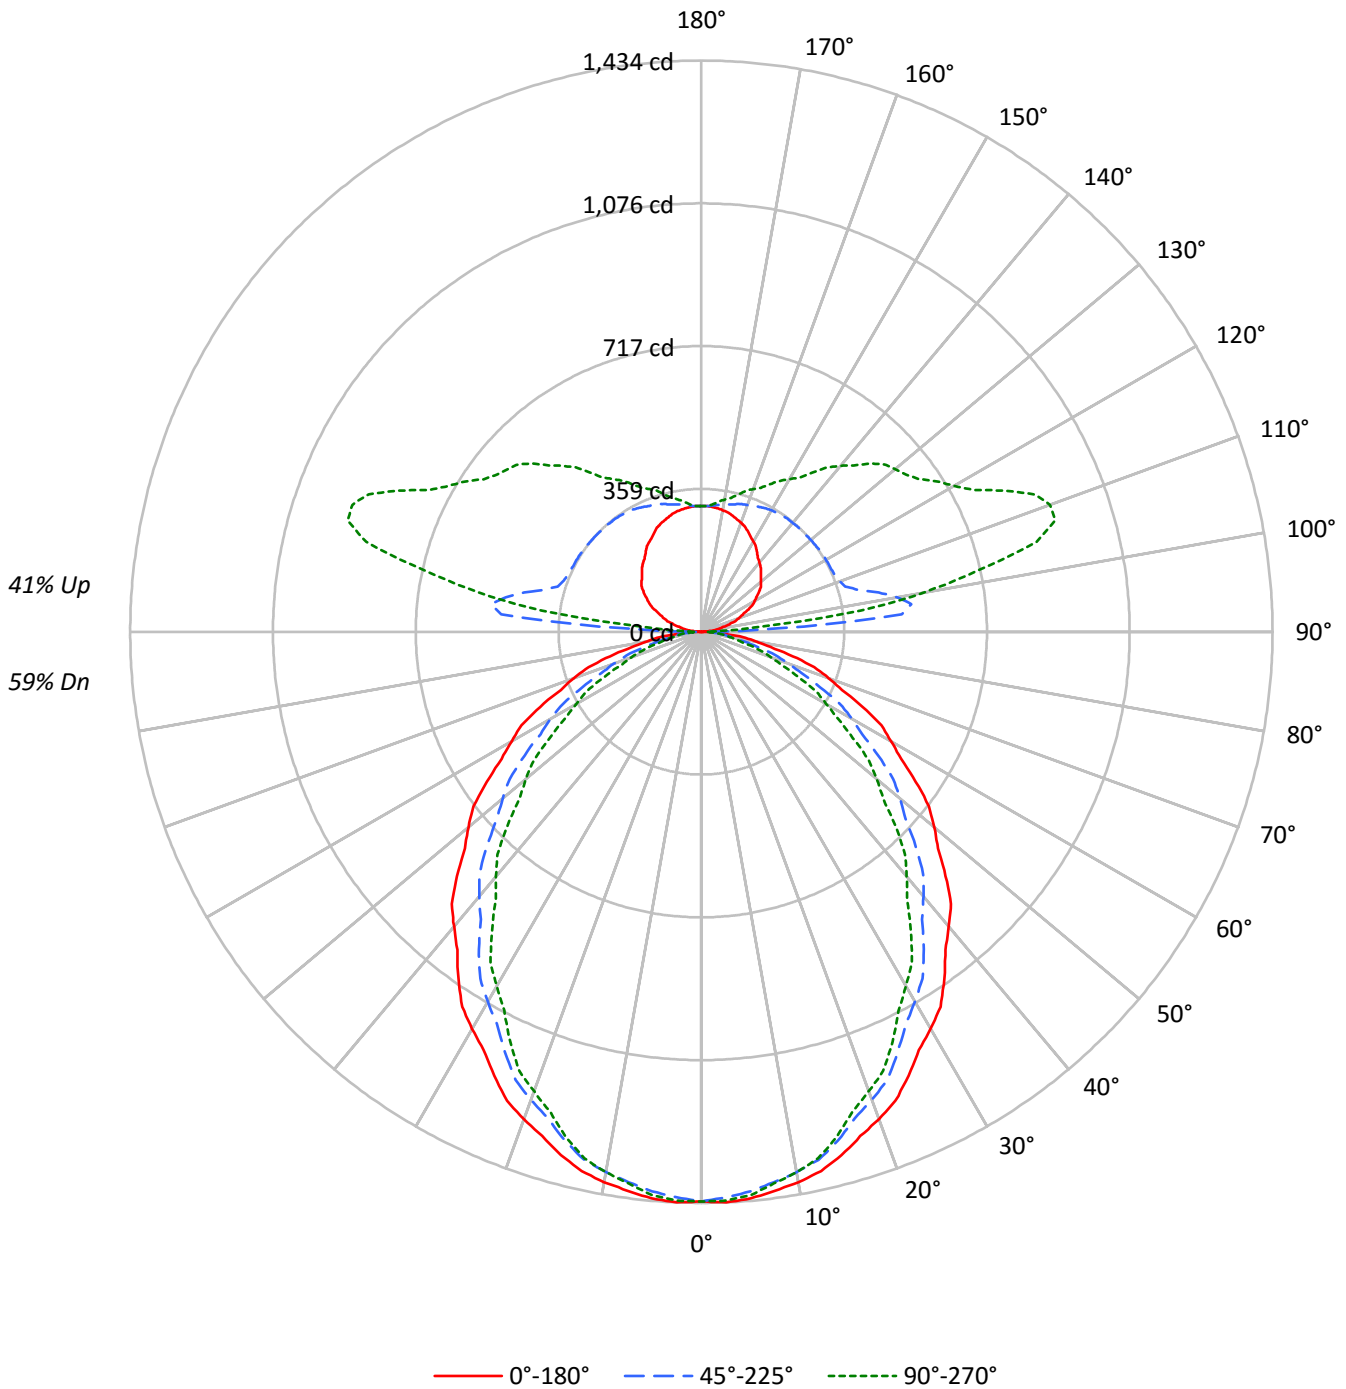



TEST NUMBER: P332972-927

CATALOG NUMBER: SA4XXRDIP-C1020D810U927-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64	59
1	100	96	92	89	93	90	86	83	78	76	73	67	66	64	57	56	55	50
2	91	84	78	73	85	79	73	69	69	65	61	60	57	54	51	49	47	43
3	84	74	67	61	78	70	63	58	61	56	52	53	49	46	45	43	40	37
4	77	66	58	52	71	62	55	49	54	49	44	47	43	40	41	38	35	32
5	71	59	51	45	66	55	48	43	49	43	39	43	38	35	37	33	31	28
6	65	53	45	39	61	50	43	37	44	38	34	39	34	30	34	30	27	24
7	60	48	40	34	56	45	38	33	40	34	30	35	31	27	31	27	24	22
8	56	44	36	31	52	41	34	29	37	31	27	32	28	24	28	25	22	19
9	52	40	32	27	49	38	31	26	34	28	24	30	25	22	26	22	20	18
10	49	37	30	25	46	35	28	24	31	26	22	28	23	20	24	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11548	11548	11548
5°	11574	11432	11503
10°	11501	11294	11294
15°	11369	11058	10975
20°	11188	10746	10548
25°	10956	10381	10117
30°	10730	9996	9577
35°	10481	9596	9034
40°	10181	9141	8450
45°	9903	8691	7854
50°	9588	8171	7222
55°	9250	7631	6536
60°	8879	7038	5837
65°	8537	6298	5146
70°	8039	5481	4369
75°	7414	4545	3553
80°	6467	3464	3259
85°	5483	3149	2946



TEST NUMBER: P332972-927

CATALOG NUMBER: SA4XXRDIP-C1020D810U927-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	134.4	2.4
10°-20°	374.7	6.7
20°-30°	541.1	9.7
30°-40°	613.3	11.0
40°-50°	592.3	10.6
50°-60°	492.5	8.8
60°-70°	340.1	6.1
70°-80°	172.4	3.1
80°-90°	46.0	0.8
90°-100°	227.7	4.1
100°-110°	474.0	8.5
110°-120°	424.5	7.6
120°-130°	357.1	6.4
130°-140°	297.7	5.3
140°-150°	227.5	4.1
150°-160°	159.9	2.9
160°-170°	94.0	1.7
170°-180°	30.6	0.5
0°-30°	1050.1	18.8
0°-40°	1663.5	29.7
0°-60°	2748.2	49.1
0°-90°	3306.6	59.1
90°-120°	1126.2	20.1
90°-150°	2008.5	35.9
90°-180°	2293.0	40.9
0°-180°	5599.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1430	1430	1430	1430	1430	
5°	1428	1423	1411	1421	1420	135
15°	1360	1349	1323	1321	1313	383
25°	1230	1209	1165	1147	1136	566
35°	1064	1027	974	937	917	664
45°	867	826	761	709	688	669
55°	657	612	542	487	464	588
65°	447	398	330	284	269	441
75°	238	197	146	122	114	251
85°	59	38	34	32	32	67
90°	1	5	11	12	13	4
95°	20	64	505	250	151	23
105°	72	105	406	875	872	77
115°	128	160	362	696	837	127
125°	178	211	360	592	668	158
135°	211	251	357	526	597	163
145°	243	279	356	444	488	153
155°	277	299	346	392	408	128
165°	302	311	331	351	356	85
175°	315	315	318	322	321	30
180°	315	315	315	315	315	



TEST NUMBER: P332972-927

CATALOG NUMBER: SA4XXRDIP-C1020D810U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4
2.5°	1433.9	1433.1	1432.3	1431.6	1430.8	1429.3	1427.2	1425.1	1422.9	1420.8	1422.9
5°	1428.2	1427.3	1426.3	1425.3	1424.3	1422.4	1419.5	1416.6	1413.6	1410.7	1413.2
7.5°	1415.3	1414.3	1413.3	1412.2	1411.2	1408.8	1405.0	1401.2	1397.4	1393.6	1395.2
10°	1403.0	1401.8	1400.6	1399.4	1398.2	1395.3	1391.0	1386.6	1382.2	1377.8	1378.8
12.5°	1387.3	1385.8	1384.4	1383.1	1381.6	1378.3	1373.2	1368.0	1362.9	1357.7	1358.3
15°	1360.3	1358.1	1356.0	1353.8	1351.5	1347.4	1341.3	1335.2	1329.2	1323.1	1322.6
17.5°	1327.7	1324.5	1321.4	1318.2	1315.0	1309.8	1302.5	1295.2	1287.9	1280.6	1279.2
20°	1302.3	1299.1	1295.9	1292.8	1289.6	1283.9	1275.7	1267.3	1259.1	1250.8	1248.9
22.5°	1274.2	1270.7	1267.1	1263.6	1260.0	1253.8	1245.0	1236.1	1227.2	1218.4	1215.4
25°	1230.0	1225.6	1221.2	1216.9	1212.4	1205.3	1195.3	1185.3	1175.4	1165.4	1161.3
27.5°	1183.5	1178.1	1172.6	1167.0	1161.6	1153.5	1142.8	1132.2	1121.5	1110.8	1105.7
30°	1151.1	1145.0	1139.0	1132.9	1126.8	1118.0	1106.6	1095.1	1083.7	1072.3	1066.2
32.5°	1117.0	1110.1	1103.2	1096.4	1089.5	1080.1	1068.3	1056.5	1044.7	1032.8	1025.8
35°	1063.5	1055.7	1047.9	1040.1	1032.4	1022.4	1010.2	998.1	985.9	973.7	965.4
37.5°	1006.3	998.3	990.3	982.2	974.2	963.5	950.0	936.5	923.0	909.5	900.2
40°	966.1	958.0	950.0	941.9	933.9	923.0	909.1	895.2	881.3	867.4	857.2
42.5°	927.5	919.1	910.6	902.2	893.8	882.3	867.9	853.4	839.0	824.5	814.1
45°	867.4	858.5	849.5	840.4	831.4	819.6	805.0	790.4	775.8	761.2	749.3
47.5°	805.5	796.1	786.9	777.6	768.3	756.1	740.8	725.6	710.4	695.3	682.9
50°	763.4	753.9	744.4	734.9	725.4	712.9	697.4	681.8	666.1	650.6	638.4
52.5°	720.5	711.1	701.9	692.6	683.3	670.7	654.7	638.7	622.7	606.8	594.5
55°	657.2	647.5	637.7	628.0	618.2	605.5	589.6	573.8	558.0	542.2	529.5
57.5°	594.5	584.4	574.3	564.1	554.1	541.1	525.6	510.0	494.4	478.9	466.0
60°	549.9	540.1	530.4	520.6	510.9	498.2	482.7	467.1	451.5	435.9	423.3
62.5°	509.5	499.4	489.3	479.1	469.1	456.0	440.0	424.1	408.1	392.1	380.4
65°	446.9	436.4	426.0	415.5	405.0	392.0	376.4	360.8	345.2	329.7	319.2
67.5°	381.8	371.8	361.8	351.7	341.7	329.5	315.0	300.6	286.1	271.6	262.6
70°	340.6	330.4	320.2	310.0	299.8	287.7	273.9	259.9	246.1	232.2	224.2
72.5°	296.8	287.6	278.3	269.1	259.8	248.7	235.6	222.4	209.4	196.3	189.4
75°	237.7	228.7	219.7	210.6	201.7	191.4	180.0	168.6	157.1	145.7	140.1
77.5°	177.7	170.0	162.4	154.7	147.1	138.6	129.4	120.2	110.9	101.6	98.4
80°	139.1	132.1	125.0	118.0	110.9	103.7	96.4	89.1	81.8	74.5	73.8
82.5°	105.8	99.3	92.8	86.3	79.9	74.5	70.4	66.2	62.0	57.8	57.3
85°	59.2	54.3	49.4	44.5	39.7	36.8	36.1	35.4	34.7	34.0	33.4
87.5°	20.3	18.9	17.7	16.3	14.9	14.0	14.6	14.4	14.4	14.5	14.2
90°	0.6	1.8	3.7	4.4	5.0	5.0	8.6	8.6	9.9	11.2	10.5
92.5°	7.1	10.3	16.1	23.7	32.7	45.6	77.1	125.1	172.0	196.5	163.7
95°	20.4	22.3	28.5	36.5	51.4	77.4	131.3	232.9	381.0	504.9	519.1
97.5°	36.7	36.7	42.0	49.4	62.2	84.0	125.5	209.4	356.6	531.7	652.1
100°	47.1	47.1	51.4	58.9	70.6	90.5	127.0	197.0	323.4	498.0	656.6
102.5°	57.0	58.0	61.8	68.8	80.0	98.9	131.9	193.5	301.0	455.9	619.4
105°	72.5	74.3	77.4	84.8	96.0	114.0	143.7	195.1	281.9	406.3	551.9
107.5°	89.6	90.8	93.9	101.8	112.5	130.2	157.5	204.3	278.4	378.6	497.4
110°	101.0	102.2	105.3	112.7	123.9	140.6	167.9	211.2	279.3	369.2	470.2



TEST NUMBER: P332972-927

CATALOG NUMBER: SA4XXRDIP-C1020D810U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	111.9	113.1	116.7	123.7	134.8	151.5	177.8	218.6	282.3	364.7	454.8
115°	127.6	129.4	133.8	140.0	151.8	168.5	193.3	230.4	288.0	362.3	440.4
117.5°	143.9	145.7	149.6	156.4	167.4	184.7	208.3	242.4	294.1	361.7	434.0
120°	154.9	156.1	160.4	167.2	177.8	195.1	218.6	250.9	298.6	361.7	430.5
122.5°	164.8	166.0	170.3	176.7	188.1	205.0	228.5	258.8	303.0	361.2	426.5
125°	177.8	180.2	183.9	190.8	202.6	219.9	242.2	270.7	309.7	360.5	419.9
127.5°	189.3	191.3	195.7	203.5	215.8	233.3	254.8	281.0	315.1	359.2	411.1
130°	195.7	198.2	203.2	212.5	224.3	242.2	263.2	287.4	319.0	358.6	405.8
132.5°	202.2	204.1	210.6	219.4	232.2	249.1	270.2	293.8	322.5	358.1	400.8
135°	211.2	213.7	219.9	230.4	243.4	259.5	280.0	302.3	327.6	357.4	393.3
137.5°	220.3	222.6	229.4	239.5	252.9	268.3	287.4	308.2	330.7	357.3	386.9
140°	226.7	228.5	235.4	245.9	258.9	273.8	292.4	312.2	333.3	356.8	383.4
142.5°	233.6	235.5	241.9	251.8	264.4	278.8	296.8	315.1	335.3	356.8	380.5
145°	243.4	245.3	251.5	260.2	272.0	285.6	301.7	318.4	336.4	355.5	375.3
147.5°	254.4	255.1	260.5	269.4	279.2	291.5	306.7	321.2	337.0	353.3	370.8
150°	261.4	262.1	267.0	274.4	283.7	295.5	309.1	322.7	337.0	351.8	367.3
152.5°	267.8	268.0	272.9	279.9	288.2	299.0	311.1	323.7	336.0	349.4	363.4
155°	276.9	277.5	281.2	287.4	294.2	303.5	314.0	324.6	334.5	345.6	357.4
157.5°	285.7	285.7	289.1	294.0	299.9	307.2	316.2	324.6	332.9	341.8	351.3
160°	291.1	291.1	293.6	297.9	302.9	309.7	317.1	324.6	331.4	338.8	346.9
162.5°	296.1	295.6	297.5	301.4	305.9	311.2	318.1	324.6	329.9	335.9	342.9
165°	301.7	301.7	302.9	306.0	309.1	312.8	318.4	323.4	327.1	331.4	336.4
167.5°	307.2	306.7	307.2	309.6	311.3	314.2	318.3	321.9	324.1	326.9	330.4
170°	309.7	309.1	309.7	311.6	312.8	314.7	317.7	320.8	322.1	323.9	326.5
172.5°	312.2	311.6	311.7	313.1	313.8	315.1	317.3	319.9	320.1	321.0	323.0
175°	314.7	314.0	314.0	314.7	315.3	315.3	316.6	318.4	317.7	317.7	319.0
177.5°	315.8	315.3	314.8	315.3	315.3	315.3	315.8	316.8	315.8	315.8	316.2
180°	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3



TEST NUMBER: P332972-927

CATALOG NUMBER: SA4XXRDIP-C1020D810U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4	1430.4
2.5°	1425.1	1427.2	1429.3	1430.4	1430.1	1430.0	1429.7	1429.6
5°	1415.6	1418.0	1420.5	1421.4	1420.9	1420.5	1420.0	1419.5
7.5°	1396.8	1398.3	1399.9	1400.3	1399.5	1398.7	1397.9	1397.1
10°	1379.8	1380.8	1381.7	1381.7	1380.8	1379.8	1378.8	1377.8
12.5°	1358.8	1359.5	1360.0	1359.6	1358.3	1356.9	1355.6	1354.2
15°	1322.2	1321.6	1321.1	1320.0	1318.3	1316.6	1314.9	1313.2
17.5°	1277.9	1276.5	1275.2	1273.2	1270.6	1268.0	1265.4	1262.8
20°	1246.9	1245.0	1243.0	1240.5	1237.3	1234.1	1231.0	1227.8
22.5°	1212.5	1209.6	1206.7	1204.0	1201.3	1198.8	1196.2	1193.7
25°	1157.1	1152.9	1148.8	1145.5	1143.1	1140.7	1138.2	1135.8
27.5°	1100.6	1095.5	1090.4	1086.1	1082.6	1079.0	1075.5	1072.1
30°	1060.1	1054.0	1047.9	1042.9	1039.0	1035.1	1031.3	1027.4
32.5°	1018.7	1011.7	1004.6	999.3	995.5	991.8	988.2	984.4
35°	957.1	948.9	940.6	934.3	929.9	925.5	921.1	916.7
37.5°	891.0	881.8	872.5	865.7	861.3	856.9	852.5	848.2
40°	847.0	836.8	826.6	819.3	814.9	810.5	806.1	801.8
42.5°	803.7	793.3	782.8	775.4	770.8	766.2	761.6	757.1
45°	737.4	725.4	713.5	705.4	701.0	696.6	692.2	687.9
47.5°	670.6	658.2	645.8	637.2	632.4	627.6	622.7	618.0
50°	626.2	614.1	601.9	593.5	588.9	584.2	579.6	575.0
52.5°	582.0	569.7	557.3	548.7	543.9	539.1	534.2	529.5
55°	516.8	504.2	491.5	482.9	478.2	473.6	469.1	464.4
57.5°	453.1	440.3	427.5	419.3	415.7	412.3	408.8	405.3
60°	410.6	397.9	385.3	377.0	373.1	369.2	365.4	361.5
62.5°	368.8	357.0	345.4	337.9	334.9	331.8	328.6	325.5
65°	308.7	298.3	287.8	281.1	278.2	275.3	272.4	269.4
67.5°	253.6	244.6	235.6	229.5	226.2	223.1	219.8	216.7
70°	216.1	208.1	200.1	194.8	192.4	190.0	187.5	185.1
72.5°	182.5	175.7	168.8	164.3	162.0	159.8	157.6	155.3
75°	134.5	128.9	123.3	119.8	118.3	116.8	115.3	113.9
77.5°	95.1	91.9	88.6	86.7	86.3	85.9	85.4	85.0
80°	73.0	72.3	71.5	71.1	70.8	70.6	70.3	70.1
82.5°	56.7	56.2	55.7	55.3	55.1	54.8	54.6	54.3
85°	33.0	32.5	32.0	31.8	31.8	31.8	31.8	31.8
87.5°	14.1	14.0	13.9	13.9	14.3	14.6	14.7	14.9
90°	11.2	11.8	12.4	12.4	13.0	13.6	13.0	13.0
92.5°	121.7	91.6	72.9	60.4	53.2	49.8	47.7	47.7
95°	459.0	363.0	280.0	219.9	189.6	170.3	159.2	151.1
97.5°	678.1	642.5	581.9	517.2	472.8	435.5	416.8	404.0
100°	747.0	759.4	729.0	683.3	629.3	591.5	573.0	568.0
102.5°	743.5	805.0	813.8	794.7	761.7	734.3	714.7	710.7
105°	693.8	800.9	862.2	887.6	888.9	883.9	875.3	871.6
107.5°	623.1	737.1	823.5	878.7	909.3	923.4	929.6	931.2
110°	580.4	687.5	777.4	845.5	889.5	915.5	926.7	932.2



TEST NUMBER: P332972-927

CATALOG NUMBER: SA4XXRDIP-C1020D810U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	549.2	644.0	728.8	796.9	846.8	878.4	894.0	903.0
115°	517.8	594.1	666.5	726.0	774.9	812.1	831.9	836.9
117.5°	502.5	565.5	622.5	673.0	714.7	745.9	766.0	769.8
120°	495.5	553.2	602.7	646.7	682.0	709.2	725.3	732.1
122.5°	489.6	545.2	590.3	628.8	658.7	682.0	695.6	702.4
125°	479.4	532.7	575.4	609.5	634.3	652.3	664.0	667.7
127.5°	467.1	517.9	560.5	592.9	617.8	633.8	643.7	647.5
130°	457.2	506.0	548.2	581.0	606.4	621.9	631.8	635.6
132.5°	446.7	492.7	533.9	566.6	591.5	609.0	618.5	622.2
135°	432.4	472.6	510.4	541.4	566.2	583.5	593.4	597.1
137.5°	419.4	453.4	485.3	513.3	536.4	553.5	561.7	566.2
140°	411.9	441.0	468.9	495.0	516.6	530.2	538.9	543.8
142.5°	405.0	430.6	454.6	477.1	496.3	508.9	516.6	520.1
145°	395.2	416.3	434.8	452.2	467.7	478.2	484.4	487.5
147.5°	387.1	403.9	418.7	432.4	443.8	452.8	457.5	458.6
150°	382.1	396.4	408.8	419.9	429.9	437.9	441.6	442.3
152.5°	376.8	389.0	400.4	409.6	418.0	424.5	426.7	427.4
155°	368.5	378.5	387.8	395.2	401.4	406.3	408.2	408.2
157.5°	359.7	368.0	375.9	381.8	386.5	390.2	391.3	391.3
160°	354.3	361.2	368.0	372.9	376.6	380.3	381.0	381.0
162.5°	348.9	354.7	360.0	364.5	367.2	370.9	371.5	371.1
165°	341.3	345.0	349.4	352.4	354.9	357.4	356.8	356.2
167.5°	334.0	336.8	340.3	342.1	343.4	345.0	344.9	344.4
170°	329.5	331.4	333.9	335.7	337.0	337.5	337.0	337.0
172.5°	325.6	326.9	328.4	329.8	330.5	331.1	330.5	329.5
175°	320.3	320.8	322.1	322.1	322.1	323.4	322.1	320.8
177.5°	316.8	317.3	317.3	317.7	317.3	317.7	316.8	315.8
180°	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3

(END OF REPORT)