

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332882-927

Luminaire Tested: **SA4XXRDIP-C350D810U927-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332882-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXRDIP-C350D810U927-4F0-1E-UDD-F4  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 810 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3426.2 lumens  
Efficiency: N/A  
Efficacy: 109.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 31.2  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332882-927

CATALOG NUMBER: SA4XXRDIP-C350D810U927-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

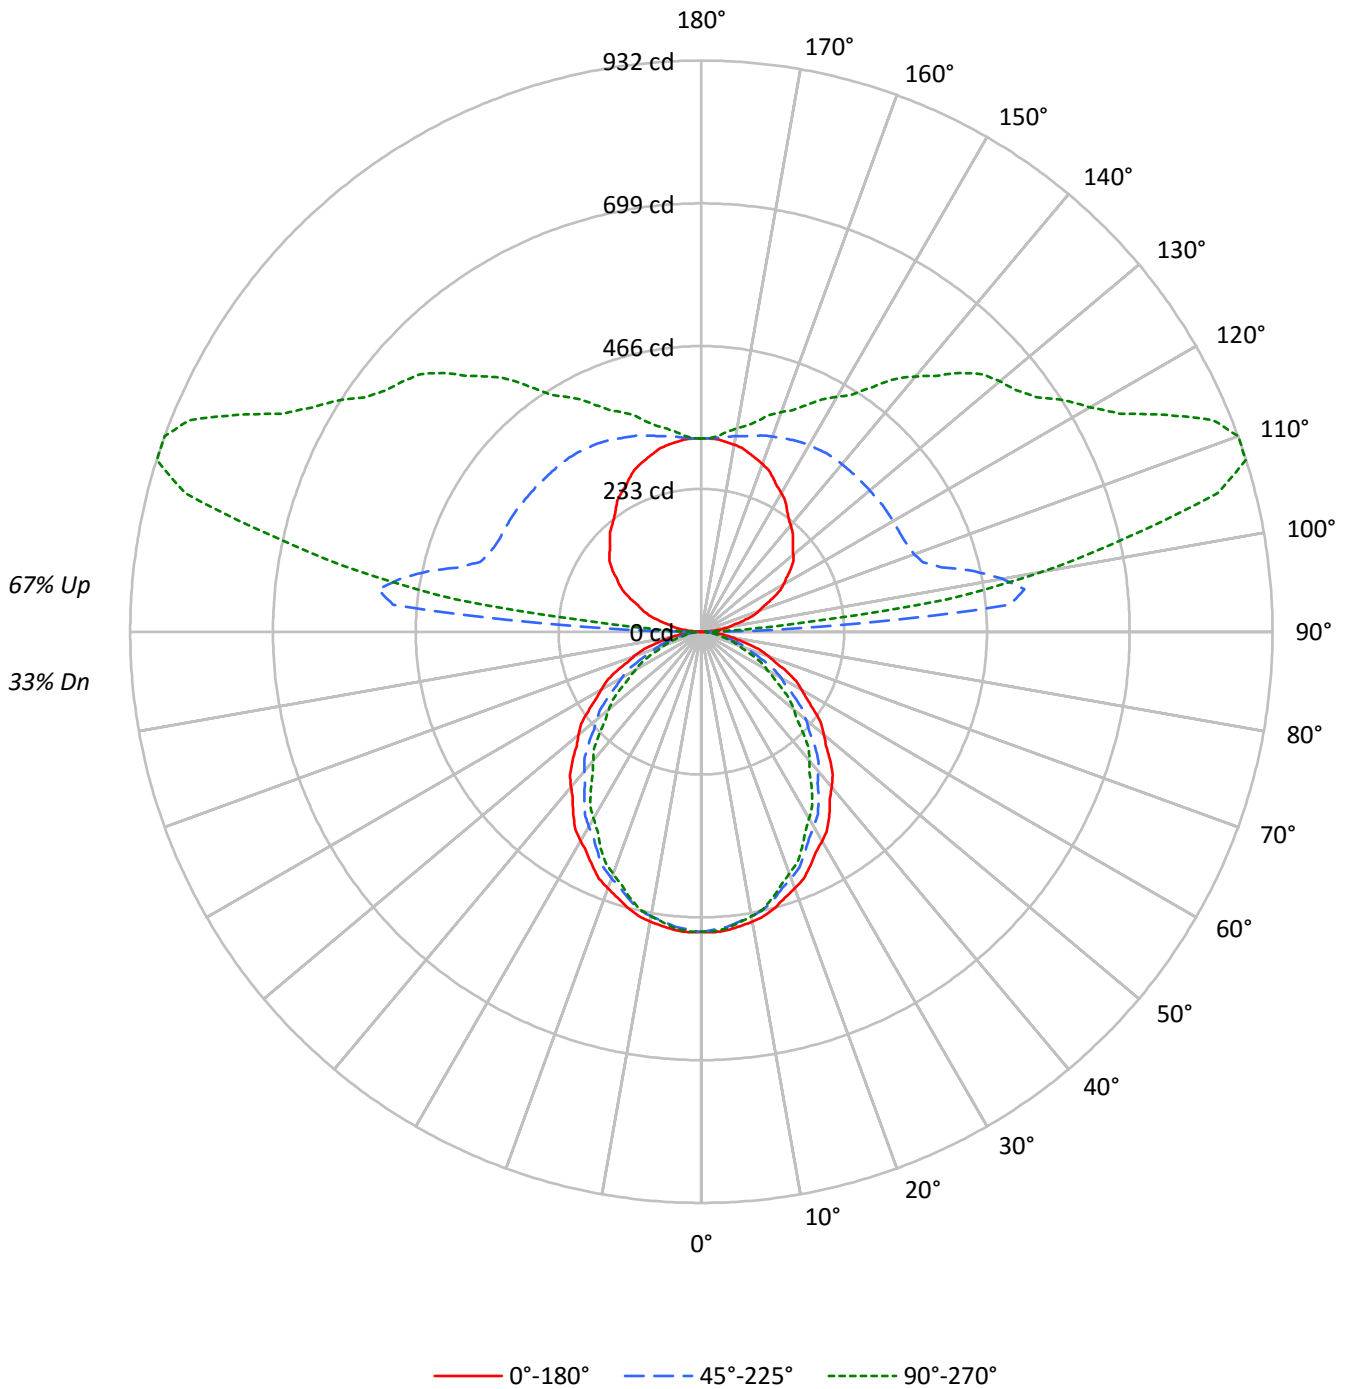



TEST NUMBER: P332882-927

CATALOG NUMBER: SA4XXRDIP-C350D810U927-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	33				
1	94	90	86	83	85	81	78	75	65	63	61	50	49	47	36	35	35	28				
2	86	79	73	68	77	71	66	62	57	54	51	44	42	40	32	31	29	24				
3	78	69	62	57	70	63	57	52	50	46	43	39	36	34	28	27	25	20				
4	72	61	54	48	64	56	49	44	45	40	36	35	32	29	26	23	22	18				
5	66	55	47	41	59	50	43	38	40	35	31	31	28	25	23	21	19	15				
6	61	49	41	36	54	45	38	33	36	31	27	28	25	22	21	19	17	14				
7	56	44	36	31	50	40	33	29	33	28	24	26	22	19	19	17	15	12				
8	52	40	33	27	47	36	30	25	30	25	21	23	20	17	18	15	13	11				
9	48	36	29	24	43	33	27	23	27	22	19	22	18	16	16	14	12	10				
10	45	33	26	22	41	30	24	20	25	20	17	20	16	14	15	13	11	9				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3953	3953	3953
5°	3962	3914	3938
10°	3937	3867	3867
15°	3892	3786	3758
20°	3830	3679	3611
25°	3751	3553	3463
30°	3674	3422	3278
35°	3588	3286	3094
40°	3485	3130	2893
45°	3391	2975	2689
50°	3282	2798	2473
55°	3167	2612	2238
60°	3039	2409	1997
65°	2923	2157	1761
70°	2752	1876	1496
75°	2539	1556	1216
80°	2213	1186	1116
85°	1880	1074	1010



TEST NUMBER: P332882-927

CATALOG NUMBER: SA4XXRDIP-C350D810U927-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	46.0	1.3
10°-20°	128.3	3.7
20°-30°	185.2	5.4
30°-40°	210.0	6.1
40°-50°	202.8	5.9
50°-60°	168.6	4.9
60°-70°	116.4	3.4
70°-80°	59.0	1.7
80°-90°	16.9	0.5
90°-100°	227.7	6.6
100°-110°	474.0	13.8
110°-120°	424.5	12.4
120°-130°	357.1	10.4
130°-140°	297.7	8.7
140°-150°	227.5	6.6
150°-160°	159.9	4.7
160°-170°	94.0	2.7
170°-180°	30.6	0.9
0°-30°	359.5	10.5
0°-40°	569.5	16.6
0°-60°	940.8	27.5
0°-90°	1133.2	33.1
90°-120°	1126.2	32.9
90°-150°	2008.5	58.6
90°-180°	2293.0	66.9
0°-180°	3426.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	490	490	490	490	490	
5°	489	487	483	486	486	46
15°	466	462	453	452	450	131
25°	421	414	399	393	389	194
35°	364	352	333	321	314	227
45°	297	283	261	243	236	229
55°	225	209	186	167	159	201
65°	153	136	113	97	92	151
75°	81	67	50	42	39	86
85°	20	13	12	11	11	23
90°	1	5	11	12	13	2
95°	20	64	505	250	151	23
105°	72	105	406	875	872	77
115°	128	160	362	696	837	127
125°	178	211	360	592	668	158
135°	211	251	357	526	597	163
145°	243	279	356	444	488	153
155°	277	299	346	392	408	128
165°	302	311	331	351	356	85
175°	315	315	318	322	321	30
180°	315	315	315	315	315	



TEST NUMBER: P332882-927

CATALOG NUMBER: SA4XXRDIP-C350D810U927-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	489.7	489.7	489.7	489.7	489.7	489.7	489.7	489.7	489.7	489.7	489.7
2.5°	490.9	490.6	490.4	490.1	489.8	489.3	488.6	487.9	487.1	486.4	487.1
5°	488.9	488.6	488.3	488.0	487.6	487.0	485.9	485.0	483.9	483.0	483.8
7.5°	484.5	484.2	483.9	483.5	483.2	482.3	481.0	479.7	478.4	477.1	477.6
10°	480.3	479.9	479.5	479.1	478.6	477.7	476.2	474.7	473.2	471.7	472.1
12.5°	474.9	474.4	474.0	473.5	473.0	471.9	470.1	468.3	466.6	464.8	465.0
15°	465.7	464.9	464.2	463.4	462.7	461.3	459.2	457.1	455.0	453.0	452.8
17.5°	454.6	453.4	452.3	451.3	450.2	448.4	445.9	443.4	440.9	438.4	437.9
20°	445.8	444.7	443.7	442.6	441.5	439.6	436.7	433.9	431.0	428.2	427.5
22.5°	436.3	435.0	433.8	432.6	431.3	429.2	426.2	423.2	420.2	417.1	416.1
25°	421.1	419.6	418.1	416.6	415.1	412.6	409.2	405.8	402.3	398.9	397.5
27.5°	405.2	403.3	401.4	399.6	397.7	394.9	391.3	387.6	384.0	380.3	378.5
30°	394.1	392.0	389.9	387.9	385.8	382.8	378.8	374.9	371.0	367.1	365.0
32.5°	382.4	380.0	377.7	375.3	373.0	369.8	365.8	361.7	357.7	353.6	351.2
35°	364.1	361.4	358.8	356.1	353.4	350.0	345.9	341.7	337.5	333.4	330.5
37.5°	344.5	341.7	339.1	336.3	333.5	329.9	325.2	320.6	316.0	311.4	308.2
40°	330.7	328.0	325.2	322.5	319.7	316.0	311.2	306.5	301.7	297.0	293.5
42.5°	317.5	314.7	311.7	308.9	306.0	302.1	297.1	292.2	287.2	282.3	278.7
45°	297.0	293.9	290.8	287.7	284.6	280.6	275.6	270.6	265.6	260.6	256.5
47.5°	275.8	272.6	269.4	266.2	263.0	258.8	253.7	248.4	243.2	238.1	233.8
50°	261.3	258.1	254.8	251.6	248.3	244.1	238.8	233.4	228.1	222.8	218.6
52.5°	246.7	243.4	240.3	237.1	233.9	229.6	224.1	218.6	213.2	207.7	203.5
55°	225.0	221.7	218.3	215.0	211.7	207.2	201.8	196.5	191.0	185.6	181.3
57.5°	203.5	200.0	196.6	193.1	189.6	185.3	179.9	174.6	169.3	163.9	159.5
60°	188.2	184.9	181.6	178.2	174.9	170.6	165.2	159.9	154.6	149.2	144.9
62.5°	174.4	171.0	167.5	164.1	160.6	156.1	150.7	145.2	139.7	134.3	130.2
65°	153.0	149.4	145.8	142.3	138.6	134.2	128.9	123.5	118.2	112.9	109.3
67.5°	130.7	127.3	123.8	120.4	117.0	112.8	107.8	102.9	97.9	93.0	89.9
70°	116.6	113.1	109.6	106.2	102.6	98.5	93.7	89.0	84.2	79.5	76.8
72.5°	101.6	98.5	95.3	92.1	89.0	85.2	80.6	76.1	71.7	67.2	64.9
75°	81.4	78.3	75.2	72.1	69.0	65.5	61.6	57.7	53.8	49.9	47.9
77.5°	60.8	58.2	55.6	53.0	50.4	47.5	44.3	41.1	37.9	34.8	33.7
80°	47.6	45.2	42.8	40.4	37.9	35.5	33.0	30.5	28.0	25.5	25.3
82.5°	36.2	34.0	31.8	29.5	27.3	25.5	24.1	22.7	21.2	19.8	19.6
85°	20.3	18.6	17.0	15.2	13.5	12.6	12.4	12.1	11.9	11.6	11.5
87.5°	7.1	6.7	6.6	6.2	5.8	5.5	6.1	6.1	6.3	6.4	6.3
90°	0.6	1.8	3.7	4.4	5.0	5.0	8.6	8.6	9.9	11.2	10.5
92.5°	7.1	10.3	16.1	23.7	32.7	45.6	77.1	125.1	172.0	196.5	163.7
95°	20.4	22.3	28.5	36.5	51.4	77.4	131.3	232.9	381.0	504.9	519.1
97.5°	36.7	36.7	42.0	49.4	62.2	84.0	125.5	209.4	356.6	531.7	652.1
100°	47.1	47.1	51.4	58.9	70.6	90.5	127.0	197.0	323.4	498.0	656.6
102.5°	57.0	58.0	61.8	68.8	80.0	98.9	131.9	193.5	301.0	455.9	619.4
105°	72.5	74.3	77.4	84.8	96.0	114.0	143.7	195.1	281.9	406.3	551.9
107.5°	89.6	90.8	93.9	101.8	112.5	130.2	157.5	204.3	278.4	378.6	497.4
110°	101.0	102.2	105.3	112.7	123.9	140.6	167.9	211.2	279.3	369.2	470.2



TEST NUMBER: P332882-927

CATALOG NUMBER: SA4XXRDIP-C350D810U927-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	111.9	113.1	116.7	123.7	134.8	151.5	177.8	218.6	282.3	364.7	454.8
115°	127.6	129.4	133.8	140.0	151.8	168.5	193.3	230.4	288.0	362.3	440.4
117.5°	143.9	145.7	149.6	156.4	167.4	184.7	208.3	242.4	294.1	361.7	434.0
120°	154.9	156.1	160.4	167.2	177.8	195.1	218.6	250.9	298.6	361.7	430.5
122.5°	164.8	166.0	170.3	176.7	188.1	205.0	228.5	258.8	303.0	361.2	426.5
125°	177.8	180.2	183.9	190.8	202.6	219.9	242.2	270.7	309.7	360.5	419.9
127.5°	189.3	191.3	195.7	203.5	215.8	233.3	254.8	281.0	315.1	359.2	411.1
130°	195.7	198.2	203.2	212.5	224.3	242.2	263.2	287.4	319.0	358.6	405.8
132.5°	202.2	204.1	210.6	219.4	232.2	249.1	270.2	293.8	322.5	358.1	400.8
135°	211.2	213.7	219.9	230.4	243.4	259.5	280.0	302.3	327.6	357.4	393.3
137.5°	220.3	222.6	229.4	239.5	252.9	268.3	287.4	308.2	330.7	357.3	386.9
140°	226.7	228.5	235.4	245.9	258.9	273.8	292.4	312.2	333.3	356.8	383.4
142.5°	233.6	235.5	241.9	251.8	264.4	278.8	296.8	315.1	335.3	356.8	380.5
145°	243.4	245.3	251.5	260.2	272.0	285.6	301.7	318.4	336.4	355.5	375.3
147.5°	254.4	255.1	260.5	269.4	279.2	291.5	306.7	321.2	337.0	353.3	370.8
150°	261.4	262.1	267.0	274.4	283.7	295.5	309.1	322.7	337.0	351.8	367.3
152.5°	267.8	268.0	272.9	279.9	288.2	299.0	311.1	323.7	336.0	349.4	363.4
155°	276.9	277.5	281.2	287.4	294.2	303.5	314.0	324.6	334.5	345.6	357.4
157.5°	285.7	285.7	289.1	294.0	299.9	307.2	316.2	324.6	332.9	341.8	351.3
160°	291.1	291.1	293.6	297.9	302.9	309.7	317.1	324.6	331.4	338.8	346.9
162.5°	296.1	295.6	297.5	301.4	305.9	311.2	318.1	324.6	329.9	335.9	342.9
165°	301.7	301.7	302.9	306.0	309.1	312.8	318.4	323.4	327.1	331.4	336.4
167.5°	307.2	306.7	307.2	309.6	311.3	314.2	318.3	321.9	324.1	326.9	330.4
170°	309.7	309.1	309.7	311.6	312.8	314.7	317.7	320.8	322.1	323.9	326.5
172.5°	312.2	311.6	311.7	313.1	313.8	315.1	317.3	319.9	320.1	321.0	323.0
175°	314.7	314.0	314.0	314.7	315.3	315.3	316.6	318.4	317.7	317.7	319.0
177.5°	315.8	315.3	314.8	315.3	315.3	315.3	315.8	316.8	315.8	315.8	316.2
180°	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3



TEST NUMBER: P332882-927

CATALOG NUMBER: SA4XXRDIP-C350D810U927-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	489.7	489.7	489.7	489.7	489.7	489.7	489.7	489.7
2.5°	487.9	488.6	489.3	489.6	489.6	489.6	489.5	489.4
5°	484.7	485.4	486.3	486.6	486.5	486.3	486.1	485.9
7.5°	478.2	478.7	479.3	479.3	479.1	478.9	478.6	478.3
10°	472.4	472.7	473.0	473.0	472.7	472.4	472.1	471.7
12.5°	465.2	465.4	465.6	465.5	465.0	464.5	464.1	463.6
15°	452.7	452.5	452.3	451.9	451.3	450.8	450.2	449.6
17.5°	437.4	437.0	436.6	435.9	435.0	434.1	433.2	432.4
20°	426.9	426.2	425.6	424.7	423.6	422.5	421.4	420.3
22.5°	415.1	414.1	413.1	412.2	411.3	410.4	409.6	408.6
25°	396.1	394.7	393.3	392.2	391.3	390.5	389.7	388.8
27.5°	376.8	375.0	373.3	371.9	370.6	369.4	368.2	367.0
30°	362.9	360.8	358.8	357.0	355.7	354.4	353.1	351.7
32.5°	348.8	346.3	344.0	342.1	340.8	339.5	338.3	337.0
35°	327.6	324.9	322.0	319.9	318.4	316.9	315.4	313.9
37.5°	305.1	301.9	298.7	296.4	294.9	293.3	291.8	290.3
40°	289.9	286.5	283.0	280.5	279.0	277.5	276.0	274.5
42.5°	275.1	271.6	268.0	265.5	263.9	262.3	260.7	259.2
45°	252.5	248.3	244.2	241.5	240.0	238.4	236.9	235.5
47.5°	229.6	225.3	221.1	218.2	216.5	214.8	213.2	211.6
50°	214.4	210.2	206.0	203.2	201.6	200.0	198.4	196.9
52.5°	199.2	195.0	190.8	187.8	186.2	184.6	182.9	181.3
55°	177.0	172.6	168.3	165.3	163.7	162.2	160.6	159.0
57.5°	155.1	150.8	146.3	143.5	142.4	141.2	139.9	138.7
60°	140.5	136.3	131.9	129.0	127.7	126.4	125.1	123.7
62.5°	126.3	122.2	118.3	115.7	114.6	113.6	112.5	111.5
65°	105.7	102.1	98.5	96.3	95.2	94.3	93.2	92.2
67.5°	86.8	83.7	80.6	78.6	77.5	76.4	75.3	74.1
70°	74.0	71.2	68.5	66.7	65.8	65.0	64.2	63.4
72.5°	62.5	60.1	57.8	56.2	55.5	54.7	53.9	53.2
75°	46.0	44.1	42.2	41.0	40.5	40.0	39.5	39.0
77.5°	32.6	31.4	30.3	29.7	29.5	29.4	29.2	29.1
80°	25.0	24.7	24.5	24.3	24.2	24.2	24.1	24.0
82.5°	19.4	19.3	19.1	18.9	18.9	18.8	18.7	18.6
85°	11.3	11.1	10.9	10.9	10.9	10.9	10.9	10.9
87.5°	6.3	6.3	6.4	6.4	6.6	6.8	6.7	6.8
90°	11.2	11.8	12.4	12.4	13.0	13.6	13.0	13.0
92.5°	121.7	91.6	72.9	60.4	53.2	49.8	47.7	47.7
95°	459.0	363.0	280.0	219.9	189.6	170.3	159.2	151.1
97.5°	678.1	642.5	581.9	517.2	472.8	435.5	416.8	404.0
100°	747.0	759.4	729.0	683.3	629.3	591.5	573.0	568.0
102.5°	743.5	805.0	813.8	794.7	761.7	734.3	714.7	710.7
105°	693.8	800.9	862.2	887.6	888.9	883.9	875.3	871.6
107.5°	623.1	737.1	823.5	878.7	909.3	923.4	929.6	931.2
110°	580.4	687.5	777.4	845.5	889.5	915.5	926.7	932.2





TEST NUMBER: P332882-927

CATALOG NUMBER: SA4XXRDIP-C350D810U927-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	549.2	644.0	728.8	796.9	846.8	878.4	894.0	903.0
115°	517.8	594.1	666.5	726.0	774.9	812.1	831.9	836.9
117.5°	502.5	565.5	622.5	673.0	714.7	745.9	766.0	769.8
120°	495.5	553.2	602.7	646.7	682.0	709.2	725.3	732.1
122.5°	489.6	545.2	590.3	628.8	658.7	682.0	695.6	702.4
125°	479.4	532.7	575.4	609.5	634.3	652.3	664.0	667.7
127.5°	467.1	517.9	560.5	592.9	617.8	633.8	643.7	647.5
130°	457.2	506.0	548.2	581.0	606.4	621.9	631.8	635.6
132.5°	446.7	492.7	533.9	566.6	591.5	609.0	618.5	622.2
135°	432.4	472.6	510.4	541.4	566.2	583.5	593.4	597.1
137.5°	419.4	453.4	485.3	513.3	536.4	553.5	561.7	566.2
140°	411.9	441.0	468.9	495.0	516.6	530.2	538.9	543.8
142.5°	405.0	430.6	454.6	477.1	496.3	508.9	516.6	520.1
145°	395.2	416.3	434.8	452.2	467.7	478.2	484.4	487.5
147.5°	387.1	403.9	418.7	432.4	443.8	452.8	457.5	458.6
150°	382.1	396.4	408.8	419.9	429.9	437.9	441.6	442.3
152.5°	376.8	389.0	400.4	409.6	418.0	424.5	426.7	427.4
155°	368.5	378.5	387.8	395.2	401.4	406.3	408.2	408.2
157.5°	359.7	368.0	375.9	381.8	386.5	390.2	391.3	391.3
160°	354.3	361.2	368.0	372.9	376.6	380.3	381.0	381.0
162.5°	348.9	354.7	360.0	364.5	367.2	370.9	371.5	371.1
165°	341.3	345.0	349.4	352.4	354.9	357.4	356.8	356.2
167.5°	334.0	336.8	340.3	342.1	343.4	345.0	344.9	344.4
170°	329.5	331.4	333.9	335.7	337.0	337.5	337.0	337.0
172.5°	325.6	326.9	328.4	329.8	330.5	331.1	330.5	329.5
175°	320.3	320.8	322.1	322.1	322.1	323.4	322.1	320.8
177.5°	316.8	317.3	317.3	317.7	317.3	317.7	316.8	315.8
180°	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3

(END OF REPORT)