

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332951-927

Luminaire Tested: **SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332951-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1205 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6053.5 lumens
Efficiency: N/A
Efficacy: 106.4 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.23 / 1.39
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 56.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

Luminous Intensity Polar Plot

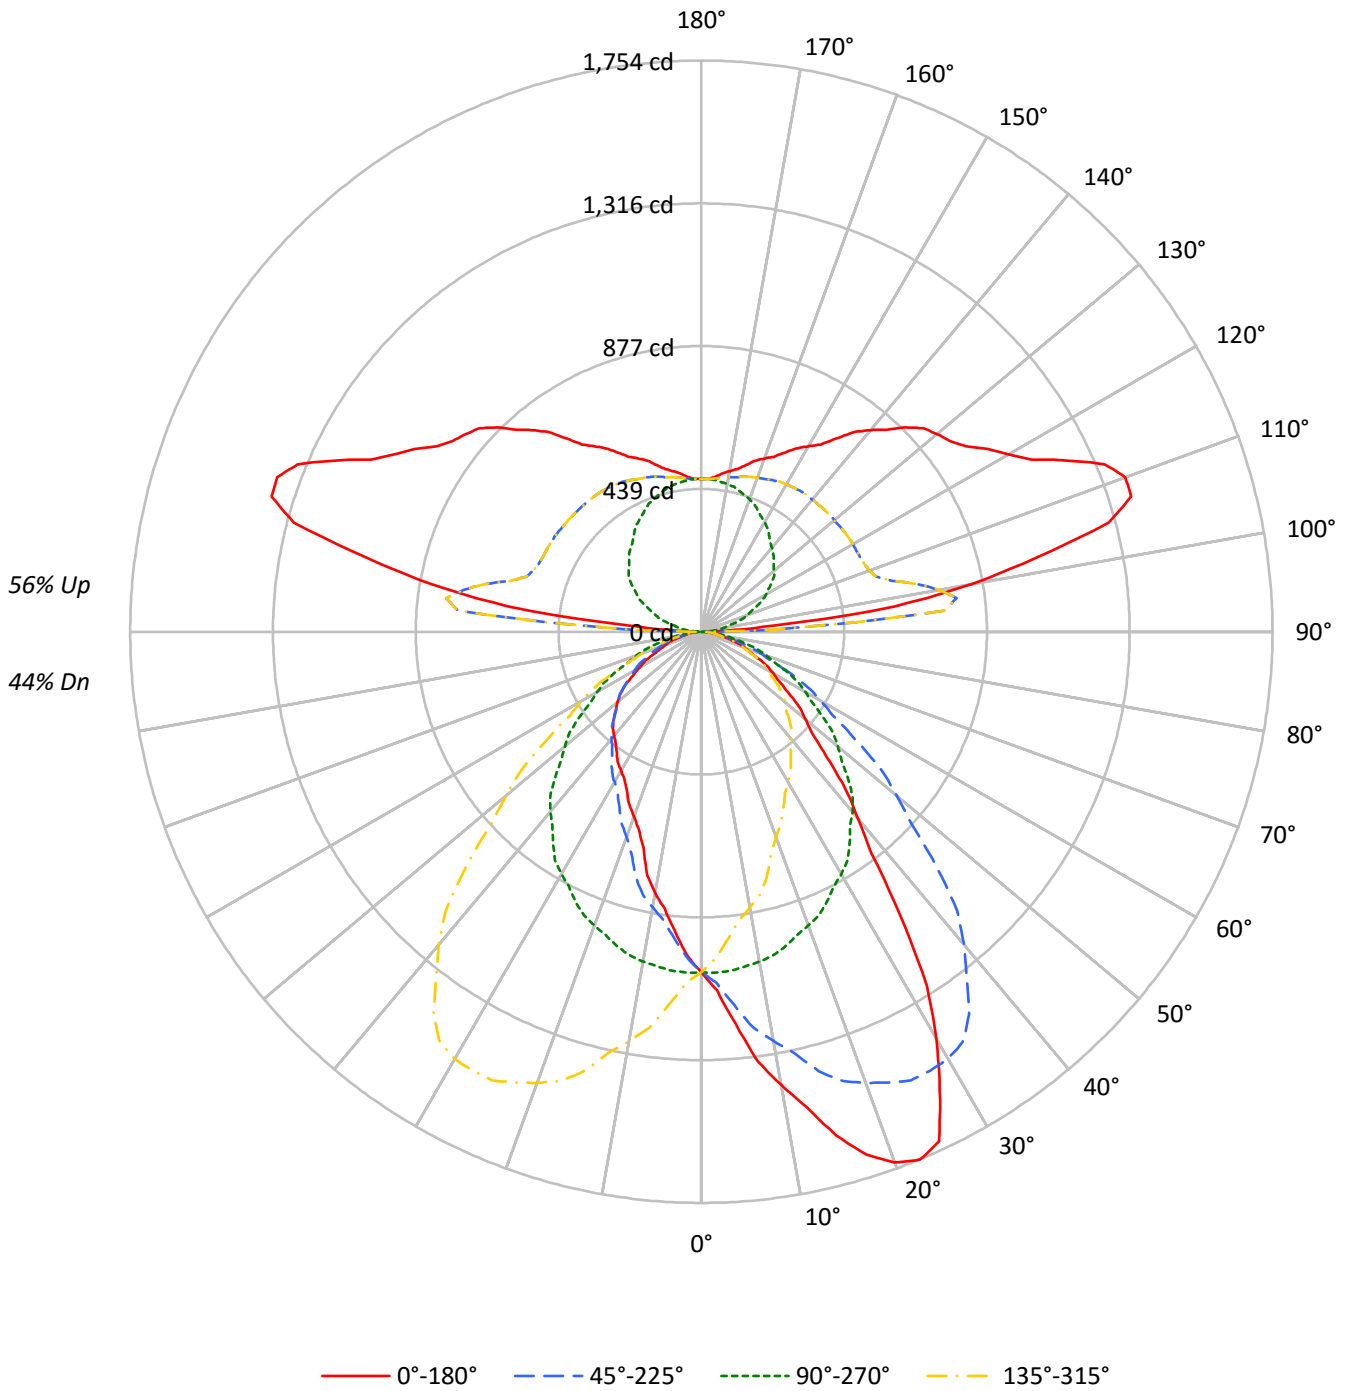



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	106	106	106	106	97	97	97	97	80	80	80	64	64	64	50	50	50	44		
1	97	93	89	86	88	85	82	79	71	68	66	57	56	54	45	44	43	38		
2	88	81	75	71	81	75	70	65	62	59	56	51	48	46	40	39	37	32		
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	36	34	32	28		
4	74	64	56	50	68	59	52	47	49	44	40	40	37	34	32	30	28	24		
5	68	57	49	43	62	53	46	40	44	39	35	36	33	30	29	27	24	21		
6	63	51	43	38	57	47	40	35	40	35	31	33	29	26	27	24	22	19		
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	24	22	19	17		
8	54	42	34	29	49	39	32	28	33	28	24	28	24	21	22	20	17	15		
9	50	38	31	26	46	36	29	25	30	25	22	25	21	19	21	18	16	14		
10	47	35	28	23	43	33	26	22	28	23	19	23	20	17	19	16	14	12		

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	8442	8442	8442	8442
5°	9792	8468	7484	8468
10°	11584	8430	6679	8430
15°	13381	8352	5739	8352
20°	14898	8245	5191	8245
25°	15380	8141	4819	8141
30°	13463	8011	4595	8011
35°	10480	7823	4459	7823
40°	7860	7606	4387	7606
45°	6205	7258	4349	7258
50°	5238	6859	4222	6859
55°	4566	6415	3997	6415
60°	4108	5959	3538	5959
65°	3622	5465	3041	5465
70°	3262	4952	2745	4952
75°	2732	4389	2339	4389
80°	2311	3742	2194	3742
85°	1954	2927	1954	2927



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	101.3	1.7
10°-20°	305.6	5.0
20°-30°	478.0	7.9
30°-40°	531.4	8.8
40°-50°	471.5	7.8
50°-60°	367.4	6.1
60°-70°	240.5	4.0
70°-80°	118.3	2.0
80°-90°	31.8	0.5
90°-100°	338.4	5.6
100°-110°	704.3	11.6
110°-120°	630.9	10.4
120°-130°	530.7	8.8
130°-140°	442.5	7.3
140°-150°	338.0	5.6
150°-160°	237.6	3.9
160°-170°	139.8	2.3
170°-180°	45.5	0.8
0°-30°	885.0	14.6
0°-40°	1416.4	23.4
0°-60°	2255.3	37.3
0°-90°	2645.9	43.7
90°-120°	1673.6	27.6
90°-150°	2984.8	49.3
90°-180°	3408.0	56.3
0°-180°	6053.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1046	1046	1046	1046	1046	
5°	1208	1045	924	1045	1208	122
15°	1601	999	687	999	1601	455
25°	1727	914	541	914	1727	766
35°	1063	794	452	794	1063	667
45°	544	636	381	636	544	430
55°	324	456	284	456	324	295
65°	190	286	159	286	190	191
75°	88	141	75	141	88	96
85°	21	32	21	32	21	24
90°	19	1	19	1	19	17
95°	225	30	225	30	225	349
105°	1295	108	1295	108	1295	1280
115°	1244	190	1244	190	1244	1235
125°	992	264	992	264	992	902
135°	887	314	887	314	887	685
145°	724	362	724	362	724	459
155°	607	412	607	412	607	283
165°	529	448	529	448	529	152
175°	477	468	477	468	477	46
180°	469	469	469	469	469	



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7
2.5°	1103.0	1106.0	1103.0	1102.6	1099.3	1098.3	1096.9	1092.6	1084.4	1079.7	1080.8
5°	1208.3	1218.9	1213.0	1212.1	1202.8	1193.6	1187.6	1174.2	1159.8	1150.2	1142.2
7.5°	1330.2	1336.3	1332.5	1326.6	1311.6	1303.1	1289.4	1271.7	1246.0	1226.4	1208.4
10°	1413.1	1418.2	1416.4	1405.5	1394.6	1372.2	1359.5	1334.7	1302.3	1276.6	1252.6
12.5°	1494.6	1500.1	1485.2	1485.7	1465.0	1447.4	1427.4	1396.1	1358.6	1325.5	1295.4
15°	1601.0	1594.3	1594.3	1585.8	1562.7	1538.2	1517.6	1484.7	1437.5	1397.9	1356.2
17.5°	1684.3	1686.6	1683.1	1663.3	1645.0	1619.8	1581.9	1543.6	1499.8	1446.6	1404.0
20°	1734.1	1734.1	1730.4	1716.8	1693.3	1666.3	1625.4	1583.7	1528.1	1474.6	1426.6
22.5°	1754.4	1755.7	1751.2	1740.1	1718.9	1692.6	1657.8	1615.4	1558.1	1497.9	1438.4
25°	1726.6	1734.6	1735.4	1732.4	1726.1	1710.1	1680.2	1636.8	1585.4	1520.1	1456.0
27.5°	1585.2	1595.2	1604.1	1618.7	1638.1	1648.1	1649.5	1627.5	1582.6	1519.7	1455.3
30°	1444.2	1452.7	1480.0	1515.8	1543.7	1569.0	1590.9	1596.8	1571.5	1515.0	1447.2
32.5°	1287.9	1299.3	1326.7	1365.2	1411.6	1454.4	1503.6	1528.7	1528.0	1494.1	1431.4
35°	1063.4	1071.8	1097.1	1137.6	1193.2	1256.8	1334.7	1395.3	1436.7	1433.7	1395.3
37.5°	857.6	867.1	892.7	926.2	980.2	1058.9	1134.3	1217.9	1294.3	1337.1	1324.4
40°	745.8	746.2	771.0	805.6	856.1	924.8	1006.9	1099.6	1184.7	1254.3	1267.7
42.5°	657.4	657.5	673.9	711.1	747.6	812.2	890.7	982.7	1082.3	1162.6	1198.3
45°	543.5	547.3	560.8	583.1	611.7	666.5	729.3	814.8	926.5	1021.7	1081.1
47.5°	460.3	465.8	474.4	492.6	515.4	551.9	603.8	680.6	771.5	876.2	960.8
50°	417.1	418.0	428.9	439.0	458.8	487.9	533.4	597.4	680.8	781.6	875.5
52.5°	380.0	379.9	386.4	399.3	415.3	438.0	474.8	533.1	607.0	697.3	794.2
55°	324.4	326.5	331.6	341.7	353.9	369.9	398.9	442.8	501.0	578.1	666.1
57.5°	282.1	283.2	287.2	291.4	302.7	314.3	336.1	366.5	415.6	478.7	560.8
60°	254.4	254.9	256.2	262.4	271.3	282.3	297.0	322.7	364.0	421.8	486.6
62.5°	227.5	228.2	230.2	234.8	241.7	249.2	264.7	285.3	319.5	368.8	427.3
65°	189.6	190.0	193.0	194.6	200.1	206.8	218.2	232.1	255.7	297.0	341.3
67.5°	158.4	158.4	158.6	160.9	164.6	169.1	175.9	187.0	204.9	230.2	269.2
70°	138.2	138.2	139.0	140.3	142.4	146.2	150.0	158.4	171.5	192.1	222.0
72.5°	119.3	119.6	120.5	120.7	121.8	124.9	127.8	133.2	142.8	158.4	182.6
75°	87.6	88.9	91.0	92.7	94.8	94.3	97.4	100.7	103.6	112.9	126.8
77.5°	65.2	64.6	64.8	66.2	66.5	66.9	69.0	71.6	73.8	78.2	83.2
80°	49.7	49.7	51.0	51.4	51.0	51.4	53.5	54.7	55.6	57.3	61.9
82.5°	37.5	38.3	37.9	38.3	38.5	38.9	40.7	41.0	41.8	42.5	44.4
85°	21.1	21.5	21.9	21.1	21.1	21.1	21.9	22.3	23.2	22.7	23.6
87.5°	11.2	10.9	11.5	11.2	11.4	11.1	11.2	11.7	10.9	11.4	11.0
90°	19.3	19.3	20.3	19.3	18.4	18.4	17.5	16.6	15.7	16.6	14.7
92.5°	70.9	70.9	74.0	79.0	89.8	108.3	136.0	180.8	243.2	292.0	255.6
95°	224.6	236.5	253.2	281.7	326.8	416.1	539.4	682.1	771.4	750.2	566.1
97.5°	600.4	619.5	647.1	702.5	768.7	864.7	954.7	1007.8	969.2	790.2	529.8
100°	844.1	851.5	879.1	935.3	1015.3	1083.5	1128.5	1110.2	975.7	740.1	480.5
102.5°	1056.2	1062.1	1091.2	1131.9	1181.0	1209.3	1196.3	1105.0	920.5	677.5	447.3
105°	1295.1	1300.7	1313.6	1321.0	1319.1	1281.4	1190.3	1030.9	820.1	603.9	418.8
107.5°	1383.9	1381.5	1372.3	1351.3	1305.8	1223.8	1095.4	925.8	739.2	562.6	413.7
110°	1385.4	1377.1	1360.5	1321.8	1256.5	1155.2	1021.8	862.5	698.7	548.7	415.2



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	1342.0	1328.5	1305.3	1258.5	1184.3	1083.1	957.0	816.1	675.8	542.0	419.5
115°	1243.6	1236.3	1206.8	1151.6	1078.9	990.5	882.8	769.5	654.5	538.5	428.0
117.5°	1144.0	1138.3	1108.5	1062.1	1000.1	925.1	840.4	746.7	644.9	537.6	437.0
120°	1088.1	1077.9	1054.0	1013.5	961.0	895.6	822.0	736.4	639.8	537.6	443.7
122.5°	1043.9	1033.7	1013.5	978.9	934.5	877.3	810.2	727.5	633.9	536.9	450.4
125°	992.3	986.8	969.3	942.6	905.8	855.2	791.6	712.5	624.1	535.8	460.3
127.5°	962.1	956.6	941.9	918.1	881.1	833.1	769.8	694.0	611.0	533.7	468.2
130°	944.4	938.9	924.2	901.2	863.5	814.7	752.1	679.4	602.9	533.0	474.0
132.5°	924.6	919.0	905.1	879.1	842.1	793.3	732.2	663.8	595.6	532.3	479.2
135°	887.4	881.9	867.1	841.4	804.5	758.5	702.3	642.5	584.6	531.2	487.0
137.5°	841.4	834.7	822.6	797.2	762.7	721.1	673.8	623.2	575.0	530.9	491.5
140°	808.2	800.8	788.0	767.7	735.5	696.8	655.4	612.1	569.8	530.2	495.3
142.5°	772.9	767.7	756.3	737.5	709.0	675.5	639.9	601.8	565.4	530.2	498.2
145°	724.5	719.9	710.7	695.0	672.0	646.2	618.6	587.3	557.9	528.4	499.9
147.5°	681.5	679.9	672.9	659.5	642.5	622.3	600.2	575.4	551.0	525.1	500.7
150°	657.3	656.3	650.8	638.8	624.1	607.5	589.1	568.0	545.9	522.8	500.7
152.5°	635.2	634.2	630.9	621.2	608.6	595.0	578.1	559.8	540.0	519.2	499.3
155°	606.7	606.7	603.9	596.5	587.3	576.2	562.4	547.7	531.2	513.7	497.1
157.5°	581.6	581.6	580.0	574.4	567.4	558.6	547.0	534.6	522.1	507.9	494.7
160°	566.1	566.1	565.2	559.7	554.1	546.8	536.6	526.6	515.5	503.5	492.5
162.5°	551.4	552.2	551.2	545.7	541.6	535.0	527.1	518.4	509.6	499.1	490.3
165°	529.3	530.2	531.2	527.4	523.8	519.2	512.7	507.2	499.9	492.5	486.0
167.5°	511.8	512.5	512.7	510.3	508.5	505.7	500.6	496.4	491.0	485.8	481.6
170°	500.7	500.7	501.7	500.7	498.9	496.1	492.5	489.7	485.1	481.4	478.6
172.5°	489.7	491.2	492.1	491.2	490.0	488.1	485.8	483.8	480.0	477.0	475.7
175°	476.8	478.6	480.5	478.6	478.6	478.6	476.8	475.9	474.0	472.2	472.2
177.5°	469.3	470.7	472.2	471.5	472.2	471.5	471.5	470.7	470.0	469.3	469.3
180°	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7
2.5°	1077.4	1072.7	1070.3	1064.9	1058.5	1055.1	1052.1	1047.7	1042.0	1035.9	1031.5
5°	1132.0	1122.0	1109.3	1094.2	1080.7	1067.6	1056.2	1044.9	1031.8	1018.3	1004.8
7.5°	1188.2	1168.3	1146.8	1122.0	1097.8	1075.8	1055.6	1036.2	1014.2	994.7	976.8
10°	1227.2	1200.3	1170.4	1138.8	1107.2	1079.8	1052.9	1028.4	1001.5	977.5	957.2
12.5°	1258.9	1227.2	1191.3	1151.9	1114.0	1080.9	1049.8	1018.0	987.3	961.2	934.3
15°	1311.5	1268.1	1219.7	1172.5	1123.2	1078.2	1036.4	999.3	964.4	927.7	902.1
17.5°	1347.7	1296.2	1237.3	1180.6	1122.4	1069.2	1021.1	976.9	936.6	899.1	868.5
20°	1369.3	1312.4	1247.1	1182.6	1117.3	1060.4	1008.6	959.7	918.1	877.6	846.0
22.5°	1381.4	1318.4	1247.1	1179.6	1111.9	1050.4	993.5	942.5	897.1	856.7	821.7
25°	1385.3	1317.9	1245.0	1167.4	1093.3	1028.0	969.0	913.9	863.2	822.8	785.8
27.5°	1379.9	1300.5	1225.8	1146.3	1069.8	1000.9	939.1	881.1	830.4	787.0	749.0
30°	1371.8	1286.7	1206.7	1124.0	1046.6	980.4	915.0	859.4	806.8	761.8	723.4
32.5°	1354.2	1269.9	1183.7	1099.2	1020.6	952.4	890.5	834.6	782.9	736.8	696.1
35°	1319.5	1234.1	1140.5	1053.7	976.6	905.8	847.7	793.8	744.5	695.1	652.2
37.5°	1273.8	1186.5	1093.4	998.3	921.1	854.4	801.0	750.4	702.3	657.3	609.7
40°	1230.7	1151.0	1054.9	960.6	881.4	816.9	767.6	721.7	673.3	628.6	581.0
42.5°	1178.4	1110.6	1013.5	918.8	840.6	778.5	732.6	687.7	643.6	600.3	550.6
45°	1091.2	1039.8	948.8	857.8	779.0	717.5	675.3	635.7	597.0	555.7	509.0
47.5°	991.3	956.5	877.9	784.7	711.9	656.5	615.8	583.4	550.6	509.4	468.3
50°	921.9	899.5	823.6	738.6	669.1	618.1	576.4	546.1	518.6	479.0	442.4
52.5°	847.7	835.8	771.7	690.4	623.2	573.2	537.6	510.3	482.6	449.7	415.4
55°	734.7	741.1	686.7	616.4	553.2	511.0	478.6	455.8	432.3	404.5	378.0
57.5°	619.3	642.4	605.9	544.2	484.9	446.0	421.6	402.4	382.6	359.6	336.9
60°	550.2	569.6	549.0	494.6	442.8	406.5	383.8	369.1	349.3	328.2	310.9
62.5°	482.8	503.6	491.3	447.4	399.3	368.1	348.1	334.4	319.6	301.3	283.3
65°	398.2	411.6	405.8	375.4	341.3	314.7	296.2	286.1	272.6	259.1	243.1
67.5°	304.9	331.0	327.6	311.4	281.9	261.2	249.1	240.1	227.8	217.9	206.9
70°	250.6	274.7	274.3	261.2	245.2	225.9	217.4	209.8	198.8	189.2	180.3
72.5°	205.2	227.2	230.4	220.5	209.5	194.8	186.7	181.5	170.9	164.2	157.1
75°	143.7	159.7	163.9	163.9	158.8	151.2	144.1	140.7	133.2	127.2	123.0
77.5°	94.2	104.3	110.9	112.4	113.2	110.7	104.7	102.3	96.6	94.4	90.4
80°	66.5	73.3	80.9	83.4	85.6	84.7	82.1	80.5	75.0	72.9	71.2
82.5°	46.0	49.7	55.9	61.5	60.9	63.1	60.9	59.6	55.5	54.7	53.0
85°	24.0	24.4	25.3	29.1	31.2	32.0	32.5	31.6	30.3	30.3	27.4
87.5°	10.7	10.3	9.9	9.9	10.1	11.2	11.6	11.6	11.0	10.5	9.7
90°	12.9	12.9	7.4	7.4	6.4	5.5	2.8	1.0	2.8	5.5	6.4
92.5°	185.9	114.5	67.7	48.6	35.2	23.9	15.3	10.5	15.3	23.9	35.2
95°	346.1	195.1	115.1	76.4	54.3	42.4	33.1	30.3	33.1	42.4	54.3
97.5°	311.2	186.5	124.8	92.4	73.4	62.4	54.5	54.5	54.5	62.4	73.4
100°	292.7	188.7	134.4	105.0	87.5	76.4	69.9	69.9	69.9	76.4	87.5
102.5°	287.6	196.1	146.9	118.9	102.2	91.9	86.2	84.7	86.2	91.9	102.2
105°	289.9	213.6	169.4	142.7	126.1	115.1	110.4	107.7	110.4	115.1	126.1
107.5°	303.6	234.0	193.5	167.2	151.3	139.6	134.9	133.1	134.9	139.6	151.3
110°	313.9	249.5	209.0	184.1	167.5	156.5	151.9	150.0	151.9	156.5	167.5



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	325.0	264.2	225.1	200.3	183.7	173.4	168.1	166.3	168.1	173.4	183.7
115°	342.5	287.2	250.4	225.5	208.0	198.8	192.4	189.6	192.4	198.8	208.0
117.5°	360.3	309.5	274.5	248.7	232.3	222.2	216.5	213.9	216.5	222.2	232.3
120°	372.8	325.0	289.9	264.2	248.5	238.4	232.0	230.1	232.0	238.4	248.5
122.5°	384.6	339.7	304.7	279.6	262.5	253.2	246.7	244.9	246.7	253.2	262.5
125°	402.3	359.9	326.8	301.0	283.5	273.4	267.8	264.2	267.8	273.4	283.5
127.5°	417.6	378.7	346.7	320.7	302.5	290.9	284.2	281.3	284.2	290.9	302.5
130°	427.1	391.3	359.9	333.2	315.8	301.9	294.5	290.9	294.5	301.9	315.8
132.5°	436.7	401.6	370.3	345.0	326.1	313.0	303.4	300.5	303.4	313.0	326.1
135°	449.2	416.1	385.7	361.8	342.5	326.8	317.6	313.9	317.6	326.8	342.5
137.5°	458.0	427.1	398.8	376.0	355.8	341.0	330.8	327.3	330.8	341.0	355.8
140°	463.9	434.5	406.9	384.8	365.4	349.8	339.7	336.9	339.7	349.8	365.4
142.5°	468.3	441.1	414.2	392.8	374.3	359.3	350.0	347.2	350.0	359.3	374.3
145°	473.2	448.3	424.4	404.1	386.6	373.8	364.6	361.8	364.6	373.8	386.6
147.5°	477.4	455.7	433.2	414.9	400.4	387.1	379.1	378.1	379.1	387.1	400.4
150°	479.6	459.3	439.1	421.6	407.8	396.7	389.4	388.5	389.4	396.7	407.8
152.5°	481.1	462.3	444.3	428.3	415.9	405.6	398.2	398.0	398.2	405.6	415.9
155°	482.4	466.7	451.1	437.3	427.1	417.9	412.4	411.5	412.4	417.9	427.1
157.5°	482.4	469.8	456.6	445.7	436.9	429.7	424.5	424.5	424.5	429.7	436.9
160°	482.4	471.3	460.3	450.1	442.8	436.3	432.6	432.6	432.6	436.3	442.8
162.5°	482.4	472.8	462.5	454.6	447.9	442.2	439.3	440.0	439.3	442.2	447.9
165°	480.5	473.2	464.9	459.3	454.7	450.1	448.3	448.3	448.3	450.1	454.7
167.5°	478.3	472.9	466.9	462.6	460.1	456.6	455.7	456.6	455.7	456.6	460.1
170°	476.8	472.2	467.6	464.9	463.0	460.3	459.3	460.3	459.3	460.3	463.0
172.5°	475.4	471.5	468.3	466.4	465.2	463.2	463.0	463.9	463.0	463.2	465.2
175°	473.2	470.4	468.6	468.6	467.6	466.7	466.7	467.6	466.7	466.7	467.6
177.5°	470.7	469.3	468.6	468.6	468.6	467.8	468.6	469.3	468.6	467.8	468.6
180°	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7
2.5°	1026.8	1023.4	1019.1	1014.0	1008.0	1002.6	1000.2	1002.2	1003.2	1000.5	1000.2
5°	995.5	985.0	976.6	963.9	953.9	945.4	939.5	937.0	937.9	931.1	929.4
7.5°	960.4	947.9	934.1	919.2	905.1	892.8	886.3	882.7	875.6	872.5	867.4
10°	937.9	921.0	907.5	889.8	873.8	859.0	851.9	846.0	838.8	835.4	828.3
12.5°	914.6	895.0	880.2	861.8	845.5	827.7	820.9	809.9	798.8	791.6	782.4
15°	881.8	858.3	840.1	818.2	798.8	778.6	760.5	740.2	732.7	716.7	707.4
17.5°	843.4	819.5	797.1	767.7	737.8	712.7	693.4	674.0	662.4	652.2	647.5
20°	818.2	796.3	765.1	730.9	697.7	669.9	654.3	641.7	629.0	621.9	616.8
22.5°	794.2	766.3	730.1	693.2	660.0	638.2	625.0	612.0	601.7	594.9	588.1
25°	754.2	717.5	679.1	637.0	614.3	595.3	581.0	570.5	564.1	555.3	551.9
27.5°	713.0	668.5	626.2	597.9	574.3	556.9	544.4	536.5	528.5	522.8	518.5
30°	681.3	636.2	598.3	571.3	547.3	533.0	522.8	513.6	507.2	502.6	499.2
32.5°	649.9	604.8	573.0	544.0	525.1	511.0	500.3	493.4	488.4	482.4	480.4
35°	604.6	564.6	536.8	510.6	491.2	478.6	470.2	463.0	458.8	457.1	455.8
37.5°	561.0	528.2	498.4	476.9	459.6	449.7	439.7	436.3	433.3	430.3	431.7
40°	533.4	502.6	476.1	453.4	439.4	428.5	422.6	418.4	415.8	415.8	415.8
42.5°	509.5	479.3	453.5	433.1	419.2	410.0	403.4	399.8	398.9	398.6	400.7
45°	472.3	444.5	418.4	401.5	389.7	380.4	376.7	373.7	373.7	375.4	375.8
47.5°	435.5	409.4	388.5	369.6	358.8	353.0	349.7	348.2	348.3	350.1	352.0
50°	412.9	387.2	366.5	349.7	339.6	334.1	331.1	330.3	331.1	331.1	334.1
52.5°	388.2	365.3	345.0	330.8	319.3	314.2	312.6	311.4	312.0	313.3	314.6
55°	352.2	331.6	312.2	298.7	290.3	286.9	283.1	283.5	282.7	283.5	283.5
57.5°	316.1	297.5	279.5	268.8	261.4	256.5	252.4	253.6	252.3	252.2	251.4
60°	292.8	272.6	258.3	248.6	240.1	235.9	232.1	233.0	231.7	230.8	229.2
62.5°	267.5	250.6	237.0	227.7	220.9	216.0	212.2	211.4	208.5	205.6	201.9
65°	230.8	217.0	204.8	195.9	189.6	185.8	182.8	180.3	174.0	167.2	163.9
67.5°	195.3	185.2	173.8	166.4	161.2	156.2	150.6	146.3	140.4	136.7	134.6
70°	172.3	162.6	153.0	145.8	140.3	135.7	129.4	126.4	122.2	120.5	118.4
72.5°	150.4	141.4	132.4	125.9	120.1	116.5	111.5	108.5	106.7	106.0	103.9
75°	117.2	110.0	103.2	97.4	92.7	90.2	88.1	86.0	85.1	81.3	79.2
77.5°	85.5	80.7	76.5	72.3	69.0	67.3	63.3	60.8	59.4	57.7	57.2
80°	66.5	63.2	59.0	56.5	51.8	50.1	48.5	48.0	47.6	47.2	46.7
82.5°	50.1	46.7	42.5	41.0	39.7	38.7	37.6	37.2	36.8	37.1	37.0
85°	25.3	23.6	23.6	23.2	22.7	22.3	21.9	21.9	21.5	21.9	21.5
87.5°	9.9	9.6	10.7	10.0	10.7	11.1	10.5	10.7	11.2	10.8	10.8
90°	7.4	7.4	12.9	12.9	14.7	16.6	15.7	16.6	17.5	18.4	18.4
92.5°	48.6	67.7	114.5	185.9	255.6	292.0	243.2	180.8	136.0	108.3	89.8
95°	76.4	115.1	195.1	346.1	566.1	750.2	771.4	682.1	539.4	416.1	326.8
97.5°	92.4	124.8	186.5	311.2	529.8	790.2	969.2	1007.8	954.7	864.7	768.7
100°	105.0	134.4	188.7	292.7	480.5	740.1	975.7	1110.2	1128.5	1083.5	1015.3
102.5°	118.9	146.9	196.1	287.6	447.3	677.5	920.5	1105.0	1196.3	1209.3	1181.0
105°	142.7	169.4	213.6	289.9	418.8	603.9	820.1	1030.9	1190.3	1281.4	1319.1
107.5°	167.2	193.5	234.0	303.6	413.7	562.6	739.2	925.8	1095.4	1223.8	1305.8
110°	184.1	209.0	249.5	313.9	415.2	548.7	698.7	862.5	1021.8	1155.2	1256.5



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	200.3	225.1	264.2	325.0	419.5	542.0	675.8	816.1	957.0	1083.1	1184.3
115°	225.5	250.4	287.2	342.5	428.0	538.5	654.5	769.5	882.8	990.5	1078.9
117.5°	248.7	274.5	309.5	360.3	437.0	537.6	644.9	746.7	840.4	925.1	1000.1
120°	264.2	289.9	325.0	372.8	443.7	537.6	639.8	736.4	822.0	895.6	961.0
122.5°	279.6	304.7	339.7	384.6	450.4	536.9	633.9	727.5	810.2	877.3	934.5
125°	301.0	326.8	359.9	402.3	460.3	535.8	624.1	712.5	791.6	855.2	905.8
127.5°	320.7	346.7	378.7	417.6	468.2	533.7	611.0	694.0	769.8	833.1	881.1
130°	333.2	359.9	391.3	427.1	474.0	533.0	602.9	679.4	752.1	814.7	863.5
132.5°	345.0	370.3	401.6	436.7	479.2	532.3	595.6	663.8	732.2	793.3	842.1
135°	361.8	385.7	416.1	449.2	487.0	531.2	584.6	642.5	702.3	758.5	804.5
137.5°	376.0	398.8	427.1	458.0	491.5	530.9	575.0	623.2	673.8	721.1	762.7
140°	384.8	406.9	434.5	463.9	495.3	530.2	569.8	612.1	655.4	696.8	735.5
142.5°	392.8	414.2	441.1	468.3	498.2	530.2	565.4	601.8	639.9	675.5	709.0
145°	404.1	424.4	448.3	473.2	499.9	528.4	557.9	587.3	618.6	646.2	672.0
147.5°	414.9	433.2	455.7	477.4	500.7	525.1	551.0	575.4	600.2	622.3	642.5
150°	421.6	439.1	459.3	479.6	500.7	522.8	545.9	568.0	589.1	607.5	624.1
152.5°	428.3	444.3	462.3	481.1	499.3	519.2	540.0	559.8	578.1	595.0	608.6
155°	437.3	451.1	466.7	482.4	497.1	513.7	531.2	547.7	562.4	576.2	587.3
157.5°	445.7	456.6	469.8	482.4	494.7	507.9	522.1	534.6	547.0	558.6	567.4
160°	450.1	460.3	471.3	482.4	492.5	503.5	515.5	526.6	536.6	546.8	554.1
162.5°	454.6	462.5	472.8	482.4	490.3	499.1	509.6	518.4	527.1	535.0	541.6
165°	459.3	464.9	473.2	480.5	486.0	492.5	499.9	507.2	512.7	519.2	523.8
167.5°	462.6	466.9	472.9	478.3	481.6	485.8	491.0	496.4	500.6	505.7	508.5
170°	464.9	467.6	472.2	476.8	478.6	481.4	485.1	489.7	492.5	496.1	498.9
172.5°	466.4	468.3	471.5	475.4	475.7	477.0	480.0	483.8	485.8	488.1	490.0
175°	468.6	468.6	470.4	473.2	472.2	472.2	474.0	475.9	476.8	478.6	478.6
177.5°	468.6	468.6	469.3	470.7	469.3	469.3	470.0	470.7	471.5	471.5	472.2
180°	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7
2.5°	998.1	998.9	996.5	995.8	996.5	998.9	998.1	1000.2	1000.5	1003.2	1002.2
5°	926.1	925.2	923.1	923.5	923.1	925.2	926.1	929.4	931.1	937.9	937.0
7.5°	864.4	861.1	862.0	858.6	862.0	861.1	864.4	867.4	872.5	875.6	882.7
10°	826.6	822.0	818.2	814.8	818.2	822.0	826.6	828.3	835.4	838.8	846.0
12.5°	775.1	771.1	766.0	767.0	766.0	771.1	775.1	782.4	791.6	798.8	809.9
15°	701.9	695.6	685.5	686.7	685.5	695.6	701.9	707.4	716.7	732.7	740.2
17.5°	640.0	640.1	635.4	636.5	635.4	640.1	640.0	647.5	652.2	662.4	674.0
20°	607.9	605.0	605.4	604.2	605.4	605.0	607.9	616.8	621.9	629.0	641.7
22.5°	585.7	582.1	579.2	576.6	579.2	582.1	585.7	588.1	594.9	601.7	612.0
25°	548.1	545.6	541.8	541.0	541.8	545.6	548.1	551.9	555.3	564.1	570.5
27.5°	515.1	514.6	513.1	511.1	513.1	514.6	515.1	518.5	522.8	528.5	536.5
30°	495.9	495.0	494.2	492.9	494.2	495.0	495.9	499.2	502.6	507.2	513.6
32.5°	478.7	478.2	477.4	477.4	477.4	478.2	478.7	480.4	482.4	488.4	493.4
35°	454.2	453.8	452.9	452.5	452.9	453.8	454.2	455.8	457.1	458.8	463.0
37.5°	431.3	432.4	431.8	431.7	431.8	432.4	431.3	431.7	430.3	433.3	436.3
40°	415.4	415.8	416.7	416.3	416.7	415.8	415.4	415.8	415.8	415.8	418.4
42.5°	402.3	402.3	403.5	402.1	403.5	402.3	402.3	400.7	398.6	398.9	399.8
45°	378.7	381.3	380.9	380.9	380.9	381.3	378.7	375.8	375.4	373.7	373.7
47.5°	353.1	355.2	355.8	355.8	355.8	355.2	353.1	352.0	350.1	348.3	348.2
50°	336.2	335.3	336.6	336.2	336.6	335.3	336.2	334.1	331.1	331.1	330.3
52.5°	315.7	315.8	315.8	315.3	315.8	315.8	315.7	314.6	313.3	312.0	311.4
55°	284.0	284.4	283.5	284.0	283.5	284.4	284.0	283.5	283.5	282.7	283.5
57.5°	249.6	247.6	248.4	247.4	248.4	247.6	249.6	251.4	252.2	252.3	253.6
60°	225.0	221.6	220.8	219.1	220.8	221.6	225.0	229.2	230.8	231.7	233.0
62.5°	197.3	195.0	192.1	193.5	192.1	195.0	197.3	201.9	205.6	208.5	211.4
65°	160.5	158.8	157.6	159.2	157.6	158.8	160.5	163.9	167.2	174.0	180.3
67.5°	132.8	132.0	132.0	131.1	132.0	132.0	132.8	134.6	136.7	140.4	146.3
70°	118.4	117.2	117.2	116.3	117.2	117.2	118.4	118.4	120.5	122.2	126.4
72.5°	103.5	102.3	102.7	102.1	102.7	102.3	103.5	103.9	106.0	106.7	108.5
75°	76.7	74.5	74.5	75.0	74.5	74.5	76.7	79.2	81.3	85.1	86.0
77.5°	57.2	56.8	57.4	56.6	57.4	56.8	57.2	57.2	57.7	59.4	60.8
80°	46.7	46.3	45.9	47.2	45.9	46.3	46.7	46.7	47.2	47.6	48.0
82.5°	36.3	36.2	36.1	37.8	36.1	36.2	36.3	37.0	37.1	36.8	37.2
85°	21.9	21.1	21.9	21.1	21.9	21.1	21.9	21.5	21.9	21.5	21.9
87.5°	11.6	11.5	10.9	11.2	10.9	11.5	11.6	10.8	10.8	11.2	10.7
90°	19.3	20.3	19.3	19.3	19.3	20.3	19.3	18.4	18.4	17.5	16.6
92.5°	79.0	74.0	70.9	70.9	70.9	74.0	79.0	89.8	108.3	136.0	180.8
95°	281.7	253.2	236.5	224.6	236.5	253.2	281.7	326.8	416.1	539.4	682.1
97.5°	702.5	647.1	619.5	600.4	619.5	647.1	702.5	768.7	864.7	954.7	1007.8
100°	935.3	879.1	851.5	844.1	851.5	879.1	935.3	1015.3	1083.5	1128.5	1110.2
102.5°	1131.9	1091.2	1062.1	1056.2	1062.1	1091.2	1131.9	1181.0	1209.3	1196.3	1105.0
105°	1321.0	1313.6	1300.7	1295.1	1300.7	1313.6	1321.0	1319.1	1281.4	1190.3	1030.9
107.5°	1351.3	1372.3	1381.5	1383.9	1381.5	1372.3	1351.3	1305.8	1223.8	1095.4	925.8
110°	1321.8	1360.5	1377.1	1385.4	1377.1	1360.5	1321.8	1256.5	1155.2	1021.8	862.5



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	1258.5	1305.3	1328.5	1342.0	1328.5	1305.3	1258.5	1184.3	1083.1	957.0	816.1
115°	1151.6	1206.8	1236.3	1243.6	1236.3	1206.8	1151.6	1078.9	990.5	882.8	769.5
117.5°	1062.1	1108.5	1138.3	1144.0	1138.3	1108.5	1062.1	1000.1	925.1	840.4	746.7
120°	1013.5	1054.0	1077.9	1088.1	1077.9	1054.0	1013.5	961.0	895.6	822.0	736.4
122.5°	978.9	1013.5	1033.7	1043.9	1033.7	1013.5	978.9	934.5	877.3	810.2	727.5
125°	942.6	969.3	986.8	992.3	986.8	969.3	942.6	905.8	855.2	791.6	712.5
127.5°	918.1	941.9	956.6	962.1	956.6	941.9	918.1	881.1	833.1	769.8	694.0
130°	901.2	924.2	938.9	944.4	938.9	924.2	901.2	863.5	814.7	752.1	679.4
132.5°	879.1	905.1	919.0	924.6	919.0	905.1	879.1	842.1	793.3	732.2	663.8
135°	841.4	867.1	881.9	887.4	881.9	867.1	841.4	804.5	758.5	702.3	642.5
137.5°	797.2	822.6	834.7	841.4	834.7	822.6	797.2	762.7	721.1	673.8	623.2
140°	767.7	788.0	800.8	808.2	800.8	788.0	767.7	735.5	696.8	655.4	612.1
142.5°	737.5	756.3	767.7	772.9	767.7	756.3	737.5	709.0	675.5	639.9	601.8
145°	695.0	710.7	719.9	724.5	719.9	710.7	695.0	672.0	646.2	618.6	587.3
147.5°	659.5	672.9	679.9	681.5	679.9	672.9	659.5	642.5	622.3	600.2	575.4
150°	638.8	650.8	656.3	657.3	656.3	650.8	638.8	624.1	607.5	589.1	568.0
152.5°	621.2	630.9	634.2	635.2	634.2	630.9	621.2	608.6	595.0	578.1	559.8
155°	596.5	603.9	606.7	606.7	606.7	603.9	596.5	587.3	576.2	562.4	547.7
157.5°	574.4	580.0	581.6	581.6	581.6	580.0	574.4	567.4	558.6	547.0	534.6
160°	559.7	565.2	566.1	566.1	566.1	565.2	559.7	554.1	546.8	536.6	526.6
162.5°	545.7	551.2	552.2	551.4	552.2	551.2	545.7	541.6	535.0	527.1	518.4
165°	527.4	531.2	530.2	529.3	530.2	531.2	527.4	523.8	519.2	512.7	507.2
167.5°	510.3	512.7	512.5	511.8	512.5	512.7	510.3	508.5	505.7	500.6	496.4
170°	500.7	501.7	500.7	500.7	500.7	501.7	500.7	498.9	496.1	492.5	489.7
172.5°	491.2	492.1	491.2	489.7	491.2	492.1	491.2	490.0	488.1	485.8	483.8
175°	478.6	480.5	478.6	476.8	478.6	480.5	478.6	478.6	478.6	476.8	475.9
177.5°	471.5	472.2	470.7	469.3	470.7	472.2	471.5	472.2	471.5	471.5	470.7
180°	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7
2.5°	1000.2	1002.6	1008.0	1014.0	1019.1	1023.4	1026.8	1031.5	1035.9	1042.0	1047.7
5°	939.5	945.4	953.9	963.9	976.6	985.0	995.5	1004.8	1018.3	1031.8	1044.9
7.5°	886.3	892.8	905.1	919.2	934.1	947.9	960.4	976.8	994.7	1014.2	1036.2
10°	851.9	859.0	873.8	889.8	907.5	921.0	937.9	957.2	977.5	1001.5	1028.4
12.5°	820.9	827.7	845.5	861.8	880.2	895.0	914.6	934.3	961.2	987.3	1018.0
15°	760.5	778.6	798.8	818.2	840.1	858.3	881.8	902.1	927.7	964.4	999.3
17.5°	693.4	712.7	737.8	767.7	797.1	819.5	843.4	868.5	899.1	936.6	976.9
20°	654.3	669.9	697.7	730.9	765.1	796.3	818.2	846.0	877.6	918.1	959.7
22.5°	625.0	638.2	660.0	693.2	730.1	766.3	794.2	821.7	856.7	897.1	942.5
25°	581.0	595.3	614.3	637.0	679.1	717.5	754.2	785.8	822.8	863.2	913.9
27.5°	544.4	556.9	574.3	597.9	626.2	668.5	713.0	749.0	787.0	830.4	881.1
30°	522.8	533.0	547.3	571.3	598.3	636.2	681.3	723.4	761.8	806.8	859.4
32.5°	500.3	511.0	525.1	544.0	573.0	604.8	649.9	696.1	736.8	782.9	834.6
35°	470.2	478.6	491.2	510.6	536.8	564.6	604.6	652.2	695.1	744.5	793.8
37.5°	439.7	449.7	459.6	476.9	498.4	528.2	561.0	609.7	657.3	702.3	750.4
40°	422.6	428.5	439.4	453.4	476.1	502.6	533.4	581.0	628.6	673.3	721.7
42.5°	403.4	410.0	419.2	433.1	453.5	479.3	509.5	550.6	600.3	643.6	687.7
45°	376.7	380.4	389.7	401.5	418.4	444.5	472.3	509.0	555.7	597.0	635.7
47.5°	349.7	353.0	358.8	369.6	388.5	409.4	435.5	468.3	509.4	550.6	583.4
50°	331.1	334.1	339.6	349.7	366.5	387.2	412.9	442.4	479.0	518.6	546.1
52.5°	312.6	314.2	319.3	330.8	345.0	365.3	388.2	415.4	449.7	482.6	510.3
55°	283.1	286.9	290.3	298.7	312.2	331.6	352.2	378.0	404.5	432.3	455.8
57.5°	252.4	256.5	261.4	268.8	279.5	297.5	316.1	336.9	359.6	382.6	402.4
60°	232.1	235.9	240.1	248.6	258.3	272.6	292.8	310.9	328.2	349.3	369.1
62.5°	212.2	216.0	220.9	227.7	237.0	250.6	267.5	283.3	301.3	319.6	334.4
65°	182.8	185.8	189.6	195.9	204.8	217.0	230.8	243.1	259.1	272.6	286.1
67.5°	150.6	156.2	161.2	166.4	173.8	185.2	195.3	206.9	217.9	227.8	240.1
70°	129.4	135.7	140.3	145.8	153.0	162.6	172.3	180.3	189.2	198.8	209.8
72.5°	111.5	116.5	120.1	125.9	132.4	141.4	150.4	157.1	164.2	170.9	181.5
75°	88.1	90.2	92.7	97.4	103.2	110.0	117.2	123.0	127.2	133.2	140.7
77.5°	63.3	67.3	69.0	72.3	76.5	80.7	85.5	90.4	94.4	96.6	102.3
80°	48.5	50.1	51.8	56.5	59.0	63.2	66.5	71.2	72.9	75.0	80.5
82.5°	37.6	38.7	39.7	41.0	42.5	46.7	50.1	53.0	54.7	55.5	59.6
85°	21.9	22.3	22.7	23.2	23.6	23.6	25.3	27.4	30.3	30.3	31.6
87.5°	10.5	11.1	10.7	10.0	10.7	9.6	9.9	9.7	10.5	11.0	11.6
90°	15.7	16.6	14.7	12.9	12.9	7.4	7.4	6.4	5.5	2.8	1.0
92.5°	243.2	292.0	255.6	185.9	114.5	67.7	48.6	35.2	23.9	15.3	10.5
95°	771.4	750.2	566.1	346.1	195.1	115.1	76.4	54.3	42.4	33.1	30.3
97.5°	969.2	790.2	529.8	311.2	186.5	124.8	92.4	73.4	62.4	54.5	54.5
100°	975.7	740.1	480.5	292.7	188.7	134.4	105.0	87.5	76.4	69.9	69.9
102.5°	920.5	677.5	447.3	287.6	196.1	146.9	118.9	102.2	91.9	86.2	84.7
105°	820.1	603.9	418.8	289.9	213.6	169.4	142.7	126.1	115.1	110.4	107.7
107.5°	739.2	562.6	413.7	303.6	234.0	193.5	167.2	151.3	139.6	134.9	133.1
110°	698.7	548.7	415.2	313.9	249.5	209.0	184.1	167.5	156.5	151.9	150.0



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	675.8	542.0	419.5	325.0	264.2	225.1	200.3	183.7	173.4	168.1	166.3
115°	654.5	538.5	428.0	342.5	287.2	250.4	225.5	208.0	198.8	192.4	189.6
117.5°	644.9	537.6	437.0	360.3	309.5	274.5	248.7	232.3	222.2	216.5	213.9
120°	639.8	537.6	443.7	372.8	325.0	289.9	264.2	248.5	238.4	232.0	230.1
122.5°	633.9	536.9	450.4	384.6	339.7	304.7	279.6	262.5	253.2	246.7	244.9
125°	624.1	535.8	460.3	402.3	359.9	326.8	301.0	283.5	273.4	267.8	264.2
127.5°	611.0	533.7	468.2	417.6	378.7	346.7	320.7	302.5	290.9	284.2	281.3
130°	602.9	533.0	474.0	427.1	391.3	359.9	333.2	315.8	301.9	294.5	290.9
132.5°	595.6	532.3	479.2	436.7	401.6	370.3	345.0	326.1	313.0	303.4	300.5
135°	584.6	531.2	487.0	449.2	416.1	385.7	361.8	342.5	326.8	317.6	313.9
137.5°	575.0	530.9	491.5	458.0	427.1	398.8	376.0	355.8	341.0	330.8	327.3
140°	569.8	530.2	495.3	463.9	434.5	406.9	384.8	365.4	349.8	339.7	336.9
142.5°	565.4	530.2	498.2	468.3	441.1	414.2	392.8	374.3	359.3	350.0	347.2
145°	557.9	528.4	499.9	473.2	448.3	424.4	404.1	386.6	373.8	364.6	361.8
147.5°	551.0	525.1	500.7	477.4	455.7	433.2	414.9	400.4	387.1	379.1	378.1
150°	545.9	522.8	500.7	479.6	459.3	439.1	421.6	407.8	396.7	389.4	388.5
152.5°	540.0	519.2	499.3	481.1	462.3	444.3	428.3	415.9	405.6	398.2	398.0
155°	531.2	513.7	497.1	482.4	466.7	451.1	437.3	427.1	417.9	412.4	411.5
157.5°	522.1	507.9	494.7	482.4	469.8	456.6	445.7	436.9	429.7	424.5	424.5
160°	515.5	503.5	492.5	482.4	471.3	460.3	450.1	442.8	436.3	432.6	432.6
162.5°	509.6	499.1	490.3	482.4	472.8	462.5	454.6	447.9	442.2	439.3	440.0
165°	499.9	492.5	486.0	480.5	473.2	464.9	459.3	454.7	450.1	448.3	448.3
167.5°	491.0	485.8	481.6	478.3	472.9	466.9	462.6	460.1	456.6	455.7	456.6
170°	485.1	481.4	478.6	476.8	472.2	467.6	464.9	463.0	460.3	459.3	460.3
172.5°	480.0	477.0	475.7	475.4	471.5	468.3	466.4	465.2	463.2	463.0	463.9
175°	474.0	472.2	472.2	473.2	470.4	468.6	468.6	467.6	466.7	466.7	467.6
177.5°	470.0	469.3	469.3	470.7	469.3	468.6	468.6	468.6	467.8	468.6	469.3
180°	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7
2.5°	1052.1	1055.1	1058.5	1064.9	1070.3	1072.7	1077.4	1080.8	1079.7	1084.4	1092.6
5°	1056.2	1067.6	1080.7	1094.2	1109.3	1122.0	1132.0	1142.2	1150.2	1159.8	1174.2
7.5°	1055.6	1075.8	1097.8	1122.0	1146.8	1168.3	1188.2	1208.4	1226.4	1246.0	1271.7
10°	1052.9	1079.8	1107.2	1138.8	1170.4	1200.3	1227.2	1252.6	1276.6	1302.3	1334.7
12.5°	1049.8	1080.9	1114.0	1151.9	1191.3	1227.2	1258.9	1295.4	1325.5	1358.6	1396.1
15°	1036.4	1078.2	1123.2	1172.5	1219.7	1268.1	1311.5	1356.2	1397.9	1437.5	1484.7
17.5°	1021.1	1069.2	1122.4	1180.6	1237.3	1296.2	1347.7	1404.0	1446.6	1499.8	1543.6
20°	1008.6	1060.4	1117.3	1182.6	1247.1	1312.4	1369.3	1426.6	1474.6	1528.1	1583.7
22.5°	993.5	1050.4	1111.9	1179.6	1247.1	1318.4	1381.4	1438.4	1497.9	1558.1	1615.4
25°	969.0	1028.0	1093.3	1167.4	1245.0	1317.9	1385.3	1456.0	1520.1	1585.4	1636.8
27.5°	939.1	1000.9	1069.8	1146.3	1225.8	1300.5	1379.9	1455.3	1519.7	1582.6	1627.5
30°	915.0	980.4	1046.6	1124.0	1206.7	1286.7	1371.8	1447.2	1515.0	1571.5	1596.8
32.5°	890.5	952.4	1020.6	1099.2	1183.7	1269.9	1354.2	1431.4	1494.1	1528.0	1528.7
35°	847.7	905.8	976.6	1053.7	1140.5	1234.1	1319.5	1395.3	1433.7	1436.7	1395.3
37.5°	801.0	854.4	921.1	998.3	1093.4	1186.5	1273.8	1324.4	1337.1	1294.3	1217.9
40°	767.6	816.9	881.4	960.6	1054.9	1151.0	1230.7	1267.7	1254.3	1184.7	1099.6
42.5°	732.6	778.5	840.6	918.8	1013.5	1110.6	1178.4	1198.3	1162.6	1082.3	982.7
45°	675.3	717.5	779.0	857.8	948.8	1039.8	1091.2	1081.1	1021.7	926.5	814.8
47.5°	615.8	656.5	711.9	784.7	877.9	956.5	991.3	960.8	876.2	771.5	680.6
50°	576.4	618.1	669.1	738.6	823.6	899.5	921.9	875.5	781.6	680.8	597.4
52.5°	537.6	573.2	623.2	690.4	771.7	835.8	847.7	794.2	697.3	607.0	533.1
55°	478.6	511.0	553.2	616.4	686.7	741.1	734.7	666.1	578.1	501.0	442.8
57.5°	421.6	446.0	484.9	544.2	605.9	642.4	619.3	560.8	478.7	415.6	366.5
60°	383.8	406.5	442.8	494.6	549.0	569.6	550.2	486.6	421.8	364.0	322.7
62.5°	348.1	368.1	399.3	447.4	491.3	503.6	482.8	427.3	368.8	319.5	285.3
65°	296.2	314.7	341.3	375.4	405.8	411.6	398.2	341.3	297.0	255.7	232.1
67.5°	249.1	261.2	281.9	311.4	327.6	331.0	304.9	269.2	230.2	204.9	187.0
70°	217.4	225.9	245.2	261.2	274.3	274.7	250.6	222.0	192.1	171.5	158.4
72.5°	186.7	194.8	209.5	220.5	230.4	227.2	205.2	182.6	158.4	142.8	133.2
75°	144.1	151.2	158.8	163.9	163.9	159.7	143.7	126.8	112.9	103.6	100.7
77.5°	104.7	110.7	113.2	112.4	110.9	104.3	94.2	83.2	78.2	73.8	71.6
80°	82.1	84.7	85.6	83.4	80.9	73.3	66.5	61.9	57.3	55.6	54.7
82.5°	60.9	63.1	60.9	61.5	55.9	49.7	46.0	44.4	42.5	41.8	41.0
85°	32.5	32.0	31.2	29.1	25.3	24.4	24.0	23.6	22.7	23.2	22.3
87.5°	11.6	11.2	10.1	9.9	9.9	10.3	10.7	11.0	11.4	10.9	11.7
90°	2.8	5.5	6.4	7.4	7.4	12.9	12.9	14.7	16.6	15.7	16.6
92.5°	15.3	23.9	35.2	48.6	67.7	114.5	185.9	255.6	292.0	243.2	180.8
95°	33.1	42.4	54.3	76.4	115.1	195.1	346.1	566.1	750.2	771.4	682.1
97.5°	54.5	62.4	73.4	92.4	124.8	186.5	311.2	529.8	790.2	969.2	1007.8
100°	69.9	76.4	87.5	105.0	134.4	188.7	292.7	480.5	740.1	975.7	1110.2
102.5°	86.2	91.9	102.2	118.9	146.9	196.1	287.6	447.3	677.5	920.5	1105.0
105°	110.4	115.1	126.1	142.7	169.4	213.6	289.9	418.8	603.9	820.1	1030.9
107.5°	134.9	139.6	151.3	167.2	193.5	234.0	303.6	413.7	562.6	739.2	925.8
110°	151.9	156.5	167.5	184.1	209.0	249.5	313.9	415.2	548.7	698.7	862.5



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	168.1	173.4	183.7	200.3	225.1	264.2	325.0	419.5	542.0	675.8	816.1
115°	192.4	198.8	208.0	225.5	250.4	287.2	342.5	428.0	538.5	654.5	769.5
117.5°	216.5	222.2	232.3	248.7	274.5	309.5	360.3	437.0	537.6	644.9	746.7
120°	232.0	238.4	248.5	264.2	289.9	325.0	372.8	443.7	537.6	639.8	736.4
122.5°	246.7	253.2	262.5	279.6	304.7	339.7	384.6	450.4	536.9	633.9	727.5
125°	267.8	273.4	283.5	301.0	326.8	359.9	402.3	460.3	535.8	624.1	712.5
127.5°	284.2	290.9	302.5	320.7	346.7	378.7	417.6	468.2	533.7	611.0	694.0
130°	294.5	301.9	315.8	333.2	359.9	391.3	427.1	474.0	533.0	602.9	679.4
132.5°	303.4	313.0	326.1	345.0	370.3	401.6	436.7	479.2	532.3	595.6	663.8
135°	317.6	326.8	342.5	361.8	385.7	416.1	449.2	487.0	531.2	584.6	642.5
137.5°	330.8	341.0	355.8	376.0	398.8	427.1	458.0	491.5	530.9	575.0	623.2
140°	339.7	349.8	365.4	384.8	406.9	434.5	463.9	495.3	530.2	569.8	612.1
142.5°	350.0	359.3	374.3	392.8	414.2	441.1	468.3	498.2	530.2	565.4	601.8
145°	364.6	373.8	386.6	404.1	424.4	448.3	473.2	499.9	528.4	557.9	587.3
147.5°	379.1	387.1	400.4	414.9	433.2	455.7	477.4	500.7	525.1	551.0	575.4
150°	389.4	396.7	407.8	421.6	439.1	459.3	479.6	500.7	522.8	545.9	568.0
152.5°	398.2	405.6	415.9	428.3	444.3	462.3	481.1	499.3	519.2	540.0	559.8
155°	412.4	417.9	427.1	437.3	451.1	466.7	482.4	497.1	513.7	531.2	547.7
157.5°	424.5	429.7	436.9	445.7	456.6	469.8	482.4	494.7	507.9	522.1	534.6
160°	432.6	436.3	442.8	450.1	460.3	471.3	482.4	492.5	503.5	515.5	526.6
162.5°	439.3	442.2	447.9	454.6	462.5	472.8	482.4	490.3	499.1	509.6	518.4
165°	448.3	450.1	454.7	459.3	464.9	473.2	480.5	486.0	492.5	499.9	507.2
167.5°	455.7	456.6	460.1	462.6	466.9	472.9	478.3	481.6	485.8	491.0	496.4
170°	459.3	460.3	463.0	464.9	467.6	472.2	476.8	478.6	481.4	485.1	489.7
172.5°	463.0	463.2	465.2	466.4	468.3	471.5	475.4	475.7	477.0	480.0	483.8
175°	466.7	466.7	467.6	468.6	468.6	470.4	473.2	472.2	472.2	474.0	475.9
177.5°	468.6	467.8	468.6	468.6	468.6	469.3	470.7	469.3	469.3	470.0	470.7
180°	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6	468.6



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7	1045.7
2.5°	1096.9	1098.3	1099.3	1102.6	1103.0	1106.0	1103.0
5°	1187.6	1193.6	1202.8	1212.1	1213.0	1218.9	1208.3
7.5°	1289.4	1303.1	1311.6	1326.6	1332.5	1336.3	1330.2
10°	1359.5	1372.2	1394.6	1405.5	1416.4	1418.2	1413.1
12.5°	1427.4	1447.4	1465.0	1485.7	1485.2	1500.1	1494.6
15°	1517.6	1538.2	1562.7	1585.8	1594.3	1594.3	1601.0
17.5°	1581.9	1619.8	1645.0	1663.3	1683.1	1686.6	1684.3
20°	1625.4	1666.3	1693.3	1716.8	1730.4	1734.1	1734.1
22.5°	1657.8	1692.6	1718.9	1740.1	1751.2	1755.7	1754.4
25°	1680.2	1710.1	1726.1	1732.4	1735.4	1734.6	1726.6
27.5°	1649.5	1648.1	1638.1	1618.7	1604.1	1595.2	1585.2
30°	1590.9	1569.0	1543.7	1515.8	1480.0	1452.7	1444.2
32.5°	1503.6	1454.4	1411.6	1365.2	1326.7	1299.3	1287.9
35°	1334.7	1256.8	1193.2	1137.6	1097.1	1071.8	1063.4
37.5°	1134.3	1058.9	980.2	926.2	892.7	867.1	857.6
40°	1006.9	924.8	856.1	805.6	771.0	746.2	745.8
42.5°	890.7	812.2	747.6	711.1	673.9	657.5	657.4
45°	729.3	666.5	611.7	583.1	560.8	547.3	543.5
47.5°	603.8	551.9	515.4	492.6	474.4	465.8	460.3
50°	533.4	487.9	458.8	439.0	428.9	418.0	417.1
52.5°	474.8	438.0	415.3	399.3	386.4	379.9	380.0
55°	398.9	369.9	353.9	341.7	331.6	326.5	324.4
57.5°	336.1	314.3	302.7	291.4	287.2	283.2	282.1
60°	297.0	282.3	271.3	262.4	256.2	254.9	254.4
62.5°	264.7	249.2	241.7	234.8	230.2	228.2	227.5
65°	218.2	206.8	200.1	194.6	193.0	190.0	189.6
67.5°	175.9	169.1	164.6	160.9	158.6	158.4	158.4
70°	150.0	146.2	142.4	140.3	139.0	138.2	138.2
72.5°	127.8	124.9	121.8	120.7	120.5	119.6	119.3
75°	97.4	94.3	94.8	92.7	91.0	88.9	87.6
77.5°	69.0	66.9	66.5	66.2	64.8	64.6	65.2
80°	53.5	51.4	51.0	51.4	51.0	49.7	49.7
82.5°	40.7	38.9	38.5	38.3	37.9	38.3	37.5
85°	21.9	21.1	21.1	21.1	21.9	21.5	21.1
87.5°	11.2	11.1	11.4	11.2	11.5	10.9	11.2
90°	17.5	18.4	18.4	19.3	20.3	19.3	19.3
92.5°	136.0	108.3	89.8	79.0	74.0	70.9	70.9
95°	539.4	416.1	326.8	281.7	253.2	236.5	224.6
97.5°	954.7	864.7	768.7	702.5	647.1	619.5	600.4
100°	1128.5	1083.5	1015.3	935.3	879.1	851.5	844.1
102.5°	1196.3	1209.3	1181.0	1131.9	1091.2	1062.1	1056.2
105°	1190.3	1281.4	1319.1	1321.0	1313.6	1300.7	1295.1
107.5°	1095.4	1223.8	1305.8	1351.3	1372.3	1381.5	1383.9
110°	1021.8	1155.2	1256.5	1321.8	1360.5	1377.1	1385.4



TEST NUMBER: P332951-927

CATALOG NUMBER: SA4XXRDIP-C795D1205U927-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	957.0	1083.1	1184.3	1258.5	1305.3	1328.5	1342.0
115°	882.8	990.5	1078.9	1151.6	1206.8	1236.3	1243.6
117.5°	840.4	925.1	1000.1	1062.1	1108.5	1138.3	1144.0
120°	822.0	895.6	961.0	1013.5	1054.0	1077.9	1088.1
122.5°	810.2	877.3	934.5	978.9	1013.5	1033.7	1043.9
125°	791.6	855.2	905.8	942.6	969.3	986.8	992.3
127.5°	769.8	833.1	881.1	918.1	941.9	956.6	962.1
130°	752.1	814.7	863.5	901.2	924.2	938.9	944.4
132.5°	732.2	793.3	842.1	879.1	905.1	919.0	924.6
135°	702.3	758.5	804.5	841.4	867.1	881.9	887.4
137.5°	673.8	721.1	762.7	797.2	822.6	834.7	841.4
140°	655.4	696.8	735.5	767.7	788.0	800.8	808.2
142.5°	639.9	675.5	709.0	737.5	756.3	767.7	772.9
145°	618.6	646.2	672.0	695.0	710.7	719.9	724.5
147.5°	600.2	622.3	642.5	659.5	672.9	679.9	681.5
150°	589.1	607.5	624.1	638.8	650.8	656.3	657.3
152.5°	578.1	595.0	608.6	621.2	630.9	634.2	635.2
155°	562.4	576.2	587.3	596.5	603.9	606.7	606.7
157.5°	547.0	558.6	567.4	574.4	580.0	581.6	581.6
160°	536.6	546.8	554.1	559.7	565.2	566.1	566.1
162.5°	527.1	535.0	541.6	545.7	551.2	552.2	551.4
165°	512.7	519.2	523.8	527.4	531.2	530.2	529.3
167.5°	500.6	505.7	508.5	510.3	512.7	512.5	511.8
170°	492.5	496.1	498.9	500.7	501.7	500.7	500.7
172.5°	485.8	488.1	490.0	491.2	492.1	491.2	489.7
175°	476.8	478.6	478.6	478.6	480.5	478.6	476.8
177.5°	471.5	471.5	472.2	471.5	472.2	470.7	469.3
180°	468.6	468.6	468.6	468.6	468.6	468.6	468.6

(END OF REPORT)