

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332935-927

Luminaire Tested: **SA4XXRDIP-C795D590U927-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332935-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C795D590U927-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 590 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4165.1 lumens
Efficiency: N/A
Efficacy: 103.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 40.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332935-927

CATALOG NUMBER: SA4XXRDIP-C795D590U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

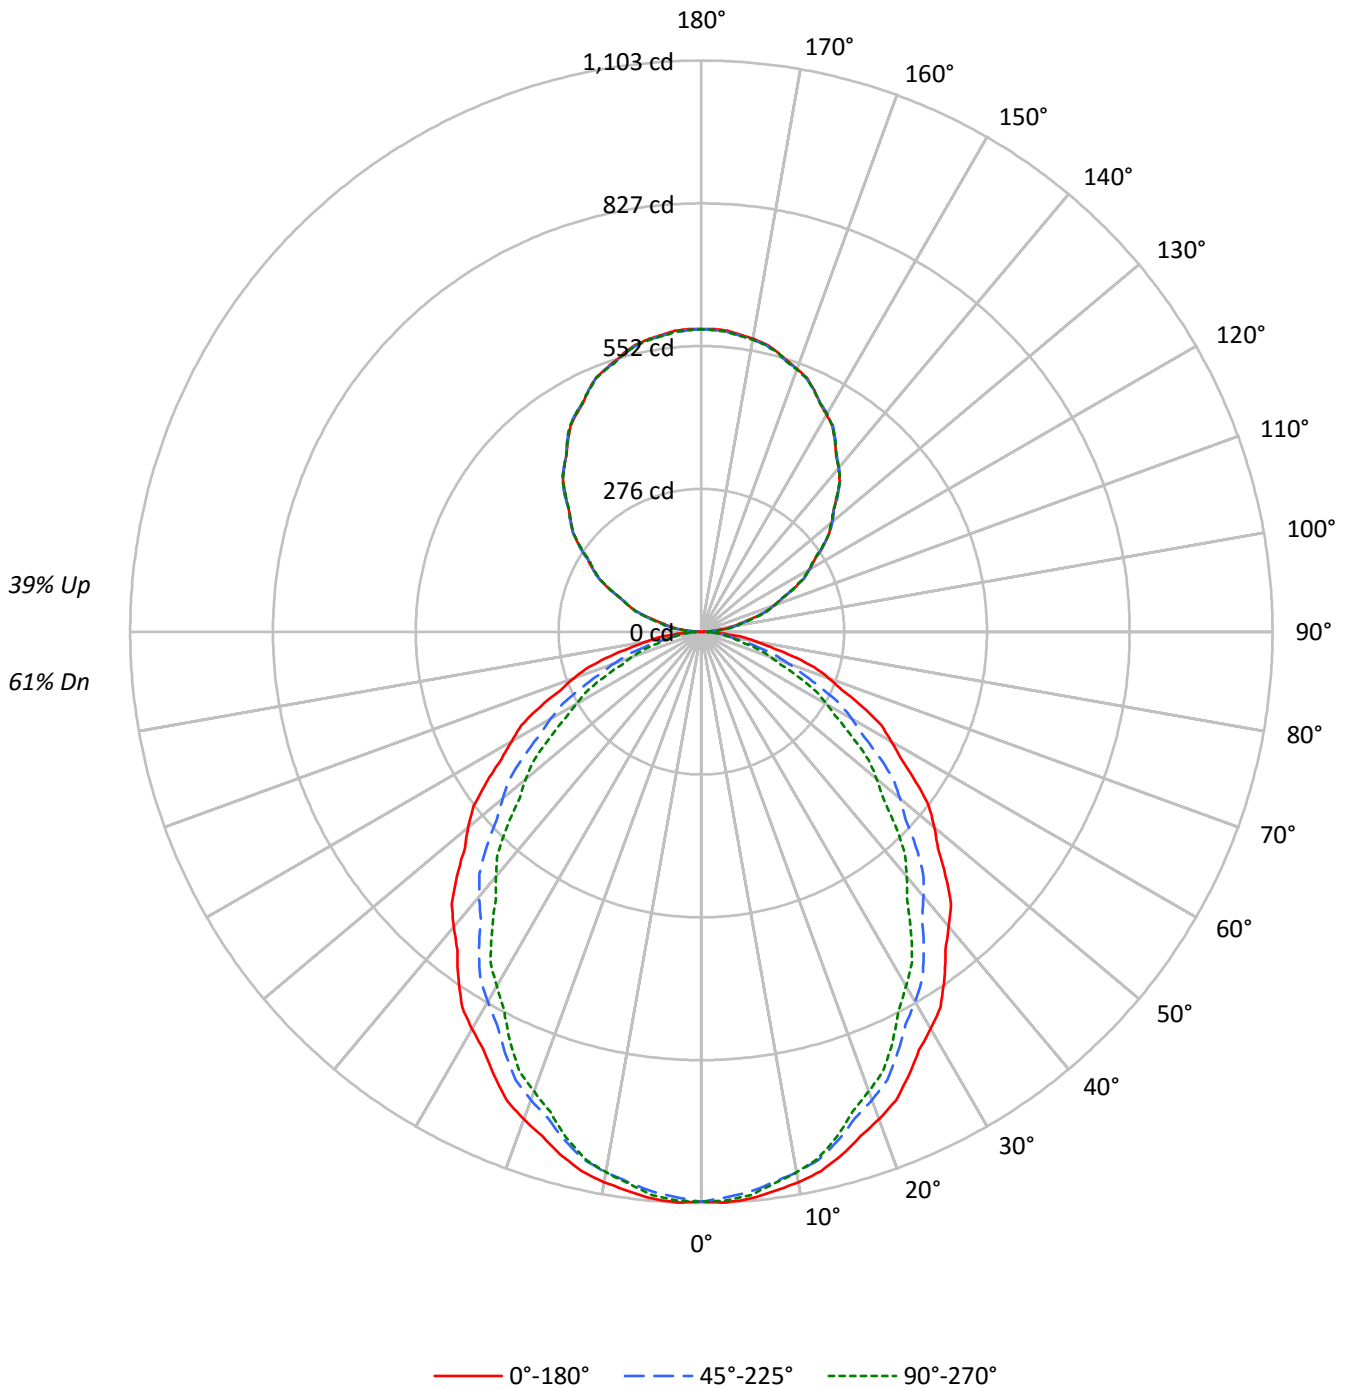



TEST NUMBER: P332935-927

CATALOG NUMBER: SA4XXRDIP-C795D590U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66	61
1	101	96	93	89	94	90	87	84	79	77	74	69	67	65	59	58	57	52
2	92	85	78	73	86	79	74	69	70	66	62	61	58	55	52	50	48	44
3	84	75	67	61	78	70	64	58	62	57	53	54	50	47	47	44	41	38
4	77	66	58	52	72	62	55	50	55	49	45	48	44	40	42	39	36	33
5	71	59	51	45	66	56	49	43	49	44	39	43	39	35	38	34	31	29
6	65	53	45	39	61	50	43	38	45	39	34	39	35	31	35	31	28	25
7	61	48	40	35	57	46	38	33	41	35	30	36	31	28	32	28	25	22
8	56	44	36	31	53	42	35	30	37	31	27	33	28	25	29	25	22	20
9	53	40	33	28	49	38	31	27	34	28	24	30	26	22	27	23	20	18
10	49	37	30	25	46	35	28	24	32	26	22	28	24	20	25	21	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8884	8884	8884
5°	8904	8795	8849
10°	8848	8689	8689
15°	8747	8507	8444
20°	8607	8267	8115
25°	8429	7986	7783
30°	8255	7690	7368
35°	8064	7383	6951
40°	7832	7032	6500
45°	7618	6687	6042
50°	7376	6286	5556
55°	7116	5871	5029
60°	6830	5414	4490
65°	6567	4846	3960
70°	6187	4216	3361
75°	5702	3497	2732
80°	4974	2664	2506
85°	4215	2418	2260



TEST NUMBER: P332935-927

CATALOG NUMBER: SA4XXRDIP-C795D590U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	103.4	2.5
10°-20°	288.3	6.9
20°-30°	416.3	10.0
30°-40°	471.8	11.3
40°-50°	455.6	10.9
50°-60°	378.9	9.1
60°-70°	261.6	6.3
70°-80°	132.6	3.2
80°-90°	35.8	0.9
90°-100°	38.5	0.9
100°-110°	114.1	2.7
110°-120°	193.7	4.7
120°-130°	255.5	6.1
130°-140°	286.9	6.9
140°-150°	281.9	6.8
150°-160°	237.1	5.7
160°-170°	157.8	3.8
170°-180°	55.2	1.3
0°-30°	807.9	19.4
0°-40°	1279.7	30.7
0°-60°	2114.3	50.8
0°-90°	2544.3	61.1
90°-120°	346.4	8.3
90°-150°	1170.7	28.1
90°-180°	1621.0	38.9
0°-180°	4165.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1100	1100	1100	1100	1100	
5°	1099	1095	1085	1093	1092	104
15°	1047	1038	1018	1016	1010	295
25°	946	930	896	883	874	436
35°	818	790	749	721	705	511
45°	667	635	586	546	529	514
55°	506	471	417	375	357	452
65°	344	307	254	219	207	339
75°	183	151	112	93	88	193
85°	46	29	26	24	24	51
90°	1	6	10	13	14	4
95°	27	31	34	36	36	30
105°	105	106	108	109	110	112
115°	197	197	196	196	195	194
125°	287	287	286	286	285	256
135°	370	373	373	372	370	286
145°	450	451	452	451	450	281
155°	515	515	515	516	515	237
165°	561	559	558	561	559	158
175°	583	581	581	583	581	55
180°	584	584	584	584	584	



TEST NUMBER: P332935-927

CATALOG NUMBER: SA4XXRDIP-C795D590U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5
2.5°	1103.2	1102.6	1101.9	1101.4	1100.7	1099.6	1098.0	1096.4	1094.7	1093.1	1094.7
5°	1098.8	1098.0	1097.3	1096.5	1095.7	1094.3	1092.0	1089.8	1087.5	1085.3	1087.2
7.5°	1088.9	1088.1	1087.3	1086.5	1085.7	1083.9	1080.9	1078.0	1075.1	1072.1	1073.3
10°	1079.4	1078.5	1077.5	1076.6	1075.6	1073.5	1070.2	1066.8	1063.4	1060.0	1060.7
12.5°	1067.2	1066.2	1065.1	1064.0	1063.0	1060.4	1056.5	1052.4	1048.5	1044.5	1045.0
15°	1046.6	1044.9	1043.1	1041.5	1039.8	1036.6	1031.9	1027.2	1022.5	1017.9	1017.5
17.5°	1021.4	1019.0	1016.5	1014.2	1011.7	1007.7	1002.0	996.4	990.8	985.2	984.1
20°	1001.9	999.4	997.0	994.6	992.1	987.8	981.4	975.0	968.6	962.3	960.8
22.5°	980.3	977.6	974.9	972.1	969.4	964.6	957.7	950.9	944.1	937.3	935.1
25°	946.3	942.9	939.5	936.1	932.8	927.2	919.6	911.9	904.2	896.5	893.3
27.5°	910.5	906.3	902.1	897.9	893.6	887.4	879.2	871.0	862.8	854.6	850.6
30°	885.6	880.9	876.2	871.6	866.9	860.2	851.4	842.6	833.7	824.9	820.2
32.5°	859.3	854.1	848.7	843.4	838.2	831.0	821.9	812.8	803.7	794.6	789.2
35°	818.2	812.2	806.2	800.2	794.2	786.6	777.2	767.8	758.4	749.1	742.8
37.5°	774.2	768.0	761.8	755.7	749.5	741.2	730.9	720.5	710.1	699.7	692.6
40°	743.2	737.0	730.9	724.7	718.5	710.0	699.3	688.7	678.0	667.3	659.5
42.5°	713.5	707.0	700.6	694.1	687.6	678.8	667.7	656.6	645.5	634.3	626.3
45°	667.3	660.4	653.5	646.6	639.6	630.6	619.3	608.1	596.8	585.7	576.5
47.5°	619.6	612.5	605.4	598.2	591.0	581.6	570.0	558.3	546.6	534.9	525.4
50°	587.3	580.0	572.7	565.4	558.1	548.4	536.5	524.5	512.5	500.5	491.2
52.5°	554.3	547.2	540.0	532.8	525.7	515.9	503.7	491.4	479.1	466.8	457.3
55°	505.6	498.0	490.6	483.1	475.6	465.8	453.6	441.4	429.3	417.1	407.3
57.5°	457.4	449.6	441.8	434.0	426.2	416.3	404.3	392.4	380.4	368.4	358.5
60°	423.0	415.5	408.1	400.5	393.0	383.3	371.3	359.3	347.4	335.3	325.6
62.5°	392.0	384.2	376.4	368.6	360.8	350.8	338.5	326.2	313.9	301.7	292.6
65°	343.8	335.7	327.6	319.6	311.6	301.6	289.5	277.6	265.6	253.7	245.6
67.5°	293.7	286.1	278.3	270.6	262.8	253.5	242.3	231.2	220.1	209.0	202.0
70°	262.1	254.2	246.3	238.4	230.6	221.3	210.6	199.9	189.3	178.6	172.5
72.5°	228.4	221.3	214.1	207.0	199.9	191.3	181.3	171.1	161.1	151.0	145.7
75°	182.8	175.9	169.0	162.1	155.1	147.3	138.5	129.7	120.9	112.1	107.7
77.5°	136.7	130.8	124.9	119.1	113.1	106.6	99.6	92.4	85.3	78.2	75.7
80°	107.0	101.6	96.2	90.7	85.3	79.8	74.1	68.5	62.9	57.3	56.7
82.5°	81.4	76.4	71.5	66.5	61.5	57.4	54.2	50.9	47.7	44.5	44.0
85°	45.5	41.7	38.0	34.3	30.5	28.4	27.8	27.3	26.7	26.1	25.7
87.5°	15.8	14.8	13.8	12.8	11.9	11.4	11.4	11.4	11.4	11.4	11.4
90°	1.3	2.5	3.6	4.7	5.8	6.7	7.5	8.3	9.1	9.9	10.5
92.5°	9.7	10.9	12.2	13.5	14.7	15.6	16.2	16.8	17.3	17.9	18.2
95°	27.1	28.0	28.9	29.8	30.7	31.5	32.2	33.0	33.7	34.3	34.6
97.5°	47.4	48.1	48.8	49.5	50.2	51.0	51.8	52.7	53.5	54.3	54.7
100°	63.2	63.7	64.1	64.5	64.9	65.5	66.4	67.3	68.2	69.2	69.3
102.5°	79.9	80.0	80.2	80.3	80.5	81.0	81.8	82.6	83.5	84.3	84.6
105°	105.3	105.4	105.4	105.6	105.7	105.9	106.3	106.7	107.1	107.5	107.8
107.5°	131.9	132.1	132.1	132.3	132.5	132.5	132.5	132.6	132.7	132.8	133.0
110°	150.0	150.2	150.4	150.6	150.8	150.8	150.8	150.7	150.6	150.4	150.3



TEST NUMBER: P332935-927

CATALOG NUMBER: SA4XXRDIP-C795D590U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	168.8	168.8	168.9	168.9	169.0	168.9	168.7	168.5	168.3	168.2	168.1
115°	197.0	197.0	197.0	197.0	197.0	196.9	196.7	196.5	196.3	196.1	196.0
117.5°	223.6	223.6	223.7	223.8	223.9	223.9	223.7	223.6	223.4	223.3	222.9
120°	241.3	241.7	242.1	242.5	242.9	243.0	242.6	242.3	242.0	241.7	241.2
122.5°	259.7	259.8	260.0	260.2	260.3	260.4	260.2	260.1	259.9	259.8	259.4
125°	286.9	286.9	286.9	286.9	286.9	286.8	286.8	286.7	286.5	286.5	286.2
127.5°	311.6	311.9	312.2	312.5	312.8	312.8	312.7	312.5	312.4	312.2	312.0
130°	328.9	329.2	329.5	329.9	330.1	330.3	330.3	330.3	330.3	330.3	330.1
132.5°	346.7	346.9	347.1	347.3	347.5	347.6	347.5	347.5	347.4	347.3	347.1
135°	370.0	370.7	371.2	371.9	372.5	372.7	372.7	372.7	372.7	372.7	372.6
137.5°	395.5	395.8	396.1	396.3	396.6	396.9	397.0	397.2	397.4	397.5	397.3
140°	412.5	412.7	412.9	413.1	413.3	413.4	413.4	413.4	413.4	413.4	413.3
142.5°	428.0	428.3	428.5	428.6	428.9	428.9	428.8	428.7	428.6	428.6	428.6
145°	449.6	450.0	450.4	450.8	451.1	451.4	451.5	451.6	451.7	451.8	451.7
147.5°	470.9	471.3	471.8	472.3	472.9	473.0	472.9	472.9	472.8	472.7	472.6
150°	483.9	484.3	484.7	485.1	485.5	485.7	485.7	485.7	485.7	485.7	485.7
152.5°	496.2	496.5	496.7	496.9	497.2	497.3	497.4	497.5	497.6	497.6	497.9
155°	515.1	515.1	515.1	515.1	515.1	515.0	514.9	514.8	514.8	514.6	515.0
157.5°	531.0	530.8	530.6	530.4	530.3	530.1	530.1	530.1	530.1	530.0	530.4
160°	540.3	540.3	540.2	540.1	540.0	539.9	539.8	539.7	539.6	539.5	539.8
162.5°	549.1	548.8	548.5	548.3	548.0	547.8	547.7	547.6	547.6	547.4	548.0
165°	560.7	560.4	560.1	559.8	559.5	559.3	559.0	558.9	558.6	558.5	559.0
167.5°	569.7	569.3	568.8	568.4	568.0	567.8	567.8	567.8	567.8	567.8	568.5
170°	574.7	574.3	573.7	573.2	572.7	572.5	572.6	572.7	572.8	572.9	573.5
172.5°	578.3	577.9	577.5	577.1	576.6	576.5	576.5	576.5	576.5	576.6	577.2
175°	583.3	582.8	582.3	581.8	581.3	581.0	580.9	580.8	580.7	580.6	581.3
177.5°	584.9	584.6	584.2	583.8	583.3	583.1	583.1	583.1	583.1	583.1	583.7
180°	584.2	584.2	584.2	584.2	584.2	584.2	584.2	584.2	584.2	584.2	584.2



TEST NUMBER: P332935-927

CATALOG NUMBER: SA4XXRDIP-C795D590U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5	1100.5
2.5°	1096.4	1098.0	1099.6	1100.4	1100.3	1100.1	1099.9	1099.8
5°	1089.0	1090.9	1092.8	1093.5	1093.1	1092.8	1092.4	1092.0
7.5°	1074.5	1075.8	1077.0	1077.2	1076.7	1076.0	1075.5	1074.8
10°	1061.5	1062.2	1063.0	1063.0	1062.2	1061.5	1060.7	1060.0
12.5°	1045.4	1045.8	1046.3	1046.0	1045.0	1043.9	1042.8	1041.8
15°	1017.2	1016.8	1016.4	1015.6	1014.2	1012.9	1011.6	1010.3
17.5°	983.1	982.1	981.0	979.5	977.5	975.5	973.5	971.5
20°	959.3	957.7	956.2	954.3	951.9	949.4	947.0	944.6
22.5°	932.9	930.6	928.4	926.2	924.2	922.3	920.3	918.3
25°	890.2	887.0	883.8	881.3	879.4	877.6	875.7	873.8
27.5°	846.7	842.8	838.8	835.5	832.8	830.1	827.4	824.7
30°	815.6	810.9	806.2	802.3	799.4	796.4	793.4	790.4
32.5°	783.7	778.3	772.9	768.7	765.9	763.0	760.2	757.3
35°	736.3	730.0	723.7	718.7	715.4	712.0	708.6	705.3
37.5°	685.5	678.3	671.2	666.0	662.7	659.3	655.9	652.5
40°	651.6	643.7	635.9	630.3	626.9	623.5	620.2	616.8
42.5°	618.3	610.3	602.3	596.5	592.9	589.5	586.0	582.4
45°	567.3	558.1	548.9	542.6	539.2	535.9	532.5	529.2
47.5°	515.9	506.4	496.9	490.2	486.6	482.8	479.1	475.4
50°	481.8	472.5	463.0	456.6	453.0	449.5	445.9	442.4
52.5°	447.8	438.3	428.7	422.2	418.4	414.7	411.1	407.3
55°	397.6	387.9	378.2	371.5	368.0	364.4	360.8	357.3
57.5°	348.6	338.7	328.8	322.6	319.9	317.2	314.5	311.8
60°	315.9	306.2	296.4	290.0	287.1	284.1	281.1	278.1
62.5°	283.7	274.7	265.7	260.0	257.6	255.2	252.8	250.4
65°	237.5	229.5	221.4	216.3	214.0	211.8	209.5	207.3
67.5°	195.1	188.2	181.3	176.6	174.1	171.6	169.1	166.7
70°	166.3	160.1	153.9	149.9	148.1	146.2	144.3	142.4
72.5°	140.5	135.1	129.8	126.4	124.7	122.9	121.2	119.5
75°	103.5	99.2	94.8	92.1	91.0	89.9	88.7	87.6
77.5°	73.2	70.7	68.1	66.7	66.4	66.1	65.8	65.4
80°	56.2	55.6	55.1	54.7	54.5	54.3	54.1	53.9
82.5°	43.6	43.3	42.9	42.5	42.4	42.1	42.0	41.8
85°	25.3	25.0	24.6	24.4	24.4	24.4	24.4	24.4
87.5°	11.3	11.3	11.3	11.4	11.6	11.8	12.0	12.1
90°	11.2	11.7	12.4	12.8	13.0	13.2	13.4	13.5
92.5°	18.6	19.0	19.3	19.6	19.7	19.8	20.0	20.0
95°	34.9	35.3	35.6	35.7	35.7	35.7	35.7	35.7
97.5°	55.1	55.4	55.8	55.9	55.9	55.9	55.9	55.9
100°	69.6	69.7	69.9	70.0	70.0	70.0	70.0	70.0
102.5°	84.8	85.2	85.4	85.6	85.7	85.8	85.9	86.0
105°	108.1	108.4	108.8	109.0	109.3	109.6	110.0	110.3
107.5°	133.3	133.6	133.9	134.0	134.0	134.0	134.0	134.0
110°	150.0	149.9	149.6	149.7	150.0	150.3	150.6	150.9



TEST NUMBER: P332935-927

CATALOG NUMBER: SA4XXRDIP-C795D590U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	168.1	168.0	168.0	168.0	168.1	168.1	168.2	168.3
115°	195.9	195.8	195.7	195.6	195.5	195.4	195.3	195.2
117.5°	222.6	222.3	221.9	221.7	221.4	221.3	221.0	220.9
120°	240.7	240.2	239.7	239.6	239.8	240.0	240.2	240.3
122.5°	259.1	258.8	258.4	258.1	257.7	257.4	257.0	256.7
125°	286.1	285.8	285.7	285.4	285.3	285.0	284.9	284.6
127.5°	311.8	311.6	311.4	311.2	311.1	310.9	310.8	310.6
130°	329.9	329.7	329.5	329.2	328.8	328.4	328.0	327.6
132.5°	346.9	346.7	346.5	346.3	346.1	345.9	345.8	345.6
135°	372.3	372.2	371.9	371.7	371.4	371.1	370.8	370.5
137.5°	397.0	396.7	396.5	396.3	396.4	396.5	396.6	396.6
140°	413.2	413.1	413.0	412.9	412.8	412.7	412.6	412.5
142.5°	428.6	428.6	428.5	428.5	428.5	428.5	428.4	428.4
145°	451.6	451.5	451.4	451.2	450.9	450.6	450.3	450.0
147.5°	472.5	472.5	472.4	472.3	472.2	472.1	472.0	471.9
150°	485.7	485.7	485.7	485.7	485.5	485.4	485.4	485.3
152.5°	498.1	498.4	498.6	498.6	498.4	498.0	497.8	497.6
155°	515.4	515.8	516.3	516.3	515.8	515.4	515.0	514.6
157.5°	530.7	531.0	531.3	531.2	530.9	530.6	530.2	529.9
160°	540.1	540.3	540.7	540.6	540.1	539.6	539.1	538.6
162.5°	548.5	549.1	549.6	549.6	549.1	548.6	548.1	547.6
165°	559.7	560.2	560.9	560.9	560.5	560.2	559.8	559.4
167.5°	569.0	569.7	570.3	570.2	569.7	569.0	568.4	567.8
170°	574.1	574.7	575.3	575.3	574.6	573.9	573.1	572.4
172.5°	577.9	578.6	579.2	579.2	578.5	577.8	577.1	576.5
175°	582.0	582.7	583.4	583.4	582.7	582.0	581.3	580.6
177.5°	584.2	584.8	585.3	585.3	584.7	584.1	583.4	582.7
180°	584.2	584.2	584.2	584.2	584.2	584.2	584.2	584.2

(END OF REPORT)