

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332660-830

Luminaire Tested: **SA4XXDIP-C1020D1035U830-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332660-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXDIP-C1020D1035U830-4F0-1E-UDD-F4  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1035 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 7659.4 lumens  
Efficiency: N/A  
Efficacy: 126.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 60.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332660-830  
CATALOG NUMBER: SA4XXDIP-C1020D1035U830-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

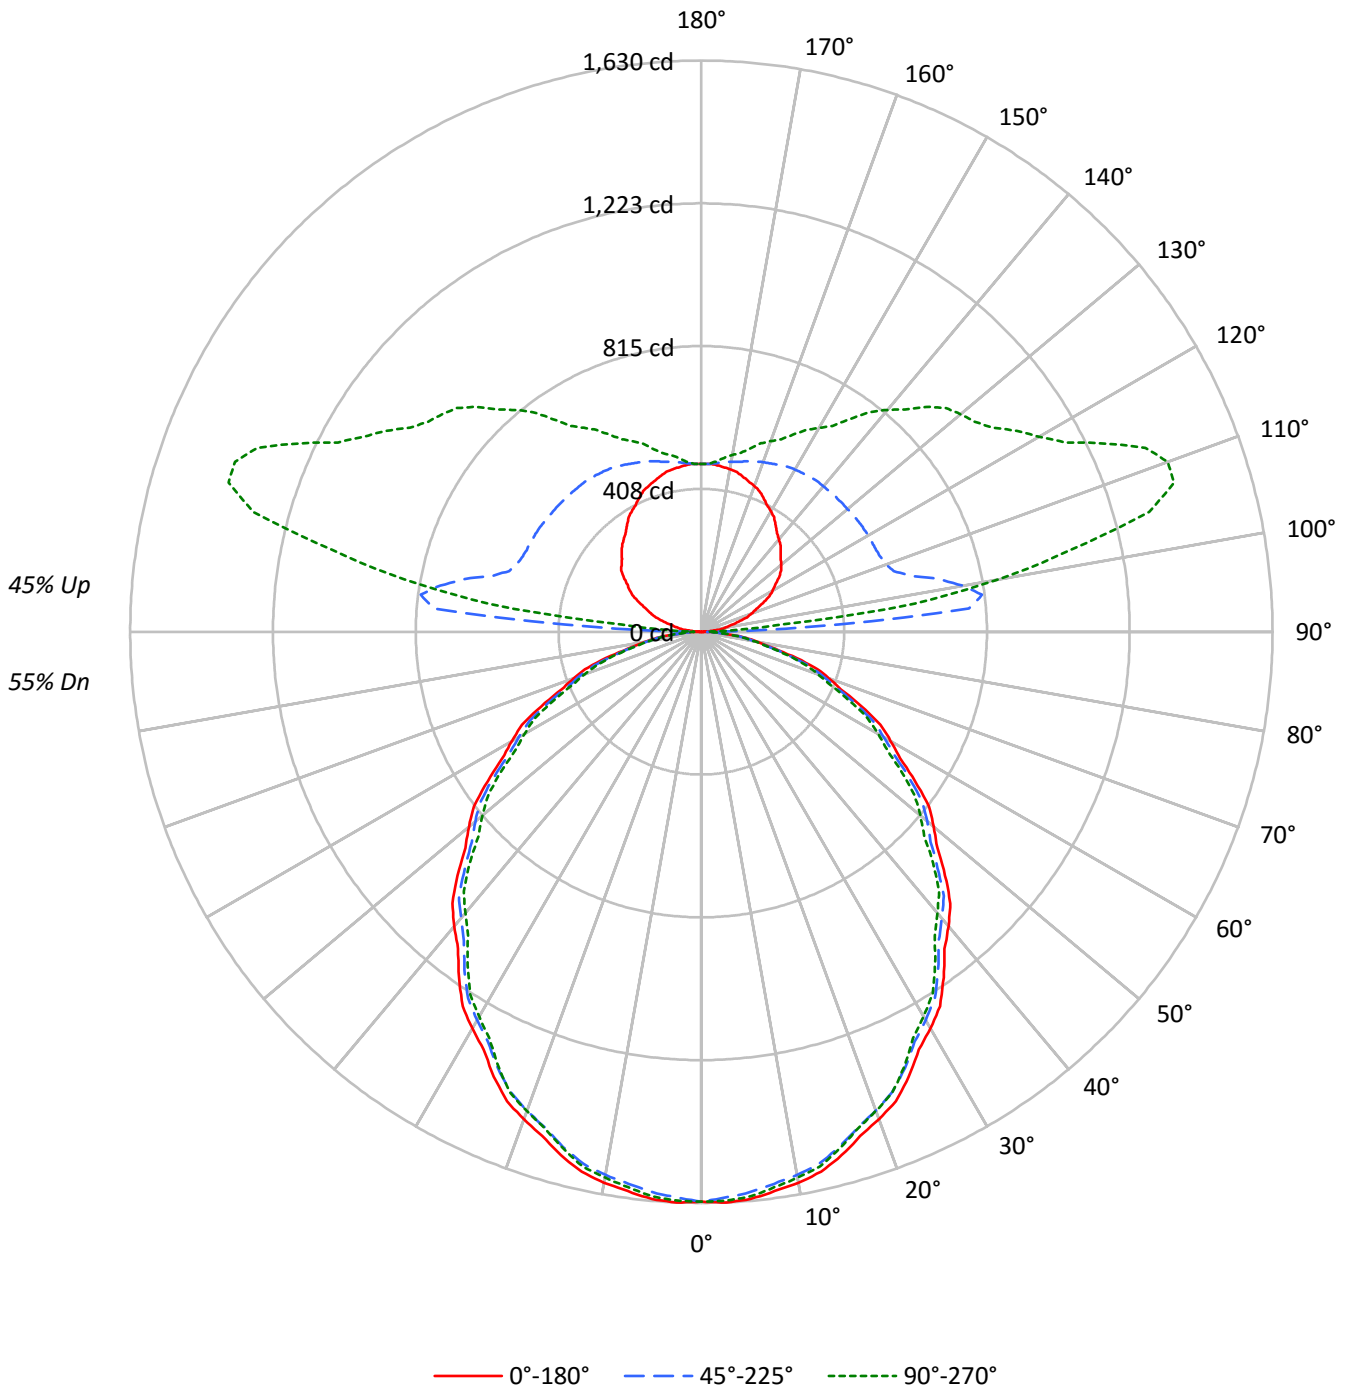



TEST NUMBER: P332660-830

CATALOG NUMBER: SA4XXDIP-C1020D1035U830-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60	55
1	99	94	90	87	91	88	84	81	75	73	70	64	62	60	53	52	51	46
2	90	82	76	71	83	77	71	67	66	62	58	56	53	50	47	45	43	38
3	82	72	65	59	76	67	61	56	58	53	49	50	46	43	41	39	36	32
4	75	64	56	50	69	60	53	47	52	46	42	44	40	37	37	34	31	28
5	69	57	49	43	64	53	46	41	46	40	36	40	35	32	33	30	27	24
6	64	51	43	37	59	48	41	35	42	36	31	36	31	28	30	27	24	21
7	59	46	38	33	54	43	36	31	38	32	28	33	28	25	28	24	21	19
8	55	42	34	29	51	39	32	28	35	29	25	30	25	22	25	22	19	17
9	51	38	31	26	47	36	29	25	32	26	22	27	23	20	24	20	17	15
10	47	35	28	23	44	33	27	22	29	24	20	25	21	18	22	18	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	13130	13130	13130
5°	13169	13011	13105
10°	13086	12904	12969
15°	12929	12721	12754
20°	12718	12494	12506
25°	12479	12235	12200
30°	12185	11929	11820
35°	11880	11610	11456
40°	11564	11248	11041
45°	11233	10891	10683
50°	10868	10574	10246
55°	10473	10162	9831
60°	10078	9700	9405
65°	9635	9259	8886
70°	9135	8674	8337
75°	8372	7966	7764
80°	7452	7146	6969
85°	6521	6280	6150



TEST NUMBER: P332660-830

CATALOG NUMBER: SA4XXDIP-C1020D1035U830-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	153.2	2.0
10°-20°	431.5	5.6
20°-30°	635.2	8.3
30°-40°	738.4	9.6
40°-50°	738.4	9.6
50°-60°	645.9	8.4
60°-70°	479.7	6.3
70°-80°	272.5	3.6
80°-90°	81.3	1.1
90°-100°	345.9	4.5
100°-110°	720.0	9.4
110°-120°	644.9	8.4
120°-130°	542.4	7.1
130°-140°	452.3	5.9
140°-150°	345.5	4.5
150°-160°	242.9	3.2
160°-170°	142.9	1.9
170°-180°	46.5	0.6
0°-30°	1219.8	15.9
0°-40°	1958.2	25.6
0°-60°	3342.6	43.6
0°-90°	4176.1	54.5
90°-120°	1710.8	22.3
90°-150°	3051.1	39.8
90°-180°	3483.0	45.5
0°-180°	7659.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1626	1626	1626	1626	1626	
5°	1625	1619	1606	1619	1617	154
15°	1547	1541	1522	1529	1526	436
25°	1401	1391	1374	1374	1370	644
35°	1205	1196	1178	1169	1162	753
45°	984	974	954	940	936	758
55°	744	739	722	707	698	666
65°	504	497	485	472	465	499
75°	268	262	255	250	249	285
85°	70	70	68	68	66	77
90°	1	8	17	19	20	5
95°	31	98	767	380	230	35
105°	110	159	617	1329	1324	117
115°	194	243	550	1058	1271	192
125°	270	321	548	900	1014	240
135°	321	382	543	799	907	248
145°	370	423	540	674	741	232
155°	421	454	525	595	620	194
165°	458	472	503	533	541	129
175°	478	479	483	489	487	45
180°	479	479	479	479	479	



TEST NUMBER: P332660-830

CATALOG NUMBER: SA4XXDIP-C1020D1035U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4
2.5°	1630.5	1629.8	1629.1	1628.4	1627.8	1626.1	1623.5	1621.0	1618.4	1615.9	1618.3
5°	1625.0	1623.9	1622.8	1621.6	1620.4	1618.3	1615.0	1611.8	1608.7	1605.5	1608.7
7.5°	1610.0	1608.7	1607.6	1606.5	1605.3	1603.0	1599.4	1595.9	1592.3	1588.8	1591.4
10°	1596.4	1595.3	1594.0	1592.9	1591.8	1589.3	1585.5	1581.8	1578.0	1574.2	1576.5
12.5°	1578.7	1577.5	1576.3	1575.2	1574.0	1571.4	1567.4	1563.5	1559.4	1555.5	1558.0
15°	1546.9	1545.7	1544.5	1543.4	1542.2	1539.5	1535.1	1530.8	1526.4	1522.1	1523.8
17.5°	1508.5	1507.1	1505.6	1504.2	1502.8	1500.0	1495.8	1491.8	1487.6	1483.6	1484.6
20°	1480.4	1478.9	1477.5	1476.0	1474.6	1471.7	1467.4	1463.0	1458.7	1454.3	1455.2
22.5°	1450.2	1448.2	1446.3	1444.4	1442.6	1439.4	1435.0	1430.7	1426.3	1422.0	1423.6
25°	1400.9	1398.9	1396.8	1394.8	1392.8	1389.8	1385.7	1381.7	1377.6	1373.6	1373.9
27.5°	1344.6	1342.6	1340.4	1338.3	1336.2	1333.3	1329.6	1325.8	1322.0	1318.2	1317.6
30°	1307.1	1304.8	1302.4	1300.1	1297.8	1294.8	1291.0	1287.2	1283.5	1279.7	1278.6
32.5°	1267.4	1265.4	1263.3	1261.2	1259.1	1256.0	1252.1	1248.1	1244.1	1240.1	1238.7
35°	1205.4	1203.4	1201.4	1199.4	1197.3	1194.3	1190.2	1186.2	1182.1	1178.1	1176.0
37.5°	1140.0	1138.1	1136.3	1134.4	1132.6	1129.5	1125.1	1120.8	1116.4	1112.1	1109.9
40°	1097.3	1095.0	1092.6	1090.3	1088.0	1084.7	1080.3	1076.0	1071.7	1067.3	1064.4
42.5°	1051.4	1050.0	1048.6	1047.3	1045.8	1042.7	1037.9	1033.1	1028.3	1023.5	1020.1
45°	983.9	981.8	979.9	977.8	975.8	972.4	967.8	963.2	958.6	953.9	950.7
47.5°	913.2	911.9	910.5	909.1	907.7	904.8	900.6	896.3	892.0	887.7	884.1
50°	865.3	864.1	863.0	861.9	860.6	858.1	854.0	850.0	845.9	841.9	837.8
52.5°	818.4	817.0	815.6	814.3	812.8	810.0	805.7	801.4	797.1	792.9	789.3
55°	744.1	743.2	742.3	741.5	740.6	738.2	734.1	730.1	726.0	722.0	718.5
57.5°	673.3	672.2	671.3	670.2	669.3	666.8	662.8	658.8	654.8	650.8	647.5
60°	624.2	622.7	621.3	619.9	618.4	615.9	612.1	608.3	604.5	600.8	598.1
62.5°	576.3	575.0	573.8	572.6	571.4	568.8	564.8	560.8	556.8	552.8	550.4
65°	504.4	502.8	501.4	500.0	498.5	496.3	493.4	490.6	487.7	484.7	481.9
67.5°	431.9	430.6	429.2	427.9	426.5	424.5	421.7	419.0	416.1	413.4	410.6
70°	387.0	385.0	383.0	381.0	378.9	376.7	374.5	372.1	369.9	367.5	365.1
72.5°	339.1	337.1	335.1	333.0	331.0	329.0	327.2	325.4	323.5	321.6	319.8
75°	268.4	267.0	265.5	264.1	262.7	261.2	259.8	258.4	256.8	255.4	254.3
77.5°	201.0	200.3	199.6	199.1	198.4	197.5	196.1	194.9	193.6	192.4	192.0
80°	160.3	159.4	158.5	157.7	156.8	156.1	155.5	155.0	154.4	153.7	153.2
82.5°	120.6	120.3	119.9	119.4	119.0	118.8	118.7	118.6	118.5	118.3	118.0
85°	70.4	70.4	70.4	70.4	70.4	70.1	69.5	68.9	68.3	67.8	67.8
87.5°	27.3	27.4	27.8	27.7	27.7	27.4	28.4	28.1	28.3	28.4	28.2
90°	0.9	2.8	5.7	6.6	7.5	7.5	13.2	13.2	15.1	17.0	16.0
92.5°	10.7	15.6	24.5	35.9	49.7	69.3	117.1	190.1	261.2	298.5	248.6
95°	31.0	33.8	43.3	55.5	78.1	117.6	199.4	353.8	578.7	766.9	788.5
97.5°	55.7	55.7	63.8	75.1	94.4	127.6	190.7	318.0	541.6	807.7	990.6
100°	71.5	71.5	78.1	89.4	107.3	137.4	192.9	299.3	491.2	756.5	997.4
102.5°	86.5	88.0	93.9	104.4	121.6	150.1	200.4	294.0	457.3	692.6	940.9
105°	110.1	112.9	117.6	128.9	145.8	173.1	218.3	296.4	428.1	617.3	838.4
107.5°	136.1	138.0	142.6	154.7	170.9	197.7	239.2	310.3	422.8	575.1	755.5
110°	153.4	155.2	159.9	171.3	188.2	213.6	255.0	320.8	424.3	560.8	714.2



TEST NUMBER: P332660-830

CATALOG NUMBER: SA4XXDIP-C1020D1035U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	169.9	171.8	177.3	187.8	204.7	230.2	270.0	332.2	428.9	554.0	690.9
115°	193.9	196.6	203.2	212.6	230.5	255.9	293.6	350.1	437.5	550.4	669.0
117.5°	218.7	221.3	227.2	237.5	254.2	280.6	316.3	368.3	446.8	549.5	659.2
120°	235.3	237.1	243.7	254.0	270.0	296.4	332.2	381.1	453.6	549.5	653.9
122.5°	250.3	252.1	258.7	268.3	285.9	311.4	347.2	393.1	460.3	548.7	647.9
125°	270.0	273.8	279.5	289.8	307.6	334.0	367.9	411.2	470.5	547.6	638.0
127.5°	287.6	290.6	297.4	309.2	327.8	354.4	387.1	426.8	478.5	545.5	624.6
130°	297.4	301.1	308.6	322.7	340.6	367.9	399.9	436.6	484.6	544.8	616.3
132.5°	307.1	310.1	319.9	333.3	352.7	378.4	410.5	446.4	489.8	544.0	608.8
135°	320.8	324.6	334.0	350.1	369.8	394.3	425.3	459.2	497.8	542.9	597.5
137.5°	334.6	338.2	348.6	363.7	384.3	407.6	436.6	468.3	502.5	542.7	587.7
140°	344.4	347.2	357.6	373.5	393.3	415.9	444.1	474.2	506.2	542.0	582.5
142.5°	355.0	357.8	367.3	382.6	401.6	423.4	450.9	478.7	509.3	542.0	578.0
145°	369.8	372.6	382.0	395.2	413.1	433.8	458.3	483.6	511.0	540.1	570.2
147.5°	386.5	387.5	395.8	409.3	424.1	442.8	465.8	488.0	511.9	536.7	563.3
150°	397.1	398.0	405.6	416.9	430.9	448.8	469.6	490.2	511.9	534.4	558.0
152.5°	406.9	407.1	414.6	425.1	437.7	454.1	472.6	491.7	510.4	530.7	552.0
155°	420.6	421.5	427.2	436.6	447.0	461.1	477.0	493.0	508.1	525.1	542.9
157.5°	433.9	433.9	439.2	446.6	455.6	466.7	480.2	493.0	505.7	519.2	533.7
160°	442.2	442.2	446.0	452.6	460.1	470.5	481.7	493.0	503.4	514.7	527.0
162.5°	449.8	449.0	452.0	457.9	464.7	472.8	483.2	493.0	501.1	510.2	520.9
165°	458.3	458.3	460.1	464.9	469.6	475.1	483.6	491.2	496.8	503.4	511.0
167.5°	466.7	465.8	466.7	470.3	473.0	477.2	483.4	488.9	492.3	496.6	501.9
170°	470.5	469.6	470.5	473.3	475.1	478.0	482.7	487.4	489.3	492.1	495.9
172.5°	474.2	473.3	473.4	475.5	476.6	478.7	481.9	485.9	486.3	487.6	490.6
175°	478.0	477.0	477.0	478.0	478.9	478.9	480.8	483.6	482.7	482.7	484.6
177.5°	479.7	478.9	478.2	478.9	478.9	478.9	479.7	481.2	479.7	479.7	480.4
180°	478.9	478.9	478.9	478.9	478.9	478.9	478.9	478.9	478.9	478.9	478.9



TEST NUMBER: P332660-830

CATALOG NUMBER: SA4XXDIP-C1020D1035U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4
2.5°	1620.5	1622.9	1625.2	1626.3	1626.0	1625.8	1625.5	1625.3
5°	1611.8	1615.0	1618.3	1619.6	1619.0	1618.3	1617.8	1617.2
7.5°	1593.9	1596.5	1599.0	1600.2	1599.8	1599.4	1599.0	1598.7
10°	1578.9	1581.2	1583.5	1584.3	1583.8	1583.2	1582.6	1582.1
12.5°	1560.6	1563.1	1565.7	1566.5	1565.8	1564.9	1564.1	1563.3
15°	1525.6	1527.3	1529.1	1529.5	1528.6	1527.8	1526.9	1526.0
17.5°	1485.7	1486.9	1487.9	1488.2	1487.6	1487.0	1486.5	1485.8
20°	1456.0	1457.0	1457.8	1457.9	1457.4	1456.8	1456.2	1455.7
22.5°	1425.1	1426.7	1428.2	1428.5	1427.5	1426.4	1425.4	1424.4
25°	1374.1	1374.4	1374.7	1374.2	1373.1	1372.0	1370.7	1369.6
27.5°	1316.9	1316.2	1315.5	1314.5	1313.0	1311.5	1310.0	1308.6
30°	1277.4	1276.2	1275.1	1273.8	1272.3	1270.8	1269.4	1268.0
32.5°	1237.3	1236.0	1234.5	1233.1	1231.6	1230.2	1228.8	1227.3
35°	1174.0	1172.0	1170.0	1168.2	1166.8	1165.4	1163.9	1162.4
37.5°	1107.7	1105.5	1103.3	1101.3	1099.4	1097.4	1095.5	1093.6
40°	1061.5	1058.6	1055.7	1053.6	1052.1	1050.7	1049.2	1047.7
42.5°	1016.8	1013.4	1010.0	1007.9	1006.9	1005.9	1004.9	1004.0
45°	947.5	944.3	941.1	939.1	938.3	937.5	936.5	935.7
47.5°	880.5	876.9	873.4	870.4	868.3	866.0	863.8	861.7
50°	833.8	829.7	825.7	822.7	821.0	819.3	817.6	815.8
52.5°	785.7	782.0	778.4	775.6	773.4	771.2	769.0	766.8
55°	715.0	711.5	708.0	705.5	703.7	702.0	700.2	698.5
57.5°	644.2	640.9	637.6	635.1	633.4	631.8	630.1	628.4
60°	595.6	593.0	590.3	588.3	586.8	585.4	584.0	582.5
62.5°	548.1	545.6	543.3	541.4	540.0	538.5	537.1	535.6
65°	479.0	476.1	473.2	471.0	469.6	468.2	466.7	465.2
67.5°	407.8	405.0	402.3	400.7	400.2	399.8	399.4	399.1
70°	362.9	360.5	358.3	356.7	355.8	354.9	354.0	353.2
72.5°	317.9	316.0	314.2	312.8	312.0	311.1	310.3	309.3
75°	253.1	251.9	250.8	250.1	249.8	249.5	249.2	248.9
77.5°	191.6	191.3	191.0	190.4	189.6	188.9	188.1	187.4
80°	152.6	152.0	151.5	151.0	150.7	150.4	150.1	149.9
82.5°	117.6	117.3	117.0	116.6	116.3	116.0	115.7	115.5
85°	67.8	67.8	67.8	67.6	67.3	67.0	66.7	66.4
87.5°	28.4	28.6	28.7	28.7	28.9	29.1	28.9	28.9
90°	17.0	17.9	18.9	18.9	19.8	20.7	19.8	19.8
92.5°	184.8	139.1	110.7	91.8	80.8	75.7	72.5	72.5
95°	697.2	551.4	425.3	334.0	287.9	258.7	241.9	229.6
97.5°	1030.2	975.9	883.9	785.7	718.1	661.5	633.3	613.7
100°	1134.8	1153.6	1107.5	1037.8	956.0	898.6	870.3	862.9
102.5°	1129.5	1222.9	1236.2	1207.2	1157.0	1115.4	1085.7	1079.7
105°	1053.9	1216.6	1309.8	1348.4	1350.3	1342.7	1329.6	1323.9
107.5°	946.4	1119.7	1250.9	1334.8	1381.3	1402.8	1412.2	1414.7
110°	881.7	1044.4	1180.9	1284.4	1351.2	1390.7	1407.7	1416.2





TEST NUMBER: P332660-830

CATALOG NUMBER: SA4XXDIP-C1020D1035U830-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	834.2	978.2	1107.1	1210.6	1286.5	1334.3	1358.0	1371.7
115°	786.6	902.4	1012.5	1102.8	1177.1	1233.6	1263.7	1271.2
117.5°	763.3	859.1	945.7	1022.3	1085.7	1133.1	1163.6	1169.4
120°	752.7	840.3	915.6	982.3	1035.9	1077.4	1101.8	1112.2
122.5°	743.8	828.2	896.7	955.3	1000.6	1035.9	1056.7	1067.1
125°	728.3	809.2	874.1	925.9	963.6	990.8	1008.7	1014.4
127.5°	709.5	786.8	851.6	900.7	938.5	962.8	977.8	983.4
130°	694.5	768.7	832.7	882.6	921.1	944.7	959.8	965.4
132.5°	678.6	748.5	810.9	860.8	898.6	925.1	939.4	945.1
135°	656.8	717.9	775.3	822.4	860.1	886.4	901.4	907.1
137.5°	637.1	688.8	737.2	779.7	814.8	840.8	853.3	860.1
140°	625.8	670.0	712.3	751.8	784.8	805.5	818.6	826.1
142.5°	615.2	654.1	690.5	724.7	753.8	773.1	784.8	790.0
145°	600.3	632.4	660.5	686.9	710.4	726.4	735.8	740.6
147.5°	588.1	613.5	636.1	656.8	674.1	687.9	695.0	696.6
150°	580.6	602.2	621.0	638.0	653.0	665.2	670.9	671.8
152.5°	572.3	590.9	608.2	622.2	635.0	644.9	648.3	649.2
155°	559.9	575.0	589.0	600.3	609.7	617.3	620.1	620.1
157.5°	546.5	559.1	571.0	580.0	587.1	592.8	594.5	594.5
160°	538.2	548.6	558.9	566.5	572.1	577.8	578.7	578.7
162.5°	529.9	538.8	546.9	553.6	557.8	563.5	564.4	563.6
165°	518.5	524.1	530.7	535.4	539.1	542.9	542.0	541.0
167.5°	507.4	511.7	517.0	519.8	521.7	524.1	524.0	523.2
170°	500.6	503.4	507.2	510.0	511.9	512.8	511.9	511.9
172.5°	494.6	496.6	498.9	501.0	502.1	503.0	502.1	500.6
175°	486.4	487.4	489.3	489.3	489.3	491.2	489.3	487.4
177.5°	481.2	481.9	481.9	482.7	481.9	482.7	481.2	479.7
180°	478.9	478.9	478.9	478.9	478.9	478.9	478.9	478.9

(END OF REPORT)