

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332611-830

Luminaire Tested: **SA4XXDIP-C795D1035U830-4F0-1E-UDD-D1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332611-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXDIP-C795D1035U830-4F0-1E-UDD-D1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, DROP SATIN WHITE DIFFUSER
UPLIGHT 1035 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6430.5 lumens
Efficiency: N/A
Efficacy: 123.7 lumens/watt
Spacing Criteria (0/90/45): 1.23 / 1.28 / 1.39
Luminous Opening: Rectangular w/ Sides (W: 0.33' x L: 4' x H: 0.08')
CIE Type: General Diffuse

Input Watts (W): 52
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332611-830
CATALOG NUMBER: SA4XXDIP-C795D1035U830-4F0-1E-UDD-D1

Luminous Intensity Polar Plot

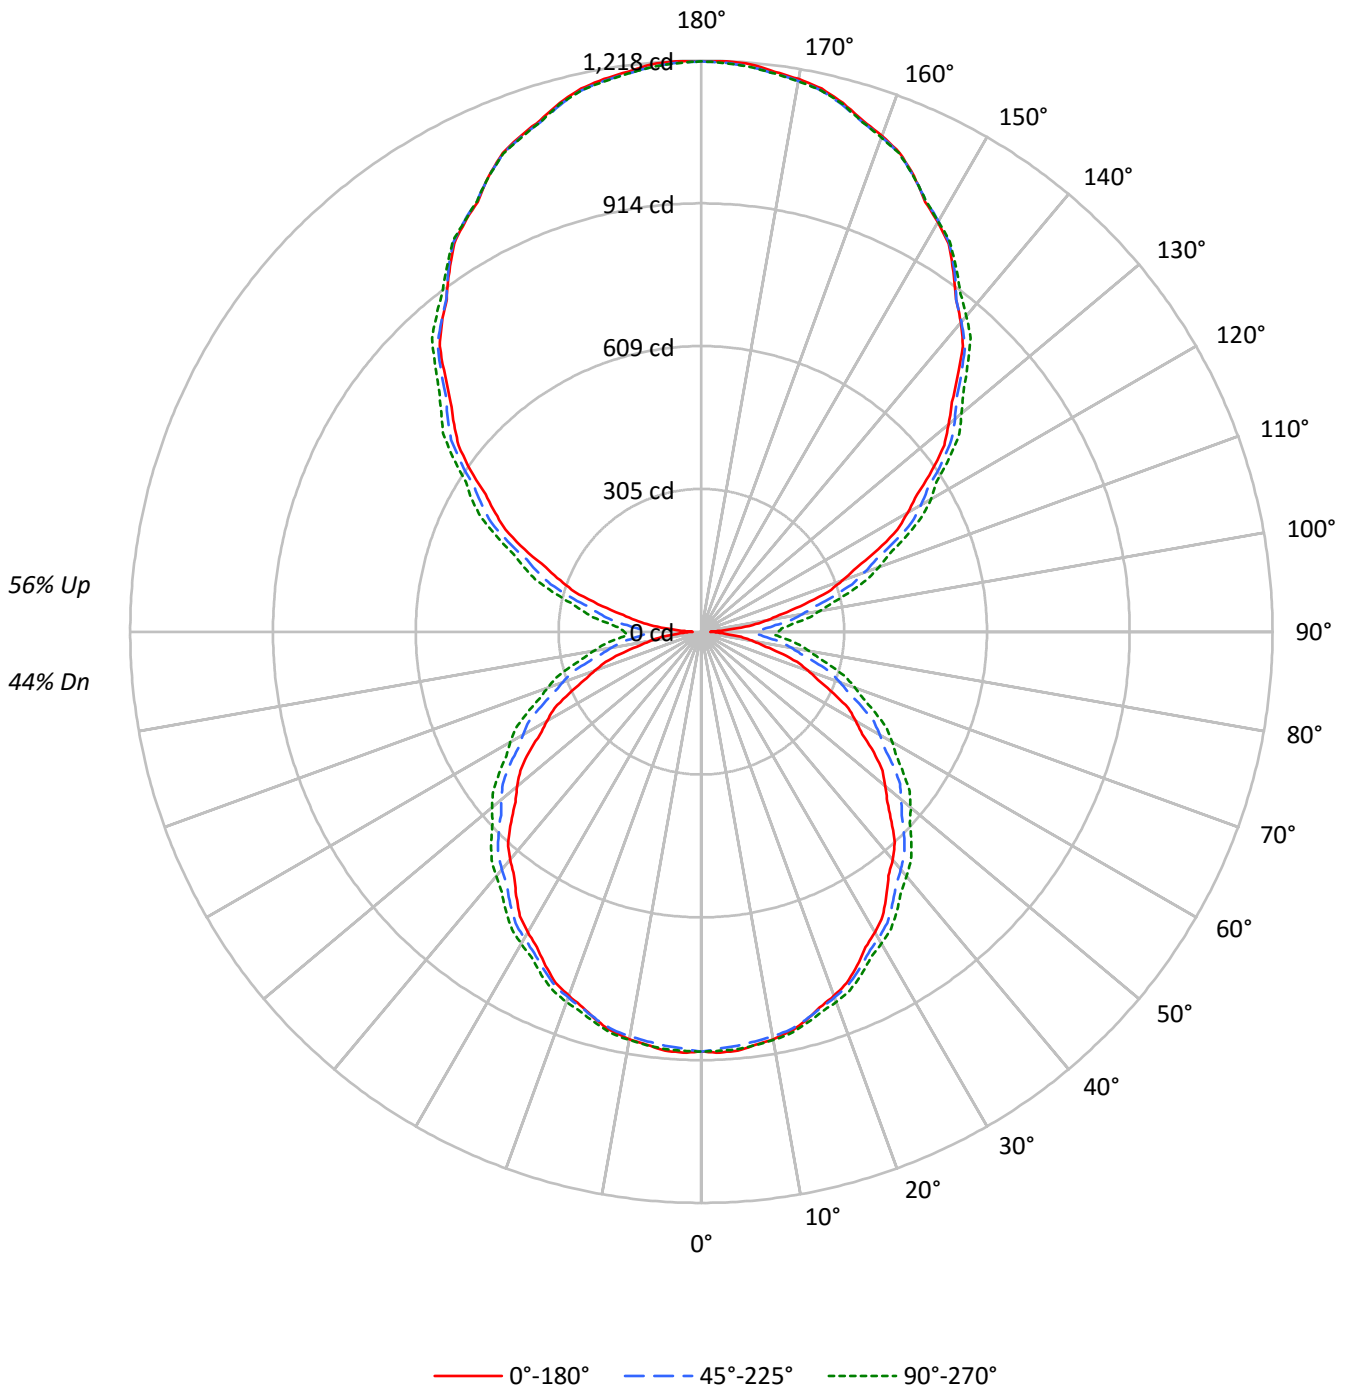



TEST NUMBER: P332611-830

CATALOG NUMBER: SA4XXDIP-C795D1035U830-4F0-1E-UDD-D1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	44		
1	96	91	87	83	87	83	80	76	69	66	64	55	54	52	43	42	41	35		
2	87	79	72	67	79	72	67	62	60	56	52	48	45	43	38	35	34	29		
3	79	69	61	55	72	63	57	51	52	47	43	42	39	36	33	30	28	24		
4	72	61	53	46	65	56	49	43	46	41	37	37	33	30	29	26	24	20		
5	66	54	46	39	60	50	42	37	41	36	31	33	29	26	26	23	21	17		
6	61	48	40	34	55	44	37	32	37	31	27	30	26	23	24	21	18	15		
7	56	43	35	30	51	40	33	28	33	28	24	27	23	20	22	18	16	13		
8	52	39	31	26	47	36	29	24	30	25	21	25	21	18	20	17	14	12		
9	48	36	28	23	44	33	26	22	28	22	19	23	19	16	18	15	13	11		
10	45	33	25	21	41	30	24	19	26	20	17	21	17	14	17	14	12	10		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7228	7228	7228
5°	7250	7064	7083
10°	7205	6948	6943
15°	7141	6814	6777
20°	7044	6667	6616
25°	6934	6501	6439
30°	6815	6336	6256
35°	6681	6168	6097
40°	6573	6008	5930
45°	6413	5859	5787
50°	6278	5689	5636
55°	6138	5529	5459
60°	5920	5324	5298
65°	5683	5104	5098
70°	5394	4853	4868
75°	4992	4579	4659
80°	4540	4312	4453
85°	3980	4075	4334



TEST NUMBER: P332611-830

CATALOG NUMBER: SA4XXDIP-C795D1035U830-4F0-1E-UDD-D1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	84.8	1.3
10°-20°	242.9	3.8
20°-30°	367.3	5.7
30°-40°	444.4	6.9
40°-50°	469.8	7.3
50°-60°	442.2	6.9
60°-70°	366.8	5.7
70°-80°	257.7	4.0
80°-90°	149.3	2.3
90°-100°	166.7	2.6
100°-110°	301.7	4.7
110°-120°	446.4	6.9
120°-130°	556.2	8.6
130°-140°	607.9	9.5
140°-150°	589.2	9.2
150°-160°	493.7	7.7
160°-170°	328.5	5.1
170°-180°	115.0	1.8
0°-30°	695.0	10.8
0°-40°	1139.4	17.7
0°-60°	2051.4	31.9
0°-90°	2825.2	43.9
90°-120°	914.8	14.2
90°-150°	2668.0	41.5
90°-180°	3605.0	56.1
0°-180°	6430.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	895	895	895	895	895	
5°	896	893	886	894	893	85
15°	859	860	857	866	865	242
25°	786	792	795	806	807	362
35°	688	700	710	723	727	431
45°	573	593	612	628	634	443
55°	449	471	500	520	526	400
65°	311	343	377	401	410	308
75°	172	210	252	279	289	183
85°	53	95	140	169	180	57
90°	19	69	120	153	165	14
95°	70	111	159	187	198	73
105°	228	250	290	317	329	243
115°	416	426	455	476	483	411
125°	601	602	624	641	646	536
135°	772	778	785	799	802	598
145°	937	940	941	946	947	586
155°	1072	1072	1072	1075	1072	493
165°	1168	1165	1163	1168	1165	329
175°	1215	1210	1209	1215	1209	115
180°	1216	1216	1216	1216	1216	



TEST NUMBER: P332611-830

CATALOG NUMBER: SA4XXDIP-C795D1035U830-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	895.3	895.3	895.3	895.3	895.3	895.3	895.3	895.3	895.3	895.3	895.3
2.5°	898.5	898.0	897.4	896.9	896.4	895.4	893.9	892.5	891.1	889.7	890.9
5°	896.3	895.6	894.9	894.3	893.6	892.5	890.9	889.4	887.8	886.3	888.1
7.5°	888.6	888.3	887.9	887.5	887.0	886.2	885.0	883.6	882.3	881.1	883.1
10°	882.2	882.0	881.8	881.6	881.4	880.7	879.6	878.4	877.3	876.2	878.3
12.5°	873.5	873.4	873.4	873.3	873.3	872.9	872.1	871.3	870.5	869.8	871.7
15°	859.2	859.4	859.6	859.9	860.1	859.9	859.2	858.6	857.8	857.1	859.2
17.5°	839.7	840.4	841.0	841.8	842.4	842.6	842.5	842.4	842.3	842.2	844.2
20°	826.1	826.8	827.5	828.1	828.8	829.2	829.4	829.6	829.9	830.1	832.4
22.5°	810.9	811.7	812.6	813.4	814.3	814.9	815.3	815.7	816.1	816.5	818.7
25°	786.0	787.3	788.7	790.0	791.4	792.4	793.1	793.7	794.4	795.0	797.5
27.5°	758.4	760.3	762.2	764.2	766.2	767.7	768.7	769.7	770.7	771.8	774.0
30°	739.9	741.7	743.5	745.3	747.1	748.7	750.3	751.8	753.4	754.9	757.3
32.5°	719.8	722.0	724.2	726.2	728.4	730.3	732.1	733.8	735.6	737.3	740.1
35°	687.8	690.4	693.1	695.8	698.4	700.9	703.1	705.4	707.6	709.8	712.9
37.5°	655.4	658.6	661.7	664.7	667.8	670.7	673.4	676.2	679.0	681.7	684.9
40°	634.6	637.5	640.4	643.3	646.2	649.2	652.3	655.4	658.6	661.7	665.1
42.5°	610.6	613.8	617.1	620.3	623.6	627.0	630.7	634.3	638.0	641.6	645.4
45°	573.4	577.7	581.9	586.2	590.4	594.7	598.9	603.1	607.3	611.5	615.4
47.5°	538.0	542.3	546.7	551.1	555.4	560.1	565.0	569.9	574.8	579.7	583.6
50°	512.3	517.2	522.1	527.0	531.9	536.8	541.7	546.6	551.5	556.4	560.9
52.5°	486.6	491.5	496.4	501.3	506.2	511.5	517.1	522.7	528.4	534.0	538.4
55°	449.1	453.8	458.5	463.2	467.9	473.5	480.2	486.9	493.6	500.3	504.7
57.5°	407.3	413.0	418.9	424.6	430.4	436.6	443.3	449.9	456.6	463.2	468.4
60°	379.9	385.8	391.5	397.4	403.1	409.7	417.1	424.4	431.8	439.1	444.2
62.5°	353.5	359.9	366.2	372.5	378.8	385.7	393.0	400.4	407.7	415.1	420.2
65°	310.8	317.9	325.1	332.2	339.3	346.7	354.2	361.8	369.4	376.9	382.5
67.5°	269.7	277.3	284.8	292.4	300.0	307.8	315.9	324.0	332.2	340.3	345.9
70°	241.6	249.2	256.7	264.4	271.9	279.9	288.4	296.9	305.3	313.8	319.8
72.5°	214.3	222.1	229.9	237.6	245.3	253.7	262.8	271.7	280.8	289.7	295.6
75°	172.5	180.7	188.9	197.2	205.4	214.2	223.6	232.9	242.3	251.7	257.9
77.5°	133.4	142.0	150.8	159.6	168.2	177.6	187.4	197.2	207.0	216.8	223.1
80°	109.2	118.2	127.1	136.0	145.0	154.3	164.1	173.9	183.7	193.5	200.2
82.5°	85.2	94.4	103.8	113.0	122.2	131.9	141.7	151.5	161.3	171.1	177.9
85°	53.2	62.5	71.8	81.2	90.6	100.3	110.3	120.3	130.4	140.3	147.0
87.5°	30.3	39.8	49.3	58.9	68.4	78.2	88.3	98.4	108.6	118.7	125.4
90°	18.9	30.1	41.3	52.5	63.7	74.9	86.1	97.5	108.7	120.0	127.6
92.5°	35.3	46.0	56.6	67.3	77.9	88.7	99.4	110.2	120.9	131.7	138.7
95°	69.5	78.7	87.9	97.2	106.4	116.3	127.0	137.5	148.2	158.7	165.3
97.5°	110.5	118.3	126.1	133.9	141.8	151.1	161.8	172.6	183.3	194.1	200.7
100°	142.7	149.4	156.0	162.6	169.3	177.9	188.4	199.0	209.5	220.2	226.6
102.5°	177.4	182.8	188.2	193.6	199.0	206.8	217.1	227.2	237.5	247.7	254.2
105°	228.2	232.9	237.5	242.2	246.9	253.7	262.9	271.9	281.0	290.1	296.2
107.5°	283.5	287.5	291.3	295.2	299.2	305.1	313.0	320.9	328.9	336.8	342.8
110°	320.4	323.9	327.4	330.9	334.5	340.1	347.7	355.2	362.9	370.4	375.1



TEST NUMBER: P332611-830

CATALOG NUMBER: SA4XXDIP-C795D1035U830-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	358.7	361.6	364.4	367.2	370.0	375.0	382.1	389.2	396.2	403.3	408.1
115°	416.2	418.2	420.2	422.3	424.2	428.6	435.3	442.0	448.7	455.4	460.1
117.5°	471.3	472.7	474.1	475.4	476.8	480.7	487.0	493.3	499.7	506.1	510.0
120°	507.4	508.9	510.4	511.9	513.4	517.1	522.9	528.8	534.6	540.5	543.8
122.5°	545.7	546.2	546.7	547.1	547.6	550.8	556.6	562.4	568.3	574.0	577.8
125°	601.4	601.2	601.0	600.8	600.5	603.1	608.4	613.8	619.2	624.5	628.3
127.5°	652.6	653.0	653.4	653.7	654.2	656.4	660.3	664.2	668.2	672.1	675.7
130°	687.9	688.3	688.7	689.1	689.6	691.5	695.0	698.6	702.2	705.8	709.4
132.5°	724.8	725.0	725.3	725.5	725.8	727.2	729.9	732.5	735.3	737.9	741.3
135°	772.5	773.7	775.1	776.3	777.5	778.9	780.5	782.0	783.6	785.1	788.3
137.5°	825.6	826.0	826.3	826.7	827.0	827.7	828.9	829.9	831.0	832.1	834.8
140°	860.9	861.1	861.3	861.5	861.8	862.0	862.1	862.3	862.6	862.8	865.5
142.5°	892.5	892.9	893.2	893.6	894.0	894.0	893.7	893.4	893.2	892.9	895.3
145°	937.1	937.7	938.3	939.0	939.5	939.9	940.2	940.4	940.6	940.8	941.9
147.5°	981.5	982.2	983.1	983.8	984.6	985.0	984.8	984.6	984.4	984.3	984.3
150°	1008.6	1009.2	1009.8	1010.4	1011.1	1011.3	1011.3	1011.3	1011.3	1011.3	1011.3
152.5°	1033.4	1033.9	1034.3	1034.7	1035.2	1035.5	1035.7	1035.9	1036.0	1036.1	1036.7
155°	1072.5	1072.5	1072.5	1072.5	1072.5	1072.4	1072.1	1072.0	1071.8	1071.6	1072.4
157.5°	1105.6	1105.2	1104.8	1104.5	1104.1	1103.9	1103.8	1103.8	1103.8	1103.7	1104.4
160°	1125.2	1124.9	1124.7	1124.5	1124.4	1124.2	1123.9	1123.7	1123.5	1123.3	1123.9
162.5°	1143.2	1142.7	1142.2	1141.6	1141.0	1140.7	1140.5	1140.3	1140.1	1139.8	1140.9
165°	1167.5	1166.9	1166.3	1165.6	1165.0	1164.5	1164.0	1163.7	1163.2	1162.8	1164.0
167.5°	1186.2	1185.2	1184.4	1183.6	1182.6	1182.2	1182.2	1182.3	1182.3	1182.4	1183.6
170°	1196.7	1195.6	1194.6	1193.5	1192.5	1192.0	1192.3	1192.5	1192.7	1192.9	1194.2
172.5°	1204.2	1203.3	1202.5	1201.6	1200.7	1200.2	1200.3	1200.3	1200.4	1200.4	1201.8
175°	1214.6	1213.5	1212.5	1211.4	1210.4	1209.8	1209.6	1209.3	1209.1	1208.9	1210.4
177.5°	1218.0	1217.1	1216.3	1215.4	1214.6	1214.2	1214.2	1214.2	1214.2	1214.2	1215.3
180°	1216.4	1216.4	1216.4	1216.4	1216.4	1216.4	1216.4	1216.4	1216.4	1216.4	1216.4



TEST NUMBER: P332611-830

CATALOG NUMBER: SA4XXDIP-C795D1035U830-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	895.3	895.3	895.3	895.3	895.3	895.3	895.3	895.3
2.5°	892.1	893.4	894.7	895.2	895.0	894.8	894.7	894.5
5°	889.9	891.6	893.3	894.2	893.9	893.7	893.5	893.2
7.5°	885.0	887.0	889.1	889.9	889.8	889.5	889.3	889.1
10°	880.2	882.2	884.3	885.1	885.0	884.7	884.5	884.3
12.5°	873.5	875.3	877.1	878.0	878.0	877.9	877.9	877.8
15°	861.2	863.2	865.2	866.1	865.9	865.6	865.4	865.2
17.5°	846.2	848.3	850.4	851.3	851.1	850.9	850.7	850.6
20°	834.5	836.8	839.1	840.2	840.2	840.2	840.2	840.2
22.5°	821.0	823.1	825.4	826.7	827.1	827.4	827.7	828.1
25°	799.9	802.4	804.8	806.2	806.3	806.6	806.8	807.1
27.5°	776.3	778.5	780.9	782.1	782.4	782.7	783.0	783.2
30°	759.8	762.2	764.7	766.2	766.7	767.0	767.5	768.0
32.5°	742.9	745.7	748.5	750.2	750.5	751.0	751.5	752.0
35°	716.0	719.2	722.3	724.2	724.8	725.5	726.2	726.9
37.5°	688.1	691.3	694.4	696.4	697.0	697.8	698.4	699.2
40°	668.4	671.8	675.0	677.1	678.1	678.9	679.9	680.7
42.5°	649.0	652.7	656.4	658.6	659.3	660.1	660.8	661.5
45°	619.2	622.9	626.7	629.1	630.3	631.4	632.5	633.6
47.5°	587.5	591.4	595.4	597.9	599.4	600.7	602.0	603.3
50°	565.3	569.8	574.2	577.1	578.4	579.9	581.2	582.5
52.5°	542.9	547.3	551.8	554.7	556.0	557.3	558.6	560.1
55°	509.2	513.7	518.1	521.0	522.4	523.7	525.0	526.3
57.5°	473.8	479.1	484.4	487.7	488.9	490.1	491.4	492.7
60°	449.4	454.5	459.6	463.1	464.9	466.7	468.4	470.2
62.5°	425.3	430.5	435.5	439.0	440.8	442.6	444.3	446.1
65°	388.1	393.7	399.3	402.9	404.7	406.5	408.2	410.0
67.5°	351.6	357.2	362.9	366.6	368.3	370.0	371.8	373.5
70°	325.8	331.9	337.9	341.7	343.2	344.8	346.3	347.9
72.5°	301.4	307.3	313.1	316.9	318.6	320.4	322.1	323.9
75°	264.1	270.3	276.6	280.7	282.8	284.7	286.7	288.7
77.5°	229.4	235.7	242.0	246.3	248.5	250.5	252.7	254.9
80°	206.9	213.6	220.3	224.4	226.2	228.0	229.8	231.6
82.5°	184.7	191.6	198.5	202.9	204.8	206.8	208.8	210.8
85°	153.7	160.4	167.1	171.5	173.8	176.0	178.2	180.5
87.5°	132.1	138.7	145.4	149.9	151.9	153.9	156.0	158.1
90°	135.3	143.1	150.8	155.8	158.0	160.1	162.4	164.6
92.5°	145.8	152.8	159.9	164.4	166.4	168.4	170.5	172.5
95°	172.0	178.6	185.3	189.6	191.6	193.6	195.7	197.7
97.5°	207.3	213.9	220.5	224.7	226.6	228.6	230.5	232.3
100°	233.0	239.4	245.9	249.9	251.5	253.0	254.6	256.1
102.5°	260.6	267.0	273.4	277.6	279.5	281.4	283.3	285.2
105°	302.5	308.7	314.9	319.1	321.6	324.0	326.4	328.8
107.5°	348.9	355.0	361.0	364.9	366.4	368.0	369.5	371.1
110°	379.8	384.6	389.3	392.9	395.2	397.7	400.0	402.5



TEST NUMBER: P332611-830

CATALOG NUMBER: SA4XXDIP-C795D1035U830-4F0-1E-UDD-D1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	413.0	417.9	422.7	426.1	428.0	430.0	431.9	433.8
115°	464.8	469.5	474.2	477.2	478.5	479.9	481.3	482.6
117.5°	513.9	517.8	521.7	524.3	525.8	527.1	528.5	529.8
120°	547.2	550.6	554.0	556.9	559.0	561.3	563.5	565.6
122.5°	581.5	585.2	589.0	591.4	592.2	593.0	593.9	594.7
125°	632.2	635.9	639.8	642.2	643.1	644.0	644.9	645.8
127.5°	679.3	682.9	686.5	688.9	690.0	691.3	692.4	693.6
130°	712.9	716.5	720.1	722.2	722.6	723.2	723.7	724.2
132.5°	744.8	748.2	751.6	753.8	754.8	755.8	756.8	757.8
135°	791.5	794.7	797.8	799.7	800.4	801.1	801.8	802.5
137.5°	837.5	840.3	842.9	844.9	846.1	847.4	848.7	849.9
140°	868.2	870.9	873.5	875.3	876.3	877.2	878.1	879.0
142.5°	897.9	900.3	902.9	904.6	905.4	906.3	907.2	908.1
145°	943.0	944.1	945.3	946.0	946.2	946.5	946.8	947.1
147.5°	984.3	984.3	984.3	984.6	985.1	985.5	986.1	986.6
150°	1011.3	1011.3	1011.3	1011.3	1011.1	1010.8	1010.6	1010.4
152.5°	1037.2	1037.6	1038.2	1038.2	1037.6	1037.1	1036.5	1035.9
155°	1073.3	1074.0	1074.9	1074.9	1074.0	1073.3	1072.4	1071.6
157.5°	1104.9	1105.6	1106.3	1106.2	1105.5	1104.8	1104.1	1103.3
160°	1124.5	1125.2	1125.8	1125.6	1124.5	1123.5	1122.5	1121.4
162.5°	1142.1	1143.2	1144.3	1144.4	1143.4	1142.4	1141.3	1140.2
165°	1165.4	1166.6	1167.8	1168.0	1167.2	1166.4	1165.5	1164.7
167.5°	1184.9	1186.2	1187.4	1187.4	1186.1	1184.8	1183.5	1182.2
170°	1195.4	1196.7	1198.0	1197.8	1196.4	1194.9	1193.4	1191.9
172.5°	1203.2	1204.7	1206.2	1206.1	1204.7	1203.2	1201.7	1200.2
175°	1211.8	1213.3	1214.7	1214.7	1213.3	1211.8	1210.4	1208.9
177.5°	1216.5	1217.7	1218.9	1218.8	1217.5	1216.1	1214.7	1213.4
180°	1216.4	1216.4	1216.4	1216.4	1216.4	1216.4	1216.4	1216.4

(END OF REPORT)