

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332595-830

Luminaire Tested: **SA4XXDIP-C795D590U830-4F0-1E-UDD-F**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332595-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXDIP-C795D590U830-4F0-1E-UDD-F  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 590 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5436.4 lumens  
Efficiency: N/A  
Efficacy: 134.9 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 40.3  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332595-830  
CATALOG NUMBER: SA4XXDIP-C795D590U830-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

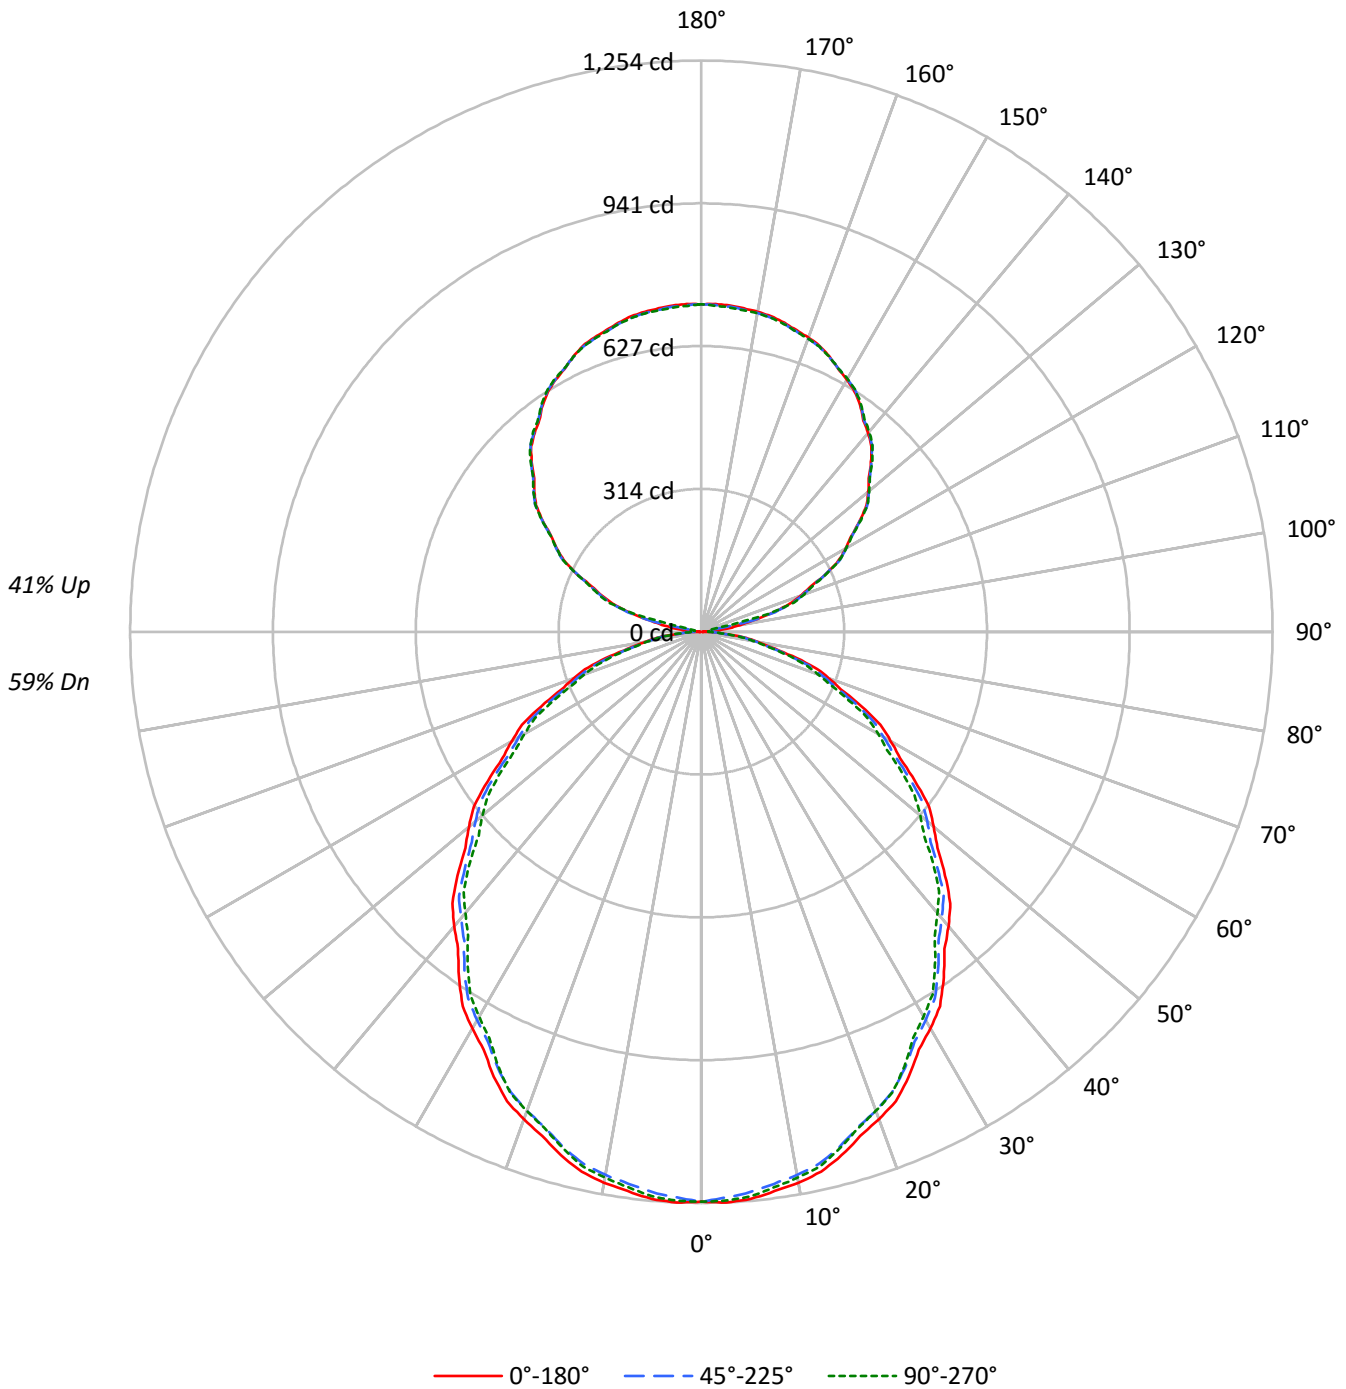



TEST NUMBER: P332595-830

CATALOG NUMBER: SA4XXDIP-C795D590U830-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20				
RC	80					70					50					30				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64	59		
1	100	95	91	88	93	89	86	83	77	75	73	67	65	63	57	56	54	50		
2	91	83	77	72	85	78	72	68	68	64	60	59	56	53	50	48	46	42		
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	44	41	39	35		
4	76	65	57	51	70	61	54	48	53	48	43	46	42	38	40	36	34	30		
5	70	58	50	43	65	54	47	41	48	42	37	42	37	33	36	32	29	26		
6	64	52	44	38	60	49	41	36	43	37	33	38	33	29	32	29	26	23		
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	30	26	23	20		
8	55	43	35	29	51	40	33	28	36	30	26	31	27	23	27	23	21	18		
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	19	17		
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	23	20	17	15		

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	10101	10101	10101
5°	10131	10009	10083
10°	10067	9928	9977
15°	9947	9787	9812
20°	9784	9613	9620
25°	9600	9413	9386
30°	9374	9177	9093
35°	9140	8932	8814
40°	8896	8652	8495
45°	8643	8379	8218
50°	8361	8133	7882
55°	8058	7817	7562
60°	7753	7463	7237
65°	7412	7125	6837
70°	7027	6675	6413
75°	6441	6129	5973
80°	5732	5500	5360
85°	5011	4826	4733



TEST NUMBER: P332595-830

CATALOG NUMBER: SA4XXDIP-C795D590U830-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	117.8	2.2
10°-20°	332.0	6.1
20°-30°	488.6	9.0
30°-40°	568.1	10.4
40°-50°	568.1	10.4
50°-60°	496.9	9.1
60°-70°	369.0	6.8
70°-80°	209.7	3.9
80°-90°	62.6	1.2
90°-100°	24.6	0.5
100°-110°	156.8	2.9
110°-120°	299.9	5.5
120°-130°	380.7	7.0
130°-140°	407.3	7.5
140°-150°	380.9	7.0
150°-160°	307.1	5.6
160°-170°	198.1	3.6
170°-180°	68.3	1.3
0°-30°	938.5	17.3
0°-40°	1506.5	27.7
0°-60°	2571.5	47.3
0°-90°	3212.8	59.1
90°-120°	481.2	8.9
90°-150°	1650.1	30.4
90°-180°	2224.0	40.9
0°-180°	5436.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1251	1251	1251	1251	1251	
5°	1250	1246	1235	1245	1244	119
15°	1190	1185	1171	1176	1174	335
25°	1078	1070	1057	1057	1054	496
35°	927	920	906	899	894	580
45°	757	749	734	723	720	583
55°	572	569	555	544	537	513
65°	388	383	373	363	358	384
75°	206	202	196	193	192	219
85°	54	54	52	52	51	60
90°	2	7	12	15	16	4
95°	30	12	12	15	16	38
105°	162	165	168	171	153	169
115°	302	304	303	304	304	297
125°	425	427	426	427	428	379
135°	527	526	528	530	531	406
145°	608	609	609	610	611	380
155°	666	667	665	667	666	307
165°	703	700	700	704	700	198
175°	719	716	716	720	714	68
180°	719	719	719	719	719	



TEST NUMBER: P332595-830

CATALOG NUMBER: SA4XXDIP-C795D590U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1251.2	1251.2	1251.2	1251.2	1251.2	1251.2	1251.2	1251.2	1251.2	1251.2	1251.2
2.5°	1254.4	1253.9	1253.3	1252.8	1252.3	1251.0	1249.1	1247.1	1245.1	1243.2	1244.9
5°	1250.2	1249.3	1248.4	1247.5	1246.6	1244.9	1242.5	1240.0	1237.6	1235.1	1237.6
7.5°	1238.6	1237.7	1236.8	1235.9	1235.0	1233.2	1230.5	1227.8	1225.0	1222.3	1224.3
10°	1228.1	1227.3	1226.3	1225.5	1224.6	1222.7	1219.7	1216.9	1214.0	1211.1	1212.9
12.5°	1214.5	1213.6	1212.7	1211.8	1211.0	1208.9	1205.9	1202.8	1199.8	1196.7	1198.6
15°	1190.1	1189.1	1188.3	1187.3	1186.5	1184.4	1181.0	1177.7	1174.3	1171.0	1172.3
17.5°	1160.6	1159.4	1158.3	1157.3	1156.1	1154.0	1150.8	1147.6	1144.4	1141.3	1142.2
20°	1138.9	1137.7	1136.7	1135.6	1134.4	1132.2	1128.9	1125.5	1122.2	1118.9	1119.6
22.5°	1115.7	1114.2	1112.7	1111.3	1109.7	1107.4	1104.0	1100.7	1097.3	1094.0	1095.2
25°	1077.7	1076.2	1074.6	1073.1	1071.5	1069.1	1066.0	1062.9	1059.8	1056.7	1056.9
27.5°	1034.4	1032.8	1031.2	1029.6	1028.0	1025.8	1022.8	1020.0	1017.1	1014.2	1013.6
30°	1005.6	1003.8	1002.0	1000.2	998.4	996.1	993.2	990.3	987.4	984.5	983.6
32.5°	975.1	973.5	971.9	970.3	968.7	966.3	963.3	960.2	957.2	954.0	953.0
35°	927.4	925.8	924.3	922.7	921.1	918.8	915.7	912.6	909.5	906.3	904.7
37.5°	877.0	875.6	874.2	872.8	871.3	868.9	865.6	862.2	858.9	855.5	853.8
40°	844.1	842.4	840.6	838.8	837.0	834.4	831.1	827.7	824.4	821.0	818.9
42.5°	808.9	807.8	806.7	805.7	804.6	802.2	798.5	794.8	791.1	787.4	784.9
45°	757.0	755.4	753.8	752.2	750.7	748.1	744.6	741.0	737.4	733.9	731.4
47.5°	702.6	701.5	700.5	699.4	698.3	696.2	692.9	689.6	686.3	683.0	680.1
50°	665.7	664.8	663.9	663.0	662.1	660.2	657.0	653.9	650.7	647.6	644.5
52.5°	629.6	628.6	627.5	626.4	625.3	623.1	619.8	616.5	613.2	609.9	607.2
55°	572.5	571.7	571.1	570.4	569.8	567.9	564.8	561.7	558.6	555.4	552.7
57.5°	517.9	517.2	516.4	515.7	514.9	512.9	509.9	506.8	503.8	500.7	498.1
60°	480.2	479.1	478.0	476.9	475.8	473.7	470.9	468.0	465.1	462.2	460.1
62.5°	443.4	442.4	441.5	440.5	439.6	437.6	434.5	431.4	428.4	425.3	423.5
65°	388.0	386.9	385.8	384.7	383.5	381.8	379.7	377.4	375.1	373.0	370.7
67.5°	332.2	331.2	330.2	329.1	328.2	326.6	324.4	322.3	320.2	318.0	315.8
70°	297.7	296.2	294.6	293.0	291.5	289.8	288.0	286.3	284.5	282.8	281.0
72.5°	260.9	259.3	257.8	256.2	254.6	253.2	251.8	250.2	248.8	247.4	246.0
75°	206.5	205.4	204.3	203.2	202.1	201.0	199.8	198.7	197.7	196.5	195.6
77.5°	154.6	154.1	153.6	153.2	152.6	151.9	150.9	150.0	148.9	148.0	147.7
80°	123.3	122.6	122.0	121.3	120.6	120.1	119.6	119.2	118.8	118.3	117.8
82.5°	92.8	92.6	92.2	91.9	91.6	91.4	91.3	91.2	91.1	91.0	90.8
85°	54.1	54.1	54.1	54.1	54.1	53.9	53.4	53.1	52.6	52.1	52.1
87.5°	21.2	21.3	21.3	21.4	21.5	21.6	21.6	21.6	21.6	21.6	21.8
90°	1.6	2.9	4.2	5.6	6.9	8.0	9.0	9.9	10.8	11.8	12.5
92.5°	6.8	6.9	6.9	7.0	7.1	7.5	8.6	9.5	10.5	11.4	12.2
95°	29.6	25.5	21.5	17.3	13.3	11.3	11.5	11.6	11.7	11.8	12.5
97.5°	62.8	65.3	67.9	70.4	73.0	67.5	54.2	40.9	27.5	14.2	14.2
100°	88.1	90.3	92.5	94.6	96.8	89.6	73.1	56.6	40.2	23.7	21.6
102.5°	116.6	118.1	119.7	121.3	122.9	122.6	120.5	118.3	116.1	114.0	92.1
105°	161.8	162.6	163.2	164.0	164.7	165.3	166.0	166.5	167.1	167.8	168.8
107.5°	203.9	204.2	204.6	204.9	205.3	205.9	206.7	207.5	208.3	209.2	209.7
110°	232.2	232.6	233.0	233.4	233.7	234.2	235.0	235.6	236.4	237.1	237.3



TEST NUMBER: P332595-830

CATALOG NUMBER: SA4XXDIP-C795D590U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	259.8	260.4	261.1	261.7	262.4	262.9	263.2	263.5	263.9	264.2	264.2
115°	302.2	302.6	302.8	303.2	303.6	303.7	303.6	303.5	303.3	303.2	303.5
117.5°	340.4	340.8	341.3	341.8	342.2	342.6	342.9	343.2	343.4	343.7	343.7
120°	366.2	366.6	367.1	367.6	368.1	368.3	368.2	368.0	367.9	367.8	368.0
122.5°	390.2	390.5	390.8	391.1	391.3	391.6	391.8	391.9	392.1	392.3	392.4
125°	424.7	425.2	425.7	426.2	426.7	426.8	426.5	426.3	426.0	425.8	426.2
127.5°	457.4	457.5	457.7	457.8	457.9	458.3	458.8	459.3	459.9	460.4	460.3
130°	478.5	478.6	478.7	478.9	479.0	479.2	479.6	479.9	480.3	480.7	480.8
132.5°	497.9	498.0	498.3	498.5	498.7	499.1	499.5	499.9	500.4	500.9	501.0
135°	526.9	526.8	526.7	526.5	526.4	526.6	527.1	527.5	528.0	528.5	528.8
137.5°	552.6	552.6	552.7	552.7	552.8	553.1	553.6	554.1	554.7	555.2	555.4
140°	569.4	569.6	569.9	570.0	570.3	570.5	570.8	571.1	571.3	571.6	571.8
142.5°	584.5	584.8	585.3	585.7	586.2	586.4	586.5	586.7	586.8	587.0	587.3
145°	607.6	607.9	608.2	608.6	609.0	609.2	609.2	609.2	609.2	609.2	609.3
147.5°	625.9	626.6	627.3	627.9	628.6	628.9	628.8	628.7	628.5	628.4	628.5
150°	639.2	639.7	640.3	640.7	641.2	641.4	641.2	641.1	641.0	640.8	640.8
152.5°	650.4	650.8	651.2	651.6	652.0	652.1	651.9	651.7	651.4	651.2	651.4
155°	666.2	666.3	666.4	666.5	666.7	666.5	666.2	665.8	665.4	665.1	665.5
157.5°	679.4	679.3	679.2	679.2	679.1	678.8	678.4	678.1	677.6	677.2	677.9
160°	687.1	686.7	686.4	686.1	685.7	685.4	685.3	685.2	685.0	684.9	685.7
162.5°	694.0	693.5	693.1	692.7	692.2	691.9	691.7	691.6	691.5	691.4	692.1
165°	702.7	702.1	701.5	700.9	700.3	700.0	700.0	700.0	700.0	700.0	701.0
167.5°	709.5	709.0	708.3	707.8	707.1	706.7	706.7	706.6	706.5	706.4	707.6
170°	713.5	712.8	712.0	711.3	710.6	710.3	710.4	710.5	710.7	710.8	711.7
172.5°	716.0	715.3	714.6	713.9	713.2	712.8	713.0	713.1	713.2	713.3	714.4
175°	718.9	718.1	717.4	716.7	716.0	715.7	715.8	716.0	716.0	716.1	717.2
177.5°	720.1	719.4	718.8	718.1	717.5	717.2	717.4	717.6	717.7	717.9	718.8
180°	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9



TEST NUMBER: P332595-830

CATALOG NUMBER: SA4XXDIP-C795D590U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1251.2	1251.2	1251.2	1251.2	1251.2	1251.2	1251.2	1251.2
2.5°	1246.7	1248.5	1250.3	1251.1	1250.9	1250.8	1250.6	1250.4
5°	1240.0	1242.5	1244.9	1245.9	1245.5	1245.1	1244.6	1244.2
7.5°	1226.2	1228.2	1230.1	1231.0	1230.8	1230.5	1230.2	1229.9
10°	1214.7	1216.4	1218.2	1218.9	1218.4	1218.0	1217.6	1217.1
12.5°	1200.6	1202.5	1204.5	1205.1	1204.6	1203.9	1203.2	1202.7
15°	1173.7	1175.0	1176.3	1176.7	1176.0	1175.4	1174.7	1174.0
17.5°	1143.0	1143.9	1144.7	1144.9	1144.4	1144.0	1143.6	1143.1
20°	1120.2	1120.9	1121.5	1121.6	1121.2	1120.8	1120.3	1119.8
22.5°	1096.4	1097.6	1098.8	1099.0	1098.2	1097.4	1096.6	1095.8
25°	1057.2	1057.3	1057.6	1057.2	1056.4	1055.5	1054.6	1053.7
27.5°	1013.1	1012.6	1012.0	1011.3	1010.1	1009.0	1007.9	1006.7
30°	982.7	981.8	980.9	980.0	978.8	977.7	976.6	975.5
32.5°	951.9	950.8	949.8	948.7	947.5	946.4	945.3	944.2
35°	903.2	901.6	900.0	898.7	897.6	896.5	895.4	894.3
37.5°	852.2	850.5	848.9	847.3	845.7	844.3	842.8	841.3
40°	816.6	814.5	812.2	810.5	809.4	808.3	807.2	806.1
42.5°	782.2	779.7	777.0	775.4	774.7	773.9	773.2	772.4
45°	729.0	726.5	724.1	722.6	721.8	721.1	720.5	719.8
47.5°	677.4	674.7	671.8	669.7	668.0	666.3	664.6	662.9
50°	641.4	638.3	635.2	632.9	631.6	630.3	629.0	627.6
52.5°	604.5	601.6	598.9	596.7	595.0	593.3	591.6	589.9
55°	550.1	547.4	544.7	542.7	541.4	540.1	538.7	537.3
57.5°	495.6	493.0	490.5	488.6	487.3	486.0	484.7	483.4
60°	458.2	456.2	454.1	452.6	451.5	450.3	449.2	448.2
62.5°	421.6	419.8	418.0	416.5	415.4	414.2	413.2	412.1
65°	368.5	366.3	364.0	362.4	361.3	360.1	359.0	357.9
67.5°	313.8	311.6	309.4	308.2	307.9	307.6	307.3	307.0
70°	279.2	277.4	275.6	274.4	273.7	273.1	272.4	271.7
72.5°	244.6	243.2	241.8	240.7	240.0	239.3	238.7	238.0
75°	194.7	193.8	192.9	192.4	192.2	191.9	191.7	191.5
77.5°	147.4	147.1	146.9	146.5	145.9	145.3	144.8	144.2
80°	117.4	117.0	116.5	116.2	115.9	115.7	115.6	115.3
82.5°	90.5	90.2	89.9	89.7	89.5	89.3	89.1	88.8
85°	52.1	52.1	52.1	52.0	51.8	51.6	51.4	51.1
87.5°	21.9	22.1	22.1	22.2	22.3	22.3	22.4	22.4
90°	13.3	13.9	14.7	15.2	15.5	15.6	15.9	16.1
92.5°	12.8	13.6	14.2	14.6	14.7	14.7	14.8	14.8
95°	13.3	13.9	14.7	15.1	15.3	15.4	15.5	15.6
97.5°	14.3	14.4	14.5	14.6	14.7	14.8	14.9	15.1
100°	19.6	17.5	15.6	14.6	14.7	14.8	14.9	15.1
102.5°	70.1	48.3	26.3	15.4	15.5	15.5	15.5	15.5
105°	169.9	171.0	172.0	170.4	166.2	161.8	157.5	153.3
107.5°	210.2	210.8	211.2	211.7	212.2	212.6	213.1	213.6
110°	237.6	237.8	238.1	238.4	238.7	239.0	239.4	239.8





TEST NUMBER: P332595-830

CATALOG NUMBER: SA4XXDIP-C795D590U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	264.1	264.1	264.0	264.2	264.7	265.1	265.6	266.0
115°	303.7	304.0	304.2	304.3	304.3	304.3	304.3	304.3
117.5°	343.6	343.6	343.5	343.5	343.4	343.4	343.3	343.3
120°	368.3	368.4	368.7	368.7	368.4	368.3	368.0	367.8
122.5°	392.6	392.7	392.9	392.8	392.6	392.3	392.1	391.8
125°	426.5	426.9	427.3	427.5	427.6	427.7	427.8	428.0
127.5°	460.3	460.2	460.1	460.1	460.0	459.9	459.8	459.7
130°	480.9	481.0	481.2	481.2	481.2	481.2	481.2	481.2
132.5°	501.1	501.2	501.3	501.3	501.2	501.1	501.1	501.0
135°	529.0	529.2	529.4	529.7	529.9	530.2	530.5	530.7
137.5°	555.7	556.0	556.2	556.3	556.3	556.2	556.1	556.0
140°	572.2	572.6	573.0	573.2	573.3	573.4	573.5	573.6
142.5°	587.5	587.8	588.1	588.2	588.2	588.2	588.2	588.3
145°	609.4	609.5	609.6	609.8	610.0	610.3	610.6	610.8
147.5°	628.6	628.7	628.8	628.9	629.1	629.1	629.2	629.3
150°	640.8	640.8	640.8	640.9	641.0	641.2	641.3	641.4
152.5°	651.6	651.8	652.0	652.1	652.0	651.9	651.8	651.8
155°	666.0	666.5	666.9	667.0	666.7	666.3	666.0	665.6
157.5°	678.4	679.1	679.7	679.7	679.1	678.4	677.9	677.2
160°	686.4	687.1	687.9	687.9	687.1	686.4	685.7	684.9
162.5°	692.9	693.5	694.3	694.3	693.4	692.6	691.8	691.0
165°	701.9	702.9	703.9	703.8	702.7	701.6	700.6	699.5
167.5°	708.6	709.6	710.7	710.6	709.5	708.2	707.0	705.9
170°	712.7	713.6	714.6	714.4	713.3	712.1	710.9	709.7
172.5°	715.3	716.2	717.2	717.0	715.8	714.4	713.1	711.8
175°	718.3	719.3	720.5	720.3	718.9	717.4	716.0	714.5
177.5°	719.5	720.3	721.0	720.9	719.7	718.6	717.4	716.2
180°	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9

(END OF REPORT)