

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332883-830

Luminaire Tested: **SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332883-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1035 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5294.5 lumens
Efficiency: N/A
Efficacy: 141.9 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.23 / 1.39
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 37.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332883-830
CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

Luminous Intensity Polar Plot

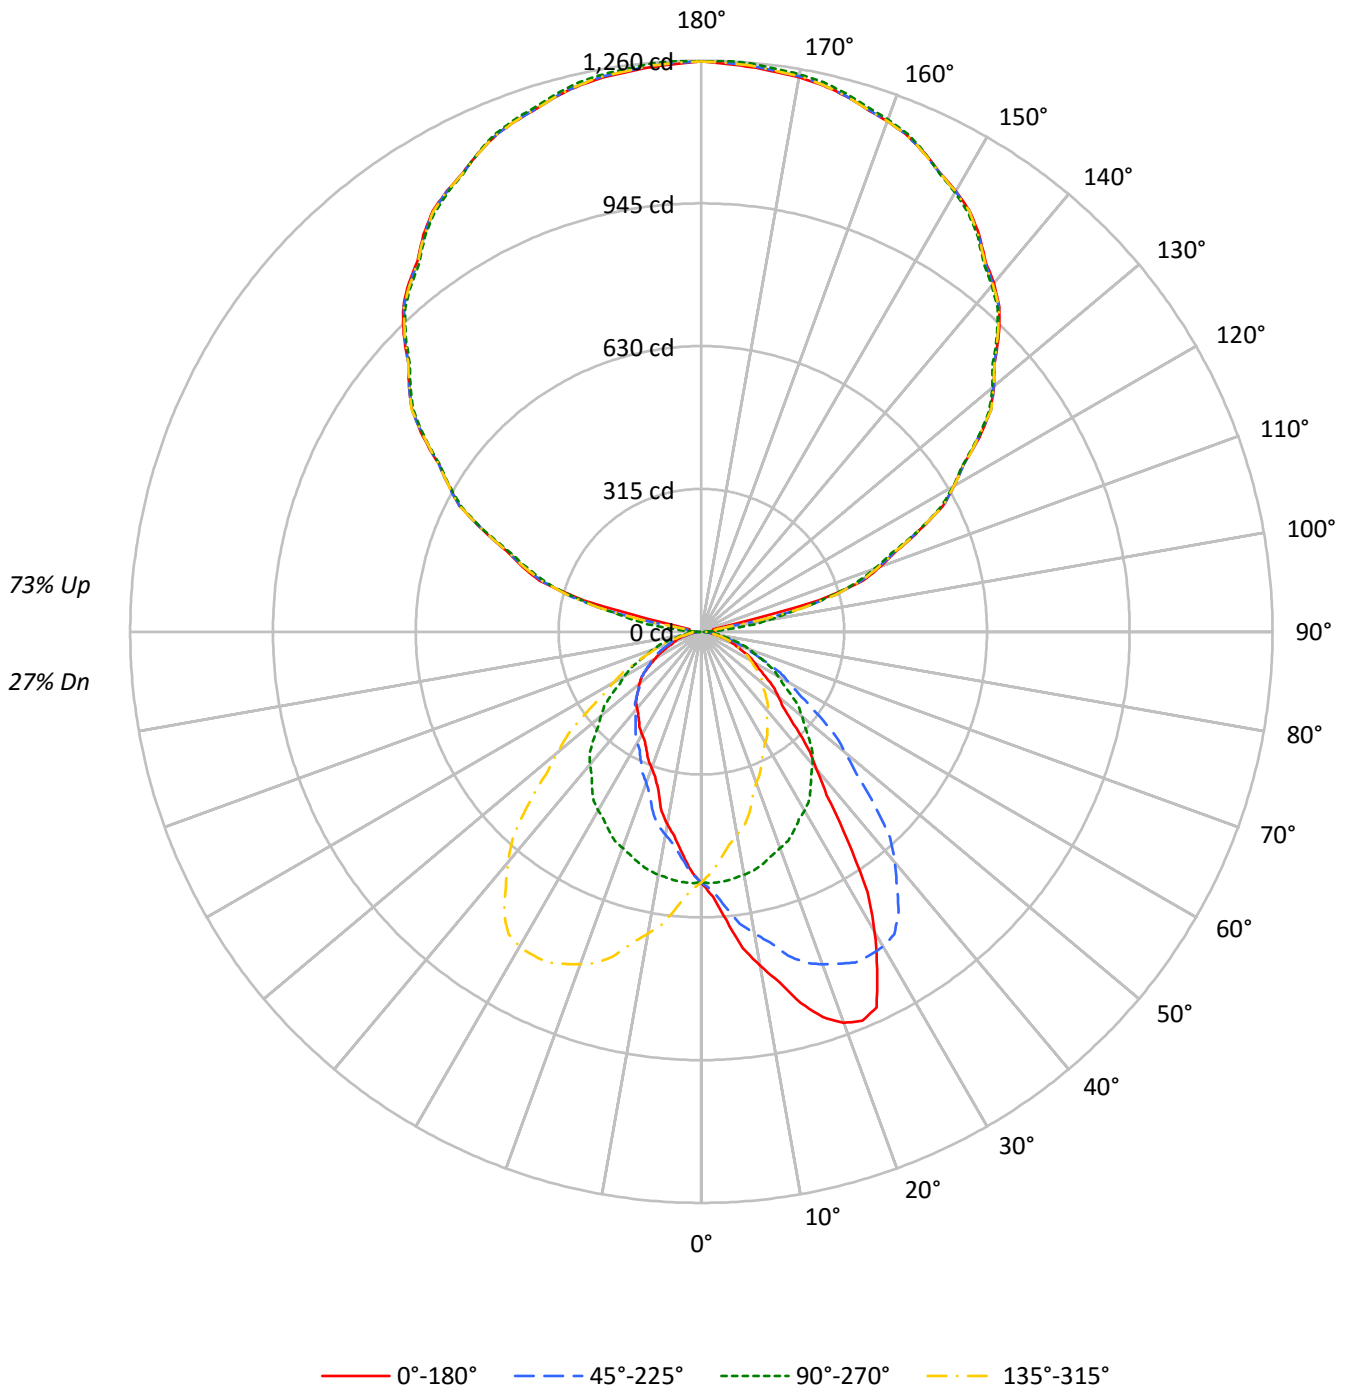



TEST NUMBER: P332883-830

CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	102	102	102	102	91	91	91	91	70	70	70	52	52	52	35	35	35	27				27
1	93	89	85	82	83	79	76	74	62	60	58	46	44	43	31	30	30	23				23
2	85	78	72	67	75	70	65	61	54	51	48	40	38	36	27	26	25	19				19
3	77	68	61	56	69	61	56	51	48	44	41	36	33	31	24	23	22	17				17
4	71	61	53	47	63	54	48	43	43	38	35	32	29	27	22	20	19	15				15
5	65	54	46	41	58	48	42	37	38	34	30	29	26	23	20	18	17	13				13
6	60	48	41	35	53	43	37	32	34	30	26	26	23	20	18	16	15	11				11
7	55	43	36	31	49	39	33	28	31	26	23	24	20	18	16	15	13	10				10
8	51	39	32	27	45	36	29	25	28	24	20	22	18	16	15	13	12	9				9
9	47	36	29	24	42	32	26	22	26	21	18	20	17	14	14	12	11	8				8
10	44	33	26	21	39	30	24	20	24	19	16	18	15	13	13	11	10	7				7

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	4469	4469	4469	4469
5°	5185	4483	3963	4483
10°	6133	4464	3536	4464
15°	7084	4422	3039	4422
20°	7887	4365	2748	4365
25°	8143	4309	2551	4309
30°	7128	4242	2433	4242
35°	5549	4142	2361	4142
40°	4161	4027	2323	4027
45°	3286	3843	2302	3843
50°	2773	3631	2236	3631
55°	2417	3398	2115	3398
60°	2175	3155	1873	3155
65°	1918	2894	1612	2894
70°	1725	2622	1452	2622
75°	1447	2324	1238	2324
80°	1223	1980	1162	1980
85°	1028	1556	1028	1556



TEST NUMBER: P332883-830

CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	53.6	1.0
10°-20°	161.8	3.1
20°-30°	253.1	4.8
30°-40°	281.4	5.3
40°-50°	249.6	4.7
50°-60°	194.5	3.7
60°-70°	127.4	2.4
70°-80°	62.6	1.2
80°-90°	19.1	0.4
90°-100°	43.0	0.8
100°-110°	274.3	5.2
110°-120°	524.8	9.9
120°-130°	666.2	12.6
130°-140°	712.8	13.5
140°-150°	666.5	12.6
150°-160°	537.5	10.2
160°-170°	346.7	6.5
170°-180°	119.5	2.3
0°-30°	468.6	8.8
0°-40°	749.9	14.2
0°-60°	1194.1	22.6
0°-90°	1403.1	26.5
90°-120°	842.2	15.9
90°-150°	2887.7	54.5
90°-180°	3891.0	73.5
0°-180°	5294.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	554	554	554	554	554	
5°	640	553	489	553	640	65
15°	848	529	364	529	848	241
25°	914	484	286	484	914	406
35°	563	420	240	420	563	353
45°	288	337	202	337	288	228
55°	172	241	150	241	172	156
65°	100	152	84	152	100	101
75°	46	74	40	74	46	51
85°	11	17	11	17	11	13
90°	28	3	28	3	28	13
95°	27	52	27	52	27	22
105°	268	283	268	283	268	234
115°	532	529	532	529	532	527
125°	749	743	749	743	749	667
135°	929	922	929	922	929	715
145°	1069	1063	1069	1063	1069	668
155°	1165	1166	1165	1166	1165	537
165°	1224	1230	1224	1230	1224	346
175°	1250	1258	1250	1258	1250	119
180°	1258	1258	1258	1258	1258	



TEST NUMBER: P332883-830

CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6
2.5°	584.0	585.6	584.0	583.8	582.0	581.5	580.8	578.4	574.2	571.7	572.2
5°	639.8	645.4	642.2	641.8	636.9	632.0	628.9	621.7	614.1	609.0	604.7
7.5°	704.3	707.5	705.5	702.4	694.5	689.9	682.7	673.4	659.7	649.3	639.8
10°	748.2	750.8	750.0	744.1	738.4	726.5	719.8	706.7	689.5	675.9	663.2
12.5°	791.4	794.2	786.4	786.6	775.6	766.3	755.7	739.1	719.3	701.8	685.9
15°	847.6	844.0	844.0	839.6	827.4	814.5	803.5	786.1	761.1	740.2	718.0
17.5°	891.7	893.0	891.2	880.6	871.0	857.6	837.5	817.3	794.1	765.9	743.4
20°	918.1	918.1	916.2	909.0	896.5	882.2	860.6	838.5	809.1	780.7	755.4
22.5°	928.9	929.5	927.2	921.3	910.1	896.2	877.7	855.3	824.9	793.1	761.6
25°	914.2	918.4	918.8	917.3	913.9	905.4	889.6	866.7	839.4	804.8	770.9
27.5°	839.2	844.6	849.3	857.1	867.3	872.6	873.4	861.7	837.9	804.6	770.5
30°	764.7	769.1	783.6	802.6	817.3	830.7	842.4	845.5	832.1	802.2	766.3
32.5°	681.8	688.0	702.5	722.8	747.3	770.1	796.1	809.4	809.0	791.1	757.9
35°	563.0	567.5	580.9	602.3	631.7	665.4	706.7	738.8	760.6	759.1	738.8
37.5°	454.1	459.1	472.6	490.4	519.0	560.6	600.6	644.9	685.2	707.9	701.2
40°	394.8	395.0	408.2	426.5	453.3	489.7	533.1	582.2	627.3	664.1	671.2
42.5°	348.1	348.1	356.8	376.5	395.8	430.0	471.6	520.3	573.1	615.6	634.4
45°	287.8	289.7	296.9	308.7	323.9	352.9	386.2	431.4	490.5	540.9	572.4
47.5°	243.6	246.7	251.2	260.8	272.9	292.2	319.7	360.4	408.5	463.9	508.7
50°	220.8	221.3	227.1	232.4	242.9	258.4	282.4	316.3	360.5	413.8	463.5
52.5°	201.2	201.1	204.6	211.4	219.9	231.9	251.4	282.2	321.4	369.2	420.6
55°	171.7	172.9	175.6	180.9	187.4	195.9	211.2	234.4	265.2	306.0	352.7
57.5°	149.4	150.0	152.0	154.3	160.2	166.5	178.0	194.1	220.0	253.4	296.9
60°	134.7	135.0	135.6	138.9	143.6	149.5	157.3	170.9	192.7	223.3	257.7
62.5°	120.5	120.8	121.9	124.3	128.0	132.0	140.2	151.1	169.2	195.3	226.2
65°	100.4	100.6	102.2	103.0	105.9	109.5	115.6	122.9	135.4	157.3	180.7
67.5°	83.9	83.9	84.0	85.2	87.2	89.5	93.1	99.1	108.5	121.9	142.5
70°	73.1	73.1	73.6	74.3	75.4	77.4	79.5	83.9	90.8	101.7	117.5
72.5°	63.2	63.3	63.8	63.9	64.5	66.2	67.7	70.5	75.6	83.9	96.7
75°	46.4	47.0	48.2	49.1	50.2	50.0	51.6	53.3	54.9	59.8	67.1
77.5°	34.5	34.2	34.3	35.1	35.2	35.4	36.6	37.9	39.1	41.4	44.0
80°	26.3	26.3	27.0	27.2	27.0	27.2	28.4	29.0	29.4	30.3	32.8
82.5°	19.9	20.3	20.1	20.3	20.4	20.6	21.6	21.7	22.1	22.5	23.5
85°	11.1	11.4	11.6	11.1	11.1	11.1	11.6	11.8	12.3	12.1	12.5
87.5°	9.6	9.3	9.4	9.3	9.4	9.0	9.0	9.1	8.5	8.4	8.1
90°	28.2	27.8	27.4	27.0	26.6	25.7	24.5	23.2	22.0	20.7	19.0
92.5°	26.0	25.9	25.8	25.7	25.6	25.0	23.8	22.4	21.2	20.0	18.3
95°	27.2	27.1	26.9	26.7	26.5	25.7	24.5	23.2	22.0	20.7	20.5
97.5°	26.4	26.1	25.9	25.7	25.5	25.4	25.3	25.1	25.0	24.9	48.2
100°	26.4	26.1	25.9	25.7	25.5	27.1	30.7	34.3	37.9	41.4	70.2
102.5°	27.1	27.1	27.1	27.0	27.0	46.1	84.5	122.8	161.1	199.4	203.2
105°	268.2	275.7	283.2	290.8	298.3	301.0	299.2	297.4	295.5	293.6	292.6
107.5°	373.7	373.0	372.1	371.4	370.5	369.7	368.8	367.9	366.9	366.0	364.6
110°	419.6	419.1	418.4	417.7	417.2	416.6	416.2	415.8	415.4	414.9	413.7



TEST NUMBER: P332883-830

CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	465.5	464.8	464.0	463.2	462.4	462.0	462.1	462.2	462.3	462.3	461.8
115°	532.5	532.5	532.5	532.5	532.5	532.3	532.0	531.5	531.1	530.7	530.8
117.5°	600.7	600.8	600.9	601.0	601.1	601.1	601.2	601.2	601.3	601.4	601.0
120°	643.6	644.0	644.4	644.8	645.3	645.3	644.8	644.4	644.0	643.6	643.8
122.5°	685.7	686.2	686.5	687.0	687.4	687.5	687.2	687.0	686.7	686.5	686.2
125°	748.9	748.8	748.6	748.4	748.1	747.7	747.1	746.5	745.8	745.2	745.6
127.5°	804.5	804.6	804.8	805.0	805.1	805.3	805.4	805.6	805.7	805.8	804.8
130°	842.2	842.2	842.2	842.2	842.2	842.0	841.8	841.6	841.4	841.2	840.6
132.5°	876.8	876.9	877.0	877.2	877.4	877.4	877.2	876.9	876.8	876.6	875.7
135°	928.7	928.2	927.8	927.5	927.0	926.6	926.1	925.8	925.3	924.9	924.1
137.5°	973.1	973.2	973.4	973.5	973.6	973.5	973.0	972.5	972.0	971.6	970.6
140°	1004.0	1003.7	1003.5	1003.3	1003.1	1002.7	1002.1	1001.5	1000.8	1000.2	999.8
142.5°	1029.5	1029.5	1029.4	1029.4	1029.4	1029.2	1028.7	1028.2	1027.7	1027.3	1027.0
145°	1068.8	1068.5	1068.0	1067.6	1067.2	1066.9	1066.7	1066.5	1066.3	1066.0	1066.0
147.5°	1101.5	1101.3	1101.0	1100.8	1100.6	1100.4	1100.2	1100.0	1099.9	1099.8	1099.9
150°	1122.5	1122.3	1122.1	1121.9	1121.6	1121.5	1121.5	1121.5	1121.5	1121.5	1121.8
152.5°	1140.6	1140.7	1140.9	1140.9	1141.0	1140.9	1140.7	1140.3	1140.0	1139.6	1140.0
155°	1164.9	1165.5	1166.1	1166.8	1167.3	1167.2	1166.4	1165.5	1164.7	1163.9	1164.5
157.5°	1185.2	1186.3	1187.3	1188.5	1189.5	1189.5	1188.5	1187.3	1186.3	1185.2	1185.9
160°	1198.7	1200.0	1201.3	1202.5	1203.7	1203.7	1202.5	1201.3	1200.0	1198.7	1198.9
162.5°	1209.3	1210.7	1212.1	1213.5	1214.9	1215.0	1213.8	1212.5	1211.3	1210.0	1210.2
165°	1224.1	1226.0	1227.9	1229.7	1231.6	1231.7	1230.1	1228.4	1226.7	1225.0	1225.0
167.5°	1235.2	1237.3	1239.4	1241.5	1243.6	1243.7	1241.9	1240.0	1238.2	1236.3	1236.5
170°	1242.0	1244.1	1246.2	1248.3	1250.4	1250.6	1248.9	1247.3	1245.6	1243.9	1243.7
172.5°	1245.8	1248.0	1250.3	1252.5	1254.8	1255.1	1253.4	1251.8	1250.1	1248.4	1248.2
175°	1250.5	1253.0	1255.5	1258.0	1260.5	1260.8	1259.0	1257.1	1255.2	1253.3	1253.1
177.5°	1253.5	1255.5	1257.5	1259.5	1261.5	1261.9	1260.5	1259.1	1257.8	1256.5	1256.1
180°	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0



TEST NUMBER: P332883-830

CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6
2.5°	570.4	568.0	566.7	563.8	560.4	558.6	557.0	554.7	551.7	548.5	546.2
5°	599.4	594.0	587.3	579.3	572.2	565.2	559.2	553.2	546.3	539.1	532.1
7.5°	629.1	618.6	607.2	594.0	581.3	569.6	558.8	548.7	537.1	526.6	517.2
10°	649.8	635.6	619.7	602.9	586.3	571.7	557.4	544.5	530.3	517.6	506.8
12.5°	666.6	649.8	630.7	609.9	589.7	572.2	555.8	538.9	522.7	509.0	494.6
15°	694.4	671.5	645.8	620.8	594.7	570.8	548.7	529.1	510.6	491.2	477.6
17.5°	713.6	686.3	655.1	625.1	594.3	566.1	540.6	517.3	495.9	476.1	459.9
20°	725.0	694.8	660.3	626.1	591.5	561.5	534.0	508.1	486.1	464.7	447.9
22.5°	731.4	698.0	660.3	624.5	588.7	556.1	526.0	499.1	475.0	453.6	435.1
25°	733.5	697.8	659.2	618.1	578.9	544.3	513.0	483.8	457.0	435.6	416.0
27.5°	730.6	688.5	649.0	606.9	566.4	530.0	497.2	466.5	439.7	416.7	396.5
30°	726.3	681.3	638.9	595.1	554.1	519.1	484.5	455.1	427.2	403.3	383.0
32.5°	717.0	672.3	626.7	581.9	540.4	504.3	471.5	441.9	414.5	390.1	368.5
35°	698.6	653.4	603.9	557.9	517.1	479.6	448.8	420.3	394.2	368.1	345.3
37.5°	674.4	628.2	578.9	528.6	487.7	452.3	424.1	397.3	371.8	348.0	322.8
40°	651.6	609.4	558.6	508.6	466.7	432.5	406.4	382.1	356.5	332.8	307.6
42.5°	624.0	588.1	536.6	486.4	445.1	412.2	387.9	364.1	340.7	317.8	291.5
45°	577.8	550.5	502.4	454.2	412.5	379.8	357.6	336.6	316.1	294.3	269.5
47.5°	524.8	506.4	464.9	415.5	376.9	347.6	326.0	308.9	291.5	269.7	248.0
50°	488.0	476.3	436.1	391.1	354.2	327.3	305.2	289.1	274.6	253.6	234.2
52.5°	448.8	442.5	408.6	365.5	330.0	303.5	284.6	270.2	255.5	238.1	220.0
55°	389.0	392.4	363.6	326.3	292.8	270.6	253.4	241.4	228.8	214.1	200.1
57.5°	327.9	340.2	320.8	288.1	256.7	236.1	223.2	213.1	202.6	190.4	178.3
60°	291.3	301.6	290.7	261.8	234.4	215.3	203.2	195.4	184.9	173.8	164.7
62.5°	255.6	266.6	260.1	236.9	211.4	194.9	184.3	177.0	169.2	159.5	150.0
65°	210.8	217.9	214.8	198.8	180.7	166.6	156.8	151.5	144.3	137.2	128.8
67.5°	161.5	175.2	173.4	164.9	149.3	138.3	131.9	127.1	120.6	115.4	109.6
70°	132.7	145.4	145.2	138.3	129.8	119.6	115.1	111.1	105.3	100.2	95.5
72.5°	108.7	120.3	122.1	116.7	110.9	103.1	98.9	96.1	90.5	87.0	83.1
75°	76.1	84.5	86.8	86.8	84.1	80.1	76.3	74.5	70.5	67.4	65.1
77.5°	49.9	55.2	58.7	59.5	59.9	58.5	55.4	54.2	51.1	50.0	47.9
80°	35.3	38.8	42.8	44.2	45.2	44.9	43.5	42.6	39.7	38.5	37.7
82.5°	24.3	26.3	29.6	32.6	32.2	33.5	32.2	31.6	29.3	28.9	28.1
85°	12.7	12.9	13.4	15.4	16.5	17.0	17.2	16.8	16.0	16.0	14.5
87.5°	7.7	7.3	7.3	6.9	6.6	6.9	6.9	6.6	6.6	6.5	6.4
90°	17.3	15.6	14.0	12.1	9.7	7.4	5.1	2.8	5.1	7.4	9.7
92.5°	16.6	14.9	13.3	12.3	12.3	12.1	12.0	11.9	12.0	12.1	12.3
95°	20.3	20.1	19.9	23.3	30.4	37.5	44.7	51.7	44.7	37.5	30.4
97.5°	71.5	94.8	118.2	127.6	123.2	118.8	114.3	109.9	114.3	118.8	123.2
100°	99.2	128.0	156.8	169.4	165.6	161.8	158.1	154.3	158.1	161.8	165.6
102.5°	207.0	210.8	214.5	215.0	212.3	209.5	206.8	204.0	206.8	209.5	212.3
105°	291.4	290.4	289.4	288.2	287.0	285.7	284.5	283.2	284.5	285.7	287.0
107.5°	363.2	361.7	360.3	359.3	358.6	358.1	357.4	356.8	357.4	358.1	358.6
110°	412.5	411.1	409.9	409.0	408.3	407.7	407.1	406.5	407.1	407.7	408.3



TEST NUMBER: P332883-830

CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	461.2	460.6	460.1	459.2	458.1	456.9	455.8	454.7	455.8	456.9	458.1
115°	531.1	531.3	531.5	531.3	530.7	530.1	529.4	528.8	529.4	530.1	530.7
117.5°	600.5	600.0	599.6	599.0	598.1	597.3	596.4	595.6	596.4	597.3	598.1
120°	644.0	644.2	644.4	644.1	643.3	642.4	641.6	640.7	641.6	642.4	643.3
122.5°	685.9	685.6	685.3	684.9	684.4	683.9	683.4	682.9	683.4	683.9	684.4
125°	746.0	746.5	746.9	746.7	745.8	745.0	744.1	743.3	744.1	745.0	745.8
127.5°	803.9	803.0	801.9	801.3	801.2	801.0	800.7	800.5	800.7	801.0	801.2
130°	839.9	839.3	838.7	838.2	838.0	837.8	837.6	837.4	837.6	837.8	838.0
132.5°	875.0	874.2	873.4	872.8	872.4	872.0	871.7	871.3	871.7	872.0	872.4
135°	923.2	922.4	921.5	921.2	921.4	921.7	921.9	922.1	921.9	921.7	921.4
137.5°	969.8	968.8	967.9	967.4	967.3	967.2	967.1	967.0	967.1	967.2	967.3
140°	999.4	998.9	998.5	998.1	997.7	997.3	996.8	996.5	996.8	997.3	997.7
142.5°	1026.8	1026.5	1026.2	1025.8	1025.0	1024.3	1023.5	1022.8	1023.5	1024.3	1025.0
145°	1066.0	1066.0	1066.0	1065.7	1065.1	1064.5	1063.8	1063.2	1063.8	1064.5	1065.1
147.5°	1100.1	1100.3	1100.6	1100.1	1098.9	1097.8	1096.6	1095.4	1096.6	1097.8	1098.9
150°	1122.0	1122.2	1122.4	1122.1	1121.2	1120.4	1119.6	1118.7	1119.6	1120.4	1121.2
152.5°	1140.4	1140.8	1141.1	1140.9	1140.3	1139.6	1139.0	1138.3	1139.0	1139.6	1140.3
155°	1165.2	1165.8	1166.4	1166.6	1166.4	1166.2	1166.0	1165.8	1166.0	1166.2	1166.4
157.5°	1186.6	1187.3	1188.0	1188.5	1188.5	1188.6	1188.8	1188.9	1188.8	1188.6	1188.5
160°	1199.1	1199.4	1199.6	1200.0	1200.6	1201.3	1201.8	1202.5	1201.8	1201.3	1200.6
162.5°	1210.4	1210.6	1210.9	1211.4	1212.1	1213.0	1213.7	1214.6	1213.7	1213.0	1212.1
165°	1225.0	1225.0	1225.0	1225.6	1226.6	1227.7	1228.7	1229.7	1228.7	1227.7	1226.6
167.5°	1236.6	1236.7	1236.9	1237.5	1238.6	1239.6	1240.8	1241.8	1240.8	1239.6	1238.6
170°	1243.5	1243.2	1243.0	1243.6	1244.8	1246.0	1247.4	1248.6	1247.4	1246.0	1244.8
172.5°	1248.0	1247.7	1247.5	1248.1	1249.3	1250.6	1251.9	1253.1	1251.9	1250.6	1249.3
175°	1252.9	1252.6	1252.5	1253.0	1254.2	1255.5	1256.8	1258.0	1256.8	1255.5	1254.2
177.5°	1255.8	1255.5	1255.2	1255.6	1256.8	1257.9	1259.0	1260.3	1259.0	1257.9	1256.8
180°	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0



TEST NUMBER: P332883-830

CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6
2.5°	543.7	541.9	539.6	536.9	533.7	530.8	529.5	530.7	531.2	529.7	529.5
5°	527.1	521.5	517.1	510.4	505.0	500.6	497.5	496.1	496.5	492.9	492.1
7.5°	508.5	501.9	494.6	486.6	479.3	472.7	469.3	467.4	463.5	461.9	459.2
10°	496.5	487.7	480.5	471.1	462.6	454.9	451.0	447.9	444.1	442.3	438.6
12.5°	484.3	473.9	466.0	456.3	447.6	438.3	434.6	428.9	422.9	419.1	414.2
15°	466.8	454.4	444.8	433.2	422.9	412.3	402.7	391.9	388.0	379.5	374.6
17.5°	446.6	433.9	422.1	406.5	390.7	377.3	367.1	356.8	350.7	345.3	342.8
20°	433.2	421.6	405.1	387.0	369.4	354.7	346.4	339.7	333.0	329.2	326.6
22.5°	420.6	405.7	386.5	367.0	349.4	337.9	330.9	324.0	318.6	315.0	311.4
25°	399.3	379.8	359.6	337.2	325.3	315.2	307.6	302.0	298.7	294.0	292.2
27.5°	377.5	353.9	331.6	316.6	304.1	294.8	288.2	284.1	279.8	276.8	274.5
30°	360.7	336.9	316.8	302.5	289.7	282.2	276.8	271.9	268.5	266.1	264.4
32.5°	344.1	320.3	303.4	288.0	278.0	270.6	264.9	261.2	258.5	255.4	254.3
35°	320.1	298.9	284.2	270.3	260.1	253.4	248.9	245.2	242.9	242.0	241.4
37.5°	297.0	279.7	263.8	252.5	243.4	238.1	232.8	230.9	229.4	227.8	228.6
40°	282.4	266.1	252.0	240.1	232.6	226.9	223.8	221.5	220.2	220.2	220.2
42.5°	269.8	253.8	240.1	229.3	222.0	217.1	213.6	211.7	211.2	211.0	212.2
45°	250.1	235.4	221.5	212.5	206.3	201.4	199.4	197.8	197.8	198.8	199.0
47.5°	230.5	216.8	205.7	195.7	189.9	186.9	185.1	184.4	184.5	185.3	186.3
50°	218.6	205.0	194.1	185.1	179.8	176.9	175.3	174.8	175.3	175.3	176.9
52.5°	205.6	193.4	182.7	175.1	169.1	166.4	165.5	164.9	165.1	165.9	166.5
55°	186.5	175.6	165.3	158.2	153.7	151.9	149.9	150.1	149.7	150.1	150.1
57.5°	167.3	157.5	148.0	142.3	138.4	135.8	133.7	134.2	133.6	133.5	133.1
60°	155.0	144.3	136.8	131.6	127.1	124.9	122.9	123.4	122.7	122.2	121.3
62.5°	141.7	132.7	125.5	120.6	117.0	114.4	112.4	112.0	110.4	108.9	106.9
65°	122.2	114.9	108.4	103.8	100.4	98.4	96.8	95.5	92.1	88.6	86.8
67.5°	103.4	98.0	92.0	88.0	85.3	82.8	79.7	77.5	74.4	72.4	71.3
70°	91.2	86.1	81.0	77.2	74.3	71.8	68.5	66.9	64.7	63.8	62.7
72.5°	79.6	74.8	70.1	66.6	63.6	61.6	59.0	57.5	56.5	56.1	55.0
75°	62.0	58.2	54.7	51.6	49.1	47.7	46.7	45.5	45.1	43.1	41.9
77.5°	45.2	42.7	40.5	38.3	36.6	35.6	33.5	32.2	31.5	30.5	30.3
80°	35.3	33.5	31.2	29.9	27.4	26.6	25.6	25.4	25.2	25.0	24.8
82.5°	26.5	24.7	22.5	21.7	21.0	20.5	20.0	19.7	19.5	19.6	19.6
85°	13.4	12.5	12.5	12.3	12.1	11.8	11.6	11.6	11.4	11.6	11.4
87.5°	6.9	7.1	7.4	7.4	7.9	8.2	8.3	8.6	9.0	8.9	9.0
90°	12.1	14.0	15.6	17.3	19.0	20.7	22.0	23.2	24.5	25.7	26.6
92.5°	12.3	13.3	14.9	16.6	18.3	20.0	21.2	22.4	23.8	25.0	25.6
95°	23.3	19.9	20.1	20.3	20.5	20.7	22.0	23.2	24.5	25.7	26.5
97.5°	127.6	118.2	94.8	71.5	48.2	24.9	25.0	25.1	25.3	25.4	25.5
100°	169.4	156.8	128.0	99.2	70.2	41.4	37.9	34.3	30.7	27.1	25.5
102.5°	215.0	214.5	210.8	207.0	203.2	199.4	161.1	122.8	84.5	46.1	27.0
105°	288.2	289.4	290.4	291.4	292.6	293.6	295.5	297.4	299.2	301.0	298.3
107.5°	359.3	360.3	361.7	363.2	364.6	366.0	366.9	367.9	368.8	369.7	370.5
110°	409.0	409.9	411.1	412.5	413.7	414.9	415.4	415.8	416.2	416.6	417.2



TEST NUMBER: P332883-830

CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	459.2	460.1	460.6	461.2	461.8	462.3	462.3	462.2	462.1	462.0	462.4
115°	531.3	531.5	531.3	531.1	530.8	530.7	531.1	531.5	532.0	532.3	532.5
117.5°	599.0	599.6	600.0	600.5	601.0	601.4	601.3	601.2	601.2	601.1	601.1
120°	644.1	644.4	644.2	644.0	643.8	643.6	644.0	644.4	644.8	645.3	645.3
122.5°	684.9	685.3	685.6	685.9	686.2	686.5	686.7	687.0	687.2	687.5	687.4
125°	746.7	746.9	746.5	746.0	745.6	745.2	745.8	746.5	747.1	747.7	748.1
127.5°	801.3	801.9	803.0	803.9	804.8	805.8	805.7	805.6	805.4	805.3	805.1
130°	838.2	838.7	839.3	839.9	840.6	841.2	841.4	841.6	841.8	842.0	842.2
132.5°	872.8	873.4	874.2	875.0	875.7	876.6	876.8	876.9	877.2	877.4	877.4
135°	921.2	921.5	922.4	923.2	924.1	924.9	925.3	925.8	926.1	926.6	927.0
137.5°	967.4	967.9	968.8	969.8	970.6	971.6	972.0	972.5	973.0	973.5	973.6
140°	998.1	998.5	998.9	999.4	999.8	1000.2	1000.8	1001.5	1002.1	1002.7	1003.1
142.5°	1025.8	1026.2	1026.5	1026.8	1027.0	1027.3	1027.7	1028.2	1028.7	1029.2	1029.4
145°	1065.7	1066.0	1066.0	1066.0	1066.0	1066.0	1066.3	1066.5	1066.7	1066.9	1067.2
147.5°	1100.1	1100.6	1100.3	1100.1	1099.9	1099.8	1099.9	1100.0	1100.2	1100.4	1100.6
150°	1122.1	1122.4	1122.2	1122.0	1121.8	1121.5	1121.5	1121.5	1121.5	1121.5	1121.6
152.5°	1140.9	1141.1	1140.8	1140.4	1140.0	1139.6	1140.0	1140.3	1140.7	1140.9	1141.0
155°	1166.6	1166.4	1165.8	1165.2	1164.5	1163.9	1164.7	1165.5	1166.4	1167.2	1167.3
157.5°	1188.5	1188.0	1187.3	1186.6	1185.9	1185.2	1186.3	1187.3	1188.5	1189.5	1189.5
160°	1200.0	1199.6	1199.4	1199.1	1198.9	1198.7	1200.0	1201.3	1202.5	1203.7	1203.7
162.5°	1211.4	1210.9	1210.6	1210.4	1210.2	1210.0	1211.3	1212.5	1213.8	1215.0	1214.9
165°	1225.6	1225.0	1225.0	1225.0	1225.0	1225.0	1226.7	1228.4	1230.1	1231.7	1231.6
167.5°	1237.5	1236.9	1236.7	1236.6	1236.5	1236.3	1238.2	1240.0	1241.9	1243.7	1243.6
170°	1243.6	1243.0	1243.2	1243.5	1243.7	1243.9	1245.6	1247.3	1248.9	1250.6	1250.4
172.5°	1248.1	1247.5	1247.7	1248.0	1248.2	1248.4	1250.1	1251.8	1253.4	1255.1	1254.8
175°	1253.0	1252.5	1252.6	1252.9	1253.1	1253.3	1255.2	1257.1	1259.0	1260.8	1260.5
177.5°	1255.6	1255.2	1255.5	1255.8	1256.1	1256.5	1257.8	1259.1	1260.5	1261.9	1261.5
180°	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0



TEST NUMBER: P332883-830

CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6
2.5°	528.5	528.9	527.6	527.3	527.6	528.9	528.5	529.5	529.7	531.2	530.7
5°	490.3	489.8	488.7	489.0	488.7	489.8	490.3	492.1	492.9	496.5	496.1
7.5°	457.6	455.9	456.4	454.6	456.4	455.9	457.6	459.2	461.9	463.5	467.4
10°	437.6	435.2	433.2	431.4	433.2	435.2	437.6	438.6	442.3	444.1	447.9
12.5°	410.4	408.2	405.6	406.0	405.6	408.2	410.4	414.2	419.1	422.9	428.9
15°	371.6	368.3	363.0	363.6	363.0	368.3	371.6	374.6	379.5	388.0	391.9
17.5°	338.8	338.8	336.4	337.1	336.4	338.8	338.8	342.8	345.3	350.7	356.8
20°	321.9	320.4	320.6	319.9	320.6	320.4	321.9	326.6	329.2	333.0	339.7
22.5°	310.1	308.2	306.6	305.3	306.6	308.2	310.1	311.4	315.0	318.6	324.0
25°	290.2	288.9	286.9	286.4	286.9	288.9	290.2	292.2	294.0	298.7	302.0
27.5°	272.7	272.5	271.6	270.6	271.6	272.5	272.7	274.5	276.8	279.8	284.1
30°	262.6	262.1	261.6	261.0	261.6	262.1	262.6	264.4	266.1	268.5	271.9
32.5°	253.4	253.2	252.7	252.8	252.7	253.2	253.4	254.3	255.4	258.5	261.2
35°	240.4	240.3	239.8	239.6	239.8	240.3	240.4	241.4	242.0	242.9	245.2
37.5°	228.4	228.9	228.7	228.6	228.7	228.9	228.4	228.6	227.8	229.4	230.9
40°	220.0	220.2	220.6	220.4	220.6	220.2	220.0	220.2	220.2	220.2	221.5
42.5°	213.0	213.0	213.7	212.9	213.7	213.0	213.0	212.2	211.0	211.2	211.7
45°	200.6	201.9	201.6	201.6	201.6	201.9	200.6	199.0	198.8	197.8	197.8
47.5°	186.9	188.1	188.4	188.3	188.4	188.1	186.9	186.3	185.3	184.5	184.4
50°	178.0	177.6	178.2	178.0	178.2	177.6	178.0	176.9	175.3	175.3	174.8
52.5°	167.1	167.2	167.2	166.9	167.2	167.2	167.1	166.5	165.9	165.1	164.9
55°	150.3	150.6	150.1	150.3	150.1	150.6	150.3	150.1	150.1	149.7	150.1
57.5°	132.1	131.1	131.5	131.0	131.5	131.1	132.1	133.1	133.5	133.6	134.2
60°	119.1	117.3	116.9	116.0	116.9	117.3	119.1	121.3	122.2	122.7	123.4
62.5°	104.5	103.2	101.7	102.5	101.7	103.2	104.5	106.9	108.9	110.4	112.0
65°	85.0	84.1	83.4	84.4	83.4	84.1	85.0	86.8	88.6	92.1	95.5
67.5°	70.3	69.8	69.8	69.5	69.8	69.8	70.3	71.3	72.4	74.4	77.5
70°	62.7	62.0	62.0	61.5	62.0	62.0	62.7	62.7	63.8	64.7	66.9
72.5°	54.9	54.2	54.4	54.1	54.4	54.2	54.9	55.0	56.1	56.5	57.5
75°	40.6	39.5	39.5	39.7	39.5	39.5	40.6	41.9	43.1	45.1	45.5
77.5°	30.3	30.1	30.3	30.0	30.3	30.1	30.3	30.3	30.5	31.5	32.2
80°	24.8	24.5	24.3	25.0	24.3	24.5	24.8	24.8	25.0	25.2	25.4
82.5°	19.2	19.2	19.1	20.0	19.1	19.2	19.2	19.6	19.6	19.5	19.7
85°	11.6	11.1	11.6	11.1	11.6	11.1	11.6	11.4	11.6	11.4	11.6
87.5°	9.5	9.4	9.3	9.6	9.3	9.4	9.5	9.0	8.9	9.0	8.6
90°	27.0	27.4	27.8	28.2	27.8	27.4	27.0	26.6	25.7	24.5	23.2
92.5°	25.7	25.8	25.9	26.0	25.9	25.8	25.7	25.6	25.0	23.8	22.4
95°	26.7	26.9	27.1	27.2	27.1	26.9	26.7	26.5	25.7	24.5	23.2
97.5°	25.7	25.9	26.1	26.4	26.1	25.9	25.7	25.5	25.4	25.3	25.1
100°	25.7	25.9	26.1	26.4	26.1	25.9	25.7	25.5	27.1	30.7	34.3
102.5°	27.0	27.1	27.1	27.1	27.1	27.1	27.0	27.0	46.1	84.5	122.8
105°	290.8	283.2	275.7	268.2	275.7	283.2	290.8	298.3	301.0	299.2	297.4
107.5°	371.4	372.1	373.0	373.7	373.0	372.1	371.4	370.5	369.7	368.8	367.9
110°	417.7	418.4	419.1	419.6	419.1	418.4	417.7	417.2	416.6	416.2	415.8



TEST NUMBER: P332883-830

CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	463.2	464.0	464.8	465.5	464.8	464.0	463.2	462.4	462.0	462.1	462.2
115°	532.5	532.5	532.5	532.5	532.5	532.5	532.5	532.5	532.3	532.0	531.5
117.5°	601.0	600.9	600.8	600.7	600.8	600.9	601.0	601.1	601.1	601.2	601.2
120°	644.8	644.4	644.0	643.6	644.0	644.4	644.8	645.3	645.3	644.8	644.4
122.5°	687.0	686.5	686.2	685.7	686.2	686.5	687.0	687.4	687.5	687.2	687.0
125°	748.4	748.6	748.8	748.9	748.8	748.6	748.4	748.1	747.7	747.1	746.5
127.5°	805.0	804.8	804.6	804.5	804.6	804.8	805.0	805.1	805.3	805.4	805.6
130°	842.2	842.2	842.2	842.2	842.2	842.2	842.2	842.2	842.0	841.8	841.6
132.5°	877.2	877.0	876.9	876.8	876.9	877.0	877.2	877.4	877.4	877.2	876.9
135°	927.5	927.8	928.2	928.7	928.2	927.8	927.5	927.0	926.6	926.1	925.8
137.5°	973.5	973.4	973.2	973.1	973.2	973.4	973.5	973.6	973.5	973.0	972.5
140°	1003.3	1003.5	1003.7	1004.0	1003.7	1003.5	1003.3	1003.1	1002.7	1002.1	1001.5
142.5°	1029.4	1029.4	1029.5	1029.5	1029.5	1029.4	1029.4	1029.4	1029.2	1028.7	1028.2
145°	1067.6	1068.0	1068.5	1068.8	1068.5	1068.0	1067.6	1067.2	1066.9	1066.7	1066.5
147.5°	1100.8	1101.0	1101.3	1101.5	1101.3	1101.0	1100.8	1100.6	1100.4	1100.2	1100.0
150°	1121.9	1122.1	1122.3	1122.5	1122.3	1122.1	1121.9	1121.6	1121.5	1121.5	1121.5
152.5°	1140.9	1140.9	1140.7	1140.6	1140.7	1140.9	1140.9	1141.0	1140.9	1140.7	1140.3
155°	1166.8	1166.1	1165.5	1164.9	1165.5	1166.1	1166.8	1167.3	1167.2	1166.4	1165.5
157.5°	1188.5	1187.3	1186.3	1185.2	1186.3	1187.3	1188.5	1189.5	1189.5	1188.5	1187.3
160°	1202.5	1201.3	1200.0	1198.7	1200.0	1201.3	1202.5	1203.7	1203.7	1202.5	1201.3
162.5°	1213.5	1212.1	1210.7	1209.3	1210.7	1212.1	1213.5	1214.9	1215.0	1213.8	1212.5
165°	1229.7	1227.9	1226.0	1224.1	1226.0	1227.9	1229.7	1231.6	1231.7	1230.1	1228.4
167.5°	1241.5	1239.4	1237.3	1235.2	1237.3	1239.4	1241.5	1243.6	1243.7	1241.9	1240.0
170°	1248.3	1246.2	1244.1	1242.0	1244.1	1246.2	1248.3	1250.4	1250.6	1248.9	1247.3
172.5°	1252.5	1250.3	1248.0	1245.8	1248.0	1250.3	1252.5	1254.8	1255.1	1253.4	1251.8
175°	1258.0	1255.5	1253.0	1250.5	1253.0	1255.5	1258.0	1260.5	1260.8	1259.0	1257.1
177.5°	1259.5	1257.5	1255.5	1253.5	1255.5	1257.5	1259.5	1261.5	1261.9	1260.5	1259.1
180°	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0



TEST NUMBER: P332883-830
 CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6
2.5°	529.5	530.8	533.7	536.9	539.6	541.9	543.7	546.2	548.5	551.7	554.7
5°	497.5	500.6	505.0	510.4	517.1	521.5	527.1	532.1	539.1	546.3	553.2
7.5°	469.3	472.7	479.3	486.6	494.6	501.9	508.5	517.2	526.6	537.1	548.7
10°	451.0	454.9	462.6	471.1	480.5	487.7	496.5	506.8	517.6	530.3	544.5
12.5°	434.6	438.3	447.6	456.3	466.0	473.9	484.3	494.6	509.0	522.7	538.9
15°	402.7	412.3	422.9	433.2	444.8	454.4	466.8	477.6	491.2	510.6	529.1
17.5°	367.1	377.3	390.7	406.5	422.1	433.9	446.6	459.9	476.1	495.9	517.3
20°	346.4	354.7	369.4	387.0	405.1	421.6	433.2	447.9	464.7	486.1	508.1
22.5°	330.9	337.9	349.4	367.0	386.5	405.7	420.6	435.1	453.6	475.0	499.1
25°	307.6	315.2	325.3	337.2	359.6	379.8	399.3	416.0	435.6	457.0	483.8
27.5°	288.2	294.8	304.1	316.6	331.6	353.9	377.5	396.5	416.7	439.7	466.5
30°	276.8	282.2	289.7	302.5	316.8	336.9	360.7	383.0	403.3	427.2	455.1
32.5°	264.9	270.6	278.0	288.0	303.4	320.3	344.1	368.5	390.1	414.5	441.9
35°	248.9	253.4	260.1	270.3	284.2	298.9	320.1	345.3	368.1	394.2	420.3
37.5°	232.8	238.1	243.4	252.5	263.8	279.7	297.0	322.8	348.0	371.8	397.3
40°	223.8	226.9	232.6	240.1	252.0	266.1	282.4	307.6	332.8	356.5	382.1
42.5°	213.6	217.1	222.0	229.3	240.1	253.8	269.8	291.5	317.8	340.7	364.1
45°	199.4	201.4	206.3	212.5	221.5	235.4	250.1	269.5	294.3	316.1	336.6
47.5°	185.1	186.9	189.9	195.7	205.7	216.8	230.5	248.0	269.7	291.5	308.9
50°	175.3	176.9	179.8	185.1	194.1	205.0	218.6	234.2	253.6	274.6	289.1
52.5°	165.5	166.4	169.1	175.1	182.7	193.4	205.6	220.0	238.1	255.5	270.2
55°	149.9	151.9	153.7	158.2	165.3	175.6	186.5	200.1	214.1	228.8	241.4
57.5°	133.7	135.8	138.4	142.3	148.0	157.5	167.3	178.3	190.4	202.6	213.1
60°	122.9	124.9	127.1	131.6	136.8	144.3	155.0	164.7	173.8	184.9	195.4
62.5°	112.4	114.4	117.0	120.6	125.5	132.7	141.7	150.0	159.5	169.2	177.0
65°	96.8	98.4	100.4	103.8	108.4	114.9	122.2	128.8	137.2	144.3	151.5
67.5°	79.7	82.8	85.3	88.0	92.0	98.0	103.4	109.6	115.4	120.6	127.1
70°	68.5	71.8	74.3	77.2	81.0	86.1	91.2	95.5	100.2	105.3	111.1
72.5°	59.0	61.6	63.6	66.6	70.1	74.8	79.6	83.1	87.0	90.5	96.1
75°	46.7	47.7	49.1	51.6	54.7	58.2	62.0	65.1	67.4	70.5	74.5
77.5°	33.5	35.6	36.6	38.3	40.5	42.7	45.2	47.9	50.0	51.1	54.2
80°	25.6	26.6	27.4	29.9	31.2	33.5	35.3	37.7	38.5	39.7	42.6
82.5°	20.0	20.5	21.0	21.7	22.5	24.7	26.5	28.1	28.9	29.3	31.6
85°	11.6	11.8	12.1	12.3	12.5	12.5	13.4	14.5	16.0	16.0	16.8
87.5°	8.3	8.2	7.9	7.4	7.4	7.1	6.9	6.4	6.5	6.6	6.6
90°	22.0	20.7	19.0	17.3	15.6	14.0	12.1	9.7	7.4	5.1	2.8
92.5°	21.2	20.0	18.3	16.6	14.9	13.3	12.3	12.3	12.1	12.0	11.9
95°	22.0	20.7	20.5	20.3	20.1	19.9	23.3	30.4	37.5	44.7	51.7
97.5°	25.0	24.9	48.2	71.5	94.8	118.2	127.6	123.2	118.8	114.3	109.9
100°	37.9	41.4	70.2	99.2	128.0	156.8	169.4	165.6	161.8	158.1	154.3
102.5°	161.1	199.4	203.2	207.0	210.8	214.5	215.0	212.3	209.5	206.8	204.0
105°	295.5	293.6	292.6	291.4	290.4	289.4	288.2	287.0	285.7	284.5	283.2
107.5°	366.9	366.0	364.6	363.2	361.7	360.3	359.3	358.6	358.1	357.4	356.8
110°	415.4	414.9	413.7	412.5	411.1	409.9	409.0	408.3	407.7	407.1	406.5



TEST NUMBER: P332883-830

CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	462.3	462.3	461.8	461.2	460.6	460.1	459.2	458.1	456.9	455.8	454.7
115°	531.1	530.7	530.8	531.1	531.3	531.5	531.3	530.7	530.1	529.4	528.8
117.5°	601.3	601.4	601.0	600.5	600.0	599.6	599.0	598.1	597.3	596.4	595.6
120°	644.0	643.6	643.8	644.0	644.2	644.4	644.1	643.3	642.4	641.6	640.7
122.5°	686.7	686.5	686.2	685.9	685.6	685.3	684.9	684.4	683.9	683.4	682.9
125°	745.8	745.2	745.6	746.0	746.5	746.9	746.7	745.8	745.0	744.1	743.3
127.5°	805.7	805.8	804.8	803.9	803.0	801.9	801.3	801.2	801.0	800.7	800.5
130°	841.4	841.2	840.6	839.9	839.3	838.7	838.2	838.0	837.8	837.6	837.4
132.5°	876.8	876.6	875.7	875.0	874.2	873.4	872.8	872.4	872.0	871.7	871.3
135°	925.3	924.9	924.1	923.2	922.4	921.5	921.2	921.4	921.7	921.9	922.1
137.5°	972.0	971.6	970.6	969.8	968.8	967.9	967.4	967.3	967.2	967.1	967.0
140°	1000.8	1000.2	999.8	999.4	998.9	998.5	998.1	997.7	997.3	996.8	996.5
142.5°	1027.7	1027.3	1027.0	1026.8	1026.5	1026.2	1025.8	1025.0	1024.3	1023.5	1022.8
145°	1066.3	1066.0	1066.0	1066.0	1066.0	1066.0	1065.7	1065.1	1064.5	1063.8	1063.2
147.5°	1099.9	1099.8	1099.9	1100.1	1100.3	1100.6	1100.1	1098.9	1097.8	1096.6	1095.4
150°	1121.5	1121.5	1121.8	1122.0	1122.2	1122.4	1122.1	1121.2	1120.4	1119.6	1118.7
152.5°	1140.0	1139.6	1140.0	1140.4	1140.8	1141.1	1140.9	1140.3	1139.6	1139.0	1138.3
155°	1164.7	1163.9	1164.5	1165.2	1165.8	1166.4	1166.6	1166.4	1166.2	1166.0	1165.8
157.5°	1186.3	1185.2	1185.9	1186.6	1187.3	1188.0	1188.5	1188.5	1188.6	1188.8	1188.9
160°	1200.0	1198.7	1198.9	1199.1	1199.4	1199.6	1200.0	1200.6	1201.3	1201.8	1202.5
162.5°	1211.3	1210.0	1210.2	1210.4	1210.6	1210.9	1211.4	1212.1	1213.0	1213.7	1214.6
165°	1226.7	1225.0	1225.0	1225.0	1225.0	1225.0	1225.6	1226.6	1227.7	1228.7	1229.7
167.5°	1238.2	1236.3	1236.5	1236.6	1236.7	1236.9	1237.5	1238.6	1239.6	1240.8	1241.8
170°	1245.6	1243.9	1243.7	1243.5	1243.2	1243.0	1243.6	1244.8	1246.0	1247.4	1248.6
172.5°	1250.1	1248.4	1248.2	1248.0	1247.7	1247.5	1248.1	1249.3	1250.6	1251.9	1253.1
175°	1255.2	1253.3	1253.1	1252.9	1252.6	1252.5	1253.0	1254.2	1255.5	1256.8	1258.0
177.5°	1257.8	1256.5	1256.1	1255.8	1255.5	1255.2	1255.6	1256.8	1257.9	1259.0	1260.3
180°	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0



TEST NUMBER: P332883-830

CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6	553.6
2.5°	557.0	558.6	560.4	563.8	566.7	568.0	570.4	572.2	571.7	574.2	578.4
5°	559.2	565.2	572.2	579.3	587.3	594.0	599.4	604.7	609.0	614.1	621.7
7.5°	558.8	569.6	581.3	594.0	607.2	618.6	629.1	639.8	649.3	659.7	673.4
10°	557.4	571.7	586.3	602.9	619.7	635.6	649.8	663.2	675.9	689.5	706.7
12.5°	555.8	572.2	589.7	609.9	630.7	649.8	666.6	685.9	701.8	719.3	739.1
15°	548.7	570.8	594.7	620.8	645.8	671.5	694.4	718.0	740.2	761.1	786.1
17.5°	540.6	566.1	594.3	625.1	655.1	686.3	713.6	743.4	765.9	794.1	817.3
20°	534.0	561.5	591.5	626.1	660.3	694.8	725.0	755.4	780.7	809.1	838.5
22.5°	526.0	556.1	588.7	624.5	660.3	698.0	731.4	761.6	793.1	824.9	855.3
25°	513.0	544.3	578.9	618.1	659.2	697.8	733.5	770.9	804.8	839.4	866.7
27.5°	497.2	530.0	566.4	606.9	649.0	688.5	730.6	770.5	804.6	837.9	861.7
30°	484.5	519.1	554.1	595.1	638.9	681.3	726.3	766.3	802.2	832.1	845.5
32.5°	471.5	504.3	540.4	581.9	626.7	672.3	717.0	757.9	791.1	809.0	809.4
35°	448.8	479.6	517.1	557.9	603.9	653.4	698.6	738.8	759.1	760.6	738.8
37.5°	424.1	452.3	487.7	528.6	578.9	628.2	674.4	701.2	707.9	685.2	644.9
40°	406.4	432.5	466.7	508.6	558.6	609.4	651.6	671.2	664.1	627.3	582.2
42.5°	387.9	412.2	445.1	486.4	536.6	588.1	624.0	634.4	615.6	573.1	520.3
45°	357.6	379.8	412.5	454.2	502.4	550.5	577.8	572.4	540.9	490.5	431.4
47.5°	326.0	347.6	376.9	415.5	464.9	506.4	524.8	508.7	463.9	408.5	360.4
50°	305.2	327.3	354.2	391.1	436.1	476.3	488.0	463.5	413.8	360.5	316.3
52.5°	284.6	303.5	330.0	365.5	408.6	442.5	448.8	420.6	369.2	321.4	282.2
55°	253.4	270.6	292.8	326.3	363.6	392.4	389.0	352.7	306.0	265.2	234.4
57.5°	223.2	236.1	256.7	288.1	320.8	340.2	327.9	296.9	253.4	220.0	194.1
60°	203.2	215.3	234.4	261.8	290.7	301.6	291.3	257.7	223.3	192.7	170.9
62.5°	184.3	194.9	211.4	236.9	260.1	266.6	255.6	226.2	195.3	169.2	151.1
65°	156.8	166.6	180.7	198.8	214.8	217.9	210.8	180.7	157.3	135.4	122.9
67.5°	131.9	138.3	149.3	164.9	173.4	175.2	161.5	142.5	121.9	108.5	99.1
70°	115.1	119.6	129.8	138.3	145.2	145.4	132.7	117.5	101.7	90.8	83.9
72.5°	98.9	103.1	110.9	116.7	122.1	120.3	108.7	96.7	83.9	75.6	70.5
75°	76.3	80.1	84.1	86.8	86.8	84.5	76.1	67.1	59.8	54.9	53.3
77.5°	55.4	58.5	59.9	59.5	58.7	55.2	49.9	44.0	41.4	39.1	37.9
80°	43.5	44.9	45.2	44.2	42.8	38.8	35.3	32.8	30.3	29.4	29.0
82.5°	32.2	33.5	32.2	32.6	29.6	26.3	24.3	23.5	22.5	22.1	21.7
85°	17.2	17.0	16.5	15.4	13.4	12.9	12.7	12.5	12.1	12.3	11.8
87.5°	6.9	6.9	6.6	6.9	7.3	7.3	7.7	8.1	8.4	8.5	9.1
90°	5.1	7.4	9.7	12.1	14.0	15.6	17.3	19.0	20.7	22.0	23.2
92.5°	12.0	12.1	12.3	12.3	13.3	14.9	16.6	18.3	20.0	21.2	22.4
95°	44.7	37.5	30.4	23.3	19.9	20.1	20.3	20.5	20.7	22.0	23.2
97.5°	114.3	118.8	123.2	127.6	118.2	94.8	71.5	48.2	24.9	25.0	25.1
100°	158.1	161.8	165.6	169.4	156.8	128.0	99.2	70.2	41.4	37.9	34.3
102.5°	206.8	209.5	212.3	215.0	214.5	210.8	207.0	203.2	199.4	161.1	122.8
105°	284.5	285.7	287.0	288.2	289.4	290.4	291.4	292.6	293.6	295.5	297.4
107.5°	357.4	358.1	358.6	359.3	360.3	361.7	363.2	364.6	366.0	366.9	367.9
110°	407.1	407.7	408.3	409.0	409.9	411.1	412.5	413.7	414.9	415.4	415.8



TEST NUMBER: P332883-830

CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	455.8	456.9	458.1	459.2	460.1	460.6	461.2	461.8	462.3	462.3	462.2
115°	529.4	530.1	530.7	531.3	531.5	531.3	531.1	530.8	530.7	531.1	531.5
117.5°	596.4	597.3	598.1	599.0	599.6	600.0	600.5	601.0	601.4	601.3	601.2
120°	641.6	642.4	643.3	644.1	644.4	644.2	644.0	643.8	643.6	644.0	644.4
122.5°	683.4	683.9	684.4	684.9	685.3	685.6	685.9	686.2	686.5	686.7	687.0
125°	744.1	745.0	745.8	746.7	746.9	746.5	746.0	745.6	745.2	745.8	746.5
127.5°	800.7	801.0	801.2	801.3	801.9	803.0	803.9	804.8	805.8	805.7	805.6
130°	837.6	837.8	838.0	838.2	838.7	839.3	839.9	840.6	841.2	841.4	841.6
132.5°	871.7	872.0	872.4	872.8	873.4	874.2	875.0	875.7	876.6	876.8	876.9
135°	921.9	921.7	921.4	921.2	921.5	922.4	923.2	924.1	924.9	925.3	925.8
137.5°	967.1	967.2	967.3	967.4	967.9	968.8	969.8	970.6	971.6	972.0	972.5
140°	996.8	997.3	997.7	998.1	998.5	998.9	999.4	999.8	1000.2	1000.8	1001.5
142.5°	1023.5	1024.3	1025.0	1025.8	1026.2	1026.5	1026.8	1027.0	1027.3	1027.7	1028.2
145°	1063.8	1064.5	1065.1	1065.7	1066.0	1066.0	1066.0	1066.0	1066.0	1066.3	1066.5
147.5°	1096.6	1097.8	1098.9	1100.1	1100.6	1100.3	1100.1	1099.9	1099.8	1099.9	1100.0
150°	1119.6	1120.4	1121.2	1122.1	1122.4	1122.2	1122.0	1121.8	1121.5	1121.5	1121.5
152.5°	1139.0	1139.6	1140.3	1140.9	1141.1	1140.8	1140.4	1140.0	1139.6	1140.0	1140.3
155°	1166.0	1166.2	1166.4	1166.6	1166.4	1165.8	1165.2	1164.5	1163.9	1164.7	1165.5
157.5°	1188.8	1188.6	1188.5	1188.5	1188.0	1187.3	1186.6	1185.9	1185.2	1186.3	1187.3
160°	1201.8	1201.3	1200.6	1200.0	1199.6	1199.4	1199.1	1198.9	1198.7	1200.0	1201.3
162.5°	1213.7	1213.0	1212.1	1211.4	1210.9	1210.6	1210.4	1210.2	1210.0	1211.3	1212.5
165°	1228.7	1227.7	1226.6	1225.6	1225.0	1225.0	1225.0	1225.0	1225.0	1226.7	1228.4
167.5°	1240.8	1239.6	1238.6	1237.5	1236.9	1236.7	1236.6	1236.5	1236.3	1238.2	1240.0
170°	1247.4	1246.0	1244.8	1243.6	1243.0	1243.2	1243.5	1243.7	1243.9	1245.6	1247.3
172.5°	1251.9	1250.6	1249.3	1248.1	1247.5	1247.7	1248.0	1248.2	1248.4	1250.1	1251.8
175°	1256.8	1255.5	1254.2	1253.0	1252.5	1252.6	1252.9	1253.1	1253.3	1255.2	1257.1
177.5°	1259.0	1257.9	1256.8	1255.6	1255.2	1255.5	1255.8	1256.1	1256.5	1257.8	1259.1
180°	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0



TEST NUMBER: P332883-830

CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	553.6	553.6	553.6	553.6	553.6	553.6	553.6
2.5°	580.8	581.5	582.0	583.8	584.0	585.6	584.0
5°	628.9	632.0	636.9	641.8	642.2	645.4	639.8
7.5°	682.7	689.9	694.5	702.4	705.5	707.5	704.3
10°	719.8	726.5	738.4	744.1	750.0	750.8	748.2
12.5°	755.7	766.3	775.6	786.6	786.4	794.2	791.4
15°	803.5	814.5	827.4	839.6	844.0	844.0	847.6
17.5°	837.5	857.6	871.0	880.6	891.2	893.0	891.7
20°	860.6	882.2	896.5	909.0	916.2	918.1	918.1
22.5°	877.7	896.2	910.1	921.3	927.2	929.5	928.9
25°	889.6	905.4	913.9	917.3	918.8	918.4	914.2
27.5°	873.4	872.6	867.3	857.1	849.3	844.6	839.2
30°	842.4	830.7	817.3	802.6	783.6	769.1	764.7
32.5°	796.1	770.1	747.3	722.8	702.5	688.0	681.8
35°	706.7	665.4	631.7	602.3	580.9	567.5	563.0
37.5°	600.6	560.6	519.0	490.4	472.6	459.1	454.1
40°	533.1	489.7	453.3	426.5	408.2	395.0	394.8
42.5°	471.6	430.0	395.8	376.5	356.8	348.1	348.1
45°	386.2	352.9	323.9	308.7	296.9	289.7	287.8
47.5°	319.7	292.2	272.9	260.8	251.2	246.7	243.6
50°	282.4	258.4	242.9	232.4	227.1	221.3	220.8
52.5°	251.4	231.9	219.9	211.4	204.6	201.1	201.2
55°	211.2	195.9	187.4	180.9	175.6	172.9	171.7
57.5°	178.0	166.5	160.2	154.3	152.0	150.0	149.4
60°	157.3	149.5	143.6	138.9	135.6	135.0	134.7
62.5°	140.2	132.0	128.0	124.3	121.9	120.8	120.5
65°	115.6	109.5	105.9	103.0	102.2	100.6	100.4
67.5°	93.1	89.5	87.2	85.2	84.0	83.9	83.9
70°	79.5	77.4	75.4	74.3	73.6	73.1	73.1
72.5°	67.7	66.2	64.5	63.9	63.8	63.3	63.2
75°	51.6	50.0	50.2	49.1	48.2	47.0	46.4
77.5°	36.6	35.4	35.2	35.1	34.3	34.2	34.5
80°	28.4	27.2	27.0	27.2	27.0	26.3	26.3
82.5°	21.6	20.6	20.4	20.3	20.1	20.3	19.9
85°	11.6	11.1	11.1	11.1	11.6	11.4	11.1
87.5°	9.0	9.0	9.4	9.3	9.4	9.3	9.6
90°	24.5	25.7	26.6	27.0	27.4	27.8	28.2
92.5°	23.8	25.0	25.6	25.7	25.8	25.9	26.0
95°	24.5	25.7	26.5	26.7	26.9	27.1	27.2
97.5°	25.3	25.4	25.5	25.7	25.9	26.1	26.4
100°	30.7	27.1	25.5	25.7	25.9	26.1	26.4
102.5°	84.5	46.1	27.0	27.0	27.1	27.1	27.1
105°	299.2	301.0	298.3	290.8	283.2	275.7	268.2
107.5°	368.8	369.7	370.5	371.4	372.1	373.0	373.7
110°	416.2	416.6	417.2	417.7	418.4	419.1	419.6



TEST NUMBER: P332883-830

CATALOG NUMBER: SA4XXRDIP-C350D1035U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	462.1	462.0	462.4	463.2	464.0	464.8	465.5
115°	532.0	532.3	532.5	532.5	532.5	532.5	532.5
117.5°	601.2	601.1	601.1	601.0	600.9	600.8	600.7
120°	644.8	645.3	645.3	644.8	644.4	644.0	643.6
122.5°	687.2	687.5	687.4	687.0	686.5	686.2	685.7
125°	747.1	747.7	748.1	748.4	748.6	748.8	748.9
127.5°	805.4	805.3	805.1	805.0	804.8	804.6	804.5
130°	841.8	842.0	842.2	842.2	842.2	842.2	842.2
132.5°	877.2	877.4	877.4	877.2	877.0	876.9	876.8
135°	926.1	926.6	927.0	927.5	927.8	928.2	928.7
137.5°	973.0	973.5	973.6	973.5	973.4	973.2	973.1
140°	1002.1	1002.7	1003.1	1003.3	1003.5	1003.7	1004.0
142.5°	1028.7	1029.2	1029.4	1029.4	1029.4	1029.5	1029.5
145°	1066.7	1066.9	1067.2	1067.6	1068.0	1068.5	1068.8
147.5°	1100.2	1100.4	1100.6	1100.8	1101.0	1101.3	1101.5
150°	1121.5	1121.5	1121.6	1121.9	1122.1	1122.3	1122.5
152.5°	1140.7	1140.9	1141.0	1140.9	1140.9	1140.7	1140.6
155°	1166.4	1167.2	1167.3	1166.8	1166.1	1165.5	1164.9
157.5°	1188.5	1189.5	1189.5	1188.5	1187.3	1186.3	1185.2
160°	1202.5	1203.7	1203.7	1202.5	1201.3	1200.0	1198.7
162.5°	1213.8	1215.0	1214.9	1213.5	1212.1	1210.7	1209.3
165°	1230.1	1231.7	1231.6	1229.7	1227.9	1226.0	1224.1
167.5°	1241.9	1243.7	1243.6	1241.5	1239.4	1237.3	1235.2
170°	1248.9	1250.6	1250.4	1248.3	1246.2	1244.1	1242.0
172.5°	1253.4	1255.1	1254.8	1252.5	1250.3	1248.0	1245.8
175°	1259.0	1260.8	1260.5	1258.0	1255.5	1253.0	1250.5
177.5°	1260.5	1261.9	1261.5	1259.5	1257.5	1255.5	1253.5
180°	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0	1258.0

(END OF REPORT)