

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332894-830

Luminaire Tested: **SA4XXRDIP-C350D1205U830-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332894-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C350D1205U830-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1205 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5403.7 lumens
Efficiency: N/A
Efficacy: 128.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 42.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332894-830

CATALOG NUMBER: SA4XXRDIP-C350D1205U830-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

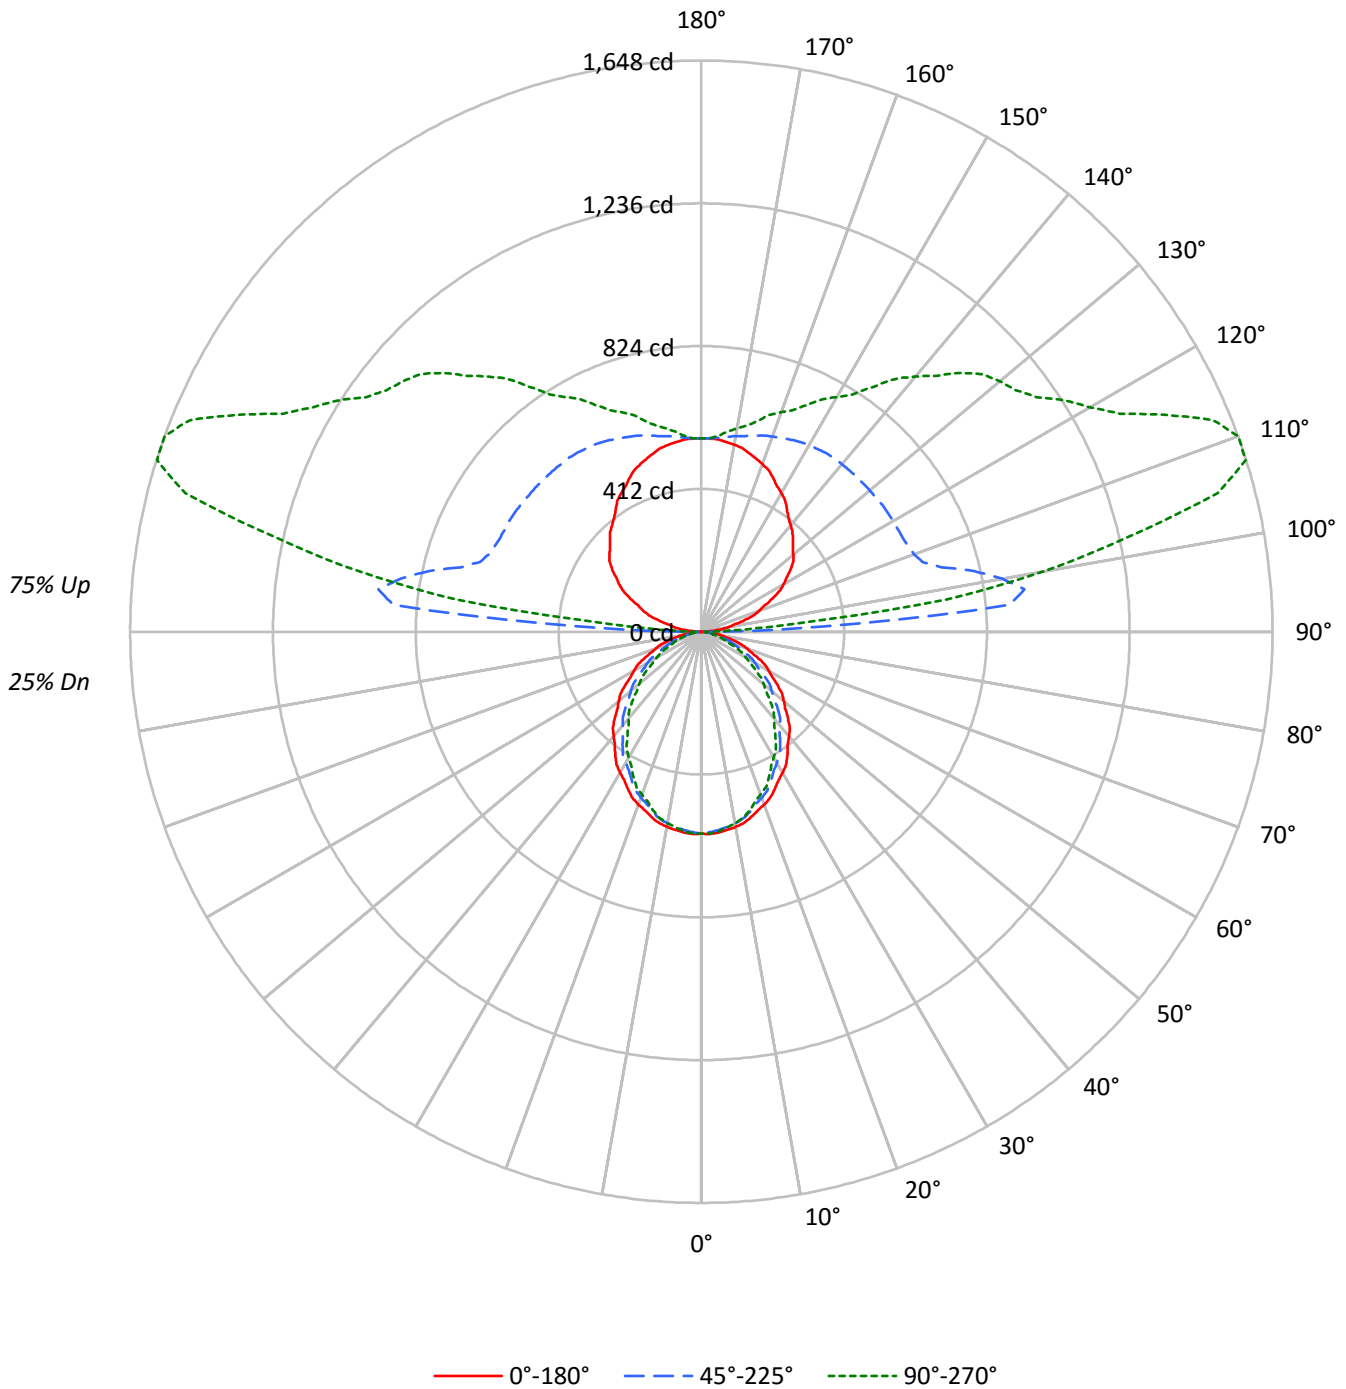



TEST NUMBER: P332894-830

CATALOG NUMBER: SA4XXRDIP-C350D1205U830-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	51	51	51	33	33	33	25
1	92	88	85	81	82	79	76	73	61	59	57	45	43	42	29	29	28	21
2	84	77	71	66	75	69	64	60	53	50	47	39	37	35	26	25	24	18
3	77	68	61	55	68	61	55	50	47	43	40	35	32	30	23	22	20	15
4	70	60	52	47	62	54	47	42	42	37	34	31	28	26	21	19	18	13
5	64	53	46	40	57	48	41	36	37	33	29	28	25	22	19	17	15	12
6	59	48	40	34	53	43	36	31	34	29	25	25	22	19	17	15	14	10
7	55	43	35	30	48	39	32	27	30	26	22	23	20	17	15	14	12	9
8	51	39	31	26	45	35	29	24	28	23	20	21	18	15	14	12	11	8
9	47	35	28	23	42	32	26	21	25	21	17	19	16	14	13	11	10	7
10	44	32	25	21	39	29	23	19	23	19	16	17	14	12	12	10	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4704	4704	4704
5°	4714	4657	4686
10°	4685	4601	4601
15°	4631	4504	4471
20°	4558	4376	4296
25°	4464	4228	4121
30°	4371	4072	3901
35°	4269	3909	3680
40°	4147	3724	3442
45°	4035	3540	3199
50°	3905	3328	2941
55°	3768	3108	2663
60°	3615	2868	2377
65°	3477	2565	2096
70°	3274	2231	1780
75°	3019	1853	1447
80°	2631	1409	1330
85°	2232	1288	1195



TEST NUMBER: P332894-830

CATALOG NUMBER: SA4XXRDIP-C350D1205U830-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.7	1.0
10°-20°	152.6	2.8
20°-30°	220.4	4.1
30°-40°	249.8	4.6
40°-50°	241.2	4.5
50°-60°	200.6	3.7
60°-70°	138.5	2.6
70°-80°	70.2	1.3
80°-90°	21.1	0.4
90°-100°	402.7	7.5
100°-110°	838.0	15.5
110°-120°	750.6	13.9
120°-130°	631.4	11.7
130°-140°	526.5	9.7
140°-150°	402.2	7.4
150°-160°	282.7	5.2
160°-170°	166.3	3.1
170°-180°	54.1	1.0
0°-30°	427.8	7.9
0°-40°	677.6	12.5
0°-60°	1119.4	20.7
0°-90°	1349.2	25.0
90°-120°	1991.3	36.9
90°-150°	3551.4	65.7
90°-180°	4054.0	75.0
0°-180°	5403.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	583	583	583	583	583	
5°	582	580	575	579	578	55
15°	554	550	539	538	535	156
25°	501	492	475	467	463	231
35°	433	418	397	382	373	271
45°	353	336	310	289	280	272
55°	268	249	221	198	189	239
65°	182	162	134	116	110	180
75°	97	80	59	50	46	102
85°	24	16	14	13	13	27
90°	1	9	20	22	23	3
95°	36	114	893	442	267	40
105°	128	186	718	1547	1541	137
115°	226	283	641	1231	1480	224
125°	314	374	637	1048	1181	280
135°	373	445	632	930	1056	289
145°	430	493	629	784	862	270
155°	490	528	611	692	722	226
165°	533	550	586	620	630	151
175°	556	558	562	570	567	53
180°	558	558	558	558	558	



TEST NUMBER: P332894-830

CATALOG NUMBER: SA4XXRDIP-C350D1205U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	582.7	582.7	582.7	582.7	582.7	582.7	582.7	582.7	582.7	582.7	582.7
2.5°	584.1	583.7	583.4	583.2	582.8	582.2	581.4	580.5	579.6	578.7	579.6
5°	581.7	581.4	581.0	580.6	580.1	579.4	578.2	577.0	575.8	574.7	575.6
7.5°	576.5	576.1	575.7	575.2	574.9	573.8	572.3	570.7	569.2	567.7	568.3
10°	571.5	571.0	570.5	570.0	569.5	568.4	566.6	564.8	563.0	561.3	561.7
12.5°	565.1	564.5	563.9	563.4	562.8	561.5	559.3	557.2	555.2	553.0	553.3
15°	554.1	553.2	552.3	551.4	550.5	548.8	546.4	543.8	541.4	538.9	538.8
17.5°	540.8	539.5	538.2	537.0	535.6	533.5	530.6	527.5	524.6	521.6	521.0
20°	530.5	529.1	527.9	526.6	525.3	523.0	519.6	516.2	512.8	509.4	508.7
22.5°	519.1	517.6	516.1	514.7	513.2	510.7	507.1	503.5	499.9	496.2	495.1
25°	501.1	499.3	497.5	495.7	493.9	491.0	486.9	482.9	478.7	474.7	473.0
27.5°	482.1	479.8	477.6	475.4	473.2	469.9	465.5	461.2	456.9	452.5	450.3
30°	468.9	466.4	463.9	461.5	459.0	455.4	450.7	446.1	441.4	436.8	434.3
32.5°	455.0	452.1	449.4	446.6	443.7	440.0	435.2	430.4	425.6	420.8	417.8
35°	433.2	430.0	426.9	423.7	420.5	416.4	411.5	406.5	401.6	396.6	393.2
37.5°	409.9	406.6	403.4	400.1	396.8	392.5	386.9	381.4	376.0	370.5	366.7
40°	393.5	390.2	386.9	383.7	380.4	376.0	370.3	364.7	359.0	353.4	349.2
42.5°	377.8	374.4	370.9	367.5	364.1	359.4	353.5	347.6	341.8	335.8	331.6
45°	353.4	349.7	346.0	342.3	338.7	333.8	327.9	322.0	316.0	310.1	305.2
47.5°	328.1	324.3	320.6	316.7	312.9	307.9	301.8	295.6	289.4	283.2	278.1
50°	310.9	307.1	303.2	299.4	295.5	290.4	284.1	277.7	271.4	265.0	260.0
52.5°	293.5	289.6	285.9	282.1	278.3	273.1	266.6	260.1	253.6	247.1	242.1
55°	267.7	263.7	259.8	255.8	251.8	246.6	240.2	233.8	227.2	220.8	215.7
57.5°	242.1	238.0	233.9	229.8	225.6	220.5	214.1	207.7	201.4	195.0	189.8
60°	223.9	220.0	216.0	212.1	208.1	202.9	196.6	190.2	183.9	177.6	172.4
62.5°	207.5	203.4	199.3	195.2	191.1	185.8	179.3	172.8	166.3	159.8	155.0
65°	182.0	177.8	173.5	169.3	164.9	159.7	153.4	146.9	140.6	134.3	130.1
67.5°	155.5	151.5	147.3	143.3	139.2	134.2	128.3	122.4	116.5	110.7	107.0
70°	138.7	134.6	130.4	126.3	122.1	117.2	111.5	105.8	100.2	94.5	91.3
72.5°	120.9	117.2	113.4	109.6	105.8	101.3	96.0	90.6	85.3	79.9	77.2
75°	96.8	93.1	89.4	85.8	82.1	77.9	73.3	68.6	64.0	59.4	57.0
77.5°	72.4	69.3	66.2	63.1	59.9	56.5	52.7	48.9	45.1	41.4	40.1
80°	56.6	53.8	50.9	48.1	45.1	42.2	39.3	36.3	33.3	30.3	30.1
82.5°	43.1	40.4	37.8	35.2	32.5	30.3	28.7	27.0	25.3	23.6	23.4
85°	24.1	22.1	20.2	18.1	16.1	15.0	14.7	14.4	14.1	13.9	13.7
87.5°	8.4	8.2	8.3	7.8	7.4	7.1	8.3	8.2	8.6	9.0	8.7
90°	1.1	3.3	6.6	7.6	8.8	8.8	15.4	15.4	17.5	19.7	18.7
92.5°	12.4	18.2	28.5	41.8	57.9	80.6	136.3	221.2	304.1	347.4	289.4
95°	36.1	39.4	50.4	64.7	90.9	137.0	232.1	411.8	673.5	892.6	917.8
97.5°	64.8	64.8	74.3	87.4	110.0	148.5	221.9	370.2	630.4	940.2	1153.1
100°	83.2	83.2	90.9	104.1	124.9	159.9	224.5	348.3	571.7	880.5	1160.9
102.5°	100.8	102.5	109.3	121.6	141.5	174.8	233.3	342.1	532.3	806.1	1095.2
105°	128.2	131.4	137.0	150.1	169.8	201.5	254.1	345.0	498.3	718.5	975.8
107.5°	158.3	160.5	166.1	180.0	198.9	230.3	278.4	361.2	492.2	669.4	879.5
110°	178.5	180.7	186.2	199.3	219.0	248.6	296.8	373.4	494.0	652.8	831.3



TEST NUMBER: P332894-830

CATALOG NUMBER: SA4XXRDIP-C350D1205U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	197.8	200.0	206.3	218.6	238.4	267.9	314.3	386.6	499.2	644.9	804.1
115°	225.6	228.9	236.6	247.5	268.3	297.9	341.7	407.5	509.3	640.7	778.7
117.5°	254.5	257.6	264.4	276.4	296.0	326.6	368.3	428.7	520.0	639.6	767.3
120°	273.8	276.0	283.7	295.7	314.3	345.0	386.6	443.6	527.9	639.6	761.2
122.5°	291.3	293.5	301.2	312.4	332.7	362.5	404.2	457.6	535.8	638.8	754.2
125°	314.3	318.7	325.3	337.3	358.2	388.8	428.2	478.6	547.6	637.4	742.5
127.5°	334.7	338.2	346.1	359.9	381.5	412.5	450.5	496.8	557.0	635.0	727.0
130°	346.1	350.4	359.2	375.7	396.4	428.2	465.5	508.2	564.0	634.1	717.4
132.5°	357.5	361.0	372.4	388.0	410.5	440.5	477.8	519.6	570.1	633.3	708.6
135°	373.4	377.9	388.8	407.5	430.5	458.9	495.0	534.5	579.4	632.0	695.5
137.5°	389.5	393.6	405.7	423.4	447.3	474.5	508.2	545.0	584.8	631.7	684.1
140°	400.9	404.2	416.2	434.8	457.8	484.1	517.0	552.0	589.3	630.8	678.0
142.5°	413.1	416.4	427.5	445.4	467.4	492.9	524.8	557.2	592.8	630.8	672.7
145°	430.5	433.8	444.7	460.0	480.8	504.9	533.4	563.0	594.7	628.7	663.7
147.5°	449.9	451.0	460.6	476.5	493.7	515.4	542.2	568.0	595.8	624.7	655.6
150°	462.2	463.3	472.0	485.2	501.6	522.5	546.5	570.6	595.8	622.1	649.5
152.5°	473.5	473.8	482.6	494.8	509.5	528.6	550.1	572.4	594.1	617.7	642.4
155°	489.6	490.7	497.2	508.2	520.3	536.7	555.3	573.9	591.4	611.1	632.0
157.5°	505.1	505.1	511.2	519.8	530.3	543.3	559.0	573.9	588.6	604.4	621.2
160°	514.7	514.7	519.2	526.8	535.6	547.6	560.7	573.9	586.0	599.1	613.3
162.5°	523.5	522.6	526.1	532.9	540.8	550.3	562.5	573.9	583.3	593.8	606.3
165°	533.4	533.4	535.6	541.0	546.5	553.1	563.0	571.7	578.2	586.0	594.7
167.5°	543.3	542.2	543.3	547.4	550.4	555.5	562.7	569.1	573.1	578.1	584.2
170°	547.6	546.5	547.6	550.9	553.1	556.4	561.8	567.3	569.5	572.8	577.2
172.5°	552.0	550.9	551.1	553.6	554.9	557.2	561.0	565.6	566.0	567.5	571.1
175°	556.4	555.3	555.3	556.4	557.5	557.5	559.7	563.0	561.8	561.8	564.0
177.5°	558.4	557.5	556.6	557.5	557.5	557.5	558.4	560.1	558.4	558.4	559.2
180°	557.5	557.5	557.5	557.5	557.5	557.5	557.5	557.5	557.5	557.5	557.5



TEST NUMBER: P332894-830

CATALOG NUMBER: SA4XXRDIP-C350D1205U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	582.7	582.7	582.7	582.7	582.7	582.7	582.7	582.7
2.5°	580.5	581.4	582.2	582.6	582.5	582.5	582.4	582.3
5°	576.6	577.6	578.6	579.0	578.8	578.6	578.3	578.2
7.5°	568.9	569.6	570.2	570.3	570.0	569.8	569.4	569.1
10°	562.0	562.4	562.8	562.8	562.4	562.0	561.7	561.3
12.5°	553.5	553.7	554.0	553.8	553.3	552.7	552.1	551.6
15°	538.6	538.4	538.1	537.7	537.0	536.3	535.6	534.9
17.5°	520.5	520.0	519.4	518.6	517.6	516.5	515.5	514.4
20°	507.9	507.1	506.3	505.3	504.0	502.7	501.4	500.1
22.5°	493.9	492.7	491.5	490.4	489.4	488.3	487.3	486.2
25°	471.3	469.7	468.0	466.7	465.6	464.6	463.6	462.6
27.5°	448.3	446.2	444.1	442.4	440.9	439.5	438.1	436.7
30°	431.8	429.3	426.9	424.8	423.2	421.7	420.1	418.5
32.5°	415.0	412.1	409.3	407.0	405.5	404.0	402.5	401.0
35°	389.8	386.5	383.1	380.6	378.8	377.0	375.2	373.4
37.5°	363.0	359.2	355.4	352.6	350.8	349.0	347.2	345.4
40°	345.0	340.8	336.7	333.8	332.0	330.2	328.4	326.6
42.5°	327.3	323.1	318.9	315.8	314.0	312.1	310.2	308.4
45°	300.4	295.5	290.6	287.3	285.5	283.7	281.9	280.2
47.5°	273.1	268.1	263.1	259.6	257.6	255.6	253.6	251.8
50°	255.1	250.2	245.2	241.8	239.9	238.0	236.1	234.2
52.5°	237.0	232.1	227.1	223.5	221.6	219.6	217.6	215.7
55°	210.6	205.4	200.2	196.7	194.8	192.9	191.1	189.2
57.5°	184.5	179.4	174.1	170.8	169.4	168.0	166.5	165.0
60°	167.2	162.1	156.9	153.5	151.9	150.4	148.8	147.2
62.5°	150.2	145.4	140.7	137.7	136.4	135.2	133.8	132.6
65°	125.7	121.5	117.3	114.5	113.3	112.2	110.9	109.7
67.5°	103.3	99.6	96.0	93.5	92.2	90.9	89.5	88.2
70°	88.0	84.7	81.5	79.4	78.3	77.4	76.3	75.4
72.5°	74.4	71.5	68.8	66.9	66.0	65.1	64.2	63.2
75°	54.8	52.5	50.2	48.8	48.2	47.6	47.0	46.4
77.5°	38.7	37.4	36.1	35.3	35.2	35.0	34.8	34.6
80°	29.8	29.4	29.1	28.9	28.8	28.7	28.7	28.6
82.5°	23.1	22.9	22.7	22.5	22.4	22.3	22.2	22.1
85°	13.5	13.2	13.0	12.9	12.9	12.9	12.9	12.9
87.5°	8.8	9.0	9.0	9.0	9.3	9.6	9.5	9.6
90°	19.7	20.8	21.9	21.9	23.0	24.1	23.0	23.0
92.5°	215.1	161.8	128.8	106.9	94.0	88.0	84.4	84.4
95°	811.5	641.8	495.0	388.8	335.2	301.2	281.4	267.2
97.5°	1199.1	1136.0	1028.9	914.5	835.8	770.0	737.1	714.4
100°	1320.9	1342.7	1289.1	1208.1	1112.8	1045.9	1013.1	1004.4
102.5°	1314.8	1423.3	1438.9	1405.1	1346.7	1298.3	1263.7	1256.7
105°	1226.6	1416.2	1524.6	1569.4	1571.7	1562.9	1547.6	1541.0
107.5°	1101.5	1303.3	1456.0	1553.7	1607.8	1632.8	1643.7	1646.6
110°	1026.2	1215.7	1374.5	1495.0	1572.7	1618.7	1638.5	1648.3



TEST NUMBER: P332894-830

CATALOG NUMBER: SA4XXRDIP-C350D1205U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	971.0	1138.6	1288.6	1409.1	1497.4	1553.0	1580.6	1596.7
115°	915.6	1050.4	1178.5	1283.6	1370.2	1435.9	1470.9	1479.7
117.5°	888.4	999.9	1100.7	1189.9	1263.7	1318.9	1354.3	1361.1
120°	876.2	978.1	1065.6	1143.4	1205.9	1254.1	1282.5	1294.6
122.5°	865.6	964.0	1043.8	1111.9	1164.7	1205.9	1229.9	1242.0
125°	847.7	941.9	1017.5	1077.7	1121.5	1153.3	1174.1	1180.6
127.5°	825.8	915.9	991.2	1048.4	1092.4	1120.7	1138.2	1144.7
130°	808.3	894.8	969.3	1027.4	1072.2	1099.6	1117.1	1123.7
132.5°	789.9	871.2	943.9	1001.9	1045.9	1076.9	1093.4	1100.0
135°	764.5	835.7	902.5	957.2	1001.1	1031.7	1049.2	1055.8
137.5°	741.5	801.7	858.0	907.5	948.5	978.7	993.2	1001.1
140°	728.3	779.8	829.1	875.1	913.4	937.5	952.8	961.6
142.5°	716.0	761.4	803.7	843.6	877.5	899.8	913.4	919.5
145°	698.8	736.0	768.8	799.6	826.9	845.6	856.5	862.0
147.5°	684.6	714.1	740.4	764.5	784.7	800.6	809.0	810.9
150°	675.8	701.0	722.8	742.5	760.1	774.3	780.9	782.0
152.5°	666.1	687.8	707.9	724.2	739.0	750.6	754.6	755.7
155°	651.7	669.2	685.6	698.8	709.7	718.5	721.8	721.8
157.5°	636.1	650.8	664.6	675.1	683.4	690.0	692.0	692.0
160°	626.5	638.5	650.5	659.3	665.9	672.5	673.5	673.5
162.5°	616.8	627.2	636.6	644.4	649.2	655.8	657.0	656.0
165°	603.5	610.0	617.7	623.2	627.5	632.0	630.8	629.8
167.5°	590.6	595.6	601.7	605.0	607.2	610.0	609.8	609.0
170°	582.7	586.0	590.3	593.6	595.8	596.9	595.8	595.8
172.5°	575.6	578.1	580.7	583.1	584.4	585.5	584.4	582.7
175°	566.3	567.3	569.5	569.5	569.5	571.7	569.5	567.3
177.5°	560.1	561.0	561.0	561.8	561.0	561.8	560.1	558.4
180°	557.5	557.5	557.5	557.5	557.5	557.5	557.5	557.5

(END OF REPORT)