

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332931-830

Luminaire Tested: **SA4XXRDIP-C795D590U830-4F0-1E-UDD-A**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332931-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 590 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5370.7 lumens
Efficiency: N/A
Efficacy: 133.3 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.23 / 1.39
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 40.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332931-830
CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

Luminous Intensity Polar Plot

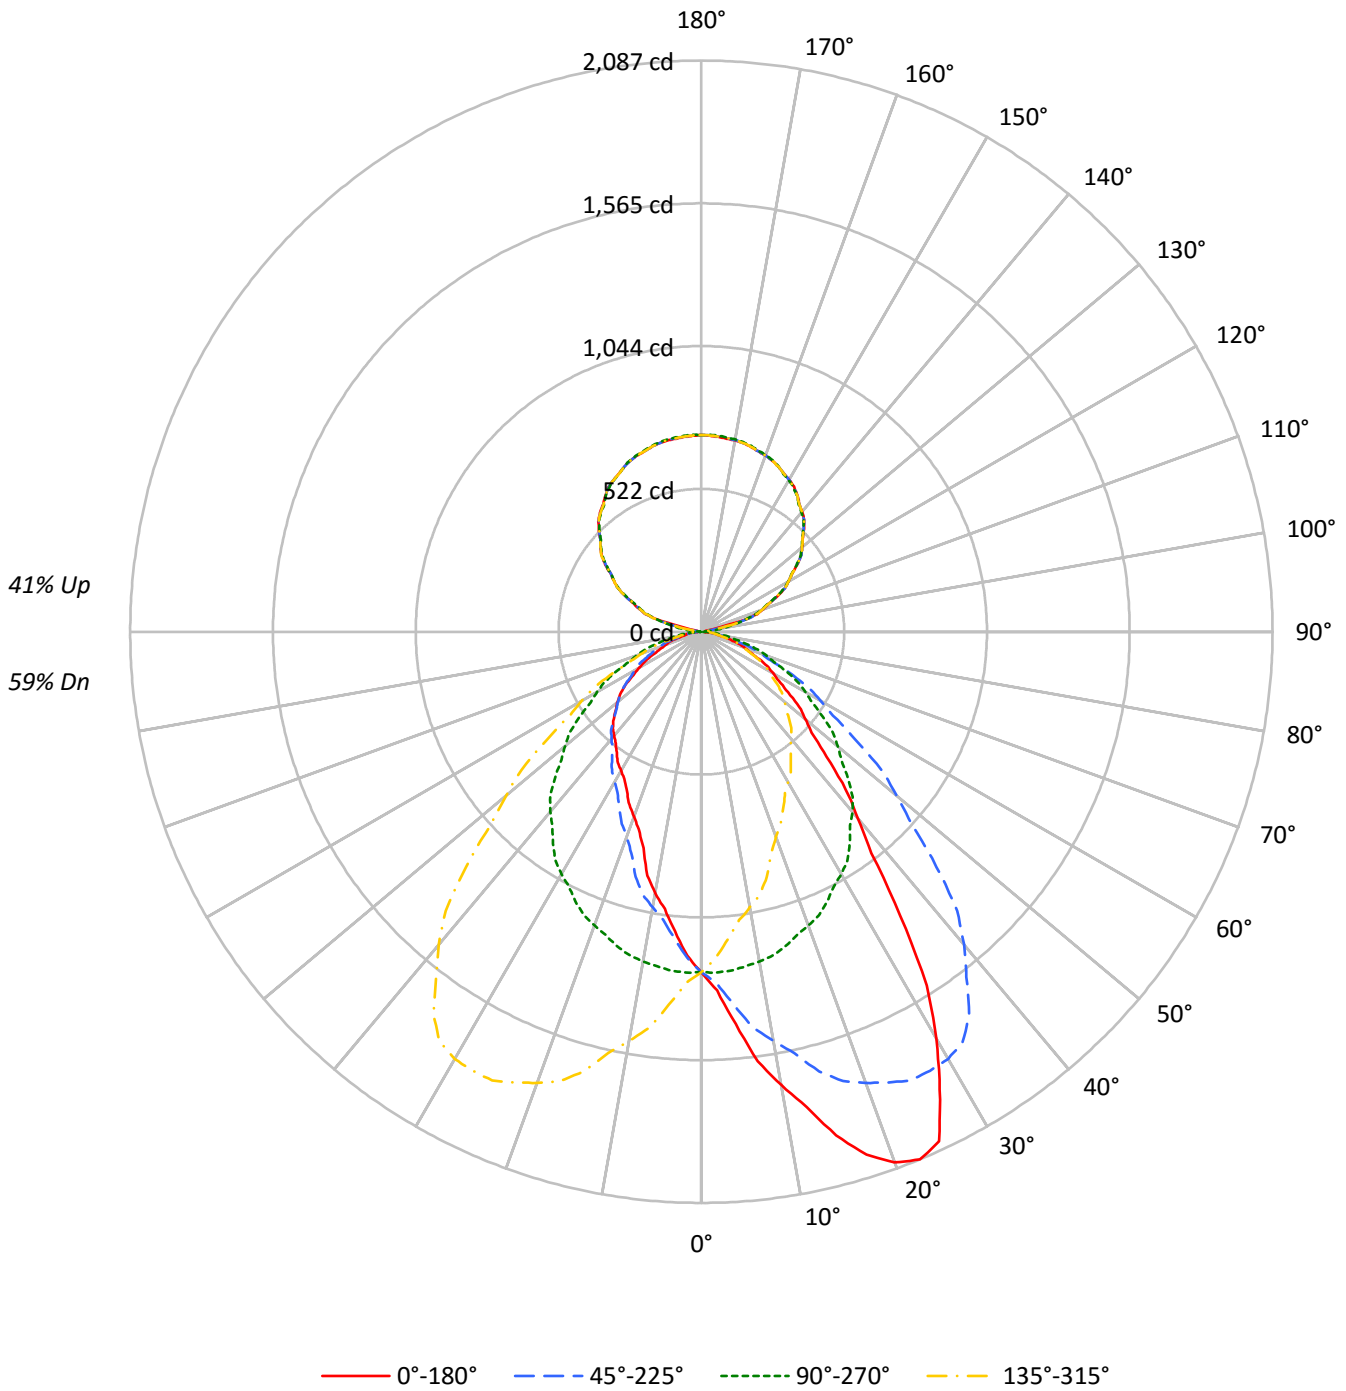



TEST NUMBER: P332931-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20				
RC	80					70					50					30				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64	59		
1	100	96	92	89	93	90	87	84	78	76	74	67	66	64	57	56	55	50		
2	92	85	79	74	85	79	74	70	69	65	62	60	57	54	51	49	47	43		
3	84	75	68	62	78	70	64	59	61	57	53	53	50	47	46	43	41	37		
4	77	67	59	53	72	62	56	50	55	49	45	48	44	40	41	38	36	32		
5	71	60	52	46	66	56	49	44	49	44	39	43	39	35	37	34	31	28		
6	66	54	46	40	61	51	43	38	45	39	35	39	35	31	34	31	28	25		
7	61	49	41	35	57	46	39	34	41	35	31	36	31	28	31	28	25	22		
8	56	44	37	31	53	42	35	30	37	31	27	33	28	25	29	25	22	20		
9	53	40	33	28	49	38	32	27	34	29	25	30	26	22	27	23	20	18		
10	49	37	30	25	46	35	29	24	32	26	22	28	24	20	25	21	18	17		

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	10044	10044	10044	10044
5°	11651	10075	8904	10075
10°	13782	10030	7947	10030
15°	15921	9937	6829	9937
20°	17725	9810	6176	9810
25°	18299	9685	5734	9685
30°	16018	9533	5466	9533
35°	12470	9307	5306	9307
40°	9351	9049	5220	9049
45°	7383	8636	5174	8636
50°	6232	8160	5024	8160
55°	5433	7633	4756	7633
60°	4887	7090	4209	7090
65°	4309	6502	3620	6502
70°	3880	5894	3267	5894
75°	3250	5221	2785	5221
80°	2752	4454	2613	4454
85°	2325	3483	2325	3483



TEST NUMBER: P332931-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	120.6	2.2
10°-20°	363.6	6.8
20°-30°	568.8	10.6
30°-40°	632.3	11.8
40°-50°	561.0	10.4
50°-60°	437.1	8.1
60°-70°	286.2	5.3
70°-80°	140.7	2.6
80°-90°	36.8	0.7
90°-100°	24.6	0.5
100°-110°	156.8	2.9
110°-120°	299.9	5.6
120°-130°	380.7	7.1
130°-140°	407.3	7.6
140°-150°	380.9	7.1
150°-160°	307.1	5.7
160°-170°	198.1	3.7
170°-180°	68.3	1.3
0°-30°	1052.9	19.6
0°-40°	1685.2	31.4
0°-60°	2683.3	50.0
0°-90°	3147.1	58.6
90°-120°	481.2	9.0
90°-150°	1650.1	30.7
90°-180°	2224.0	41.4
0°-180°	5370.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1244	1244	1244	1244	1244	
5°	1438	1243	1099	1243	1438	145
15°	1905	1189	817	1189	1905	542
25°	2054	1087	644	1087	2054	911
35°	1265	944	538	944	1265	793
45°	647	756	453	756	647	512
55°	386	542	338	542	386	351
65°	226	340	190	340	226	227
75°	104	167	89	167	104	115
85°	25	38	25	38	25	29
90°	16	2	16	2	16	8
95°	16	30	16	30	16	12
105°	153	162	153	162	153	134
115°	304	302	304	302	304	301
125°	428	425	428	425	428	381
135°	531	527	531	527	531	408
145°	611	608	611	608	611	382
155°	666	666	666	666	666	307
165°	700	703	700	703	700	198
175°	714	719	714	719	714	68
180°	719	719	719	719	719	



TEST NUMBER: P332931-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2
2.5°	1312.3	1316.0	1312.3	1311.9	1308.0	1306.7	1305.1	1300.0	1290.2	1284.7	1285.9
5°	1437.7	1450.2	1443.2	1442.2	1431.2	1420.1	1413.1	1397.0	1380.0	1368.5	1359.0
7.5°	1582.6	1589.9	1585.5	1578.4	1560.6	1550.5	1534.2	1513.1	1482.5	1459.2	1437.8
10°	1681.3	1687.3	1685.3	1672.3	1659.3	1632.7	1617.6	1588.1	1549.4	1518.9	1490.3
12.5°	1778.3	1784.8	1767.1	1767.7	1743.0	1722.1	1698.3	1661.0	1616.5	1577.1	1541.2
15°	1904.9	1896.9	1896.9	1886.8	1859.3	1830.1	1805.6	1766.5	1710.3	1663.2	1613.6
17.5°	2003.9	2006.7	2002.6	1979.0	1957.3	1927.2	1882.2	1836.5	1784.4	1721.2	1670.5
20°	2063.2	2063.2	2058.8	2042.7	2014.7	1982.5	1933.9	1884.3	1818.2	1754.4	1697.3
22.5°	2087.4	2089.0	2083.6	2070.4	2045.1	2013.8	1972.5	1922.0	1853.8	1782.2	1711.4
25°	2054.3	2063.8	2064.7	2061.2	2053.7	2034.7	1999.1	1947.5	1886.3	1808.6	1732.4
27.5°	1886.0	1898.0	1908.6	1925.9	1949.0	1961.0	1962.6	1936.4	1883.0	1808.2	1731.5
30°	1718.3	1728.4	1761.0	1803.6	1836.7	1866.8	1892.8	1899.9	1869.8	1802.6	1721.9
32.5°	1532.3	1546.0	1578.6	1624.4	1679.5	1730.4	1788.9	1818.8	1818.1	1777.7	1703.1
35°	1265.3	1275.3	1305.3	1353.5	1419.7	1495.3	1588.1	1660.2	1709.4	1705.8	1660.2
37.5°	1020.4	1031.7	1062.2	1102.0	1166.2	1259.9	1349.6	1449.1	1539.9	1590.9	1575.7
40°	887.3	887.8	917.4	958.5	1018.6	1100.3	1198.1	1308.3	1409.6	1492.3	1508.4
42.5°	782.2	782.3	801.8	846.1	889.5	966.4	1059.7	1169.2	1287.7	1383.3	1425.8
45°	646.7	651.2	667.2	693.8	727.8	793.1	867.7	969.5	1102.3	1215.6	1286.3
47.5°	547.6	554.2	564.4	586.1	613.2	656.7	718.4	809.8	917.9	1042.5	1143.1
50°	496.2	497.3	510.3	522.4	545.9	580.5	634.6	710.8	810.0	929.9	1041.7
52.5°	452.1	451.9	459.8	475.0	494.2	521.1	564.9	634.2	722.3	829.6	945.0
55°	386.0	388.5	394.5	406.5	421.0	440.2	474.7	526.9	596.1	687.8	792.5
57.5°	335.6	337.0	341.7	346.8	360.1	374.0	399.9	436.1	494.5	569.6	667.2
60°	302.7	303.3	304.8	312.3	322.8	335.8	353.4	384.0	433.1	501.8	579.0
62.5°	270.7	271.5	273.9	279.4	287.6	296.5	314.9	339.5	380.1	438.8	508.4
65°	225.6	226.1	229.6	231.6	238.1	246.1	259.7	276.2	304.3	353.4	406.0
67.5°	188.5	188.5	188.7	191.4	195.9	201.2	209.3	222.5	243.7	273.9	320.3
70°	164.4	164.4	165.4	166.9	169.5	173.9	178.4	188.5	204.1	228.6	264.2
72.5°	141.9	142.3	143.4	143.6	145.0	148.6	152.0	158.4	169.9	188.5	217.3
75°	104.2	105.8	108.3	110.3	112.8	112.3	115.8	119.8	123.3	134.3	150.9
77.5°	77.6	76.8	77.1	78.8	79.1	79.6	82.1	85.2	87.8	93.0	99.0
80°	59.2	59.2	60.7	61.2	60.7	61.2	63.6	65.1	66.2	68.1	73.7
82.5°	44.7	45.5	45.1	45.5	45.8	46.3	48.4	48.7	49.8	50.5	52.9
85°	25.1	25.5	26.1	25.1	25.1	25.1	26.1	26.6	27.6	27.1	28.1
87.5°	12.1	11.6	12.0	11.9	12.3	11.8	12.1	12.7	11.7	12.0	11.8
90°	16.1	15.9	15.6	15.5	15.2	14.7	13.9	13.3	12.5	11.8	10.8
92.5°	14.8	14.8	14.7	14.7	14.6	14.2	13.6	12.8	12.2	11.4	10.5
95°	15.6	15.5	15.4	15.3	15.1	14.7	13.9	13.3	12.5	11.8	11.7
97.5°	15.1	14.9	14.8	14.7	14.6	14.5	14.4	14.3	14.2	14.2	27.5
100°	15.1	14.9	14.8	14.7	14.6	15.6	17.5	19.6	21.6	23.7	40.2
102.5°	15.5	15.5	15.5	15.5	15.4	26.3	48.3	70.1	92.1	114.0	116.1
105°	153.3	157.5	161.8	166.2	170.4	172.0	171.0	169.9	168.8	167.8	167.1
107.5°	213.6	213.1	212.6	212.2	211.7	211.2	210.8	210.2	209.7	209.2	208.3
110°	239.8	239.4	239.0	238.7	238.4	238.1	237.8	237.6	237.3	237.1	236.4



TEST NUMBER: P332931-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	266.0	265.6	265.1	264.7	264.2	264.0	264.1	264.1	264.2	264.2	263.9
115°	304.3	304.3	304.3	304.3	304.3	304.2	304.0	303.7	303.5	303.2	303.3
117.5°	343.3	343.3	343.4	343.4	343.5	343.5	343.6	343.6	343.7	343.7	343.4
120°	367.8	368.0	368.3	368.4	368.7	368.7	368.4	368.3	368.0	367.8	367.9
122.5°	391.8	392.1	392.3	392.6	392.8	392.9	392.7	392.6	392.4	392.3	392.1
125°	428.0	427.8	427.7	427.6	427.5	427.3	426.9	426.5	426.2	425.8	426.0
127.5°	459.7	459.8	459.9	460.0	460.1	460.1	460.2	460.3	460.3	460.4	459.9
130°	481.2	481.2	481.2	481.2	481.2	481.2	481.0	480.9	480.8	480.7	480.3
132.5°	501.0	501.1	501.1	501.2	501.3	501.3	501.2	501.1	501.0	500.9	500.4
135°	530.7	530.5	530.2	529.9	529.7	529.4	529.2	529.0	528.8	528.5	528.0
137.5°	556.0	556.1	556.2	556.3	556.3	556.2	556.0	555.7	555.4	555.2	554.7
140°	573.6	573.5	573.4	573.3	573.2	573.0	572.6	572.2	571.8	571.6	571.3
142.5°	588.3	588.2	588.2	588.2	588.2	588.1	587.8	587.5	587.3	587.0	586.8
145°	610.8	610.6	610.3	610.0	609.8	609.6	609.5	609.4	609.3	609.2	609.2
147.5°	629.3	629.2	629.1	629.1	628.9	628.8	628.7	628.6	628.5	628.4	628.5
150°	641.4	641.3	641.2	641.0	640.9	640.8	640.8	640.8	640.8	640.8	641.0
152.5°	651.8	651.8	651.9	652.0	652.1	652.0	651.8	651.6	651.4	651.2	651.4
155°	665.6	666.0	666.3	666.7	667.0	666.9	666.5	666.0	665.5	665.1	665.4
157.5°	677.2	677.9	678.4	679.1	679.7	679.7	679.1	678.4	677.9	677.2	677.6
160°	684.9	685.7	686.4	687.1	687.9	687.9	687.1	686.4	685.7	684.9	685.0
162.5°	691.0	691.8	692.6	693.4	694.3	694.3	693.5	692.9	692.1	691.4	691.5
165°	699.5	700.6	701.6	702.7	703.8	703.9	702.9	701.9	701.0	700.0	700.0
167.5°	705.9	707.0	708.2	709.5	710.6	710.7	709.6	708.6	707.6	706.4	706.5
170°	709.7	710.9	712.1	713.3	714.4	714.6	713.6	712.7	711.7	710.8	710.7
172.5°	711.8	713.1	714.4	715.8	717.0	717.2	716.2	715.3	714.4	713.3	713.2
175°	714.5	716.0	717.4	718.9	720.3	720.5	719.3	718.3	717.2	716.1	716.0
177.5°	716.2	717.4	718.6	719.7	720.9	721.0	720.3	719.5	718.8	717.9	717.7
180°	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9



TEST NUMBER: P332931-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2
2.5°	1281.9	1276.3	1273.5	1267.1	1259.4	1255.4	1251.8	1246.6	1239.7	1232.6	1227.3
5°	1346.9	1334.9	1319.8	1301.8	1285.8	1270.3	1256.7	1243.2	1227.7	1211.5	1195.5
7.5°	1413.7	1390.1	1364.5	1334.9	1306.2	1280.0	1255.9	1232.8	1206.7	1183.5	1162.2
10°	1460.2	1428.1	1392.5	1355.0	1317.4	1284.8	1252.7	1223.6	1191.6	1163.0	1138.9
12.5°	1497.9	1460.2	1417.4	1370.6	1325.4	1286.0	1249.1	1211.2	1174.7	1143.7	1111.6
15°	1560.5	1508.8	1451.2	1395.1	1336.4	1282.8	1233.1	1189.0	1147.5	1103.8	1073.3
17.5°	1603.5	1542.2	1472.2	1404.7	1335.4	1272.1	1214.9	1162.3	1114.4	1069.8	1033.4
20°	1629.2	1561.5	1483.8	1407.1	1329.4	1261.7	1200.0	1141.9	1092.3	1044.1	1006.5
22.5°	1643.6	1568.7	1483.8	1403.4	1323.0	1249.7	1182.0	1121.4	1067.4	1019.3	977.7
25°	1648.2	1568.0	1481.3	1389.0	1300.8	1223.1	1152.9	1087.3	1027.1	979.0	934.9
27.5°	1641.8	1547.4	1458.5	1363.9	1272.8	1190.9	1117.3	1048.3	988.1	936.4	891.2
30°	1632.2	1530.9	1435.7	1337.4	1245.2	1166.5	1088.7	1022.6	960.0	906.3	860.7
32.5°	1611.3	1510.9	1408.3	1307.8	1214.3	1133.2	1059.5	993.0	931.5	876.7	828.2
35°	1570.0	1468.3	1357.0	1253.7	1162.0	1077.7	1008.6	944.4	885.8	827.1	776.0
37.5°	1515.6	1411.6	1300.9	1187.8	1096.0	1016.5	953.0	892.8	835.6	782.0	725.4
40°	1464.2	1369.5	1255.2	1142.9	1048.7	971.9	913.3	858.7	801.1	747.9	691.3
42.5°	1402.0	1321.4	1205.9	1093.2	1000.1	926.2	871.7	818.2	765.7	714.3	655.2
45°	1298.4	1237.2	1128.9	1020.6	926.9	853.7	803.5	756.4	710.3	661.2	605.6
47.5°	1179.4	1138.0	1044.5	933.7	847.0	781.1	732.6	694.2	655.2	606.1	557.2
50°	1096.8	1070.3	980.0	878.7	796.1	735.4	685.8	649.7	617.1	570.0	526.3
52.5°	1008.6	994.5	918.2	821.4	741.5	682.0	639.6	607.2	574.2	535.1	494.3
55°	874.2	881.7	817.1	733.4	658.2	608.0	569.5	542.3	514.3	481.3	449.7
57.5°	736.9	764.3	721.0	647.4	576.9	530.7	501.6	478.8	455.2	427.8	400.9
60°	654.7	677.7	653.2	588.5	526.9	483.7	456.7	439.1	415.6	390.5	369.9
62.5°	574.5	599.2	584.6	532.3	475.1	438.0	414.2	397.8	380.3	358.4	337.1
65°	473.7	489.7	482.8	446.7	406.0	374.5	352.4	340.4	324.3	308.3	289.3
67.5°	362.8	393.8	389.7	370.5	335.5	310.8	296.3	285.7	271.1	259.2	246.2
70°	298.2	326.9	326.3	310.8	291.7	268.7	258.6	249.7	236.6	225.1	214.5
72.5°	244.1	270.3	274.2	262.3	249.2	231.8	222.2	215.9	203.3	195.4	186.9
75°	171.0	190.0	195.0	195.0	189.0	179.9	171.4	167.4	158.4	151.4	146.4
77.5°	112.1	124.1	132.0	133.7	134.7	131.7	124.6	121.8	114.9	112.4	107.5
80°	79.2	87.2	96.2	99.2	101.8	100.8	97.7	95.8	89.3	86.7	84.7
82.5°	54.8	59.2	66.5	73.1	72.5	75.1	72.5	70.9	66.0	65.0	63.1
85°	28.6	29.0	30.1	34.6	37.1	38.1	38.6	37.6	36.1	36.1	32.6
87.5°	11.6	11.0	11.6	11.4	11.5	12.9	13.9	13.9	13.0	12.1	11.1
90°	9.9	9.0	8.0	6.9	5.6	4.2	2.9	1.6	2.9	4.2	5.6
92.5°	9.5	8.6	7.5	7.1	7.0	6.9	6.9	6.8	6.9	6.9	7.0
95°	11.6	11.5	11.3	13.3	17.3	21.5	25.5	29.6	25.5	21.5	17.3
97.5°	40.9	54.2	67.5	73.0	70.4	67.9	65.3	62.8	65.3	67.9	70.4
100°	56.6	73.1	89.6	96.8	94.6	92.5	90.3	88.1	90.3	92.5	94.6
102.5°	118.3	120.5	122.6	122.9	121.3	119.7	118.1	116.6	118.1	119.7	121.3
105°	166.5	166.0	165.3	164.7	164.0	163.2	162.6	161.8	162.6	163.2	164.0
107.5°	207.5	206.7	205.9	205.3	204.9	204.6	204.2	203.9	204.2	204.6	204.9
110°	235.6	235.0	234.2	233.7	233.4	233.0	232.6	232.2	232.6	233.0	233.4



TEST NUMBER: P332931-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	263.5	263.2	262.9	262.4	261.7	261.1	260.4	259.8	260.4	261.1	261.7
115°	303.5	303.6	303.7	303.6	303.2	302.8	302.6	302.2	302.6	302.8	303.2
117.5°	343.2	342.9	342.6	342.2	341.8	341.3	340.8	340.4	340.8	341.3	341.8
120°	368.0	368.2	368.3	368.1	367.6	367.1	366.6	366.2	366.6	367.1	367.6
122.5°	391.9	391.8	391.6	391.3	391.1	390.8	390.5	390.2	390.5	390.8	391.1
125°	426.3	426.5	426.8	426.7	426.2	425.7	425.2	424.7	425.2	425.7	426.2
127.5°	459.3	458.8	458.3	457.9	457.8	457.7	457.5	457.4	457.5	457.7	457.8
130°	479.9	479.6	479.2	479.0	478.9	478.7	478.6	478.5	478.6	478.7	478.9
132.5°	499.9	499.5	499.1	498.7	498.5	498.3	498.0	497.9	498.0	498.3	498.5
135°	527.5	527.1	526.6	526.4	526.5	526.7	526.8	526.9	526.8	526.7	526.5
137.5°	554.1	553.6	553.1	552.8	552.7	552.7	552.6	552.6	552.6	552.7	552.7
140°	571.1	570.8	570.5	570.3	570.0	569.9	569.6	569.4	569.6	569.9	570.0
142.5°	586.7	586.5	586.4	586.2	585.7	585.3	584.8	584.5	584.8	585.3	585.7
145°	609.2	609.2	609.2	609.0	608.6	608.2	607.9	607.6	607.9	608.2	608.6
147.5°	628.7	628.8	628.9	628.6	627.9	627.3	626.6	625.9	626.6	627.3	627.9
150°	641.1	641.2	641.4	641.2	640.7	640.3	639.7	639.2	639.7	640.3	640.7
152.5°	651.7	651.9	652.1	652.0	651.6	651.2	650.8	650.4	650.8	651.2	651.6
155°	665.8	666.2	666.5	666.7	666.5	666.4	666.3	666.2	666.3	666.4	666.5
157.5°	678.1	678.4	678.8	679.1	679.2	679.2	679.3	679.4	679.3	679.2	679.2
160°	685.2	685.3	685.4	685.7	686.1	686.4	686.7	687.1	686.7	686.4	686.1
162.5°	691.6	691.7	691.9	692.2	692.7	693.1	693.5	694.0	693.5	693.1	692.7
165°	700.0	700.0	700.0	700.3	700.9	701.5	702.1	702.7	702.1	701.5	700.9
167.5°	706.6	706.7	706.7	707.1	707.8	708.3	709.0	709.5	709.0	708.3	707.8
170°	710.5	710.4	710.3	710.6	711.3	712.0	712.8	713.5	712.8	712.0	711.3
172.5°	713.1	713.0	712.8	713.2	713.9	714.6	715.3	716.0	715.3	714.6	713.9
175°	716.0	715.8	715.7	716.0	716.7	717.4	718.1	718.9	718.1	717.4	716.7
177.5°	717.6	717.4	717.2	717.5	718.1	718.8	719.4	720.1	719.4	718.8	718.1
180°	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9



TEST NUMBER: P332931-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2
2.5°	1221.7	1217.7	1212.5	1206.5	1199.3	1192.9	1190.1	1192.4	1193.6	1190.4	1190.1
5°	1184.5	1172.0	1162.0	1146.9	1134.9	1124.8	1117.9	1114.8	1115.9	1107.9	1105.8
7.5°	1142.7	1127.8	1111.4	1093.6	1076.9	1062.2	1054.5	1050.3	1041.8	1038.1	1032.0
10°	1115.9	1095.8	1079.8	1058.7	1039.6	1022.1	1013.6	1006.5	998.1	994.0	985.5
12.5°	1088.2	1064.9	1047.3	1025.4	1006.0	984.8	976.7	963.7	950.4	941.9	930.9
15°	1049.1	1021.2	999.6	973.5	950.5	926.3	904.8	880.7	871.8	852.7	841.7
17.5°	1003.5	975.1	948.4	913.4	877.9	848.0	825.0	801.9	788.2	776.0	770.3
20°	973.5	947.4	910.3	869.7	830.1	797.0	778.4	763.5	748.4	739.9	733.9
22.5°	945.0	911.7	868.6	824.8	785.2	759.3	743.6	728.1	716.0	707.8	699.7
25°	897.3	853.7	808.0	757.9	730.8	708.3	691.3	678.7	671.2	660.7	656.7
27.5°	848.3	795.4	745.1	711.4	683.2	662.6	647.7	638.3	628.8	622.1	616.9
30°	810.6	757.0	711.8	679.8	651.2	634.1	622.1	611.1	603.5	598.0	594.0
32.5°	773.3	719.6	681.7	647.2	624.7	608.0	595.2	587.0	581.1	574.0	571.6
35°	719.3	671.8	638.7	607.6	584.5	569.5	559.4	550.9	545.9	543.8	542.3
37.5°	667.5	628.5	593.0	567.4	546.9	535.1	523.2	519.1	515.6	512.0	513.6
40°	634.6	598.0	566.5	539.4	522.8	509.8	502.8	497.8	494.7	494.7	494.7
42.5°	606.1	570.3	539.6	515.3	498.8	487.8	479.9	475.7	474.7	474.3	476.7
45°	561.9	528.9	497.8	477.7	463.6	452.6	448.2	444.6	444.6	446.7	447.1
47.5°	518.1	487.1	462.2	439.7	426.9	420.0	416.0	414.2	414.4	416.5	418.8
50°	491.3	460.7	436.1	416.0	404.1	397.5	394.0	393.0	394.0	394.0	397.5
52.5°	461.9	434.6	410.5	393.6	379.9	373.8	371.9	370.5	371.2	372.8	374.3
55°	419.1	394.5	371.5	355.4	345.3	341.4	336.9	337.3	336.4	337.3	337.3
57.5°	376.1	354.0	332.5	319.8	311.0	305.2	300.3	301.7	300.2	300.0	299.2
60°	348.4	324.3	307.3	295.8	285.7	280.7	276.2	277.2	275.7	274.7	272.7
62.5°	318.3	298.2	282.0	270.9	262.9	257.0	252.5	251.6	248.1	244.6	240.3
65°	274.7	258.2	243.6	233.1	225.6	221.0	217.5	214.5	207.0	199.0	195.0
67.5°	232.3	220.4	206.8	197.9	191.8	185.9	179.2	174.1	167.0	162.6	160.1
70°	205.0	193.5	182.0	173.4	166.9	161.5	153.9	150.4	145.3	143.4	140.8
72.5°	179.0	168.2	157.5	149.8	142.9	138.6	132.6	129.1	127.0	126.1	123.7
75°	139.4	130.8	122.8	115.8	110.3	107.3	104.8	102.3	101.2	96.7	94.3
77.5°	101.7	96.0	91.0	86.1	82.1	80.1	75.3	72.4	70.7	68.6	68.1
80°	79.2	75.2	70.2	67.2	61.6	59.7	57.7	57.1	56.6	56.2	55.6
82.5°	59.6	55.5	50.5	48.7	47.2	46.0	44.8	44.3	43.8	44.1	44.0
85°	30.1	28.1	28.1	27.6	27.1	26.6	26.1	26.1	25.5	26.1	25.5
87.5°	11.4	11.2	11.4	10.8	11.4	11.6	11.3	11.5	12.1	11.4	11.5
90°	6.9	8.0	9.0	9.9	10.8	11.8	12.5	13.3	13.9	14.7	15.2
92.5°	7.1	7.5	8.6	9.5	10.5	11.4	12.2	12.8	13.6	14.2	14.6
95°	13.3	11.3	11.5	11.6	11.7	11.8	12.5	13.3	13.9	14.7	15.1
97.5°	73.0	67.5	54.2	40.9	27.5	14.2	14.2	14.3	14.4	14.5	14.6
100°	96.8	89.6	73.1	56.6	40.2	23.7	21.6	19.6	17.5	15.6	14.6
102.5°	122.9	122.6	120.5	118.3	116.1	114.0	92.1	70.1	48.3	26.3	15.4
105°	164.7	165.3	166.0	166.5	167.1	167.8	168.8	169.9	171.0	172.0	170.4
107.5°	205.3	205.9	206.7	207.5	208.3	209.2	209.7	210.2	210.8	211.2	211.7
110°	233.7	234.2	235.0	235.6	236.4	237.1	237.3	237.6	237.8	238.1	238.4



TEST NUMBER: P332931-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	262.4	262.9	263.2	263.5	263.9	264.2	264.2	264.1	264.1	264.0	264.2
115°	303.6	303.7	303.6	303.5	303.3	303.2	303.5	303.7	304.0	304.2	304.3
117.5°	342.2	342.6	342.9	343.2	343.4	343.7	343.7	343.6	343.6	343.5	343.5
120°	368.1	368.3	368.2	368.0	367.9	367.8	368.0	368.3	368.4	368.7	368.7
122.5°	391.3	391.6	391.8	391.9	392.1	392.3	392.4	392.6	392.7	392.9	392.8
125°	426.7	426.8	426.5	426.3	426.0	425.8	426.2	426.5	426.9	427.3	427.5
127.5°	457.9	458.3	458.8	459.3	459.9	460.4	460.3	460.3	460.2	460.1	460.1
130°	479.0	479.2	479.6	479.9	480.3	480.7	480.8	480.9	481.0	481.2	481.2
132.5°	498.7	499.1	499.5	499.9	500.4	500.9	501.0	501.1	501.2	501.3	501.3
135°	526.4	526.6	527.1	527.5	528.0	528.5	528.8	529.0	529.2	529.4	529.7
137.5°	552.8	553.1	553.6	554.1	554.7	555.2	555.4	555.7	556.0	556.2	556.3
140°	570.3	570.5	570.8	571.1	571.3	571.6	571.8	572.2	572.6	573.0	573.2
142.5°	586.2	586.4	586.5	586.7	586.8	587.0	587.3	587.5	587.8	588.1	588.2
145°	609.0	609.2	609.2	609.2	609.2	609.2	609.3	609.4	609.5	609.6	609.8
147.5°	628.6	628.9	628.8	628.7	628.5	628.4	628.5	628.6	628.7	628.8	628.9
150°	641.2	641.4	641.2	641.1	641.0	640.8	640.8	640.8	640.8	640.8	640.9
152.5°	652.0	652.1	651.9	651.7	651.4	651.2	651.4	651.6	651.8	652.0	652.1
155°	666.7	666.5	666.2	665.8	665.4	665.1	665.5	666.0	666.5	666.9	667.0
157.5°	679.1	678.8	678.4	678.1	677.6	677.2	677.9	678.4	679.1	679.7	679.7
160°	685.7	685.4	685.3	685.2	685.0	684.9	685.7	686.4	687.1	687.9	687.9
162.5°	692.2	691.9	691.7	691.6	691.5	691.4	692.1	692.9	693.5	694.3	694.3
165°	700.3	700.0	700.0	700.0	700.0	700.0	701.0	701.9	702.9	703.9	703.8
167.5°	707.1	706.7	706.7	706.6	706.5	706.4	707.6	708.6	709.6	710.7	710.6
170°	710.6	710.3	710.4	710.5	710.7	710.8	711.7	712.7	713.6	714.6	714.4
172.5°	713.2	712.8	713.0	713.1	713.2	713.3	714.4	715.3	716.2	717.2	717.0
175°	716.0	715.7	715.8	716.0	716.0	716.1	717.2	718.3	719.3	720.5	720.3
177.5°	717.5	717.2	717.4	717.6	717.7	717.9	718.8	719.5	720.3	721.0	720.9
180°	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9



TEST NUMBER: P332931-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2
2.5°	1187.6	1188.5	1185.6	1184.8	1185.6	1188.5	1187.6	1190.1	1190.4	1193.6	1192.4
5°	1101.8	1100.8	1098.3	1098.8	1098.3	1100.8	1101.8	1105.8	1107.9	1115.9	1114.8
7.5°	1028.4	1024.5	1025.6	1021.6	1025.6	1024.5	1028.4	1032.0	1038.1	1041.8	1050.3
10°	983.5	978.0	973.5	969.5	973.5	978.0	983.5	985.5	994.0	998.1	1006.5
12.5°	922.2	917.5	911.3	912.6	911.3	917.5	922.2	930.9	941.9	950.4	963.7
15°	835.1	827.6	815.6	817.1	815.6	827.6	835.1	841.7	852.7	871.8	880.7
17.5°	761.5	761.6	756.0	757.3	756.0	761.6	761.5	770.3	776.0	788.2	801.9
20°	723.3	719.8	720.3	718.9	720.3	719.8	723.3	733.9	739.9	748.4	763.5
22.5°	696.9	692.6	689.1	686.0	689.1	692.6	696.9	699.7	707.8	716.0	728.1
25°	652.1	649.1	644.6	643.7	644.6	649.1	652.1	656.7	660.7	671.2	678.7
27.5°	612.8	612.3	610.5	608.1	610.5	612.3	612.8	616.9	622.1	628.8	638.3
30°	590.0	589.0	588.0	586.4	588.0	589.0	590.0	594.0	598.0	603.5	611.1
32.5°	569.6	568.9	568.0	568.1	568.0	568.9	569.6	571.6	574.0	581.1	587.0
35°	540.4	539.9	538.9	538.4	538.9	539.9	540.4	542.3	543.8	545.9	550.9
37.5°	513.1	514.4	513.8	513.7	513.8	514.4	513.1	513.6	512.0	515.6	519.1
40°	494.3	494.7	495.8	495.3	495.8	494.7	494.3	494.7	494.7	494.7	497.8
42.5°	478.6	478.7	480.1	478.4	480.1	478.7	478.6	476.7	474.3	474.7	475.7
45°	450.6	453.6	453.2	453.2	453.2	453.6	450.6	447.1	446.7	444.6	444.6
47.5°	420.1	422.6	423.4	423.3	423.4	422.6	420.1	418.8	416.5	414.4	414.2
50°	400.0	399.0	400.5	400.0	400.5	399.0	400.0	397.5	394.0	394.0	393.0
52.5°	375.6	375.8	375.7	375.1	375.7	375.8	375.6	374.3	372.8	371.2	370.5
55°	337.9	338.4	337.3	337.9	337.3	338.4	337.9	337.3	337.3	336.4	337.3
57.5°	297.0	294.5	295.6	294.4	295.6	294.5	297.0	299.2	300.0	300.2	301.7
60°	267.7	263.6	262.7	260.7	262.7	263.6	267.7	272.7	274.7	275.7	277.2
62.5°	234.8	232.0	228.6	230.2	228.6	232.0	234.8	240.3	244.6	248.1	251.6
65°	191.0	189.0	187.5	189.5	187.5	189.0	191.0	195.0	199.0	207.0	214.5
67.5°	158.1	157.0	157.0	156.0	157.0	157.0	158.1	160.1	162.6	167.0	174.1
70°	140.8	139.4	139.4	138.4	139.4	139.4	140.8	140.8	143.4	145.3	150.4
72.5°	123.2	121.7	122.2	121.5	122.2	121.7	123.2	123.7	126.1	127.0	129.1
75°	91.2	88.7	88.7	89.3	88.7	88.7	91.2	94.3	96.7	101.2	102.3
77.5°	68.1	67.6	68.2	67.4	68.2	67.6	68.1	68.1	68.6	70.7	72.4
80°	55.6	55.1	54.7	56.2	54.7	55.1	55.6	55.6	56.2	56.6	57.1
82.5°	43.2	43.1	43.0	45.0	43.0	43.1	43.2	44.0	44.1	43.8	44.3
85°	26.1	25.1	26.1	25.1	26.1	25.1	26.1	25.5	26.1	25.5	26.1
87.5°	12.3	12.0	11.6	12.1	11.6	12.0	12.3	11.5	11.4	12.1	11.5
90°	15.5	15.6	15.9	16.1	15.9	15.6	15.5	15.2	14.7	13.9	13.3
92.5°	14.7	14.7	14.8	14.8	14.8	14.7	14.7	14.6	14.2	13.6	12.8
95°	15.3	15.4	15.5	15.6	15.5	15.4	15.3	15.1	14.7	13.9	13.3
97.5°	14.7	14.8	14.9	15.1	14.9	14.8	14.7	14.6	14.5	14.4	14.3
100°	14.7	14.8	14.9	15.1	14.9	14.8	14.7	14.6	15.6	17.5	19.6
102.5°	15.5	15.5	15.5	15.5	15.5	15.5	15.5	15.4	26.3	48.3	70.1
105°	166.2	161.8	157.5	153.3	157.5	161.8	166.2	170.4	172.0	171.0	169.9
107.5°	212.2	212.6	213.1	213.6	213.1	212.6	212.2	211.7	211.2	210.8	210.2
110°	238.7	239.0	239.4	239.8	239.4	239.0	238.7	238.4	238.1	237.8	237.6



TEST NUMBER: P332931-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	264.7	265.1	265.6	266.0	265.6	265.1	264.7	264.2	264.0	264.1	264.1
115°	304.3	304.3	304.3	304.3	304.3	304.3	304.3	304.3	304.2	304.0	303.7
117.5°	343.4	343.4	343.3	343.3	343.3	343.4	343.4	343.5	343.5	343.6	343.6
120°	368.4	368.3	368.0	367.8	368.0	368.3	368.4	368.7	368.7	368.4	368.3
122.5°	392.6	392.3	392.1	391.8	392.1	392.3	392.6	392.8	392.9	392.7	392.6
125°	427.6	427.7	427.8	428.0	427.8	427.7	427.6	427.5	427.3	426.9	426.5
127.5°	460.0	459.9	459.8	459.7	459.8	459.9	460.0	460.1	460.1	460.2	460.3
130°	481.2	481.2	481.2	481.2	481.2	481.2	481.2	481.2	481.2	481.0	480.9
132.5°	501.2	501.1	501.1	501.0	501.1	501.1	501.2	501.3	501.3	501.2	501.1
135°	529.9	530.2	530.5	530.7	530.5	530.2	529.9	529.7	529.4	529.2	529.0
137.5°	556.3	556.2	556.1	556.0	556.1	556.2	556.3	556.3	556.2	556.0	555.7
140°	573.3	573.4	573.5	573.6	573.5	573.4	573.3	573.2	573.0	572.6	572.2
142.5°	588.2	588.2	588.2	588.3	588.2	588.2	588.2	588.2	588.1	587.8	587.5
145°	610.0	610.3	610.6	610.8	610.6	610.3	610.0	609.8	609.6	609.5	609.4
147.5°	629.1	629.1	629.2	629.3	629.2	629.1	629.1	628.9	628.8	628.7	628.6
150°	641.0	641.2	641.3	641.4	641.3	641.2	641.0	640.9	640.8	640.8	640.8
152.5°	652.0	651.9	651.8	651.8	651.8	651.9	652.0	652.1	652.0	651.8	651.6
155°	666.7	666.3	666.0	665.6	666.0	666.3	666.7	667.0	666.9	666.5	666.0
157.5°	679.1	678.4	677.9	677.2	677.9	678.4	679.1	679.7	679.7	679.1	678.4
160°	687.1	686.4	685.7	684.9	685.7	686.4	687.1	687.9	687.9	687.1	686.4
162.5°	693.4	692.6	691.8	691.0	691.8	692.6	693.4	694.3	694.3	693.5	692.9
165°	702.7	701.6	700.6	699.5	700.6	701.6	702.7	703.8	703.9	702.9	701.9
167.5°	709.5	708.2	707.0	705.9	707.0	708.2	709.5	710.6	710.7	709.6	708.6
170°	713.3	712.1	710.9	709.7	710.9	712.1	713.3	714.4	714.6	713.6	712.7
172.5°	715.8	714.4	713.1	711.8	713.1	714.4	715.8	717.0	717.2	716.2	715.3
175°	718.9	717.4	716.0	714.5	716.0	717.4	718.9	720.3	720.5	719.3	718.3
177.5°	719.7	718.6	717.4	716.2	717.4	718.6	719.7	720.9	721.0	720.3	719.5
180°	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9



TEST NUMBER: P332931-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2
2.5°	1190.1	1192.9	1199.3	1206.5	1212.5	1217.7	1221.7	1227.3	1232.6	1239.7	1246.6
5°	1117.9	1124.8	1134.9	1146.9	1162.0	1172.0	1184.5	1195.5	1211.5	1227.7	1243.2
7.5°	1054.5	1062.2	1076.9	1093.6	1111.4	1127.8	1142.7	1162.2	1183.5	1206.7	1232.8
10°	1013.6	1022.1	1039.6	1058.7	1079.8	1095.8	1115.9	1138.9	1163.0	1191.6	1223.6
12.5°	976.7	984.8	1006.0	1025.4	1047.3	1064.9	1088.2	1111.6	1143.7	1174.7	1211.2
15°	904.8	926.3	950.5	973.5	999.6	1021.2	1049.1	1073.3	1103.8	1147.5	1189.0
17.5°	825.0	848.0	877.9	913.4	948.4	975.1	1003.5	1033.4	1069.8	1114.4	1162.3
20°	778.4	797.0	830.1	869.7	910.3	947.4	973.5	1006.5	1044.1	1092.3	1141.9
22.5°	743.6	759.3	785.2	824.8	868.6	911.7	945.0	977.7	1019.3	1067.4	1121.4
25°	691.3	708.3	730.8	757.9	808.0	853.7	897.3	934.9	979.0	1027.1	1087.3
27.5°	647.7	662.6	683.2	711.4	745.1	795.4	848.3	891.2	936.4	988.1	1048.3
30°	622.1	634.1	651.2	679.8	711.8	757.0	810.6	860.7	906.3	960.0	1022.6
32.5°	595.2	608.0	624.7	647.2	681.7	719.6	773.3	828.2	876.7	931.5	993.0
35°	559.4	569.5	584.5	607.6	638.7	671.8	719.3	776.0	827.1	885.8	944.4
37.5°	523.2	535.1	546.9	567.4	593.0	628.5	667.5	725.4	782.0	835.6	892.8
40°	502.8	509.8	522.8	539.4	566.5	598.0	634.6	691.3	747.9	801.1	858.7
42.5°	479.9	487.8	498.8	515.3	539.6	570.3	606.1	655.2	714.3	765.7	818.2
45°	448.2	452.6	463.6	477.7	497.8	528.9	561.9	605.6	661.2	710.3	756.4
47.5°	416.0	420.0	426.9	439.7	462.2	487.1	518.1	557.2	606.1	655.2	694.2
50°	394.0	397.5	404.1	416.0	436.1	460.7	491.3	526.3	570.0	617.1	649.7
52.5°	371.9	373.8	379.9	393.6	410.5	434.6	461.9	494.3	535.1	574.2	607.2
55°	336.9	341.4	345.3	355.4	371.5	394.5	419.1	449.7	481.3	514.3	542.3
57.5°	300.3	305.2	311.0	319.8	332.5	354.0	376.1	400.9	427.8	455.2	478.8
60°	276.2	280.7	285.7	295.8	307.3	324.3	348.4	369.9	390.5	415.6	439.1
62.5°	252.5	257.0	262.9	270.9	282.0	298.2	318.3	337.1	358.4	380.3	397.8
65°	217.5	221.0	225.6	233.1	243.6	258.2	274.7	289.3	308.3	324.3	340.4
67.5°	179.2	185.9	191.8	197.9	206.8	220.4	232.3	246.2	259.2	271.1	285.7
70°	153.9	161.5	166.9	173.4	182.0	193.5	205.0	214.5	225.1	236.6	249.7
72.5°	132.6	138.6	142.9	149.8	157.5	168.2	179.0	186.9	195.4	203.3	215.9
75°	104.8	107.3	110.3	115.8	122.8	130.8	139.4	146.4	151.4	158.4	167.4
77.5°	75.3	80.1	82.1	86.1	91.0	96.0	101.7	107.5	112.4	114.9	121.8
80°	57.7	59.7	61.6	67.2	70.2	75.2	79.2	84.7	86.7	89.3	95.8
82.5°	44.8	46.0	47.2	48.7	50.5	55.5	59.6	63.1	65.0	66.0	70.9
85°	26.1	26.6	27.1	27.6	28.1	28.1	30.1	32.6	36.1	36.1	37.6
87.5°	11.3	11.6	11.4	10.8	11.4	11.2	11.4	11.1	12.1	13.0	13.9
90°	12.5	11.8	10.8	9.9	9.0	8.0	6.9	5.6	4.2	2.9	1.6
92.5°	12.2	11.4	10.5	9.5	8.6	7.5	7.1	7.0	6.9	6.9	6.8
95°	12.5	11.8	11.7	11.6	11.5	11.3	13.3	17.3	21.5	25.5	29.6
97.5°	14.2	14.2	27.5	40.9	54.2	67.5	73.0	70.4	67.9	65.3	62.8
100°	21.6	23.7	40.2	56.6	73.1	89.6	96.8	94.6	92.5	90.3	88.1
102.5°	92.1	114.0	116.1	118.3	120.5	122.6	122.9	121.3	119.7	118.1	116.6
105°	168.8	167.8	167.1	166.5	166.0	165.3	164.7	164.0	163.2	162.6	161.8
107.5°	209.7	209.2	208.3	207.5	206.7	205.9	205.3	204.9	204.6	204.2	203.9
110°	237.3	237.1	236.4	235.6	235.0	234.2	233.7	233.4	233.0	232.6	232.2



TEST NUMBER: P332931-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	264.2	264.2	263.9	263.5	263.2	262.9	262.4	261.7	261.1	260.4	259.8
115°	303.5	303.2	303.3	303.5	303.6	303.7	303.6	303.2	302.8	302.6	302.2
117.5°	343.7	343.7	343.4	343.2	342.9	342.6	342.2	341.8	341.3	340.8	340.4
120°	368.0	367.8	367.9	368.0	368.2	368.3	368.1	367.6	367.1	366.6	366.2
122.5°	392.4	392.3	392.1	391.9	391.8	391.6	391.3	391.1	390.8	390.5	390.2
125°	426.2	425.8	426.0	426.3	426.5	426.8	426.7	426.2	425.7	425.2	424.7
127.5°	460.3	460.4	459.9	459.3	458.8	458.3	457.9	457.8	457.7	457.5	457.4
130°	480.8	480.7	480.3	479.9	479.6	479.2	479.0	478.9	478.7	478.6	478.5
132.5°	501.0	500.9	500.4	499.9	499.5	499.1	498.7	498.5	498.3	498.0	497.9
135°	528.8	528.5	528.0	527.5	527.1	526.6	526.4	526.5	526.7	526.8	526.9
137.5°	555.4	555.2	554.7	554.1	553.6	553.1	552.8	552.7	552.7	552.6	552.6
140°	571.8	571.6	571.3	571.1	570.8	570.5	570.3	570.0	569.9	569.6	569.4
142.5°	587.3	587.0	586.8	586.7	586.5	586.4	586.2	585.7	585.3	584.8	584.5
145°	609.3	609.2	609.2	609.2	609.2	609.2	609.0	608.6	608.2	607.9	607.6
147.5°	628.5	628.4	628.5	628.7	628.8	628.9	628.6	627.9	627.3	626.6	625.9
150°	640.8	640.8	641.0	641.1	641.2	641.4	641.2	640.7	640.3	639.7	639.2
152.5°	651.4	651.2	651.4	651.7	651.9	652.1	652.0	651.6	651.2	650.8	650.4
155°	665.5	665.1	665.4	665.8	666.2	666.5	666.7	666.5	666.4	666.3	666.2
157.5°	677.9	677.2	677.6	678.1	678.4	678.8	679.1	679.2	679.2	679.3	679.4
160°	685.7	684.9	685.0	685.2	685.3	685.4	685.7	686.1	686.4	686.7	687.1
162.5°	692.1	691.4	691.5	691.6	691.7	691.9	692.2	692.7	693.1	693.5	694.0
165°	701.0	700.0	700.0	700.0	700.0	700.0	700.3	700.9	701.5	702.1	702.7
167.5°	707.6	706.4	706.5	706.6	706.7	706.7	707.1	707.8	708.3	709.0	709.5
170°	711.7	710.8	710.7	710.5	710.4	710.3	710.6	711.3	712.0	712.8	713.5
172.5°	714.4	713.3	713.2	713.1	713.0	712.8	713.2	713.9	714.6	715.3	716.0
175°	717.2	716.1	716.0	716.0	715.8	715.7	716.0	716.7	717.4	718.1	718.9
177.5°	718.8	717.9	717.7	717.6	717.4	717.2	717.5	718.1	718.8	719.4	720.1
180°	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9



TEST NUMBER: P332931-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2
2.5°	1251.8	1255.4	1259.4	1267.1	1273.5	1276.3	1281.9	1285.9	1284.7	1290.2	1300.0
5°	1256.7	1270.3	1285.8	1301.8	1319.8	1334.9	1346.9	1359.0	1368.5	1380.0	1397.0
7.5°	1255.9	1280.0	1306.2	1334.9	1364.5	1390.1	1413.7	1437.8	1459.2	1482.5	1513.1
10°	1252.7	1284.8	1317.4	1355.0	1392.5	1428.1	1460.2	1490.3	1518.9	1549.4	1588.1
12.5°	1249.1	1286.0	1325.4	1370.6	1417.4	1460.2	1497.9	1541.2	1577.1	1616.5	1661.0
15°	1233.1	1282.8	1336.4	1395.1	1451.2	1508.8	1560.5	1613.6	1663.2	1710.3	1766.5
17.5°	1214.9	1272.1	1335.4	1404.7	1472.2	1542.2	1603.5	1670.5	1721.2	1784.4	1836.5
20°	1200.0	1261.7	1329.4	1407.1	1483.8	1561.5	1629.2	1697.3	1754.4	1818.2	1884.3
22.5°	1182.0	1249.7	1323.0	1403.4	1483.8	1568.7	1643.6	1711.4	1782.2	1853.8	1922.0
25°	1152.9	1223.1	1300.8	1389.0	1481.3	1568.0	1648.2	1732.4	1808.6	1886.3	1947.5
27.5°	1117.3	1190.9	1272.8	1363.9	1458.5	1547.4	1641.8	1731.5	1808.2	1883.0	1936.4
30°	1088.7	1166.5	1245.2	1337.4	1435.7	1530.9	1632.2	1721.9	1802.6	1869.8	1899.9
32.5°	1059.5	1133.2	1214.3	1307.8	1408.3	1510.9	1611.3	1703.1	1777.7	1818.1	1818.8
35°	1008.6	1077.7	1162.0	1253.7	1357.0	1468.3	1570.0	1660.2	1705.8	1709.4	1660.2
37.5°	953.0	1016.5	1096.0	1187.8	1300.9	1411.6	1515.6	1575.7	1590.9	1539.9	1449.1
40°	913.3	971.9	1048.7	1142.9	1255.2	1369.5	1464.2	1508.4	1492.3	1409.6	1308.3
42.5°	871.7	926.2	1000.1	1093.2	1205.9	1321.4	1402.0	1425.8	1383.3	1287.7	1169.2
45°	803.5	853.7	926.9	1020.6	1128.9	1237.2	1298.4	1286.3	1215.6	1102.3	969.5
47.5°	732.6	781.1	847.0	933.7	1044.5	1138.0	1179.4	1143.1	1042.5	917.9	809.8
50°	685.8	735.4	796.1	878.7	980.0	1070.3	1096.8	1041.7	929.9	810.0	710.8
52.5°	639.6	682.0	741.5	821.4	918.2	994.5	1008.6	945.0	829.6	722.3	634.2
55°	569.5	608.0	658.2	733.4	817.1	881.7	874.2	792.5	687.8	596.1	526.9
57.5°	501.6	530.7	576.9	647.4	721.0	764.3	736.9	667.2	569.6	494.5	436.1
60°	456.7	483.7	526.9	588.5	653.2	677.7	654.7	579.0	501.8	433.1	384.0
62.5°	414.2	438.0	475.1	532.3	584.6	599.2	574.5	508.4	438.8	380.1	339.5
65°	352.4	374.5	406.0	446.7	482.8	489.7	473.7	406.0	353.4	304.3	276.2
67.5°	296.3	310.8	335.5	370.5	389.7	393.8	362.8	320.3	273.9	243.7	222.5
70°	258.6	268.7	291.7	310.8	326.3	326.9	298.2	264.2	228.6	204.1	188.5
72.5°	222.2	231.8	249.2	262.3	274.2	270.3	244.1	217.3	188.5	169.9	158.4
75°	171.4	179.9	189.0	195.0	195.0	190.0	171.0	150.9	134.3	123.3	119.8
77.5°	124.6	131.7	134.7	133.7	132.0	124.1	112.1	99.0	93.0	87.8	85.2
80°	97.7	100.8	101.8	99.2	96.2	87.2	79.2	73.7	68.1	66.2	65.1
82.5°	72.5	75.1	72.5	73.1	66.5	59.2	54.8	52.9	50.5	49.8	48.7
85°	38.6	38.1	37.1	34.6	30.1	29.0	28.6	28.1	27.1	27.6	26.6
87.5°	13.9	12.9	11.5	11.4	11.6	11.0	11.6	11.8	12.0	11.7	12.7
90°	2.9	4.2	5.6	6.9	8.0	9.0	9.9	10.8	11.8	12.5	13.3
92.5°	6.9	6.9	7.0	7.1	7.5	8.6	9.5	10.5	11.4	12.2	12.8
95°	25.5	21.5	17.3	13.3	11.3	11.5	11.6	11.7	11.8	12.5	13.3
97.5°	65.3	67.9	70.4	73.0	67.5	54.2	40.9	27.5	14.2	14.2	14.3
100°	90.3	92.5	94.6	96.8	89.6	73.1	56.6	40.2	23.7	21.6	19.6
102.5°	118.1	119.7	121.3	122.9	122.6	120.5	118.3	116.1	114.0	92.1	70.1
105°	162.6	163.2	164.0	164.7	165.3	166.0	166.5	167.1	167.8	168.8	169.9
107.5°	204.2	204.6	204.9	205.3	205.9	206.7	207.5	208.3	209.2	209.7	210.2
110°	232.6	233.0	233.4	233.7	234.2	235.0	235.6	236.4	237.1	237.3	237.6



TEST NUMBER: P332931-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	260.4	261.1	261.7	262.4	262.9	263.2	263.5	263.9	264.2	264.2	264.1
115°	302.6	302.8	303.2	303.6	303.7	303.6	303.5	303.3	303.2	303.5	303.7
117.5°	340.8	341.3	341.8	342.2	342.6	342.9	343.2	343.4	343.7	343.7	343.6
120°	366.6	367.1	367.6	368.1	368.3	368.2	368.0	367.9	367.8	368.0	368.3
122.5°	390.5	390.8	391.1	391.3	391.6	391.8	391.9	392.1	392.3	392.4	392.6
125°	425.2	425.7	426.2	426.7	426.8	426.5	426.3	426.0	425.8	426.2	426.5
127.5°	457.5	457.7	457.8	457.9	458.3	458.8	459.3	459.9	460.4	460.3	460.3
130°	478.6	478.7	478.9	479.0	479.2	479.6	479.9	480.3	480.7	480.8	480.9
132.5°	498.0	498.3	498.5	498.7	499.1	499.5	499.9	500.4	500.9	501.0	501.1
135°	526.8	526.7	526.5	526.4	526.6	527.1	527.5	528.0	528.5	528.8	529.0
137.5°	552.6	552.7	552.7	552.8	553.1	553.6	554.1	554.7	555.2	555.4	555.7
140°	569.6	569.9	570.0	570.3	570.5	570.8	571.1	571.3	571.6	571.8	572.2
142.5°	584.8	585.3	585.7	586.2	586.4	586.5	586.7	586.8	587.0	587.3	587.5
145°	607.9	608.2	608.6	609.0	609.2	609.2	609.2	609.2	609.2	609.3	609.4
147.5°	626.6	627.3	627.9	628.6	628.9	628.8	628.7	628.5	628.4	628.5	628.6
150°	639.7	640.3	640.7	641.2	641.4	641.2	641.1	641.0	640.8	640.8	640.8
152.5°	650.8	651.2	651.6	652.0	652.1	651.9	651.7	651.4	651.2	651.4	651.6
155°	666.3	666.4	666.5	666.7	666.5	666.2	665.8	665.4	665.1	665.5	666.0
157.5°	679.3	679.2	679.2	679.1	678.8	678.4	678.1	677.6	677.2	677.9	678.4
160°	686.7	686.4	686.1	685.7	685.4	685.3	685.2	685.0	684.9	685.7	686.4
162.5°	693.5	693.1	692.7	692.2	691.9	691.7	691.6	691.5	691.4	692.1	692.9
165°	702.1	701.5	700.9	700.3	700.0	700.0	700.0	700.0	700.0	701.0	701.9
167.5°	709.0	708.3	707.8	707.1	706.7	706.7	706.6	706.5	706.4	707.6	708.6
170°	712.8	712.0	711.3	710.6	710.3	710.4	710.5	710.7	710.8	711.7	712.7
172.5°	715.3	714.6	713.9	713.2	712.8	713.0	713.1	713.2	713.3	714.4	715.3
175°	718.1	717.4	716.7	716.0	715.7	715.8	716.0	716.0	716.1	717.2	718.3
177.5°	719.4	718.8	718.1	717.5	717.2	717.4	717.6	717.7	717.9	718.8	719.5
180°	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9	718.9



TEST NUMBER: P332931-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2
2.5°	1305.1	1306.7	1308.0	1311.9	1312.3	1316.0	1312.3
5°	1413.1	1420.1	1431.2	1442.2	1443.2	1450.2	1437.7
7.5°	1534.2	1550.5	1560.6	1578.4	1585.5	1589.9	1582.6
10°	1617.6	1632.7	1659.3	1672.3	1685.3	1687.3	1681.3
12.5°	1698.3	1722.1	1743.0	1767.7	1767.1	1784.8	1778.3
15°	1805.6	1830.1	1859.3	1886.8	1896.9	1896.9	1904.9
17.5°	1882.2	1927.2	1957.3	1979.0	2002.6	2006.7	2003.9
20°	1933.9	1982.5	2014.7	2042.7	2058.8	2063.2	2063.2
22.5°	1972.5	2013.8	2045.1	2070.4	2083.6	2089.0	2087.4
25°	1999.1	2034.7	2053.7	2061.2	2064.7	2063.8	2054.3
27.5°	1962.6	1961.0	1949.0	1925.9	1908.6	1898.0	1886.0
30°	1892.8	1866.8	1836.7	1803.6	1761.0	1728.4	1718.3
32.5°	1788.9	1730.4	1679.5	1624.4	1578.6	1546.0	1532.3
35°	1588.1	1495.3	1419.7	1353.5	1305.3	1275.3	1265.3
37.5°	1349.6	1259.9	1166.2	1102.0	1062.2	1031.7	1020.4
40°	1198.1	1100.3	1018.6	958.5	917.4	887.8	887.3
42.5°	1059.7	966.4	889.5	846.1	801.8	782.3	782.2
45°	867.7	793.1	727.8	693.8	667.2	651.2	646.7
47.5°	718.4	656.7	613.2	586.1	564.4	554.2	547.6
50°	634.6	580.5	545.9	522.4	510.3	497.3	496.2
52.5°	564.9	521.1	494.2	475.0	459.8	451.9	452.1
55°	474.7	440.2	421.0	406.5	394.5	388.5	386.0
57.5°	399.9	374.0	360.1	346.8	341.7	337.0	335.6
60°	353.4	335.8	322.8	312.3	304.8	303.3	302.7
62.5°	314.9	296.5	287.6	279.4	273.9	271.5	270.7
65°	259.7	246.1	238.1	231.6	229.6	226.1	225.6
67.5°	209.3	201.2	195.9	191.4	188.7	188.5	188.5
70°	178.4	173.9	169.5	166.9	165.4	164.4	164.4
72.5°	152.0	148.6	145.0	143.6	143.4	142.3	141.9
75°	115.8	112.3	112.8	110.3	108.3	105.8	104.2
77.5°	82.1	79.6	79.1	78.8	77.1	76.8	77.6
80°	63.6	61.2	60.7	61.2	60.7	59.2	59.2
82.5°	48.4	46.3	45.8	45.5	45.1	45.5	44.7
85°	26.1	25.1	25.1	25.1	26.1	25.5	25.1
87.5°	12.1	11.8	12.3	11.9	12.0	11.6	12.1
90°	13.9	14.7	15.2	15.5	15.6	15.9	16.1
92.5°	13.6	14.2	14.6	14.7	14.7	14.8	14.8
95°	13.9	14.7	15.1	15.3	15.4	15.5	15.6
97.5°	14.4	14.5	14.6	14.7	14.8	14.9	15.1
100°	17.5	15.6	14.6	14.7	14.8	14.9	15.1
102.5°	48.3	26.3	15.4	15.5	15.5	15.5	15.5
105°	171.0	172.0	170.4	166.2	161.8	157.5	153.3
107.5°	210.8	211.2	211.7	212.2	212.6	213.1	213.6
110°	237.8	238.1	238.4	238.7	239.0	239.4	239.8



TEST NUMBER: P332931-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	264.1	264.0	264.2	264.7	265.1	265.6	266.0
115°	304.0	304.2	304.3	304.3	304.3	304.3	304.3
117.5°	343.6	343.5	343.5	343.4	343.4	343.3	343.3
120°	368.4	368.7	368.7	368.4	368.3	368.0	367.8
122.5°	392.7	392.9	392.8	392.6	392.3	392.1	391.8
125°	426.9	427.3	427.5	427.6	427.7	427.8	428.0
127.5°	460.2	460.1	460.1	460.0	459.9	459.8	459.7
130°	481.0	481.2	481.2	481.2	481.2	481.2	481.2
132.5°	501.2	501.3	501.3	501.2	501.1	501.1	501.0
135°	529.2	529.4	529.7	529.9	530.2	530.5	530.7
137.5°	556.0	556.2	556.3	556.3	556.2	556.1	556.0
140°	572.6	573.0	573.2	573.3	573.4	573.5	573.6
142.5°	587.8	588.1	588.2	588.2	588.2	588.2	588.3
145°	609.5	609.6	609.8	610.0	610.3	610.6	610.8
147.5°	628.7	628.8	628.9	629.1	629.1	629.2	629.3
150°	640.8	640.8	640.9	641.0	641.2	641.3	641.4
152.5°	651.8	652.0	652.1	652.0	651.9	651.8	651.8
155°	666.5	666.9	667.0	666.7	666.3	666.0	665.6
157.5°	679.1	679.7	679.7	679.1	678.4	677.9	677.2
160°	687.1	687.9	687.9	687.1	686.4	685.7	684.9
162.5°	693.5	694.3	694.3	693.4	692.6	691.8	691.0
165°	702.9	703.9	703.8	702.7	701.6	700.6	699.5
167.5°	709.6	710.7	710.6	709.5	708.2	707.0	705.9
170°	713.6	714.6	714.4	713.3	712.1	710.9	709.7
172.5°	716.2	717.2	717.0	715.8	714.4	713.1	711.8
175°	719.3	720.5	720.3	718.9	717.4	716.0	714.5
177.5°	720.3	721.0	720.9	719.7	718.6	717.4	716.2
180°	718.9	718.9	718.9	718.9	718.9	718.9	718.9

(END OF REPORT)