

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332935-830

Luminaire Tested: **SA4XXRDIP-C795D590U830-4F0-1E-UDD-F1**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332935-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXRDIP-C795D590U830-4F0-1E-UDD-F1  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 590 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4955.7 lumens  
Efficiency: N/A  
Efficacy: 123.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: Semi-Direct

Input Watts (W): 40.3  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332935-830  
CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

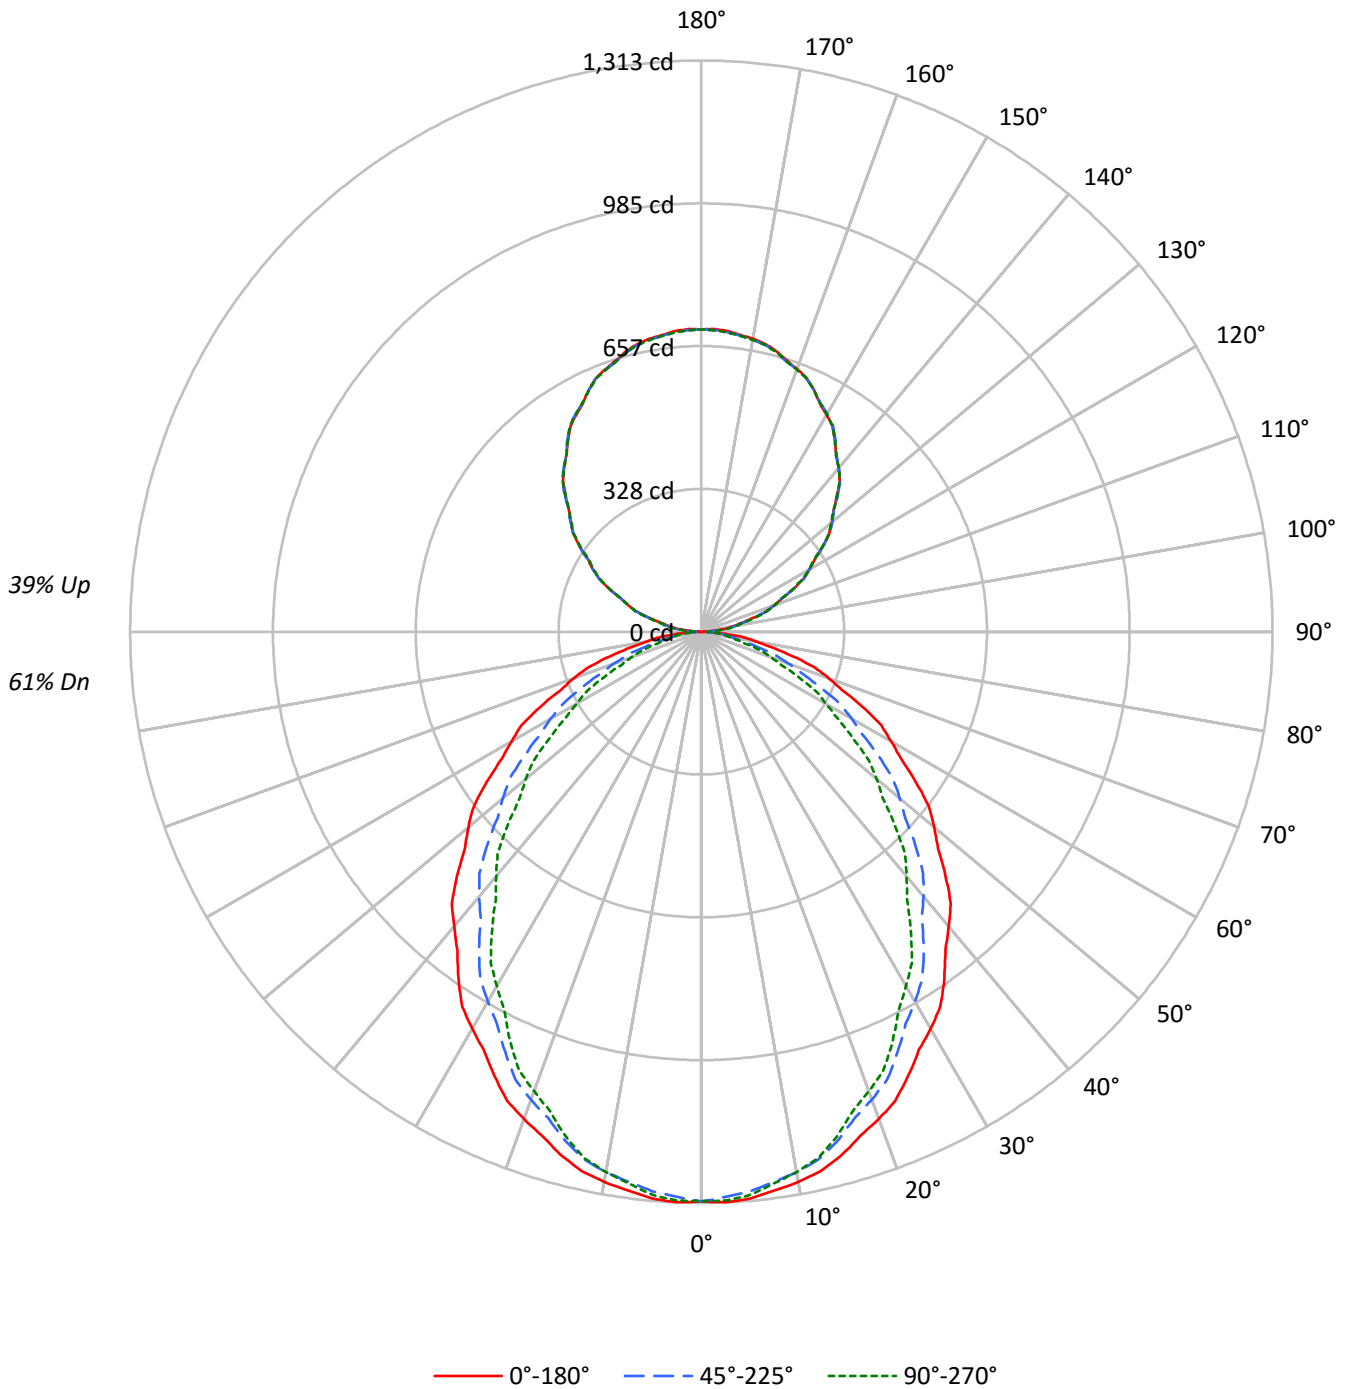



TEST NUMBER: P332935-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66	61
1	101	96	93	89	94	90	87	84	79	77	74	69	67	65	59	58	57	52
2	92	85	78	73	86	79	74	69	70	66	62	61	58	55	52	50	48	44
3	84	75	67	61	78	70	64	58	62	57	53	54	50	47	47	44	41	38
4	77	66	58	52	72	62	55	50	55	49	45	48	44	40	42	39	36	33
5	71	59	51	45	66	56	49	43	49	44	39	44	39	35	38	34	31	29
6	65	53	45	39	61	50	43	38	45	39	34	39	35	31	35	31	28	25
7	61	48	40	35	57	46	38	33	41	35	30	36	31	28	32	28	25	22
8	56	44	36	31	53	42	35	30	37	31	27	33	28	25	29	25	22	20
9	53	40	33	28	49	38	31	27	34	28	24	30	26	22	27	23	20	18
10	49	37	30	25	46	35	28	24	32	26	22	28	24	20	25	21	19	17

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	10571	10571	10571
5°	10594	10464	10529
10°	10528	10339	10339
15°	10407	10122	10046
20°	10241	9836	9655
25°	10029	9502	9260
30°	9822	9149	8766
35°	9594	8784	8270
40°	9319	8368	7734
45°	9065	7955	7188
50°	8776	7479	6610
55°	8466	6984	5983
60°	8126	6442	5341
65°	7815	5765	4713
70°	7360	5016	4001
75°	6784	4161	3250
80°	5918	3166	2985
85°	5011	2881	2686



TEST NUMBER: P332935-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	123.0	2.5
10°-20°	343.0	6.9
20°-30°	495.3	10.0
30°-40°	561.4	11.3
40°-50°	542.1	10.9
50°-60°	450.8	9.1
60°-70°	311.3	6.3
70°-80°	157.8	3.2
80°-90°	42.6	0.9
90°-100°	45.8	0.9
100°-110°	135.8	2.7
110°-120°	230.5	4.7
120°-130°	304.0	6.1
130°-140°	341.4	6.9
140°-150°	335.4	6.8
150°-160°	282.1	5.7
160°-170°	187.7	3.8
170°-180°	65.7	1.3
0°-30°	961.2	19.4
0°-40°	1522.6	30.7
0°-60°	2515.6	50.8
0°-90°	3027.2	61.1
90°-120°	412.2	8.3
90°-150°	1392.9	28.1
90°-180°	1928.0	38.9
0°-180°	4955.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1309	1309	1309	1309	1309	
5°	1307	1303	1291	1301	1299	124
15°	1245	1235	1211	1209	1202	351
25°	1126	1106	1067	1050	1040	519
35°	974	940	891	858	839	608
45°	794	756	697	649	630	612
55°	602	560	496	446	425	538
65°	409	365	302	260	247	404
75°	218	180	133	111	104	230
85°	54	35	31	29	29	61
90°	2	7	12	15	16	5
95°	32	37	41	42	42	36
105°	125	126	128	130	131	133
115°	234	234	233	233	232	231
125°	341	341	341	340	339	304
135°	440	443	444	442	441	340
145°	535	537	538	537	536	335
155°	613	613	612	614	612	282
165°	667	666	664	667	666	188
175°	694	691	691	694	691	66
180°	695	695	695	695	695	



TEST NUMBER: P332935-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1309.4	1309.4	1309.4	1309.4	1309.4	1309.4	1309.4	1309.4	1309.4	1309.4	1309.4
2.5°	1312.6	1311.8	1311.1	1310.4	1309.7	1308.3	1306.4	1304.5	1302.5	1300.5	1302.5
5°	1307.3	1306.5	1305.5	1304.7	1303.7	1302.0	1299.3	1296.7	1293.9	1291.3	1293.5
7.5°	1295.5	1294.6	1293.6	1292.7	1291.8	1289.6	1286.1	1282.6	1279.1	1275.6	1277.1
10°	1284.3	1283.2	1282.0	1280.9	1279.8	1277.2	1273.3	1269.2	1265.3	1261.2	1262.1
12.5°	1269.8	1268.6	1267.2	1265.9	1264.7	1261.7	1257.0	1252.2	1247.5	1242.7	1243.3
15°	1245.2	1243.2	1241.1	1239.2	1237.2	1233.4	1227.8	1222.2	1216.6	1211.1	1210.6
17.5°	1215.3	1212.4	1209.5	1206.6	1203.7	1198.9	1192.2	1185.5	1178.8	1172.1	1170.9
20°	1192.0	1189.1	1186.3	1183.4	1180.4	1175.3	1167.6	1160.1	1152.4	1144.9	1143.1
22.5°	1166.4	1163.1	1159.9	1156.6	1153.4	1147.6	1139.5	1131.4	1123.3	1115.2	1112.6
25°	1125.9	1121.8	1117.9	1113.8	1109.8	1103.2	1094.1	1085.0	1075.8	1066.7	1062.9
27.5°	1083.4	1078.4	1073.3	1068.3	1063.2	1055.8	1046.0	1036.3	1026.5	1016.8	1012.1
30°	1053.7	1048.1	1042.5	1037.0	1031.4	1023.4	1013.0	1002.5	991.9	981.5	975.9
32.5°	1022.4	1016.2	1009.8	1003.5	997.3	988.7	977.9	967.0	956.2	945.4	939.0
35°	973.5	966.4	959.2	952.1	945.0	935.9	924.7	913.5	902.4	891.3	883.7
37.5°	921.1	913.8	906.4	899.1	891.7	881.9	869.6	857.2	844.9	832.5	824.1
40°	884.3	876.9	869.6	862.2	854.9	844.8	832.1	819.4	806.7	794.0	784.7
42.5°	848.9	841.2	833.6	825.9	818.1	807.7	794.5	781.2	768.0	754.7	745.2
45°	794.0	785.8	777.5	769.3	761.0	750.3	736.9	723.5	710.1	696.8	685.9
47.5°	737.3	728.8	720.3	711.7	703.2	692.0	678.2	664.2	650.4	636.4	625.1
50°	698.8	690.1	681.4	672.7	664.0	652.5	638.3	624.1	609.7	595.5	584.4
52.5°	659.5	651.0	642.4	634.0	625.5	613.9	599.3	584.7	570.0	555.4	544.1
55°	601.5	592.6	583.7	574.8	565.9	554.2	539.7	525.2	510.8	496.2	484.7
57.5°	544.2	534.9	525.7	516.4	507.1	495.3	481.1	466.8	452.6	438.3	426.6
60°	503.3	494.4	485.5	476.5	467.6	456.1	441.8	427.5	413.3	399.0	387.4
62.5°	466.4	457.1	447.9	438.6	429.3	417.4	402.7	388.1	373.5	358.9	348.2
65°	409.1	399.4	389.8	380.3	370.7	358.8	344.5	330.3	316.0	301.8	292.2
67.5°	349.5	340.4	331.1	322.0	312.7	301.6	288.3	275.1	261.8	248.6	240.3
70°	311.8	302.5	293.0	283.7	274.4	263.3	250.6	237.9	225.3	212.5	205.2
72.5°	271.7	263.3	254.8	246.3	237.8	227.6	215.7	203.6	191.6	179.6	173.3
75°	217.5	209.3	201.0	192.8	184.5	175.2	164.8	154.3	143.8	133.4	128.2
77.5°	162.6	155.6	148.6	141.7	134.6	126.9	118.5	110.0	101.5	93.0	90.0
80°	127.3	120.8	114.4	107.9	101.5	94.9	88.2	81.5	74.8	68.1	67.5
82.5°	96.9	91.0	85.0	79.1	73.1	68.2	64.5	60.6	56.7	53.0	52.4
85°	54.1	49.7	45.2	40.8	36.3	33.7	33.1	32.4	31.8	31.1	30.6
87.5°	18.8	17.6	16.4	15.3	14.1	13.6	13.6	13.6	13.6	13.6	13.6
90°	1.6	2.9	4.2	5.6	6.9	8.0	9.0	9.9	10.8	11.8	12.5
92.5°	11.5	13.0	14.5	16.0	17.5	18.6	19.3	20.0	20.6	21.3	21.7
95°	32.2	33.4	34.4	35.4	36.6	37.5	38.4	39.2	40.1	40.8	41.2
97.5°	56.4	57.2	58.1	58.9	59.8	60.7	61.6	62.7	63.6	64.7	65.0
100°	75.2	75.8	76.3	76.7	77.2	77.9	79.0	80.1	81.2	82.3	82.5
102.5°	95.0	95.2	95.4	95.6	95.8	96.4	97.4	98.3	99.3	100.3	100.7
105°	125.3	125.4	125.5	125.6	125.7	126.0	126.5	127.0	127.4	127.9	128.3
107.5°	156.9	157.1	157.2	157.4	157.6	157.7	157.7	157.8	157.9	158.0	158.3
110°	178.5	178.7	179.0	179.2	179.5	179.5	179.4	179.3	179.2	179.0	178.8



TEST NUMBER: P332935-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	200.9	200.9	201.0	201.0	201.0	201.0	200.8	200.5	200.3	200.1	200.0
115°	234.4	234.4	234.4	234.4	234.4	234.2	234.0	233.8	233.6	233.3	233.2
117.5°	266.0	266.1	266.2	266.3	266.4	266.4	266.2	266.0	265.8	265.7	265.2
120°	287.1	287.6	288.0	288.5	289.0	289.1	288.7	288.3	287.9	287.6	287.0
122.5°	309.0	309.2	309.3	309.5	309.7	309.8	309.6	309.4	309.2	309.2	308.7
125°	341.4	341.4	341.4	341.4	341.4	341.3	341.2	341.1	340.9	340.8	340.5
127.5°	370.7	371.1	371.5	371.8	372.1	372.2	372.0	371.8	371.6	371.5	371.3
130°	391.3	391.7	392.1	392.5	392.8	392.9	392.9	392.9	392.9	392.9	392.8
132.5°	412.5	412.7	412.9	413.2	413.5	413.6	413.5	413.4	413.3	413.2	412.9
135°	440.3	441.0	441.7	442.4	443.2	443.5	443.5	443.5	443.5	443.5	443.3
137.5°	470.6	470.9	471.3	471.6	471.9	472.2	472.4	472.6	472.8	473.0	472.7
140°	490.8	491.1	491.3	491.5	491.7	491.9	491.9	491.9	491.9	491.9	491.7
142.5°	509.3	509.5	509.8	510.0	510.3	510.3	510.2	510.1	510.0	509.9	509.9
145°	534.9	535.4	535.8	536.3	536.8	537.1	537.2	537.3	537.4	537.5	537.4
147.5°	560.2	560.8	561.4	561.9	562.6	562.8	562.7	562.6	562.5	562.4	562.3
150°	575.7	576.3	576.7	577.2	577.7	577.9	577.9	577.9	577.9	577.9	577.9
152.5°	590.4	590.7	591.0	591.3	591.5	591.7	591.8	591.9	592.0	592.1	592.4
155°	612.8	612.8	612.8	612.8	612.8	612.7	612.7	612.6	612.5	612.3	612.7
157.5°	631.8	631.5	631.3	631.1	630.9	630.7	630.7	630.7	630.7	630.7	631.0
160°	642.9	642.8	642.7	642.6	642.4	642.3	642.2	642.2	642.0	641.9	642.2
162.5°	653.3	653.0	652.6	652.3	652.1	651.8	651.7	651.6	651.5	651.3	652.0
165°	667.1	666.8	666.4	666.1	665.7	665.4	665.2	665.0	664.7	664.5	665.2
167.5°	677.8	677.3	676.7	676.3	675.8	675.5	675.5	675.6	675.6	675.6	676.4
170°	683.8	683.2	682.6	682.0	681.4	681.2	681.3	681.4	681.6	681.6	682.4
172.5°	688.1	687.6	687.1	686.6	686.1	685.9	685.9	685.9	685.9	686.0	686.7
175°	694.0	693.4	692.9	692.2	691.6	691.3	691.2	691.1	690.9	690.8	691.6
177.5°	696.0	695.5	695.0	694.6	694.0	693.8	693.8	693.8	693.8	693.8	694.5
180°	695.1	695.1	695.1	695.1	695.1	695.1	695.1	695.1	695.1	695.1	695.1



TEST NUMBER: P332935-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1309.4	1309.4	1309.4	1309.4	1309.4	1309.4	1309.4	1309.4
2.5°	1304.5	1306.4	1308.3	1309.3	1309.1	1308.9	1308.7	1308.5
5°	1295.7	1298.0	1300.2	1301.1	1300.6	1300.2	1299.8	1299.3
7.5°	1278.5	1280.0	1281.4	1281.7	1281.0	1280.3	1279.6	1278.8
10°	1263.0	1263.9	1264.8	1264.8	1263.9	1263.0	1262.1	1261.2
12.5°	1243.9	1244.3	1244.9	1244.5	1243.3	1242.1	1240.8	1239.5
15°	1210.2	1209.8	1209.3	1208.3	1206.7	1205.1	1203.6	1202.0
17.5°	1169.7	1168.5	1167.2	1165.4	1163.0	1160.6	1158.3	1155.9
20°	1141.3	1139.5	1137.7	1135.5	1132.6	1129.6	1126.7	1123.9
22.5°	1109.9	1107.2	1104.6	1102.0	1099.7	1097.3	1095.0	1092.6
25°	1059.1	1055.4	1051.6	1048.6	1046.3	1044.1	1041.9	1039.6
27.5°	1007.4	1002.8	998.1	994.1	990.9	987.7	984.5	981.3
30°	970.3	964.8	959.2	954.6	951.1	947.5	944.0	940.4
32.5°	932.5	926.0	919.5	914.6	911.3	907.9	904.5	901.1
35°	876.1	868.6	861.0	855.2	851.2	847.2	843.1	839.1
37.5°	815.6	807.1	798.6	792.4	788.4	784.4	780.4	776.4
40°	775.3	765.9	756.6	749.9	745.9	741.9	737.9	733.9
42.5°	735.7	726.1	716.6	709.7	705.5	701.3	697.2	693.0
45°	675.0	664.0	653.1	645.6	641.6	637.6	633.6	629.6
47.5°	613.8	602.5	591.2	583.2	578.9	574.5	570.0	565.6
50°	573.3	562.1	550.9	543.3	539.0	534.8	530.6	526.3
52.5°	532.8	521.5	510.1	502.3	497.9	493.4	489.1	484.7
55°	473.1	461.5	450.0	442.1	437.8	433.6	429.3	425.1
57.5°	414.8	403.0	391.2	383.8	380.6	377.4	374.2	371.0
60°	375.9	364.3	352.7	345.1	341.6	338.0	334.4	330.8
62.5°	337.5	326.9	316.1	309.3	306.5	303.7	300.8	297.9
65°	282.6	273.1	263.4	257.3	254.7	251.9	249.3	246.7
67.5°	232.1	223.9	215.7	210.1	207.2	204.2	201.2	198.3
70°	197.8	190.5	183.1	178.3	176.2	173.9	171.6	169.5
72.5°	167.1	160.8	154.5	150.3	148.4	146.3	144.2	142.1
75°	123.1	118.0	112.8	109.6	108.3	107.0	105.6	104.2
77.5°	87.1	84.1	81.1	79.4	79.0	78.6	78.2	77.8
80°	66.8	66.2	65.5	65.0	64.8	64.6	64.4	64.2
82.5°	51.9	51.5	51.0	50.6	50.4	50.1	50.0	49.8
85°	30.2	29.8	29.3	29.0	29.0	29.0	29.0	29.0
87.5°	13.5	13.5	13.5	13.6	13.8	14.0	14.2	14.4
90°	13.3	13.9	14.7	15.2	15.5	15.6	15.9	16.1
92.5°	22.1	22.6	23.0	23.3	23.5	23.6	23.8	23.8
95°	41.6	41.9	42.3	42.5	42.5	42.5	42.5	42.5
97.5°	65.5	65.9	66.4	66.5	66.5	66.5	66.5	66.5
100°	82.8	82.9	83.2	83.3	83.3	83.3	83.3	83.3
102.5°	100.9	101.3	101.6	101.9	102.0	102.1	102.2	102.3
105°	128.7	129.0	129.4	129.7	130.1	130.4	130.8	131.2
107.5°	158.6	158.9	159.3	159.5	159.4	159.4	159.4	159.4
110°	178.5	178.3	178.0	178.1	178.5	178.8	179.2	179.6





TEST NUMBER: P332935-830

CATALOG NUMBER: SA4XXRDIP-C795D590U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	200.0	199.9	199.9	199.9	200.0	200.0	200.1	200.2
115°	233.1	233.0	232.8	232.7	232.6	232.4	232.3	232.2
117.5°	264.9	264.5	264.0	263.7	263.4	263.3	263.0	262.8
120°	286.4	285.8	285.2	285.0	285.3	285.5	285.8	286.0
122.5°	308.3	307.9	307.5	307.1	306.6	306.2	305.8	305.4
125°	340.4	340.1	339.9	339.6	339.4	339.1	338.9	338.7
127.5°	371.0	370.8	370.5	370.3	370.1	369.9	369.8	369.6
130°	392.5	392.3	392.0	391.6	391.2	390.7	390.2	389.7
132.5°	412.7	412.5	412.3	412.0	411.8	411.6	411.4	411.2
135°	443.0	442.8	442.5	442.2	441.9	441.5	441.2	440.8
137.5°	472.3	472.0	471.7	471.6	471.6	471.7	471.8	471.9
140°	491.6	491.5	491.4	491.3	491.2	491.1	491.0	490.8
142.5°	509.9	509.9	509.8	509.8	509.8	509.8	509.7	509.7
145°	537.3	537.2	537.1	536.9	536.5	536.1	535.7	535.5
147.5°	562.2	562.1	562.0	561.9	561.8	561.7	561.6	561.5
150°	577.9	577.9	577.9	577.9	577.7	577.6	577.5	577.4
152.5°	592.7	593.0	593.2	593.2	593.0	592.6	592.3	592.0
155°	613.2	613.7	614.3	614.3	613.7	613.2	612.7	612.3
157.5°	631.4	631.8	632.2	632.1	631.7	631.3	630.8	630.5
160°	642.6	642.9	643.3	643.2	642.6	642.0	641.4	640.8
162.5°	652.6	653.3	653.9	653.9	653.4	652.7	652.1	651.6
165°	665.9	666.6	667.3	667.4	666.9	666.5	666.0	665.5
167.5°	677.0	677.8	678.5	678.4	677.8	677.0	676.3	675.5
170°	683.1	683.8	684.5	684.5	683.6	682.8	681.9	681.1
172.5°	687.6	688.4	689.2	689.2	688.3	687.5	686.6	685.9
175°	692.5	693.3	694.1	694.1	693.3	692.5	691.6	690.8
177.5°	695.1	695.8	696.4	696.4	695.7	694.9	694.1	693.3
180°	695.1	695.1	695.1	695.1	695.1	695.1	695.1	695.1

(END OF REPORT)