

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332662-930

Luminaire Tested: **SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1**

Issue Date: 10/7/2019

Test Information

Test Method: LM-79-08
Report Number: P332662-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 10/7/2019
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7155.5 lumens
Efficiency: N/A
Efficacy: 109.4 lumens/watt
Spacing Criteria (0/90/45): 1.31 / 1.23 / 1.41
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 65.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

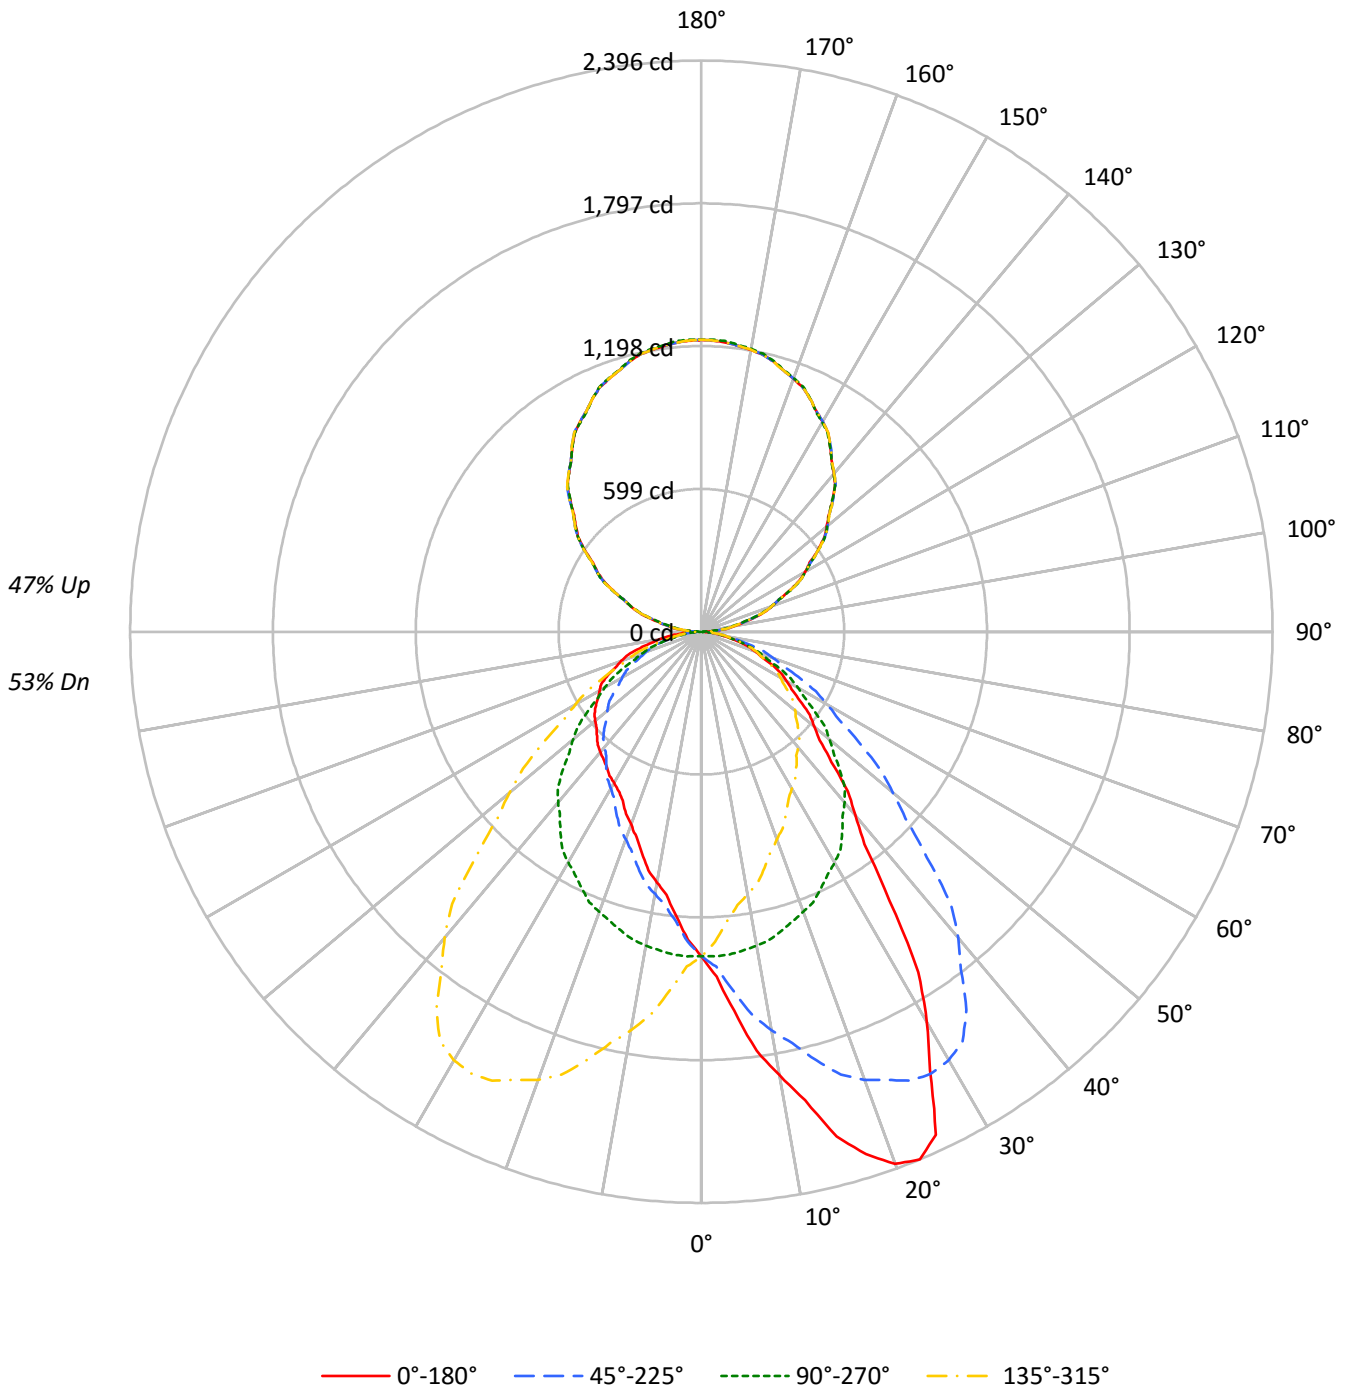



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	58	58	58	53
1	99	94	90	87	91	87	84	81	75	72	70	63	61	60	52	51	50	45
2	90	83	77	71	83	77	71	67	66	62	58	55	53	50	46	44	42	38
3	82	73	66	60	76	68	61	56	58	53	49	49	46	43	41	38	36	32
4	75	65	57	51	69	60	53	48	52	46	42	44	40	37	37	34	31	28
5	69	58	50	44	64	54	47	41	46	41	37	40	35	32	33	30	28	24
6	64	52	44	38	59	48	41	36	42	36	32	36	32	28	30	27	24	22
7	59	47	39	33	55	44	37	32	38	32	28	33	28	25	28	24	22	19
8	55	43	35	30	51	40	33	28	35	29	25	30	26	22	25	22	19	17
9	51	39	31	26	47	37	30	25	32	26	23	28	23	20	23	20	18	16
10	48	36	29	24	44	34	27	23	29	24	20	26	21	18	22	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	10984	10984	10984	10984
5°	12935	11012	9720	11012
10°	15488	10964	8751	10964
15°	18324	10853	8037	10853
20°	20405	10740	7399	10740
25°	20735	10573	6959	10573
30°	17643	10413	6820	10413
35°	13565	10154	6821	10154
40°	10572	9848	6949	9848
45°	8816	9388	7066	9388
50°	7759	8828	7304	8828
55°	7108	8155	7600	8155
60°	6660	7553	7953	7553
65°	6202	6879	8246	6879
70°	5667	6212	8434	6212
75°	5062	5468	8334	5468
80°	4245	4482	8071	4482
85°	3131	3242	7725	3242



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	132.5	1.9
10°-20°	408.6	5.7
20°-30°	647.9	9.1
30°-40°	721.0	10.1
40°-50°	656.3	9.2
50°-60°	536.3	7.5
60°-70°	382.9	5.4
70°-80°	210.8	2.9
80°-90°	61.2	0.9
90°-100°	80.8	1.1
100°-110°	239.3	3.3
110°-120°	406.2	5.7
120°-130°	535.6	7.5
130°-140°	601.5	8.4
140°-150°	591.0	8.3
150°-160°	497.1	6.9
160°-170°	330.7	4.6
170°-180°	115.8	1.6
0°-30°	1189.0	16.6
0°-40°	1910.0	26.7
0°-60°	3102.6	43.4
0°-90°	3757.5	52.5
90°-120°	726.2	10.1
90°-150°	2454.3	34.3
90°-180°	3398.0	47.5
0°-180°	7155.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1361	1361	1361	1361	1361	
5°	1596	1359	1199	1359	1596	162
15°	2192	1299	962	1299	2192	619
25°	2328	1187	781	1187	2328	1026
35°	1376	1030	692	1030	1376	874
45°	772	822	619	822	772	608
55°	505	579	540	579	505	456
65°	325	360	432	360	325	321
75°	162	175	267	175	162	173
85°	34	35	83	35	34	42
90°	28	3	28	3	28	16
95°	75	57	75	57	75	78
105°	231	221	231	221	231	244
115°	409	413	409	413	409	404
125°	597	601	597	601	597	532
135°	777	776	777	776	777	600
145°	944	942	944	942	944	590
155°	1079	1080	1079	1080	1079	497
165°	1173	1176	1173	1176	1173	330
175°	1217	1223	1217	1223	1217	116
180°	1225	1225	1225	1225	1225	



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6
2.5°	1448.1	1447.6	1443.1	1442.2	1439.0	1435.0	1434.1	1426.9	1412.4	1405.7	1403.9
5°	1596.2	1607.4	1592.8	1590.0	1588.3	1569.7	1560.1	1548.8	1522.9	1507.7	1495.8
7.5°	1772.9	1774.3	1767.9	1762.7	1748.3	1732.1	1707.8	1681.9	1651.0	1618.9	1594.6
10°	1889.3	1893.8	1886.4	1885.3	1856.6	1838.5	1802.5	1772.1	1737.1	1698.2	1662.7
12.5°	2011.9	2005.6	2001.9	1977.8	1972.5	1939.5	1897.6	1866.3	1812.4	1767.7	1720.4
15°	2192.5	2180.1	2172.2	2138.9	2122.6	2077.0	2032.4	1998.1	1927.6	1860.5	1809.8
17.5°	2298.4	2310.9	2292.6	2278.9	2236.7	2204.7	2159.2	2087.0	2031.9	1948.6	1884.6
20°	2375.1	2376.2	2366.1	2352.0	2318.7	2278.2	2228.5	2149.6	2083.7	2000.8	1912.9
22.5°	2395.8	2396.1	2391.8	2378.6	2353.4	2320.5	2270.5	2204.7	2124.8	2034.7	1946.8
25°	2327.8	2325.5	2330.6	2345.2	2335.7	2325.5	2296.8	2247.7	2173.3	2078.0	1983.4
27.5°	2074.8	2090.3	2119.0	2155.1	2189.8	2216.3	2223.7	2213.7	2167.6	2089.2	1990.1
30°	1892.6	1911.8	1933.2	1969.3	2039.1	2079.2	2123.2	2156.4	2137.8	2075.3	1982.8
32.5°	1692.5	1697.2	1729.0	1770.0	1834.0	1911.0	1980.7	2048.2	2070.6	2037.8	1960.7
35°	1376.4	1384.2	1418.6	1459.2	1537.6	1631.7	1736.5	1830.1	1907.3	1938.3	1898.8
37.5°	1123.2	1145.8	1170.1	1213.7	1282.7	1367.4	1476.3	1597.4	1712.5	1789.6	1802.7
40°	1003.2	1017.3	1034.8	1068.0	1126.7	1210.1	1303.7	1442.3	1564.6	1675.1	1711.2
42.5°	908.6	916.8	927.5	957.6	1002.2	1085.2	1170.6	1292.6	1415.4	1547.4	1607.9
45°	772.2	780.6	798.7	816.1	849.9	907.4	986.9	1087.2	1210.6	1338.1	1449.6
47.5°	673.6	679.1	689.7	708.5	737.2	775.1	839.8	923.6	1038.0	1161.6	1280.5
50°	617.8	622.2	630.7	647.6	669.6	703.4	756.4	834.7	924.3	1048.9	1165.6
52.5°	573.6	575.4	581.6	593.0	610.5	639.0	682.4	747.2	830.5	941.6	1057.8
55°	505.0	507.3	512.9	521.4	536.5	554.6	587.8	636.3	709.1	805.4	906.3
57.5°	448.7	450.2	454.9	458.2	470.8	485.4	510.9	545.6	600.7	682.4	772.5
60°	412.5	411.5	417.1	419.9	428.4	440.8	460.5	493.7	541.6	607.6	690.4
62.5°	377.4	375.9	380.6	384.3	389.1	399.7	415.8	441.9	480.8	540.4	612.0
65°	324.7	322.4	325.2	329.7	334.2	339.9	351.7	374.8	405.8	448.7	503.3
67.5°	271.7	274.0	274.5	276.7	279.3	287.0	295.1	311.4	333.3	367.6	413.9
70°	240.1	240.7	243.0	243.0	244.6	251.4	258.1	267.7	289.1	320.7	358.5
72.5°	208.6	210.9	210.0	211.8	213.0	217.5	222.5	231.6	249.9	273.4	305.2
75°	162.3	164.0	164.0	164.6	166.2	168.0	171.9	178.6	191.6	209.1	231.1
77.5°	118.4	118.6	119.4	121.4	121.4	124.1	127.0	132.5	138.8	150.8	164.2
80°	91.3	92.5	91.9	93.0	93.0	95.2	96.4	103.1	106.0	113.8	124.6
82.5°	66.9	68.1	68.0	69.5	70.4	70.9	72.5	75.2	78.0	85.0	89.4
85°	33.8	35.0	33.8	35.0	36.6	37.2	38.9	39.5	41.7	43.4	47.4
87.5°	15.6	16.9	16.8	17.1	17.9	18.3	18.4	17.8	19.3	19.5	21.0
90°	28.5	28.0	27.6	27.1	26.7	25.9	24.6	23.4	22.1	20.9	19.2
92.5°	42.1	41.8	41.6	41.3	41.0	40.5	39.8	39.1	38.2	37.5	36.4
95°	74.8	74.8	74.8	74.8	74.8	74.5	73.9	73.2	72.6	72.0	70.5
97.5°	117.2	117.2	117.2	117.2	117.2	116.9	116.1	115.4	114.6	113.8	112.1
100°	146.8	146.8	146.8	146.8	146.8	146.6	146.2	145.8	145.4	145.0	143.0
102.5°	180.2	180.0	179.9	179.7	179.4	179.1	178.6	177.9	177.3	176.8	175.0
105°	231.1	230.5	229.8	229.3	228.6	228.0	227.3	226.7	226.1	225.4	224.6
107.5°	280.8	280.8	280.9	280.9	281.0	280.6	280.1	279.5	278.9	278.3	278.2
110°	316.3	315.8	315.1	314.5	313.8	313.7	314.1	314.5	315.0	315.4	315.6



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	352.8	352.6	352.5	352.4	352.2	352.2	352.3	352.4	352.5	352.5	352.9
115°	409.2	409.4	409.6	409.9	410.0	410.3	410.4	410.7	410.9	411.1	411.5
117.5°	463.0	463.4	463.8	464.2	464.7	465.2	465.9	466.7	467.4	468.1	468.4
120°	503.9	503.5	503.0	502.6	502.2	502.6	503.6	504.7	505.7	506.8	507.4
122.5°	538.0	538.7	539.6	540.3	541.0	541.8	542.5	543.2	544.0	544.6	544.9
125°	596.7	597.1	597.6	598.0	598.4	598.8	599.2	599.7	600.1	600.5	600.7
127.5°	651.1	651.4	651.8	652.2	652.5	652.8	653.3	653.7	654.1	654.5	654.8
130°	686.7	687.5	688.4	689.3	690.1	690.7	691.1	691.5	692.0	692.4	692.4
132.5°	724.6	725.0	725.3	725.6	725.9	726.4	726.8	727.2	727.6	728.1	728.2
135°	776.7	777.3	778.0	778.6	779.3	779.8	780.2	780.6	781.1	781.5	781.5
137.5°	831.4	831.4	831.2	831.1	831.0	831.2	831.7	832.3	832.8	833.3	833.0
140°	864.8	865.0	865.2	865.4	865.7	865.8	866.1	866.3	866.5	866.7	866.7
142.5°	898.1	898.2	898.2	898.3	898.3	898.4	898.4	898.5	898.5	898.5	898.7
145°	943.5	944.0	944.7	945.3	945.9	946.4	946.6	946.8	947.0	947.2	947.0
147.5°	989.3	989.4	989.7	989.9	990.1	990.3	990.5	990.7	990.8	991.0	991.2
150°	1017.3	1017.5	1017.7	1017.9	1018.1	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2
152.5°	1043.1	1043.6	1044.2	1044.7	1045.3	1045.3	1044.8	1044.2	1043.7	1043.3	1043.1
155°	1078.9	1079.7	1080.6	1081.4	1082.2	1082.2	1081.4	1080.6	1079.7	1078.9	1079.0
157.5°	1110.9	1111.6	1112.3	1113.0	1113.8	1113.8	1113.1	1112.6	1111.9	1111.3	1111.3
160°	1129.1	1130.2	1131.1	1132.2	1133.3	1133.5	1132.9	1132.2	1131.6	1131.0	1131.1
162.5°	1148.0	1149.1	1150.1	1151.2	1152.3	1152.2	1151.0	1149.9	1148.8	1147.6	1147.9
165°	1172.6	1173.5	1174.4	1175.2	1176.0	1175.8	1174.5	1173.3	1172.0	1170.8	1171.2
167.5°	1190.3	1191.6	1192.9	1194.2	1195.5	1195.5	1194.3	1192.9	1191.7	1190.4	1190.4
170°	1200.1	1201.6	1203.1	1204.5	1206.0	1206.2	1204.8	1203.6	1202.3	1201.1	1200.9
172.5°	1208.4	1209.9	1211.4	1212.8	1214.4	1214.4	1212.9	1211.5	1210.1	1208.7	1208.6
175°	1217.2	1218.6	1220.1	1221.6	1223.0	1223.0	1221.6	1220.1	1218.6	1217.2	1217.4
177.5°	1221.7	1223.0	1224.4	1225.7	1227.1	1227.2	1226.0	1224.8	1223.7	1222.5	1222.5
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6
2.5°	1404.4	1398.0	1393.5	1389.9	1380.0	1374.1	1369.6	1363.3	1356.1	1348.4	1339.0
5°	1484.0	1464.8	1450.7	1429.4	1409.1	1392.1	1374.7	1358.9	1339.7	1318.9	1303.7
7.5°	1567.7	1539.3	1502.8	1471.0	1435.4	1404.4	1376.7	1348.3	1318.7	1290.1	1263.9
10°	1621.0	1584.4	1543.8	1495.8	1450.7	1410.7	1373.5	1337.5	1302.5	1267.5	1237.7
12.5°	1678.2	1632.6	1572.6	1516.6	1466.1	1412.6	1367.7	1323.5	1281.3	1244.6	1209.7
15°	1755.1	1689.1	1619.8	1544.9	1478.4	1415.8	1354.4	1298.6	1251.2	1202.7	1169.0
17.5°	1802.4	1720.8	1641.5	1563.2	1482.6	1403.8	1337.5	1273.1	1213.8	1165.7	1123.1
20°	1833.4	1752.3	1653.7	1575.3	1479.5	1398.3	1321.7	1250.1	1188.1	1136.9	1092.8
22.5°	1860.5	1766.8	1668.1	1565.0	1469.6	1383.5	1299.6	1227.6	1164.2	1110.2	1068.0
25°	1875.2	1767.5	1660.4	1557.9	1449.6	1347.6	1271.5	1187.0	1119.3	1062.4	1017.3
27.5°	1876.7	1761.6	1640.5	1526.5	1414.8	1319.8	1223.8	1148.2	1078.0	1017.8	974.5
30°	1871.8	1751.8	1621.5	1498.1	1385.9	1282.8	1199.4	1117.1	1045.5	985.8	940.7
32.5°	1856.0	1731.0	1597.2	1466.6	1350.3	1249.4	1163.4	1085.1	1015.3	956.4	909.1
35°	1810.4	1686.9	1544.3	1408.5	1289.6	1187.6	1109.8	1030.3	960.4	904.6	859.0
37.5°	1739.0	1627.4	1482.5	1341.9	1225.1	1122.6	1045.5	973.7	910.7	854.0	807.2
40°	1676.7	1578.7	1433.3	1296.3	1170.1	1072.6	1000.5	934.5	872.0	818.4	773.9
42.5°	1605.1	1519.6	1385.5	1240.4	1118.7	1020.8	950.4	891.2	832.3	782.8	738.3
45°	1477.2	1420.9	1294.6	1160.5	1033.7	941.3	874.2	822.3	772.7	724.2	687.1
47.5°	1330.2	1302.3	1196.0	1068.6	948.3	857.1	799.0	751.1	707.6	666.5	633.7
50°	1231.5	1218.0	1126.1	1003.2	888.3	802.6	744.0	702.9	665.6	629.6	598.6
52.5°	1134.1	1133.7	1050.8	938.3	831.9	749.4	691.2	652.8	620.5	591.3	563.4
55°	985.2	1001.0	936.2	835.8	740.6	666.2	613.8	579.4	556.8	532.6	511.8
57.5°	848.5	874.7	821.2	732.8	653.4	584.8	539.2	513.3	489.3	474.7	459.5
60°	759.2	784.0	742.3	667.9	593.0	534.3	490.9	467.8	446.9	436.8	426.1
62.5°	679.9	702.0	671.1	602.1	537.0	480.6	444.0	421.8	407.7	396.6	389.6
65°	566.5	585.1	558.6	508.4	452.6	407.5	377.6	360.1	346.7	342.1	334.2
67.5°	457.9	474.8	460.5	417.8	373.1	339.0	315.6	298.8	290.8	286.9	281.3
70°	393.4	410.3	395.1	357.9	323.5	294.8	272.8	263.2	254.8	253.1	245.2
72.5°	338.8	350.3	335.2	306.1	276.6	252.4	235.4	225.3	220.9	217.9	213.6
75°	254.2	264.3	254.2	231.6	210.8	193.9	179.2	175.3	170.2	168.5	165.7
77.5°	179.9	188.7	180.9	166.8	151.2	138.2	130.3	125.2	124.1	121.2	122.5
80°	137.5	143.2	135.8	126.3	113.8	104.8	99.2	96.4	93.0	91.9	94.1
82.5°	98.7	101.3	97.5	91.1	81.9	76.0	72.2	68.9	68.2	68.4	68.4
85°	51.3	50.7	50.1	44.5	41.7	37.7	35.5	35.0	34.4	35.5	36.6
87.5°	20.6	20.7	20.0	17.8	15.9	14.1	13.2	12.3	13.2	14.1	15.0
90°	17.4	15.8	14.1	12.1	9.8	7.5	5.1	2.9	5.1	7.5	9.8
92.5°	35.1	34.0	32.8	30.9	28.2	25.6	22.9	20.3	22.9	25.6	28.2
95°	69.1	67.6	66.1	64.4	62.5	60.7	58.7	56.8	58.7	60.7	62.5
97.5°	110.4	108.7	107.0	105.3	103.8	102.3	100.8	99.3	100.8	102.3	103.8
100°	141.1	139.3	137.4	136.0	135.1	134.3	133.5	132.6	133.5	134.3	135.1
102.5°	173.3	171.5	169.8	168.8	168.4	168.1	167.8	167.5	167.8	168.1	168.4
105°	223.7	222.9	222.1	221.5	221.4	221.1	220.9	220.7	220.9	221.1	221.4
107.5°	278.0	277.9	277.8	277.6	277.4	277.1	276.9	276.5	276.9	277.1	277.4
110°	315.8	316.1	316.3	316.2	315.8	315.3	314.9	314.5	314.9	315.3	315.8



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	353.4	353.7	354.1	354.2	354.2	354.1	354.0	353.8	354.0	354.1	354.2
115°	412.0	412.4	412.8	412.9	412.9	412.9	412.9	412.9	412.9	412.9	412.9
117.5°	468.7	469.0	469.3	469.4	469.2	469.0	468.9	468.7	468.9	469.0	469.2
120°	508.0	508.7	509.3	509.2	508.3	507.5	506.6	505.8	506.6	507.5	508.3
122.5°	545.3	545.5	545.8	545.8	545.4	545.1	544.8	544.5	544.8	545.1	545.4
125°	601.0	601.2	601.4	601.4	601.4	601.4	601.4	601.4	601.4	601.4	601.4
127.5°	655.2	655.5	655.9	655.7	655.1	654.4	653.9	653.2	653.9	654.4	655.1
130°	692.4	692.4	692.4	692.1	691.5	690.8	690.2	689.6	690.2	690.8	691.5
132.5°	728.4	728.6	728.7	728.6	728.1	727.7	727.2	726.7	727.2	727.7	728.1
135°	781.5	781.5	781.5	780.8	779.6	778.3	777.1	775.8	777.1	778.3	779.6
137.5°	832.7	832.3	832.0	831.5	831.0	830.4	829.8	829.2	829.8	830.4	831.0
140°	866.7	866.7	866.7	866.5	866.1	865.7	865.2	864.8	865.2	865.7	866.1
142.5°	898.9	899.0	899.2	899.1	898.6	898.2	897.8	897.4	897.8	898.2	898.6
145°	946.8	946.6	946.4	945.8	945.0	944.2	943.3	942.5	943.3	944.2	945.0
147.5°	991.3	991.5	991.6	991.2	990.2	989.2	988.2	987.2	988.2	989.2	990.2
150°	1018.2	1018.2	1018.2	1017.8	1017.0	1016.2	1015.3	1014.5	1015.3	1016.2	1017.0
152.5°	1042.9	1042.8	1042.6	1042.3	1041.7	1041.2	1040.7	1040.2	1040.7	1041.2	1041.7
155°	1079.3	1079.5	1079.7	1079.8	1079.8	1079.8	1079.8	1079.8	1079.8	1079.8	1079.8
157.5°	1111.3	1111.4	1111.4	1111.7	1112.1	1112.4	1112.8	1113.1	1112.8	1112.4	1112.1
160°	1131.4	1131.6	1131.8	1132.0	1132.2	1132.5	1132.7	1132.9	1132.7	1132.5	1132.2
162.5°	1148.1	1148.3	1148.5	1148.8	1149.4	1150.0	1150.5	1151.0	1150.5	1150.0	1149.4
165°	1171.6	1172.0	1172.4	1173.0	1173.6	1174.2	1174.8	1175.5	1174.8	1174.2	1173.6
167.5°	1190.3	1190.3	1190.3	1190.7	1191.6	1192.5	1193.4	1194.3	1193.4	1192.5	1191.6
170°	1200.6	1200.4	1200.2	1200.6	1201.7	1202.7	1203.8	1204.8	1203.8	1202.7	1201.7
172.5°	1208.6	1208.5	1208.4	1208.9	1209.7	1210.6	1211.5	1212.4	1211.5	1210.6	1209.7
175°	1217.6	1217.8	1218.0	1218.6	1219.7	1220.7	1221.8	1222.9	1221.8	1220.7	1219.7
177.5°	1222.5	1222.5	1222.5	1222.9	1223.8	1224.6	1225.4	1226.3	1225.4	1224.6	1223.8
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6
2.5°	1334.4	1330.4	1324.5	1316.4	1309.6	1302.4	1300.6	1297.9	1303.3	1298.8	1297.5
5°	1290.7	1278.9	1263.6	1246.2	1236.0	1221.4	1218.5	1212.9	1207.3	1206.7	1201.1
7.5°	1244.4	1227.0	1207.1	1189.3	1172.8	1156.7	1146.3	1144.0	1135.7	1130.8	1125.2
10°	1214.6	1193.2	1170.1	1153.2	1134.0	1117.1	1105.3	1098.5	1092.8	1086.6	1081.0
12.5°	1179.4	1156.7	1137.6	1119.3	1096.6	1083.7	1064.2	1052.5	1051.4	1051.5	1036.8
15°	1138.5	1116.0	1086.6	1060.7	1048.3	1023.5	1012.8	999.3	990.8	982.4	975.7
17.5°	1091.8	1063.6	1040.8	1011.1	987.3	967.6	953.6	945.4	932.7	920.7	912.1
20°	1062.4	1032.6	1008.3	976.7	950.8	926.6	914.8	903.5	893.9	883.8	874.2
22.5°	1032.7	1001.4	971.8	941.1	917.0	891.4	880.0	864.7	855.6	849.9	840.3
25°	985.8	951.9	918.1	888.8	864.1	841.5	826.3	814.4	804.3	799.8	793.6
27.5°	934.8	901.2	868.5	835.3	807.1	790.8	778.6	769.6	763.9	757.8	755.0
30°	902.4	867.4	832.5	801.4	775.5	759.2	748.0	741.8	737.2	734.4	731.6
32.5°	869.4	834.9	798.2	769.9	746.7	732.1	723.6	717.4	715.1	714.1	713.1
35°	816.7	781.7	748.0	722.6	700.6	695.0	687.6	684.2	683.1	687.1	688.8
37.5°	765.6	733.2	702.1	677.4	663.1	654.8	652.3	652.5	656.5	660.0	664.1
40°	732.7	701.2	671.8	650.4	636.9	631.9	630.7	633.5	638.1	642.0	646.5
42.5°	700.7	669.6	642.9	622.9	613.4	608.8	609.5	612.3	618.6	623.5	630.2
45°	651.0	625.1	599.2	582.8	574.9	576.0	576.0	581.1	587.3	594.6	601.9
47.5°	604.2	578.0	556.8	543.0	538.9	537.9	541.1	547.7	556.6	565.7	575.9
50°	572.7	547.8	529.2	516.8	512.3	514.0	518.5	524.7	535.4	546.7	557.4
52.5°	540.6	518.0	500.8	489.3	486.2	489.3	493.7	503.5	512.9	525.1	538.0
55°	490.9	471.7	458.2	449.8	448.7	450.4	455.4	466.1	479.6	494.9	507.3
57.5°	441.4	425.4	413.0	407.2	407.7	409.3	417.7	430.4	444.8	461.1	477.0
60°	408.1	393.4	383.3	378.8	379.3	382.7	392.8	404.7	422.7	438.5	455.4
62.5°	376.5	363.6	353.9	349.9	349.1	356.5	366.2	378.5	396.6	414.2	432.4
65°	325.8	315.6	307.8	305.5	307.2	312.8	325.2	341.5	356.8	375.4	394.5
67.5°	276.1	267.8	262.4	263.4	265.5	273.8	284.2	298.2	315.5	334.8	353.8
70°	244.6	236.7	232.2	232.8	236.2	246.3	255.4	269.4	288.0	307.8	323.5
72.5°	212.1	206.9	202.9	205.3	208.6	215.6	226.9	241.0	257.4	275.7	292.4
75°	162.9	162.9	160.6	162.3	167.4	174.1	182.6	197.3	213.6	228.3	241.8
77.5°	120.8	119.6	121.1	123.1	126.0	134.0	143.7	154.2	166.5	181.2	192.3
80°	92.5	93.0	95.8	99.2	100.4	106.6	116.7	126.3	135.8	148.2	158.9
82.5°	69.5	70.0	71.5	75.7	76.9	83.6	90.1	99.6	108.4	116.7	125.6
85°	37.7	37.7	40.6	42.2	45.1	49.6	53.6	59.2	67.1	72.7	81.1
87.5°	16.9	17.3	19.4	20.6	22.3	24.9	26.1	31.3	33.3	35.9	40.0
90°	12.1	14.1	15.8	17.4	19.2	20.9	22.1	23.4	24.6	25.9	26.7
92.5°	30.9	32.8	34.0	35.1	36.4	37.5	38.2	39.1	39.8	40.5	41.0
95°	64.4	66.1	67.6	69.1	70.5	72.0	72.6	73.2	73.9	74.5	74.8
97.5°	105.3	107.0	108.7	110.4	112.1	113.8	114.6	115.4	116.1	116.9	117.2
100°	136.0	137.4	139.3	141.1	143.0	145.0	145.4	145.8	146.2	146.6	146.8
102.5°	168.8	169.8	171.5	173.3	175.0	176.8	177.3	177.9	178.6	179.1	179.4
105°	221.5	222.1	222.9	223.7	224.6	225.4	226.1	226.7	227.3	228.0	228.6
107.5°	277.6	277.8	277.9	278.0	278.2	278.3	278.9	279.5	280.1	280.6	281.0
110°	316.2	316.3	316.1	315.8	315.6	315.4	315.0	314.5	314.1	313.7	313.8



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	354.2	354.1	353.7	353.4	352.9	352.5	352.5	352.4	352.3	352.2	352.2
115°	412.9	412.8	412.4	412.0	411.5	411.1	410.9	410.7	410.4	410.3	410.0
117.5°	469.4	469.3	469.0	468.7	468.4	468.1	467.4	466.7	465.9	465.2	464.7
120°	509.2	509.3	508.7	508.0	507.4	506.8	505.7	504.7	503.6	502.6	502.2
122.5°	545.8	545.8	545.5	545.3	544.9	544.6	544.0	543.2	542.5	541.8	541.0
125°	601.4	601.4	601.2	601.0	600.7	600.5	600.1	599.7	599.2	598.8	598.4
127.5°	655.7	655.9	655.5	655.2	654.8	654.5	654.1	653.7	653.3	652.8	652.5
130°	692.1	692.4	692.4	692.4	692.4	692.4	692.0	691.5	691.1	690.7	690.1
132.5°	728.6	728.7	728.6	728.4	728.2	728.1	727.6	727.2	726.8	726.4	725.9
135°	780.8	781.5	781.5	781.5	781.5	781.5	781.1	780.6	780.2	779.8	779.3
137.5°	831.5	832.0	832.3	832.7	833.0	833.3	832.8	832.3	831.7	831.2	831.0
140°	866.5	866.7	866.7	866.7	866.7	866.7	866.5	866.3	866.1	865.8	865.7
142.5°	899.1	899.2	899.0	898.9	898.7	898.5	898.5	898.5	898.4	898.4	898.3
145°	945.8	946.4	946.6	946.8	947.0	947.2	947.0	946.8	946.6	946.4	945.9
147.5°	991.2	991.6	991.5	991.3	991.2	991.0	990.8	990.7	990.5	990.3	990.1
150°	1017.8	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.1
152.5°	1042.3	1042.6	1042.8	1042.9	1043.1	1043.3	1043.7	1044.2	1044.8	1045.3	1045.3
155°	1079.8	1079.7	1079.5	1079.3	1079.0	1078.9	1079.7	1080.6	1081.4	1082.2	1082.2
157.5°	1111.7	1111.4	1111.4	1111.3	1111.3	1111.3	1111.9	1112.6	1113.1	1113.8	1113.8
160°	1132.0	1131.8	1131.6	1131.4	1131.1	1131.0	1131.6	1132.2	1132.9	1133.5	1133.3
162.5°	1148.8	1148.5	1148.3	1148.1	1147.9	1147.6	1148.8	1149.9	1151.0	1152.2	1152.3
165°	1173.0	1172.4	1172.0	1171.6	1171.2	1170.8	1172.0	1173.3	1174.5	1175.8	1176.0
167.5°	1190.7	1190.3	1190.3	1190.3	1190.4	1190.4	1191.7	1192.9	1194.3	1195.5	1195.5
170°	1200.6	1200.2	1200.4	1200.6	1200.9	1201.1	1202.3	1203.6	1204.8	1206.2	1206.0
172.5°	1208.9	1208.4	1208.5	1208.6	1208.6	1208.7	1210.1	1211.5	1212.9	1214.4	1214.4
175°	1218.6	1218.0	1217.8	1217.6	1217.4	1217.2	1218.6	1220.1	1221.6	1223.0	1223.0
177.5°	1222.9	1222.5	1222.5	1222.5	1222.5	1222.5	1223.7	1224.8	1226.0	1227.2	1227.1
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6
2.5°	1296.6	1295.7	1292.5	1292.1	1292.5	1295.7	1296.6	1297.5	1298.8	1303.3	1297.9
5°	1197.7	1194.9	1193.2	1199.4	1193.2	1194.9	1197.7	1201.1	1206.7	1207.3	1212.9
7.5°	1123.2	1121.0	1116.0	1114.4	1116.0	1121.0	1123.2	1125.2	1130.8	1135.7	1144.0
10°	1075.4	1073.1	1068.6	1067.5	1068.6	1073.1	1075.4	1081.0	1086.6	1092.8	1098.5
12.5°	1029.4	1024.9	1024.0	1025.1	1024.0	1024.9	1029.4	1036.8	1051.5	1051.4	1052.5
15°	968.3	966.0	959.9	961.6	959.9	966.0	968.3	975.7	982.4	990.8	999.3
17.5°	908.1	905.4	897.9	904.5	897.9	905.4	908.1	912.1	920.7	932.7	945.4
20°	870.3	865.7	861.8	861.2	861.8	865.7	870.3	874.2	883.8	893.9	903.5
22.5°	834.1	830.1	829.7	826.1	829.7	830.1	834.1	840.3	849.9	855.6	864.7
25°	789.0	785.1	784.0	781.2	784.0	785.1	789.0	793.6	799.8	804.3	814.4
27.5°	754.5	752.5	750.5	751.4	750.5	752.5	754.5	755.0	757.8	763.9	769.6
30°	733.3	732.7	731.6	731.6	731.6	732.7	733.3	731.6	734.4	737.2	741.8
32.5°	715.7	715.6	716.2	716.2	716.2	715.6	715.7	713.1	714.1	715.1	717.4
35°	691.0	692.7	693.8	692.1	693.8	692.7	691.0	688.8	687.1	683.1	684.2
37.5°	668.7	670.3	672.0	673.8	672.0	670.3	668.7	664.1	660.0	656.5	652.5
40°	651.5	655.5	656.6	659.4	656.6	655.5	651.5	646.5	642.0	638.1	633.5
42.5°	635.3	639.7	642.6	643.2	642.6	639.7	635.3	630.2	623.5	618.6	612.3
45°	610.4	614.9	618.9	618.9	618.9	614.9	610.4	601.9	594.6	587.3	581.1
47.5°	584.6	591.1	595.1	596.1	595.1	591.1	584.6	575.9	565.7	556.6	547.7
50°	567.0	574.9	578.9	581.6	578.9	574.9	567.0	557.4	546.7	535.4	524.7
52.5°	549.8	557.7	563.0	564.5	563.0	557.7	549.8	538.0	525.1	512.9	503.5
55°	520.2	531.5	537.7	540.0	537.7	531.5	520.2	507.3	494.9	479.6	466.1
57.5°	492.3	502.6	509.9	511.5	509.9	502.6	492.3	477.0	461.1	444.8	430.4
60°	470.6	481.9	490.9	492.6	490.9	481.9	470.6	455.4	438.5	422.7	404.7
62.5°	448.5	460.2	468.4	472.8	468.4	460.2	448.5	432.4	414.2	396.6	378.5
65°	410.3	422.2	430.1	431.7	430.1	422.2	410.3	394.5	375.4	356.8	341.5
67.5°	368.6	380.4	385.6	388.9	385.6	380.4	368.6	353.8	334.8	315.5	298.2
70°	339.3	348.9	354.5	357.3	354.5	348.9	339.3	323.5	307.8	288.0	269.4
72.5°	305.9	315.9	322.5	323.1	322.5	315.9	305.9	292.4	275.7	257.4	241.0
75°	254.8	263.7	267.2	267.2	267.2	263.7	254.8	241.8	228.3	213.6	197.3
77.5°	201.6	206.3	210.6	211.5	210.6	206.3	201.6	192.3	181.2	166.5	154.2
80°	167.4	170.2	173.6	173.6	173.6	170.2	167.4	158.9	148.2	135.8	126.3
82.5°	132.2	134.6	137.9	137.5	137.9	134.6	132.2	125.6	116.7	108.4	99.6
85°	80.1	85.1	84.5	83.4	84.5	85.1	80.1	81.1	72.7	67.1	59.2
87.5°	41.5	42.1	43.5	44.4	43.5	42.1	41.5	40.0	35.9	33.3	31.3
90°	27.1	27.6	28.0	28.5	28.0	27.6	27.1	26.7	25.9	24.6	23.4
92.5°	41.3	41.6	41.8	42.1	41.8	41.6	41.3	41.0	40.5	39.8	39.1
95°	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.5	73.9	73.2
97.5°	117.2	117.2	117.2	117.2	117.2	117.2	117.2	117.2	116.9	116.1	115.4
100°	146.8	146.8	146.8	146.8	146.8	146.8	146.8	146.8	146.6	146.2	145.8
102.5°	179.7	179.9	180.0	180.2	180.0	179.9	179.7	179.4	179.1	178.6	177.9
105°	229.3	229.8	230.5	231.1	230.5	229.8	229.3	228.6	228.0	227.3	226.7
107.5°	280.9	280.9	280.8	280.8	280.8	280.9	280.9	281.0	280.6	280.1	279.5
110°	314.5	315.1	315.8	316.3	315.8	315.1	314.5	313.8	313.7	314.1	314.5



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	352.4	352.5	352.6	352.8	352.6	352.5	352.4	352.2	352.2	352.3	352.4
115°	409.9	409.6	409.4	409.2	409.4	409.6	409.9	410.0	410.3	410.4	410.7
117.5°	464.2	463.8	463.4	463.0	463.4	463.8	464.2	464.7	465.2	465.9	466.7
120°	502.6	503.0	503.5	503.9	503.5	503.0	502.6	502.2	502.6	503.6	504.7
122.5°	540.3	539.6	538.7	538.0	538.7	539.6	540.3	541.0	541.8	542.5	543.2
125°	598.0	597.6	597.1	596.7	597.1	597.6	598.0	598.4	598.8	599.2	599.7
127.5°	652.2	651.8	651.4	651.1	651.4	651.8	652.2	652.5	652.8	653.3	653.7
130°	689.3	688.4	687.5	686.7	687.5	688.4	689.3	690.1	690.7	691.1	691.5
132.5°	725.6	725.3	725.0	724.6	725.0	725.3	725.6	725.9	726.4	726.8	727.2
135°	778.6	778.0	777.3	776.7	777.3	778.0	778.6	779.3	779.8	780.2	780.6
137.5°	831.1	831.2	831.4	831.4	831.4	831.2	831.1	831.0	831.2	831.7	832.3
140°	865.4	865.2	865.0	864.8	865.0	865.2	865.4	865.7	865.8	866.1	866.3
142.5°	898.3	898.2	898.2	898.1	898.2	898.2	898.3	898.3	898.4	898.4	898.5
145°	945.3	944.7	944.0	943.5	944.0	944.7	945.3	945.9	946.4	946.6	946.8
147.5°	989.9	989.7	989.4	989.3	989.4	989.7	989.9	990.1	990.3	990.5	990.7
150°	1017.9	1017.7	1017.5	1017.3	1017.5	1017.7	1017.9	1018.1	1018.2	1018.2	1018.2
152.5°	1044.7	1044.2	1043.6	1043.1	1043.6	1044.2	1044.7	1045.3	1045.3	1044.8	1044.2
155°	1081.4	1080.6	1079.7	1078.9	1079.7	1080.6	1081.4	1082.2	1082.2	1081.4	1080.6
157.5°	1113.0	1112.3	1111.6	1110.9	1111.6	1112.3	1113.0	1113.8	1113.8	1113.1	1112.6
160°	1132.2	1131.1	1130.2	1129.1	1130.2	1131.1	1132.2	1133.3	1133.5	1132.9	1132.2
162.5°	1151.2	1150.1	1149.1	1148.0	1149.1	1150.1	1151.2	1152.3	1152.2	1151.0	1149.9
165°	1175.2	1174.4	1173.5	1172.6	1173.5	1174.4	1175.2	1176.0	1175.8	1174.5	1173.3
167.5°	1194.2	1192.9	1191.6	1190.3	1191.6	1192.9	1194.2	1195.5	1195.5	1194.3	1192.9
170°	1204.5	1203.1	1201.6	1200.1	1201.6	1203.1	1204.5	1206.0	1206.2	1204.8	1203.6
172.5°	1212.8	1211.4	1209.9	1208.4	1209.9	1211.4	1212.8	1214.4	1214.4	1212.9	1211.5
175°	1221.6	1220.1	1218.6	1217.2	1218.6	1220.1	1221.6	1223.0	1223.0	1221.6	1220.1
177.5°	1225.7	1224.4	1223.0	1221.7	1223.0	1224.4	1225.7	1227.1	1227.2	1226.0	1224.8
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6
2.5°	1300.6	1302.4	1309.6	1316.4	1324.5	1330.4	1334.4	1339.0	1348.4	1356.1	1363.3
5°	1218.5	1221.4	1236.0	1246.2	1263.6	1278.9	1290.7	1303.7	1318.9	1339.7	1358.9
7.5°	1146.3	1156.7	1172.8	1189.3	1207.1	1227.0	1244.4	1263.9	1290.1	1318.7	1348.3
10°	1105.3	1117.1	1134.0	1153.2	1170.1	1193.2	1214.6	1237.7	1267.5	1302.5	1337.5
12.5°	1064.2	1083.7	1096.6	1119.3	1137.6	1156.7	1179.4	1209.7	1244.6	1281.3	1323.5
15°	1012.8	1023.5	1048.3	1060.7	1086.6	1116.0	1138.5	1169.0	1202.7	1251.2	1298.6
17.5°	953.6	967.6	987.3	1011.1	1040.8	1063.6	1091.8	1123.1	1165.7	1213.8	1273.1
20°	914.8	926.6	950.8	976.7	1008.3	1032.6	1062.4	1092.8	1136.9	1188.1	1250.1
22.5°	880.0	891.4	917.0	941.1	971.8	1001.4	1032.7	1068.0	1110.2	1164.2	1227.6
25°	826.3	841.5	864.1	888.8	918.1	951.9	985.8	1017.3	1062.4	1119.3	1187.0
27.5°	778.6	790.8	807.1	835.3	868.5	901.2	934.8	974.5	1017.8	1078.0	1148.2
30°	748.0	759.2	775.5	801.4	832.5	867.4	902.4	940.7	985.8	1045.5	1117.1
32.5°	723.6	732.1	746.7	769.9	798.2	834.9	869.4	909.1	956.4	1015.3	1085.1
35°	687.6	695.0	700.6	722.6	748.0	781.7	816.7	859.0	904.6	960.4	1030.3
37.5°	652.3	654.8	663.1	677.4	702.1	733.2	765.6	807.2	854.0	910.7	973.7
40°	630.7	631.9	636.9	650.4	671.8	701.2	732.7	773.9	818.4	872.0	934.5
42.5°	609.5	608.8	613.4	622.9	642.9	669.6	700.7	738.3	782.8	832.3	891.2
45°	576.0	576.0	574.9	582.8	599.2	625.1	651.0	687.1	724.2	772.7	822.3
47.5°	541.1	537.9	538.9	543.0	556.8	578.0	604.2	633.7	666.5	707.6	751.1
50°	518.5	514.0	512.3	516.8	529.2	547.8	572.7	598.6	629.6	665.6	702.9
52.5°	493.7	489.3	486.2	489.3	500.8	518.0	540.6	563.4	591.3	620.5	652.8
55°	455.4	450.4	448.7	449.8	458.2	471.7	490.9	511.8	532.6	556.8	579.4
57.5°	417.7	409.3	407.7	407.2	413.0	425.4	441.4	459.5	474.7	489.3	513.3
60°	392.8	382.7	379.3	378.8	383.3	393.4	408.1	426.1	436.8	446.9	467.8
62.5°	366.2	356.5	349.1	349.9	353.9	363.6	376.5	389.6	396.6	407.7	421.8
65°	325.2	312.8	307.2	305.5	307.8	315.6	325.8	334.2	342.1	346.7	360.1
67.5°	284.2	273.8	265.5	263.4	262.4	267.8	276.1	281.3	286.9	290.8	298.8
70°	255.4	246.3	236.2	232.8	232.2	236.7	244.6	245.2	253.1	254.8	263.2
72.5°	226.9	215.6	208.6	205.3	202.9	206.9	212.1	213.6	217.9	220.9	225.3
75°	182.6	174.1	167.4	162.3	160.6	162.9	162.9	165.7	168.5	170.2	175.3
77.5°	143.7	134.0	126.0	123.1	121.1	119.6	120.8	122.5	121.2	124.1	125.2
80°	116.7	106.6	100.4	99.2	95.8	93.0	92.5	94.1	91.9	93.0	96.4
82.5°	90.1	83.6	76.9	75.7	71.5	70.0	69.5	68.4	68.4	68.2	68.9
85°	53.6	49.6	45.1	42.2	40.6	37.7	37.7	36.6	35.5	34.4	35.0
87.5°	26.1	24.9	22.3	20.6	19.4	17.3	16.9	15.0	14.1	13.2	12.3
90°	22.1	20.9	19.2	17.4	15.8	14.1	12.1	9.8	7.5	5.1	2.9
92.5°	38.2	37.5	36.4	35.1	34.0	32.8	30.9	28.2	25.6	22.9	20.3
95°	72.6	72.0	70.5	69.1	67.6	66.1	64.4	62.5	60.7	58.7	56.8
97.5°	114.6	113.8	112.1	110.4	108.7	107.0	105.3	103.8	102.3	100.8	99.3
100°	145.4	145.0	143.0	141.1	139.3	137.4	136.0	135.1	134.3	133.5	132.6
102.5°	177.3	176.8	175.0	173.3	171.5	169.8	168.8	168.4	168.1	167.8	167.5
105°	226.1	225.4	224.6	223.7	222.9	222.1	221.5	221.4	221.1	220.9	220.7
107.5°	278.9	278.3	278.2	278.0	277.9	277.8	277.6	277.4	277.1	276.9	276.5
110°	315.0	315.4	315.6	315.8	316.1	316.3	316.2	315.8	315.3	314.9	314.5



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	352.5	352.5	352.9	353.4	353.7	354.1	354.2	354.2	354.1	354.0	353.8
115°	410.9	411.1	411.5	412.0	412.4	412.8	412.9	412.9	412.9	412.9	412.9
117.5°	467.4	468.1	468.4	468.7	469.0	469.3	469.4	469.2	469.0	468.9	468.7
120°	505.7	506.8	507.4	508.0	508.7	509.3	509.2	508.3	507.5	506.6	505.8
122.5°	544.0	544.6	544.9	545.3	545.5	545.8	545.8	545.4	545.1	544.8	544.5
125°	600.1	600.5	600.7	601.0	601.2	601.4	601.4	601.4	601.4	601.4	601.4
127.5°	654.1	654.5	654.8	655.2	655.5	655.9	655.7	655.1	654.4	653.9	653.2
130°	692.0	692.4	692.4	692.4	692.4	692.4	692.1	691.5	690.8	690.2	689.6
132.5°	727.6	728.1	728.2	728.4	728.6	728.7	728.6	728.1	727.7	727.2	726.7
135°	781.1	781.5	781.5	781.5	781.5	781.5	780.8	779.6	778.3	777.1	775.8
137.5°	832.8	833.3	833.0	832.7	832.3	832.0	831.5	831.0	830.4	829.8	829.2
140°	866.5	866.7	866.7	866.7	866.7	866.7	866.5	866.1	865.7	865.2	864.8
142.5°	898.5	898.5	898.7	898.9	899.0	899.2	899.1	898.6	898.2	897.8	897.4
145°	947.0	947.2	947.0	946.8	946.6	946.4	945.8	945.0	944.2	943.3	942.5
147.5°	990.8	991.0	991.2	991.3	991.5	991.6	991.2	990.2	989.2	988.2	987.2
150°	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1017.8	1017.0	1016.2	1015.3	1014.5
152.5°	1043.7	1043.3	1043.1	1042.9	1042.8	1042.6	1042.3	1041.7	1041.2	1040.7	1040.2
155°	1079.7	1078.9	1079.0	1079.3	1079.5	1079.7	1079.8	1079.8	1079.8	1079.8	1079.8
157.5°	1111.9	1111.3	1111.3	1111.3	1111.4	1111.4	1111.7	1112.1	1112.4	1112.8	1113.1
160°	1131.6	1131.0	1131.1	1131.4	1131.6	1131.8	1132.0	1132.2	1132.5	1132.7	1132.9
162.5°	1148.8	1147.6	1147.9	1148.1	1148.3	1148.5	1148.8	1149.4	1150.0	1150.5	1151.0
165°	1172.0	1170.8	1171.2	1171.6	1172.0	1172.4	1173.0	1173.6	1174.2	1174.8	1175.5
167.5°	1191.7	1190.4	1190.4	1190.3	1190.3	1190.3	1190.7	1191.6	1192.5	1193.4	1194.3
170°	1202.3	1201.1	1200.9	1200.6	1200.4	1200.2	1200.6	1201.7	1202.7	1203.8	1204.8
172.5°	1210.1	1208.7	1208.6	1208.6	1208.5	1208.4	1208.9	1209.7	1210.6	1211.5	1212.4
175°	1218.6	1217.2	1217.4	1217.6	1217.8	1218.0	1218.6	1219.7	1220.7	1221.8	1222.9
177.5°	1223.7	1222.5	1222.5	1222.5	1222.5	1222.5	1222.9	1223.8	1224.6	1225.4	1226.3
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6
2.5°	1369.6	1374.1	1380.0	1389.9	1393.5	1398.0	1404.4	1403.9	1405.7	1412.4	1426.9
5°	1374.7	1392.1	1409.1	1429.4	1450.7	1464.8	1484.0	1495.8	1507.7	1522.9	1548.8
7.5°	1376.7	1404.4	1435.4	1471.0	1502.8	1539.3	1567.7	1594.6	1618.9	1651.0	1681.9
10°	1373.5	1410.7	1450.7	1495.8	1543.8	1584.4	1621.0	1662.7	1698.2	1737.1	1772.1
12.5°	1367.7	1412.6	1466.1	1516.6	1572.6	1632.6	1678.2	1720.4	1767.7	1812.4	1866.3
15°	1354.4	1415.8	1478.4	1544.9	1619.8	1689.1	1755.1	1809.8	1860.5	1927.6	1998.1
17.5°	1337.5	1403.8	1482.6	1563.2	1641.5	1720.8	1802.4	1884.6	1948.6	2031.9	2087.0
20°	1321.7	1398.3	1479.5	1575.3	1653.7	1752.3	1833.4	1912.9	2000.8	2083.7	2149.6
22.5°	1299.6	1383.5	1469.6	1565.0	1668.1	1766.8	1860.5	1946.8	2034.7	2124.8	2204.7
25°	1271.5	1347.6	1449.6	1557.9	1660.4	1767.5	1875.2	1983.4	2078.0	2173.3	2247.7
27.5°	1223.8	1319.8	1414.8	1526.5	1640.5	1761.6	1876.7	1990.1	2089.2	2167.6	2213.7
30°	1199.4	1282.8	1385.9	1498.1	1621.5	1751.8	1871.8	1982.8	2075.3	2137.8	2156.4
32.5°	1163.4	1249.4	1350.3	1466.6	1597.2	1731.0	1856.0	1960.7	2037.8	2070.6	2048.2
35°	1109.8	1187.6	1289.6	1408.5	1544.3	1686.9	1810.4	1898.8	1938.3	1907.3	1830.1
37.5°	1045.5	1122.6	1225.1	1341.9	1482.5	1627.4	1739.0	1802.7	1789.6	1712.5	1597.4
40°	1000.5	1072.6	1170.1	1296.3	1433.3	1578.7	1676.7	1711.2	1675.1	1564.6	1442.3
42.5°	950.4	1020.8	1118.7	1240.4	1385.5	1519.6	1605.1	1607.9	1547.4	1415.4	1292.6
45°	874.2	941.3	1033.7	1160.5	1294.6	1420.9	1477.2	1449.6	1338.1	1210.6	1087.2
47.5°	799.0	857.1	948.3	1068.6	1196.0	1302.3	1330.2	1280.5	1161.6	1038.0	923.6
50°	744.0	802.6	888.3	1003.2	1126.1	1218.0	1231.5	1165.6	1048.9	924.3	834.7
52.5°	691.2	749.4	831.9	938.3	1050.8	1133.7	1134.1	1057.8	941.6	830.5	747.2
55°	613.8	666.2	740.6	835.8	936.2	1001.0	985.2	906.3	805.4	709.1	636.3
57.5°	539.2	584.8	653.4	732.8	821.2	874.7	848.5	772.5	682.4	600.7	545.6
60°	490.9	534.3	593.0	667.9	742.3	784.0	759.2	690.4	607.6	541.6	493.7
62.5°	444.0	480.6	537.0	602.1	671.1	702.0	679.9	612.0	540.4	480.8	441.9
65°	377.6	407.5	452.6	508.4	558.6	585.1	566.5	503.3	448.7	405.8	374.8
67.5°	315.6	339.0	373.1	417.8	460.5	474.8	457.9	413.9	367.6	333.3	311.4
70°	272.8	294.8	323.5	357.9	395.1	410.3	393.4	358.5	320.7	289.1	267.7
72.5°	235.4	252.4	276.6	306.1	335.2	350.3	338.8	305.2	273.4	249.9	231.6
75°	179.2	193.9	210.8	231.6	254.2	264.3	254.2	231.1	209.1	191.6	178.6
77.5°	130.3	138.2	151.2	166.8	180.9	188.7	179.9	164.2	150.8	138.8	132.5
80°	99.2	104.8	113.8	126.3	135.8	143.2	137.5	124.6	113.8	106.0	103.1
82.5°	72.2	76.0	81.9	91.1	97.5	101.3	98.7	89.4	85.0	78.0	75.2
85°	35.5	37.7	41.7	44.5	50.1	50.7	51.3	47.4	43.4	41.7	39.5
87.5°	13.2	14.1	15.9	17.8	20.0	20.7	20.6	21.0	19.5	19.3	17.8
90°	5.1	7.5	9.8	12.1	14.1	15.8	17.4	19.2	20.9	22.1	23.4
92.5°	22.9	25.6	28.2	30.9	32.8	34.0	35.1	36.4	37.5	38.2	39.1
95°	58.7	60.7	62.5	64.4	66.1	67.6	69.1	70.5	72.0	72.6	73.2
97.5°	100.8	102.3	103.8	105.3	107.0	108.7	110.4	112.1	113.8	114.6	115.4
100°	133.5	134.3	135.1	136.0	137.4	139.3	141.1	143.0	145.0	145.4	145.8
102.5°	167.8	168.1	168.4	168.8	169.8	171.5	173.3	175.0	176.8	177.3	177.9
105°	220.9	221.1	221.4	221.5	222.1	222.9	223.7	224.6	225.4	226.1	226.7
107.5°	276.9	277.1	277.4	277.6	277.8	277.9	278.0	278.2	278.3	278.9	279.5
110°	314.9	315.3	315.8	316.2	316.3	316.1	315.8	315.6	315.4	315.0	314.5



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	354.0	354.1	354.2	354.2	354.1	353.7	353.4	352.9	352.5	352.5	352.4
115°	412.9	412.9	412.9	412.9	412.8	412.4	412.0	411.5	411.1	410.9	410.7
117.5°	468.9	469.0	469.2	469.4	469.3	469.0	468.7	468.4	468.1	467.4	466.7
120°	506.6	507.5	508.3	509.2	509.3	508.7	508.0	507.4	506.8	505.7	504.7
122.5°	544.8	545.1	545.4	545.8	545.8	545.5	545.3	544.9	544.6	544.0	543.2
125°	601.4	601.4	601.4	601.4	601.4	601.2	601.0	600.7	600.5	600.1	599.7
127.5°	653.9	654.4	655.1	655.7	655.9	655.5	655.2	654.8	654.5	654.1	653.7
130°	690.2	690.8	691.5	692.1	692.4	692.4	692.4	692.4	692.4	692.0	691.5
132.5°	727.2	727.7	728.1	728.6	728.7	728.6	728.4	728.2	728.1	727.6	727.2
135°	777.1	778.3	779.6	780.8	781.5	781.5	781.5	781.5	781.5	781.1	780.6
137.5°	829.8	830.4	831.0	831.5	832.0	832.3	832.7	833.0	833.3	832.8	832.3
140°	865.2	865.7	866.1	866.5	866.7	866.7	866.7	866.7	866.7	866.5	866.3
142.5°	897.8	898.2	898.6	899.1	899.2	899.0	898.9	898.7	898.5	898.5	898.5
145°	943.3	944.2	945.0	945.8	946.4	946.6	946.8	947.0	947.2	947.0	946.8
147.5°	988.2	989.2	990.2	991.2	991.6	991.5	991.3	991.2	991.0	990.8	990.7
150°	1015.3	1016.2	1017.0	1017.8	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2
152.5°	1040.7	1041.2	1041.7	1042.3	1042.6	1042.8	1042.9	1043.1	1043.3	1043.7	1044.2
155°	1079.8	1079.8	1079.8	1079.8	1079.7	1079.5	1079.3	1079.0	1078.9	1079.7	1080.6
157.5°	1112.8	1112.4	1112.1	1111.7	1111.4	1111.4	1111.3	1111.3	1111.3	1111.9	1112.6
160°	1132.7	1132.5	1132.2	1132.0	1131.8	1131.6	1131.4	1131.1	1131.0	1131.6	1132.2
162.5°	1150.5	1150.0	1149.4	1148.8	1148.5	1148.3	1148.1	1147.9	1147.6	1148.8	1149.9
165°	1174.8	1174.2	1173.6	1173.0	1172.4	1172.0	1171.6	1171.2	1170.8	1172.0	1173.3
167.5°	1193.4	1192.5	1191.6	1190.7	1190.3	1190.3	1190.3	1190.4	1190.4	1191.7	1192.9
170°	1203.8	1202.7	1201.7	1200.6	1200.2	1200.4	1200.6	1200.9	1201.1	1202.3	1203.6
172.5°	1211.5	1210.6	1209.7	1208.9	1208.4	1208.5	1208.6	1208.6	1208.7	1210.1	1211.5
175°	1221.8	1220.7	1219.7	1218.6	1218.0	1217.8	1217.6	1217.4	1217.2	1218.6	1220.1
177.5°	1225.4	1224.6	1223.8	1222.9	1222.5	1222.5	1222.5	1222.5	1222.5	1223.7	1224.8
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6	1360.6
2.5°	1434.1	1435.0	1439.0	1442.2	1443.1	1447.6	1448.1
5°	1560.1	1569.7	1588.3	1590.0	1592.8	1607.4	1596.2
7.5°	1707.8	1732.1	1748.3	1762.7	1767.9	1774.3	1772.9
10°	1802.5	1838.5	1856.6	1885.3	1886.4	1893.8	1889.3
12.5°	1897.6	1939.5	1972.5	1977.8	2001.9	2005.6	2011.9
15°	2032.4	2077.0	2122.6	2138.9	2172.2	2180.1	2192.5
17.5°	2159.2	2204.7	2236.7	2278.9	2292.6	2310.9	2298.4
20°	2228.5	2278.2	2318.7	2352.0	2366.1	2376.2	2375.1
22.5°	2270.5	2320.5	2353.4	2378.6	2391.8	2396.1	2395.8
25°	2296.8	2325.5	2335.7	2345.2	2330.6	2325.5	2327.8
27.5°	2223.7	2216.3	2189.8	2155.1	2119.0	2090.3	2074.8
30°	2123.2	2079.2	2039.1	1969.3	1933.2	1911.8	1892.6
32.5°	1980.7	1911.0	1834.0	1770.0	1729.0	1697.2	1692.5
35°	1736.5	1631.7	1537.6	1459.2	1418.6	1384.2	1376.4
37.5°	1476.3	1367.4	1282.7	1213.7	1170.1	1145.8	1123.2
40°	1303.7	1210.1	1126.7	1068.0	1034.8	1017.3	1003.2
42.5°	1170.6	1085.2	1002.2	957.6	927.5	916.8	908.6
45°	986.9	907.4	849.9	816.1	798.7	780.6	772.2
47.5°	839.8	775.1	737.2	708.5	689.7	679.1	673.6
50°	756.4	703.4	669.6	647.6	630.7	622.2	617.8
52.5°	682.4	639.0	610.5	593.0	581.6	575.4	573.6
55°	587.8	554.6	536.5	521.4	512.9	507.3	505.0
57.5°	510.9	485.4	470.8	458.2	454.9	450.2	448.7
60°	460.5	440.8	428.4	419.9	417.1	411.5	412.5
62.5°	415.8	399.7	389.1	384.3	380.6	375.9	377.4
65°	351.7	339.9	334.2	329.7	325.2	322.4	324.7
67.5°	295.1	287.0	279.3	276.7	274.5	274.0	271.7
70°	258.1	251.4	244.6	243.0	243.0	240.7	240.1
72.5°	222.5	217.5	213.0	211.8	210.0	210.9	208.6
75°	171.9	168.0	166.2	164.6	164.0	164.0	162.3
77.5°	127.0	124.1	121.4	121.4	119.4	118.6	118.4
80°	96.4	95.2	93.0	93.0	91.9	92.5	91.3
82.5°	72.5	70.9	70.4	69.5	68.0	68.1	66.9
85°	38.9	37.2	36.6	35.0	33.8	35.0	33.8
87.5°	18.4	18.3	17.9	17.1	16.8	16.9	15.6
90°	24.6	25.9	26.7	27.1	27.6	28.0	28.5
92.5°	39.8	40.5	41.0	41.3	41.6	41.8	42.1
95°	73.9	74.5	74.8	74.8	74.8	74.8	74.8
97.5°	116.1	116.9	117.2	117.2	117.2	117.2	117.2
100°	146.2	146.6	146.8	146.8	146.8	146.8	146.8
102.5°	178.6	179.1	179.4	179.7	179.9	180.0	180.2
105°	227.3	228.0	228.6	229.3	229.8	230.5	231.1
107.5°	280.1	280.6	281.0	280.9	280.9	280.8	280.8
110°	314.1	313.7	313.8	314.5	315.1	315.8	316.3



TEST NUMBER: P332662-930

CATALOG NUMBER: SA4XXDIP-C1020D1205U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	352.3	352.2	352.2	352.4	352.5	352.6	352.8
115°	410.4	410.3	410.0	409.9	409.6	409.4	409.2
117.5°	465.9	465.2	464.7	464.2	463.8	463.4	463.0
120°	503.6	502.6	502.2	502.6	503.0	503.5	503.9
122.5°	542.5	541.8	541.0	540.3	539.6	538.7	538.0
125°	599.2	598.8	598.4	598.0	597.6	597.1	596.7
127.5°	653.3	652.8	652.5	652.2	651.8	651.4	651.1
130°	691.1	690.7	690.1	689.3	688.4	687.5	686.7
132.5°	726.8	726.4	725.9	725.6	725.3	725.0	724.6
135°	780.2	779.8	779.3	778.6	778.0	777.3	776.7
137.5°	831.7	831.2	831.0	831.1	831.2	831.4	831.4
140°	866.1	865.8	865.7	865.4	865.2	865.0	864.8
142.5°	898.4	898.4	898.3	898.3	898.2	898.2	898.1
145°	946.6	946.4	945.9	945.3	944.7	944.0	943.5
147.5°	990.5	990.3	990.1	989.9	989.7	989.4	989.3
150°	1018.2	1018.2	1018.1	1017.9	1017.7	1017.5	1017.3
152.5°	1044.8	1045.3	1045.3	1044.7	1044.2	1043.6	1043.1
155°	1081.4	1082.2	1082.2	1081.4	1080.6	1079.7	1078.9
157.5°	1113.1	1113.8	1113.8	1113.0	1112.3	1111.6	1110.9
160°	1132.9	1133.5	1133.3	1132.2	1131.1	1130.2	1129.1
162.5°	1151.0	1152.2	1152.3	1151.2	1150.1	1149.1	1148.0
165°	1174.5	1175.8	1176.0	1175.2	1174.4	1173.5	1172.6
167.5°	1194.3	1195.5	1195.5	1194.2	1192.9	1191.6	1190.3
170°	1204.8	1206.2	1206.0	1204.5	1203.1	1201.6	1200.1
172.5°	1212.9	1214.4	1214.4	1212.8	1211.4	1209.9	1208.4
175°	1221.6	1223.0	1223.0	1221.6	1220.1	1218.6	1217.2
177.5°	1226.0	1227.2	1227.1	1225.7	1224.4	1223.0	1221.7
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7

(END OF REPORT)