

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332707-930

Luminaire Tested: **SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332707-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1195 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 7737.1 lumens  
Efficiency: N/A  
Efficacy: 107.9 lumens/watt  
Spacing Criteria (0/90/45): 1.31 / 1.23 / 1.41  
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 71.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332707-930  
CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

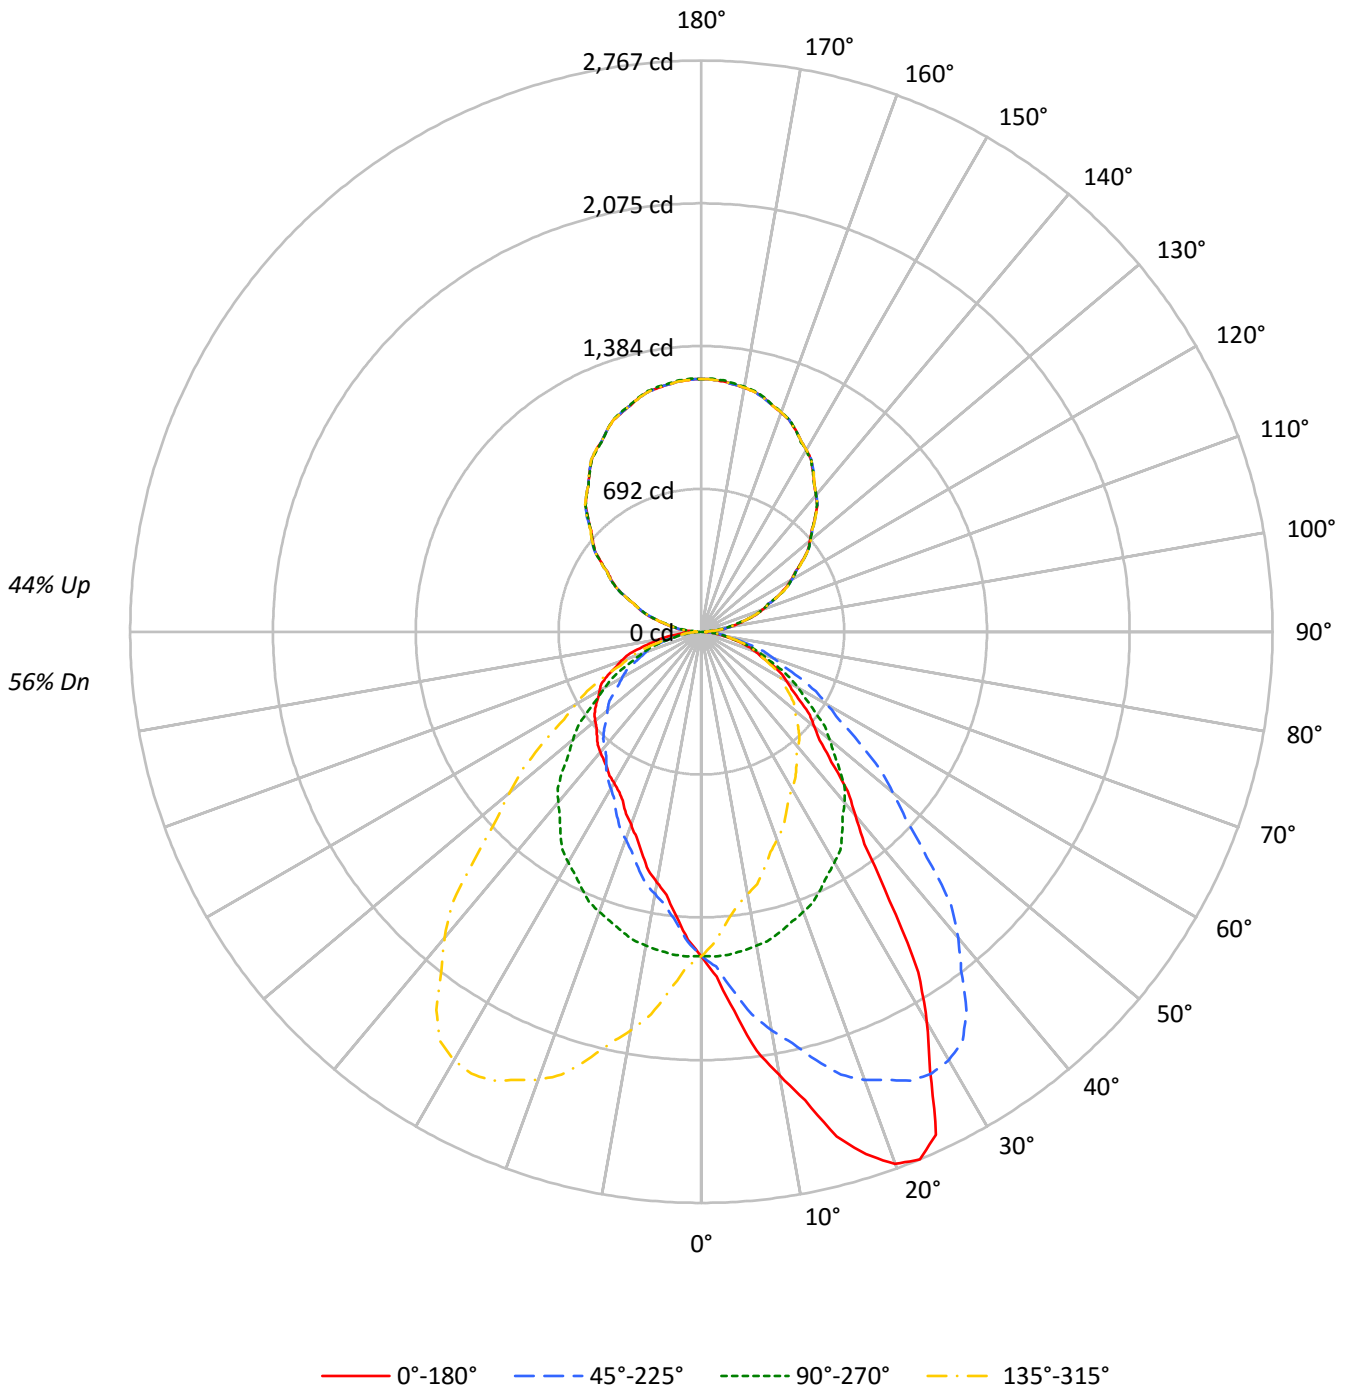



TEST NUMBER: P332707-930

CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	56
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	55	54	53	48
2	91	83	77	72	84	78	72	68	67	63	60	58	55	52	49	47	45	40
3	83	74	66	60	77	69	62	57	60	55	51	51	47	44	43	41	38	34
4	76	65	57	51	70	61	54	49	53	48	43	46	42	38	39	36	33	30
5	70	58	50	44	65	55	47	42	48	42	38	41	37	33	35	32	29	26
6	64	52	44	38	60	49	42	37	43	37	33	37	33	29	32	28	26	23
7	60	47	39	34	55	45	37	32	39	33	29	34	29	26	29	26	23	20
8	55	43	35	30	52	41	34	29	36	30	26	31	27	23	27	23	21	18
9	52	39	32	27	48	37	30	26	33	27	23	29	24	21	25	21	19	17
10	48	36	29	24	45	34	28	23	30	25	21	27	22	19	23	20	17	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	12686	12686	12686	12686
5°	14939	12719	11225	12719
10°	17887	12663	10107	12663
15°	21163	12534	9281	12534
20°	23566	12404	8546	12404
25°	23947	12211	8036	12211
30°	20377	12027	7876	12027
35°	15666	11727	7877	11727
40°	12211	11374	8026	11374
45°	10182	10843	8161	10843
50°	8961	10194	8437	10194
55°	8210	9419	8777	9419
60°	7694	8724	9185	8724
65°	7163	7947	9524	7947
70°	6545	7176	9741	7176
75°	5845	6313	9623	6313
80°	4900	5174	9321	5174
85°	3622	3742	8929	3742



TEST NUMBER: P332707-930

CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	153.1	2.0
10°-20°	471.9	6.1
20°-30°	748.2	9.7
30°-40°	832.7	10.8
40°-50°	758.0	9.8
50°-60°	619.4	8.0
60°-70°	442.2	5.7
70°-80°	243.5	3.1
80°-90°	70.1	0.9
90°-100°	80.8	1.0
100°-110°	239.3	3.1
110°-120°	406.2	5.2
120°-130°	535.6	6.9
130°-140°	601.5	7.8
140°-150°	591.0	7.6
150°-160°	497.1	6.4
160°-170°	330.7	4.3
170°-180°	115.8	1.5
0°-30°	1373.2	17.7
0°-40°	2205.9	28.5
0°-60°	3583.3	46.3
0°-90°	4339.1	56.1
90°-120°	726.2	9.4
90°-150°	2454.3	31.7
90°-180°	3398.0	43.9
0°-180°	7737.1	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1571	1571	1571	1571	1571	
5°	1844	1570	1385	1570	1844	187
15°	2532	1500	1110	1500	2532	715
25°	2688	1371	902	1371	2688	1185
35°	1590	1190	799	1190	1590	1009
45°	892	950	715	950	892	703
55°	583	669	624	669	583	527
65°	375	416	499	416	375	371
75°	187	202	308	202	187	199
85°	39	40	96	40	39	48
90°	28	3	28	3	28	16
95°	75	57	75	57	75	78
105°	231	221	231	221	231	244
115°	409	413	409	413	409	404
125°	597	601	597	601	597	532
135°	777	776	777	776	777	600
145°	944	942	944	942	944	590
155°	1079	1080	1079	1080	1079	497
165°	1173	1176	1173	1176	1173	330
175°	1217	1223	1217	1223	1217	116
180°	1225	1225	1225	1225	1225	



TEST NUMBER: P332707-930

CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4
2.5°	1672.4	1671.9	1666.7	1665.7	1662.0	1657.3	1656.3	1648.0	1631.3	1623.4	1621.4
5°	1843.5	1856.5	1839.6	1836.3	1834.3	1812.9	1801.8	1788.8	1758.8	1741.3	1727.6
7.5°	2047.6	2049.2	2041.8	2035.8	2019.3	2000.5	1972.4	1942.5	1906.7	1869.6	1841.7
10°	2182.0	2187.2	2178.7	2177.4	2144.2	2123.4	2081.7	2046.6	2006.2	1961.3	1920.3
12.5°	2323.6	2316.3	2312.0	2284.1	2278.0	2240.0	2191.6	2155.4	2093.2	2041.5	1987.0
15°	2532.2	2517.9	2508.8	2470.4	2451.4	2398.7	2347.3	2307.6	2226.3	2148.8	2090.2
17.5°	2654.5	2668.9	2647.8	2632.0	2583.2	2546.3	2493.7	2410.4	2346.7	2250.5	2176.5
20°	2743.1	2744.4	2732.6	2716.4	2678.0	2631.1	2573.8	2482.7	2406.5	2310.9	2209.3
22.5°	2767.0	2767.3	2762.3	2747.2	2718.0	2680.1	2622.2	2546.3	2454.0	2349.9	2248.4
25°	2688.4	2685.8	2691.6	2708.6	2697.5	2685.8	2652.6	2596.0	2510.1	2400.0	2290.7
27.5°	2396.2	2414.2	2447.3	2488.9	2529.1	2559.6	2568.3	2556.6	2503.4	2413.0	2298.3
30°	2185.9	2208.0	2232.8	2274.4	2355.2	2401.3	2452.1	2490.5	2469.1	2396.8	2290.0
32.5°	1954.7	1960.1	1996.8	2044.2	2118.1	2207.1	2287.6	2365.5	2391.4	2353.5	2264.5
35°	1589.6	1598.7	1638.4	1685.3	1775.8	1884.5	2005.6	2113.6	2202.8	2238.6	2193.0
37.5°	1297.2	1323.4	1351.4	1401.7	1481.4	1579.3	1705.1	1844.9	1977.8	2066.9	2081.9
40°	1158.7	1174.9	1195.1	1233.5	1301.2	1397.6	1505.6	1665.7	1807.0	1934.6	1976.3
42.5°	1049.3	1058.8	1071.2	1106.0	1157.5	1253.4	1352.0	1492.9	1634.7	1787.2	1857.0
45°	891.8	901.6	922.3	942.6	981.6	1048.0	1139.8	1255.6	1398.2	1545.3	1674.2
47.5°	778.0	784.2	796.6	818.2	851.4	895.2	969.9	1066.7	1198.8	1341.6	1479.0
50°	713.5	718.6	728.4	748.0	773.3	812.4	873.6	964.0	1067.6	1211.4	1346.1
52.5°	662.4	664.5	671.6	684.9	705.1	737.9	788.1	863.0	959.2	1087.4	1221.7
55°	583.3	585.9	592.4	602.1	619.7	640.5	678.9	734.9	818.9	930.2	1046.7
57.5°	518.1	520.0	525.5	529.2	543.6	560.6	590.1	630.1	693.7	788.1	892.2
60°	476.5	475.2	481.7	484.9	494.7	509.1	531.8	570.2	625.6	701.7	797.4
62.5°	435.9	434.1	439.5	443.8	449.4	461.6	480.3	510.4	555.2	624.1	706.8
65°	375.0	372.3	375.6	380.8	386.0	392.5	406.2	432.8	468.7	518.1	581.3
67.5°	313.7	316.5	317.0	319.6	322.6	331.5	340.8	359.7	385.0	424.5	478.1
70°	277.3	277.9	280.5	280.5	282.5	290.3	298.2	309.2	333.9	370.4	414.0
72.5°	240.8	243.6	242.6	244.6	246.1	251.3	257.0	267.5	288.6	315.7	352.5
75°	187.4	189.4	189.4	190.0	192.0	194.0	198.5	206.4	221.4	241.5	266.8
77.5°	136.7	137.0	137.9	140.2	140.2	143.3	146.8	153.0	160.4	174.2	189.7
80°	105.4	106.7	106.1	107.4	107.4	110.0	111.3	119.1	122.4	131.5	143.8
82.5°	77.4	78.6	78.5	80.3	81.4	81.9	83.7	86.8	90.1	98.2	103.2
85°	39.1	40.4	39.1	40.4	42.3	43.0	44.9	45.6	48.2	50.1	54.7
87.5°	17.1	18.6	18.5	19.0	19.9	20.3	20.5	19.8	21.6	21.9	23.6
90°	28.5	28.0	27.6	27.1	26.7	25.9	24.6	23.4	22.1	20.9	19.2
92.5°	42.1	41.8	41.6	41.3	41.0	40.5	39.8	39.1	38.2	37.5	36.4
95°	74.8	74.8	74.8	74.8	74.8	74.5	73.9	73.2	72.6	72.0	70.5
97.5°	117.2	117.2	117.2	117.2	117.2	116.9	116.1	115.4	114.6	113.8	112.1
100°	146.8	146.8	146.8	146.8	146.8	146.6	146.2	145.8	145.4	145.0	143.0
102.5°	180.2	180.0	179.9	179.7	179.4	179.1	178.6	177.9	177.3	176.8	175.0
105°	231.1	230.5	229.8	229.3	228.6	228.0	227.3	226.7	226.1	225.4	224.6
107.5°	280.8	280.8	280.9	280.9	281.0	280.6	280.1	279.5	278.9	278.3	278.2
110°	316.3	315.8	315.1	314.5	313.8	313.7	314.1	314.5	315.0	315.4	315.6



TEST NUMBER: P332707-930

CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	352.8	352.6	352.5	352.4	352.2	352.2	352.3	352.4	352.5	352.5	352.9
115°	409.2	409.4	409.6	409.9	410.0	410.3	410.4	410.7	410.9	411.1	411.5
117.5°	463.0	463.4	463.8	464.2	464.7	465.2	465.9	466.7	467.4	468.1	468.4
120°	503.9	503.5	503.0	502.6	502.2	502.6	503.6	504.7	505.7	506.8	507.4
122.5°	538.0	538.7	539.6	540.3	541.0	541.8	542.5	543.2	544.0	544.6	544.9
125°	596.7	597.1	597.6	598.0	598.4	598.8	599.2	599.7	600.1	600.5	600.7
127.5°	651.1	651.4	651.8	652.2	652.5	652.8	653.3	653.7	654.1	654.5	654.8
130°	686.7	687.5	688.4	689.3	690.1	690.7	691.1	691.5	692.0	692.4	692.4
132.5°	724.6	725.0	725.3	725.6	725.9	726.4	726.8	727.2	727.6	728.1	728.2
135°	776.7	777.3	778.0	778.6	779.3	779.8	780.2	780.6	781.1	781.5	781.5
137.5°	831.4	831.4	831.2	831.1	831.0	831.2	831.7	832.3	832.8	833.3	833.0
140°	864.8	865.0	865.2	865.4	865.7	865.8	866.1	866.3	866.5	866.7	866.7
142.5°	898.1	898.2	898.2	898.3	898.3	898.4	898.4	898.5	898.5	898.5	898.7
145°	943.5	944.0	944.7	945.3	945.9	946.4	946.6	946.8	947.0	947.2	947.0
147.5°	989.3	989.4	989.7	989.9	990.1	990.3	990.5	990.7	990.8	991.0	991.2
150°	1017.3	1017.5	1017.7	1017.9	1018.1	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2
152.5°	1043.1	1043.6	1044.2	1044.7	1045.3	1045.3	1044.8	1044.2	1043.7	1043.3	1043.1
155°	1078.9	1079.7	1080.6	1081.4	1082.2	1082.2	1081.4	1080.6	1079.7	1078.9	1079.0
157.5°	1110.9	1111.6	1112.3	1113.0	1113.8	1113.8	1113.1	1112.6	1111.9	1111.3	1111.3
160°	1129.1	1130.2	1131.1	1132.2	1133.3	1133.5	1132.9	1132.2	1131.6	1131.0	1131.1
162.5°	1148.0	1149.1	1150.1	1151.2	1152.3	1152.2	1151.0	1149.9	1148.8	1147.6	1147.9
165°	1172.6	1173.5	1174.4	1175.2	1176.0	1175.8	1174.5	1173.3	1172.0	1170.8	1171.2
167.5°	1190.3	1191.6	1192.9	1194.2	1195.5	1195.5	1194.3	1192.9	1191.7	1190.4	1190.4
170°	1200.1	1201.6	1203.1	1204.5	1206.0	1206.2	1204.8	1203.6	1202.3	1201.1	1200.9
172.5°	1208.4	1209.9	1211.4	1212.8	1214.4	1214.4	1212.9	1211.5	1210.1	1208.7	1208.6
175°	1217.2	1218.6	1220.1	1221.6	1223.0	1223.0	1221.6	1220.1	1218.6	1217.2	1217.4
177.5°	1221.7	1223.0	1224.4	1225.7	1227.1	1227.2	1226.0	1224.8	1223.7	1222.5	1222.5
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332707-930

CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4
2.5°	1621.9	1614.6	1609.4	1605.2	1593.7	1587.0	1581.8	1574.5	1566.2	1557.3	1546.4
5°	1713.9	1691.8	1675.5	1650.8	1627.3	1607.9	1587.6	1569.5	1547.3	1523.2	1505.6
7.5°	1810.7	1777.8	1735.5	1699.0	1657.8	1622.0	1590.0	1557.2	1523.1	1490.0	1459.7
10°	1872.1	1829.8	1782.9	1727.6	1675.5	1629.3	1586.3	1544.7	1504.3	1464.0	1429.5
12.5°	1938.3	1885.5	1816.2	1751.6	1693.2	1631.4	1579.6	1528.5	1479.8	1437.5	1397.2
15°	2027.1	1950.8	1870.8	1784.2	1707.4	1635.2	1564.2	1499.7	1445.1	1389.1	1350.1
17.5°	2081.6	1987.4	1895.8	1805.3	1712.4	1621.2	1544.7	1470.4	1401.9	1346.3	1297.1
20°	2117.5	2023.8	1909.8	1819.4	1708.7	1615.0	1526.5	1443.8	1372.2	1313.0	1262.2
22.5°	2148.8	2040.4	1926.6	1807.4	1697.3	1597.8	1501.0	1417.7	1344.6	1282.2	1233.5
25°	2165.7	2041.3	1917.7	1799.2	1674.2	1556.4	1468.5	1370.9	1292.7	1227.0	1174.9
27.5°	2167.6	2034.6	1894.7	1763.0	1634.0	1524.3	1413.3	1326.1	1245.0	1175.5	1125.5
30°	2161.8	2023.2	1872.7	1730.2	1600.7	1481.6	1385.2	1290.2	1207.5	1138.5	1086.4
32.5°	2143.6	1999.2	1844.6	1693.8	1559.5	1443.0	1343.5	1253.2	1172.6	1104.6	1049.9
35°	2090.8	1948.2	1783.5	1626.7	1489.4	1371.6	1281.7	1189.9	1109.2	1044.8	992.1
37.5°	2008.4	1879.5	1712.1	1549.8	1414.9	1296.6	1207.5	1124.5	1051.8	986.3	932.3
40°	1936.6	1823.3	1655.4	1497.1	1351.4	1238.8	1155.4	1079.3	1007.0	945.2	893.7
42.5°	1853.7	1755.1	1600.2	1432.6	1292.0	1178.8	1097.6	1029.2	961.2	904.0	852.6
45°	1706.1	1641.0	1495.3	1340.3	1193.8	1087.0	1009.6	949.7	892.4	836.5	793.5
47.5°	1536.4	1504.1	1381.3	1234.2	1095.1	989.9	922.8	867.5	817.2	769.8	731.9
50°	1422.3	1406.7	1300.6	1158.7	1025.9	926.9	859.2	811.7	768.7	727.1	691.3
52.5°	1309.9	1309.3	1213.7	1083.7	960.8	865.5	798.3	753.9	716.7	682.8	650.7
55°	1137.8	1156.1	1081.2	965.3	855.3	769.4	708.9	669.2	643.1	615.1	591.1
57.5°	979.9	1010.2	948.4	846.4	754.6	675.4	622.7	592.9	565.2	548.2	530.7
60°	876.9	905.5	857.3	771.4	684.8	617.1	567.0	540.3	516.2	504.5	492.1
62.5°	785.1	810.7	775.0	695.4	620.2	555.1	512.8	487.1	470.9	458.1	450.0
65°	654.2	675.7	645.1	587.2	522.7	470.7	436.1	416.0	400.3	395.1	386.0
67.5°	528.8	548.4	531.8	482.6	430.9	391.5	364.5	345.1	335.9	331.3	324.8
70°	454.4	473.9	456.3	413.4	373.7	340.5	315.0	304.0	294.2	292.3	283.2
72.5°	391.3	404.6	387.0	353.4	319.5	291.5	271.8	260.2	255.2	251.7	246.7
75°	293.6	305.3	293.6	267.5	243.4	224.0	207.0	202.4	196.6	194.6	191.4
77.5°	207.8	217.9	209.0	192.7	174.7	159.6	150.5	144.6	143.3	140.0	141.5
80°	158.8	165.3	156.9	145.8	131.5	121.1	114.5	111.3	107.4	106.1	108.7
82.5°	114.1	116.9	112.6	105.2	94.5	87.7	83.3	79.6	78.8	79.0	79.0
85°	59.3	58.6	58.0	51.4	48.2	43.6	41.0	40.4	39.7	41.0	42.3
87.5°	23.3	23.5	22.6	20.1	18.1	16.1	15.1	14.1	15.1	16.1	17.0
90°	17.4	15.8	14.1	12.1	9.8	7.5	5.1	2.9	5.1	7.5	9.8
92.5°	35.1	34.0	32.8	30.9	28.2	25.6	22.9	20.3	22.9	25.6	28.2
95°	69.1	67.6	66.1	64.4	62.5	60.7	58.7	56.8	58.7	60.7	62.5
97.5°	110.4	108.7	107.0	105.3	103.8	102.3	100.8	99.3	100.8	102.3	103.8
100°	141.1	139.3	137.4	136.0	135.1	134.3	133.5	132.6	133.5	134.3	135.1
102.5°	173.3	171.5	169.8	168.8	168.4	168.1	167.8	167.5	167.8	168.1	168.4
105°	223.7	222.9	222.1	221.5	221.4	221.1	220.9	220.7	220.9	221.1	221.4
107.5°	278.0	277.9	277.8	277.6	277.4	277.1	276.9	276.5	276.9	277.1	277.4
110°	315.8	316.1	316.3	316.2	315.8	315.3	314.9	314.5	314.9	315.3	315.8





TEST NUMBER: P332707-930

CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	353.4	353.7	354.1	354.2	354.2	354.1	354.0	353.8	354.0	354.1	354.2
115°	412.0	412.4	412.8	412.9	412.9	412.9	412.9	412.9	412.9	412.9	412.9
117.5°	468.7	469.0	469.3	469.4	469.2	469.0	468.9	468.7	468.9	469.0	469.2
120°	508.0	508.7	509.3	509.2	508.3	507.5	506.6	505.8	506.6	507.5	508.3
122.5°	545.3	545.5	545.8	545.8	545.4	545.1	544.8	544.5	544.8	545.1	545.4
125°	601.0	601.2	601.4	601.4	601.4	601.4	601.4	601.4	601.4	601.4	601.4
127.5°	655.2	655.5	655.9	655.7	655.1	654.4	653.9	653.2	653.9	654.4	655.1
130°	692.4	692.4	692.4	692.1	691.5	690.8	690.2	689.6	690.2	690.8	691.5
132.5°	728.4	728.6	728.7	728.6	728.1	727.7	727.2	726.7	727.2	727.7	728.1
135°	781.5	781.5	781.5	780.8	779.6	778.3	777.1	775.8	777.1	778.3	779.6
137.5°	832.7	832.3	832.0	831.5	831.0	830.4	829.8	829.2	829.8	830.4	831.0
140°	866.7	866.7	866.7	866.5	866.1	865.7	865.2	864.8	865.2	865.7	866.1
142.5°	898.9	899.0	899.2	899.1	898.6	898.2	897.8	897.4	897.8	898.2	898.6
145°	946.8	946.6	946.4	945.8	945.0	944.2	943.3	942.5	943.3	944.2	945.0
147.5°	991.3	991.5	991.6	991.2	990.2	989.2	988.2	987.2	988.2	989.2	990.2
150°	1018.2	1018.2	1018.2	1017.8	1017.0	1016.2	1015.3	1014.5	1015.3	1016.2	1017.0
152.5°	1042.9	1042.8	1042.6	1042.3	1041.7	1041.2	1040.7	1040.2	1040.7	1041.2	1041.7
155°	1079.3	1079.5	1079.7	1079.8	1079.8	1079.8	1079.8	1079.8	1079.8	1079.8	1079.8
157.5°	1111.3	1111.4	1111.4	1111.7	1112.1	1112.4	1112.8	1113.1	1112.8	1112.4	1112.1
160°	1131.4	1131.6	1131.8	1132.0	1132.2	1132.5	1132.7	1132.9	1132.7	1132.5	1132.2
162.5°	1148.1	1148.3	1148.5	1148.8	1149.4	1150.0	1150.5	1151.0	1150.5	1150.0	1149.4
165°	1171.6	1172.0	1172.4	1173.0	1173.6	1174.2	1174.8	1175.5	1174.8	1174.2	1173.6
167.5°	1190.3	1190.3	1190.3	1190.7	1191.6	1192.5	1193.4	1194.3	1193.4	1192.5	1191.6
170°	1200.6	1200.4	1200.2	1200.6	1201.7	1202.7	1203.8	1204.8	1203.8	1202.7	1201.7
172.5°	1208.6	1208.5	1208.4	1208.9	1209.7	1210.6	1211.5	1212.4	1211.5	1210.6	1209.7
175°	1217.6	1217.8	1218.0	1218.6	1219.7	1220.7	1221.8	1222.9	1221.8	1220.7	1219.7
177.5°	1222.5	1222.5	1222.5	1222.9	1223.8	1224.6	1225.4	1226.3	1225.4	1224.6	1223.8
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332707-930

CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4
2.5°	1541.2	1536.5	1529.7	1520.4	1512.5	1504.2	1502.1	1499.0	1505.2	1500.1	1498.4
5°	1490.7	1477.0	1459.4	1439.2	1427.5	1410.6	1407.4	1400.8	1394.3	1393.7	1387.2
7.5°	1437.1	1417.1	1394.1	1373.5	1354.5	1336.0	1323.9	1321.3	1311.7	1306.0	1299.5
10°	1402.8	1378.0	1351.4	1331.9	1309.7	1290.2	1276.5	1268.7	1262.2	1255.0	1248.5
12.5°	1362.2	1335.9	1313.9	1292.7	1266.5	1251.6	1229.1	1215.6	1214.3	1214.4	1197.5
15°	1314.9	1288.9	1255.0	1225.1	1210.7	1182.1	1169.7	1154.1	1144.4	1134.6	1126.8
17.5°	1260.9	1228.5	1202.0	1167.7	1140.4	1117.5	1101.3	1091.9	1077.2	1063.4	1053.4
20°	1227.0	1192.5	1164.6	1128.0	1098.1	1070.2	1056.5	1043.5	1032.4	1020.7	1009.6
22.5°	1192.6	1156.6	1122.3	1087.0	1059.1	1029.6	1016.4	998.7	988.1	981.6	970.5
25°	1138.5	1099.4	1060.4	1026.5	997.9	971.8	954.3	940.6	928.9	923.7	916.6
27.5°	1079.6	1040.9	1003.1	964.7	932.1	913.3	899.2	888.9	882.2	875.2	872.0
30°	1042.2	1001.8	961.5	925.6	895.7	876.9	863.8	856.6	851.4	848.2	844.9
32.5°	1004.1	964.3	921.9	889.2	862.3	845.5	835.7	828.5	825.9	824.8	823.6
35°	943.2	902.9	863.8	834.5	809.1	802.6	794.2	790.3	789.0	793.5	795.5
37.5°	884.3	846.8	810.8	782.4	765.8	756.3	753.4	753.5	758.2	762.2	767.0
40°	846.2	809.8	775.9	751.2	735.6	729.7	728.4	731.6	736.9	741.4	746.7
42.5°	809.3	773.3	742.6	719.4	708.5	703.1	703.9	707.2	714.4	720.1	727.9
45°	751.9	721.9	691.9	673.1	664.0	665.3	665.3	671.2	678.2	686.7	695.2
47.5°	697.8	667.6	643.0	627.1	622.4	621.3	624.9	632.6	642.9	653.3	665.1
50°	661.4	632.8	611.2	596.9	591.7	593.7	598.8	606.0	618.4	631.4	643.8
52.5°	624.4	598.3	578.5	565.2	561.5	565.0	570.2	581.6	592.4	606.4	621.4
55°	567.0	544.9	529.2	519.4	518.1	520.1	525.9	538.3	553.9	571.5	585.9
57.5°	509.8	491.3	477.0	470.3	470.9	472.7	482.3	497.1	513.7	532.5	551.0
60°	471.2	454.4	442.6	437.4	438.1	442.0	453.7	467.4	488.2	506.5	525.9
62.5°	434.8	420.0	408.8	404.1	403.2	411.8	423.0	437.2	458.0	478.3	499.4
65°	376.3	364.5	355.4	352.8	354.7	361.3	375.6	394.4	412.1	433.5	455.7
67.5°	318.9	309.3	303.0	304.3	306.6	316.3	328.2	344.5	364.4	386.7	408.5
70°	282.5	273.4	268.2	268.8	272.7	284.5	294.9	311.1	332.6	355.4	373.7
72.5°	245.0	239.0	234.3	237.1	241.0	249.1	262.0	278.3	297.3	318.5	337.7
75°	188.1	188.1	185.5	187.4	193.3	201.1	210.9	227.8	246.7	263.7	279.2
77.5°	139.6	138.1	139.8	142.2	145.5	154.8	166.0	178.1	192.3	209.2	222.1
80°	106.7	107.4	110.6	114.5	115.9	123.0	134.8	145.8	156.9	171.2	183.6
82.5°	80.2	80.9	82.5	87.5	88.8	96.4	104.0	115.1	125.1	134.8	145.0
85°	43.6	43.6	46.9	48.8	52.1	57.3	61.8	68.3	77.5	84.0	93.8
87.5°	19.1	19.5	21.9	23.3	25.2	28.1	29.4	35.4	37.7	40.6	45.4
90°	12.1	14.1	15.8	17.4	19.2	20.9	22.1	23.4	24.6	25.9	26.7
92.5°	30.9	32.8	34.0	35.1	36.4	37.5	38.2	39.1	39.8	40.5	41.0
95°	64.4	66.1	67.6	69.1	70.5	72.0	72.6	73.2	73.9	74.5	74.8
97.5°	105.3	107.0	108.7	110.4	112.1	113.8	114.6	115.4	116.1	116.9	117.2
100°	136.0	137.4	139.3	141.1	143.0	145.0	145.4	145.8	146.2	146.6	146.8
102.5°	168.8	169.8	171.5	173.3	175.0	176.8	177.3	177.9	178.6	179.1	179.4
105°	221.5	222.1	222.9	223.7	224.6	225.4	226.1	226.7	227.3	228.0	228.6
107.5°	277.6	277.8	277.9	278.0	278.2	278.3	278.9	279.5	280.1	280.6	281.0
110°	316.2	316.3	316.1	315.8	315.6	315.4	315.0	314.5	314.1	313.7	313.8



TEST NUMBER: P332707-930

CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	354.2	354.1	353.7	353.4	352.9	352.5	352.5	352.4	352.3	352.2	352.2
115°	412.9	412.8	412.4	412.0	411.5	411.1	410.9	410.7	410.4	410.3	410.0
117.5°	469.4	469.3	469.0	468.7	468.4	468.1	467.4	466.7	465.9	465.2	464.7
120°	509.2	509.3	508.7	508.0	507.4	506.8	505.7	504.7	503.6	502.6	502.2
122.5°	545.8	545.8	545.5	545.3	544.9	544.6	544.0	543.2	542.5	541.8	541.0
125°	601.4	601.4	601.2	601.0	600.7	600.5	600.1	599.7	599.2	598.8	598.4
127.5°	655.7	655.9	655.5	655.2	654.8	654.5	654.1	653.7	653.3	652.8	652.5
130°	692.1	692.4	692.4	692.4	692.4	692.4	692.0	691.5	691.1	690.7	690.1
132.5°	728.6	728.7	728.6	728.4	728.2	728.1	727.6	727.2	726.8	726.4	725.9
135°	780.8	781.5	781.5	781.5	781.5	781.5	781.1	780.6	780.2	779.8	779.3
137.5°	831.5	832.0	832.3	832.7	833.0	833.3	832.8	832.3	831.7	831.2	831.0
140°	866.5	866.7	866.7	866.7	866.7	866.7	866.5	866.3	866.1	865.8	865.7
142.5°	899.1	899.2	899.0	898.9	898.7	898.5	898.5	898.5	898.4	898.4	898.3
145°	945.8	946.4	946.6	946.8	947.0	947.2	947.0	946.8	946.6	946.4	945.9
147.5°	991.2	991.6	991.5	991.3	991.2	991.0	990.8	990.7	990.5	990.3	990.1
150°	1017.8	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.1
152.5°	1042.3	1042.6	1042.8	1042.9	1043.1	1043.3	1043.7	1044.2	1044.8	1045.3	1045.3
155°	1079.8	1079.7	1079.5	1079.3	1079.0	1078.9	1079.7	1080.6	1081.4	1082.2	1082.2
157.5°	1111.7	1111.4	1111.4	1111.3	1111.3	1111.3	1111.9	1112.6	1113.1	1113.8	1113.8
160°	1132.0	1131.8	1131.6	1131.4	1131.1	1131.0	1131.6	1132.2	1132.9	1133.5	1133.3
162.5°	1148.8	1148.5	1148.3	1148.1	1147.9	1147.6	1148.8	1149.9	1151.0	1152.2	1152.3
165°	1173.0	1172.4	1172.0	1171.6	1171.2	1170.8	1172.0	1173.3	1174.5	1175.8	1176.0
167.5°	1190.7	1190.3	1190.3	1190.3	1190.4	1190.4	1191.7	1192.9	1194.3	1195.5	1195.5
170°	1200.6	1200.2	1200.4	1200.6	1200.9	1201.1	1202.3	1203.6	1204.8	1206.2	1206.0
172.5°	1208.9	1208.4	1208.5	1208.6	1208.6	1208.7	1210.1	1211.5	1212.9	1214.4	1214.4
175°	1218.6	1218.0	1217.8	1217.6	1217.4	1217.2	1218.6	1220.1	1221.6	1223.0	1223.0
177.5°	1222.9	1222.5	1222.5	1222.5	1222.5	1222.5	1223.7	1224.8	1226.0	1227.2	1227.1
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332707-930

CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4
2.5°	1497.5	1496.4	1492.7	1492.2	1492.7	1496.4	1497.5	1498.4	1500.1	1505.2	1499.0
5°	1383.2	1380.0	1378.0	1385.2	1378.0	1380.0	1383.2	1387.2	1393.7	1394.3	1400.8
7.5°	1297.2	1294.6	1288.9	1287.0	1288.9	1294.6	1297.2	1299.5	1306.0	1311.7	1321.3
10°	1242.0	1239.4	1234.2	1232.9	1234.2	1239.4	1242.0	1248.5	1255.0	1262.2	1268.7
12.5°	1188.9	1183.7	1182.7	1184.0	1182.7	1183.7	1188.9	1197.5	1214.4	1214.3	1215.6
15°	1118.3	1115.7	1108.6	1110.5	1108.6	1115.7	1118.3	1126.8	1134.6	1144.4	1154.1
17.5°	1048.8	1045.7	1037.0	1044.6	1037.0	1045.7	1048.8	1053.4	1063.4	1077.2	1091.9
20°	1005.0	999.9	995.3	994.7	995.3	999.9	1005.0	1009.6	1020.7	1032.4	1043.5
22.5°	963.4	958.7	958.3	954.1	958.3	958.7	963.4	970.5	981.6	988.1	998.7
25°	911.3	906.8	905.5	902.2	905.5	906.8	911.3	916.6	923.7	928.9	940.6
27.5°	871.4	869.1	866.8	867.8	866.8	869.1	871.4	872.0	875.2	882.2	888.9
30°	846.9	846.2	844.9	844.9	844.9	846.2	846.9	844.9	848.2	851.4	856.6
32.5°	826.6	826.5	827.2	827.2	827.2	826.5	826.6	823.6	824.8	825.9	828.5
35°	798.1	800.0	801.3	799.3	801.3	800.0	798.1	795.5	793.5	789.0	790.3
37.5°	772.3	774.2	776.1	778.3	776.1	774.2	772.3	767.0	762.2	758.2	753.5
40°	752.5	757.1	758.3	761.6	758.3	757.1	752.5	746.7	741.4	736.9	731.6
42.5°	733.8	738.8	742.2	742.8	742.2	738.8	733.8	727.9	720.1	714.4	707.2
45°	705.0	710.2	714.8	714.8	714.8	710.2	705.0	695.2	686.7	678.2	671.2
47.5°	675.1	682.7	687.3	688.4	687.3	682.7	675.1	665.1	653.3	642.9	632.6
50°	654.8	664.0	668.5	671.8	668.5	664.0	654.8	643.8	631.4	618.4	606.0
52.5°	635.0	644.2	650.3	652.0	650.3	644.2	635.0	621.4	606.4	592.4	581.6
55°	600.8	613.8	621.0	623.6	621.0	613.8	600.8	585.9	571.5	553.9	538.3
57.5°	568.5	580.5	588.8	590.8	588.8	580.5	568.5	551.0	532.5	513.7	497.1
60°	543.6	556.5	567.0	568.9	567.0	556.5	543.6	525.9	506.5	488.2	467.4
62.5°	518.0	531.6	541.0	546.0	541.0	531.6	518.0	499.4	478.3	458.0	437.2
65°	473.9	487.5	496.7	498.6	496.7	487.5	473.9	455.7	433.5	412.1	394.4
67.5°	425.7	439.4	445.4	449.1	445.4	439.4	425.7	408.5	386.7	364.4	344.5
70°	391.8	402.9	409.4	412.7	409.4	402.9	391.8	373.7	355.4	332.6	311.1
72.5°	353.4	364.9	372.5	373.1	372.5	364.9	353.4	337.7	318.5	297.3	278.3
75°	294.2	304.7	308.5	308.5	308.5	304.7	294.2	279.2	263.7	246.7	227.8
77.5°	232.9	238.2	243.2	244.3	243.2	238.2	232.9	222.1	209.2	192.3	178.1
80°	193.3	196.6	200.5	200.5	200.5	196.6	193.3	183.6	171.2	156.9	145.8
82.5°	152.7	155.5	159.4	158.8	159.4	155.5	152.7	145.0	134.8	125.1	115.1
85°	92.5	98.3	97.7	96.4	97.7	98.3	92.5	93.8	84.0	77.5	68.3
87.5°	47.1	47.7	49.3	50.5	49.3	47.7	47.1	45.4	40.6	37.7	35.4
90°	27.1	27.6	28.0	28.5	28.0	27.6	27.1	26.7	25.9	24.6	23.4
92.5°	41.3	41.6	41.8	42.1	41.8	41.6	41.3	41.0	40.5	39.8	39.1
95°	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.8	74.5	73.9	73.2
97.5°	117.2	117.2	117.2	117.2	117.2	117.2	117.2	117.2	116.9	116.1	115.4
100°	146.8	146.8	146.8	146.8	146.8	146.8	146.8	146.8	146.6	146.2	145.8
102.5°	179.7	179.9	180.0	180.2	180.0	179.9	179.7	179.4	179.1	178.6	177.9
105°	229.3	229.8	230.5	231.1	230.5	229.8	229.3	228.6	228.0	227.3	226.7
107.5°	280.9	280.9	280.8	280.8	280.8	280.9	280.9	281.0	280.6	280.1	279.5
110°	314.5	315.1	315.8	316.3	315.8	315.1	314.5	313.8	313.7	314.1	314.5



TEST NUMBER: P332707-930

CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	352.4	352.5	352.6	352.8	352.6	352.5	352.4	352.2	352.2	352.3	352.4
115°	409.9	409.6	409.4	409.2	409.4	409.6	409.9	410.0	410.3	410.4	410.7
117.5°	464.2	463.8	463.4	463.0	463.4	463.8	464.2	464.7	465.2	465.9	466.7
120°	502.6	503.0	503.5	503.9	503.5	503.0	502.6	502.2	502.6	503.6	504.7
122.5°	540.3	539.6	538.7	538.0	538.7	539.6	540.3	541.0	541.8	542.5	543.2
125°	598.0	597.6	597.1	596.7	597.1	597.6	598.0	598.4	598.8	599.2	599.7
127.5°	652.2	651.8	651.4	651.1	651.4	651.8	652.2	652.5	652.8	653.3	653.7
130°	689.3	688.4	687.5	686.7	687.5	688.4	689.3	690.1	690.7	691.1	691.5
132.5°	725.6	725.3	725.0	724.6	725.0	725.3	725.6	725.9	726.4	726.8	727.2
135°	778.6	778.0	777.3	776.7	777.3	778.0	778.6	779.3	779.8	780.2	780.6
137.5°	831.1	831.2	831.4	831.4	831.4	831.2	831.1	831.0	831.2	831.7	832.3
140°	865.4	865.2	865.0	864.8	865.0	865.2	865.4	865.7	865.8	866.1	866.3
142.5°	898.3	898.2	898.2	898.1	898.2	898.2	898.3	898.3	898.4	898.4	898.5
145°	945.3	944.7	944.0	943.5	944.0	944.7	945.3	945.9	946.4	946.6	946.8
147.5°	989.9	989.7	989.4	989.3	989.4	989.7	989.9	990.1	990.3	990.5	990.7
150°	1017.9	1017.7	1017.5	1017.3	1017.5	1017.7	1017.9	1018.1	1018.2	1018.2	1018.2
152.5°	1044.7	1044.2	1043.6	1043.1	1043.6	1044.2	1044.7	1045.3	1045.3	1044.8	1044.2
155°	1081.4	1080.6	1079.7	1078.9	1079.7	1080.6	1081.4	1082.2	1082.2	1081.4	1080.6
157.5°	1113.0	1112.3	1111.6	1110.9	1111.6	1112.3	1113.0	1113.8	1113.8	1113.1	1112.6
160°	1132.2	1131.1	1130.2	1129.1	1130.2	1131.1	1132.2	1133.3	1133.5	1132.9	1132.2
162.5°	1151.2	1150.1	1149.1	1148.0	1149.1	1150.1	1151.2	1152.3	1152.2	1151.0	1149.9
165°	1175.2	1174.4	1173.5	1172.6	1173.5	1174.4	1175.2	1176.0	1175.8	1174.5	1173.3
167.5°	1194.2	1192.9	1191.6	1190.3	1191.6	1192.9	1194.2	1195.5	1195.5	1194.3	1192.9
170°	1204.5	1203.1	1201.6	1200.1	1201.6	1203.1	1204.5	1206.0	1206.2	1204.8	1203.6
172.5°	1212.8	1211.4	1209.9	1208.4	1209.9	1211.4	1212.8	1214.4	1214.4	1212.9	1211.5
175°	1221.6	1220.1	1218.6	1217.2	1218.6	1220.1	1221.6	1223.0	1223.0	1221.6	1220.1
177.5°	1225.7	1224.4	1223.0	1221.7	1223.0	1224.4	1225.7	1227.1	1227.2	1226.0	1224.8
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332707-930

CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4
2.5°	1502.1	1504.2	1512.5	1520.4	1529.7	1536.5	1541.2	1546.4	1557.3	1566.2	1574.5
5°	1407.4	1410.6	1427.5	1439.2	1459.4	1477.0	1490.7	1505.6	1523.2	1547.3	1569.5
7.5°	1323.9	1336.0	1354.5	1373.5	1394.1	1417.1	1437.1	1459.7	1490.0	1523.1	1557.2
10°	1276.5	1290.2	1309.7	1331.9	1351.4	1378.0	1402.8	1429.5	1464.0	1504.3	1544.7
12.5°	1229.1	1251.6	1266.5	1292.7	1313.9	1335.9	1362.2	1397.2	1437.5	1479.8	1528.5
15°	1169.7	1182.1	1210.7	1225.1	1255.0	1288.9	1314.9	1350.1	1389.1	1445.1	1499.7
17.5°	1101.3	1117.5	1140.4	1167.7	1202.0	1228.5	1260.9	1297.1	1346.3	1401.9	1470.4
20°	1056.5	1070.2	1098.1	1128.0	1164.6	1192.5	1227.0	1262.2	1313.0	1372.2	1443.8
22.5°	1016.4	1029.6	1059.1	1087.0	1122.3	1156.6	1192.6	1233.5	1282.2	1344.6	1417.7
25°	954.3	971.8	997.9	1026.5	1060.4	1099.4	1138.5	1174.9	1227.0	1292.7	1370.9
27.5°	899.2	913.3	932.1	964.7	1003.1	1040.9	1079.6	1125.5	1175.5	1245.0	1326.1
30°	863.8	876.9	895.7	925.6	961.5	1001.8	1042.2	1086.4	1138.5	1207.5	1290.2
32.5°	835.7	845.5	862.3	889.2	921.9	964.3	1004.1	1049.9	1104.6	1172.6	1253.2
35°	794.2	802.6	809.1	834.5	863.8	902.9	943.2	992.1	1044.8	1109.2	1189.9
37.5°	753.4	756.3	765.8	782.4	810.8	846.8	884.3	932.3	986.3	1051.8	1124.5
40°	728.4	729.7	735.6	751.2	775.9	809.8	846.2	893.7	945.2	1007.0	1079.3
42.5°	703.9	703.1	708.5	719.4	742.6	773.3	809.3	852.6	904.0	961.2	1029.2
45°	665.3	665.3	664.0	673.1	691.9	721.9	751.9	793.5	836.5	892.4	949.7
47.5°	624.9	621.3	622.4	627.1	643.0	667.6	697.8	731.9	769.8	817.2	867.5
50°	598.8	593.7	591.7	596.9	611.2	632.8	661.4	691.3	727.1	768.7	811.7
52.5°	570.2	565.0	561.5	565.2	578.5	598.3	624.4	650.7	682.8	716.7	753.9
55°	525.9	520.1	518.1	519.4	529.2	544.9	567.0	591.1	615.1	643.1	669.2
57.5°	482.3	472.7	470.9	470.3	477.0	491.3	509.8	530.7	548.2	565.2	592.9
60°	453.7	442.0	438.1	437.4	442.6	454.4	471.2	492.1	504.5	516.2	540.3
62.5°	423.0	411.8	403.2	404.1	408.8	420.0	434.8	450.0	458.1	470.9	487.1
65°	375.6	361.3	354.7	352.8	355.4	364.5	376.3	386.0	395.1	400.3	416.0
67.5°	328.2	316.3	306.6	304.3	303.0	309.3	318.9	324.8	331.3	335.9	345.1
70°	294.9	284.5	272.7	268.8	268.2	273.4	282.5	283.2	292.3	294.2	304.0
72.5°	262.0	249.1	241.0	237.1	234.3	239.0	245.0	246.7	251.7	255.2	260.2
75°	210.9	201.1	193.3	187.4	185.5	188.1	188.1	191.4	194.6	196.6	202.4
77.5°	166.0	154.8	145.5	142.2	139.8	138.1	139.6	141.5	140.0	143.3	144.6
80°	134.8	123.0	115.9	114.5	110.6	107.4	106.7	108.7	106.1	107.4	111.3
82.5°	104.0	96.4	88.8	87.5	82.5	80.9	80.2	79.0	79.0	78.8	79.6
85°	61.8	57.3	52.1	48.8	46.9	43.6	43.6	42.3	41.0	39.7	40.4
87.5°	29.4	28.1	25.2	23.3	21.9	19.5	19.1	17.0	16.1	15.1	14.1
90°	22.1	20.9	19.2	17.4	15.8	14.1	12.1	9.8	7.5	5.1	2.9
92.5°	38.2	37.5	36.4	35.1	34.0	32.8	30.9	28.2	25.6	22.9	20.3
95°	72.6	72.0	70.5	69.1	67.6	66.1	64.4	62.5	60.7	58.7	56.8
97.5°	114.6	113.8	112.1	110.4	108.7	107.0	105.3	103.8	102.3	100.8	99.3
100°	145.4	145.0	143.0	141.1	139.3	137.4	136.0	135.1	134.3	133.5	132.6
102.5°	177.3	176.8	175.0	173.3	171.5	169.8	168.8	168.4	168.1	167.8	167.5
105°	226.1	225.4	224.6	223.7	222.9	222.1	221.5	221.4	221.1	220.9	220.7
107.5°	278.9	278.3	278.2	278.0	277.9	277.8	277.6	277.4	277.1	276.9	276.5
110°	315.0	315.4	315.6	315.8	316.1	316.3	316.2	315.8	315.3	314.9	314.5



TEST NUMBER: P332707-930

CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	352.5	352.5	352.9	353.4	353.7	354.1	354.2	354.2	354.1	354.0	353.8
115°	410.9	411.1	411.5	412.0	412.4	412.8	412.9	412.9	412.9	412.9	412.9
117.5°	467.4	468.1	468.4	468.7	469.0	469.3	469.4	469.2	469.0	468.9	468.7
120°	505.7	506.8	507.4	508.0	508.7	509.3	509.2	508.3	507.5	506.6	505.8
122.5°	544.0	544.6	544.9	545.3	545.5	545.8	545.8	545.4	545.1	544.8	544.5
125°	600.1	600.5	600.7	601.0	601.2	601.4	601.4	601.4	601.4	601.4	601.4
127.5°	654.1	654.5	654.8	655.2	655.5	655.9	655.7	655.1	654.4	653.9	653.2
130°	692.0	692.4	692.4	692.4	692.4	692.4	692.1	691.5	690.8	690.2	689.6
132.5°	727.6	728.1	728.2	728.4	728.6	728.7	728.6	728.1	727.7	727.2	726.7
135°	781.1	781.5	781.5	781.5	781.5	781.5	780.8	779.6	778.3	777.1	775.8
137.5°	832.8	833.3	833.0	832.7	832.3	832.0	831.5	831.0	830.4	829.8	829.2
140°	866.5	866.7	866.7	866.7	866.7	866.7	866.5	866.1	865.7	865.2	864.8
142.5°	898.5	898.5	898.7	898.9	899.0	899.2	899.1	898.6	898.2	897.8	897.4
145°	947.0	947.2	947.0	946.8	946.6	946.4	945.8	945.0	944.2	943.3	942.5
147.5°	990.8	991.0	991.2	991.3	991.5	991.6	991.2	990.2	989.2	988.2	987.2
150°	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1017.8	1017.0	1016.2	1015.3	1014.5
152.5°	1043.7	1043.3	1043.1	1042.9	1042.8	1042.6	1042.3	1041.7	1041.2	1040.7	1040.2
155°	1079.7	1078.9	1079.0	1079.3	1079.5	1079.7	1079.8	1079.8	1079.8	1079.8	1079.8
157.5°	1111.9	1111.3	1111.3	1111.3	1111.4	1111.4	1111.7	1112.1	1112.4	1112.8	1113.1
160°	1131.6	1131.0	1131.1	1131.4	1131.6	1131.8	1132.0	1132.2	1132.5	1132.7	1132.9
162.5°	1148.8	1147.6	1147.9	1148.1	1148.3	1148.5	1148.8	1149.4	1150.0	1150.5	1151.0
165°	1172.0	1170.8	1171.2	1171.6	1172.0	1172.4	1173.0	1173.6	1174.2	1174.8	1175.5
167.5°	1191.7	1190.4	1190.4	1190.3	1190.3	1190.3	1190.7	1191.6	1192.5	1193.4	1194.3
170°	1202.3	1201.1	1200.9	1200.6	1200.4	1200.2	1200.6	1201.7	1202.7	1203.8	1204.8
172.5°	1210.1	1208.7	1208.6	1208.6	1208.5	1208.4	1208.9	1209.7	1210.6	1211.5	1212.4
175°	1218.6	1217.2	1217.4	1217.6	1217.8	1218.0	1218.6	1219.7	1220.7	1221.8	1222.9
177.5°	1223.7	1222.5	1222.5	1222.5	1222.5	1222.5	1222.9	1223.8	1224.6	1225.4	1226.3
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332707-930

CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4
2.5°	1581.8	1587.0	1593.7	1605.2	1609.4	1614.6	1621.9	1621.4	1623.4	1631.3	1648.0
5°	1587.6	1607.9	1627.3	1650.8	1675.5	1691.8	1713.9	1727.6	1741.3	1758.8	1788.8
7.5°	1590.0	1622.0	1657.8	1699.0	1735.5	1777.8	1810.7	1841.7	1869.6	1906.7	1942.5
10°	1586.3	1629.3	1675.5	1727.6	1782.9	1829.8	1872.1	1920.3	1961.3	2006.2	2046.6
12.5°	1579.6	1631.4	1693.2	1751.6	1816.2	1885.5	1938.3	1987.0	2041.5	2093.2	2155.4
15°	1564.2	1635.2	1707.4	1784.2	1870.8	1950.8	2027.1	2090.2	2148.8	2226.3	2307.6
17.5°	1544.7	1621.2	1712.4	1805.3	1895.8	1987.4	2081.6	2176.5	2250.5	2346.7	2410.4
20°	1526.5	1615.0	1708.7	1819.4	1909.8	2023.8	2117.5	2209.3	2310.9	2406.5	2482.7
22.5°	1501.0	1597.8	1697.3	1807.4	1926.6	2040.4	2148.8	2248.4	2349.9	2454.0	2546.3
25°	1468.5	1556.4	1674.2	1799.2	1917.7	2041.3	2165.7	2290.7	2400.0	2510.1	2596.0
27.5°	1413.3	1524.3	1634.0	1763.0	1894.7	2034.6	2167.6	2298.3	2413.0	2503.4	2556.6
30°	1385.2	1481.6	1600.7	1730.2	1872.7	2023.2	2161.8	2290.0	2396.8	2469.1	2490.5
32.5°	1343.5	1443.0	1559.5	1693.8	1844.6	1999.2	2143.6	2264.5	2353.5	2391.4	2365.5
35°	1281.7	1371.6	1489.4	1626.7	1783.5	1948.2	2090.8	2193.0	2238.6	2202.8	2113.6
37.5°	1207.5	1296.6	1414.9	1549.8	1712.1	1879.5	2008.4	2081.9	2066.9	1977.8	1844.9
40°	1155.4	1238.8	1351.4	1497.1	1655.4	1823.3	1936.6	1976.3	1934.6	1807.0	1665.7
42.5°	1097.6	1178.8	1292.0	1432.6	1600.2	1755.1	1853.7	1857.0	1787.2	1634.7	1492.9
45°	1009.6	1087.0	1193.8	1340.3	1495.3	1641.0	1706.1	1674.2	1545.3	1398.2	1255.6
47.5°	922.8	989.9	1095.1	1234.2	1381.3	1504.1	1536.4	1479.0	1341.6	1198.8	1066.7
50°	859.2	926.9	1025.9	1158.7	1300.6	1406.7	1422.3	1346.1	1211.4	1067.6	964.0
52.5°	798.3	865.5	960.8	1083.7	1213.7	1309.3	1309.9	1221.7	1087.4	959.2	863.0
55°	708.9	769.4	855.3	965.3	1081.2	1156.1	1137.8	1046.7	930.2	818.9	734.9
57.5°	622.7	675.4	754.6	846.4	948.4	1010.2	979.9	892.2	788.1	693.7	630.1
60°	567.0	617.1	684.8	771.4	857.3	905.5	876.9	797.4	701.7	625.6	570.2
62.5°	512.8	555.1	620.2	695.4	775.0	810.7	785.1	706.8	624.1	555.2	510.4
65°	436.1	470.7	522.7	587.2	645.1	675.7	654.2	581.3	518.1	468.7	432.8
67.5°	364.5	391.5	430.9	482.6	531.8	548.4	528.8	478.1	424.5	385.0	359.7
70°	315.0	340.5	373.7	413.4	456.3	473.9	454.4	414.0	370.4	333.9	309.2
72.5°	271.8	291.5	319.5	353.4	387.0	404.6	391.3	352.5	315.7	288.6	267.5
75°	207.0	224.0	243.4	267.5	293.6	305.3	293.6	266.8	241.5	221.4	206.4
77.5°	150.5	159.6	174.7	192.7	209.0	217.9	207.8	189.7	174.2	160.4	153.0
80°	114.5	121.1	131.5	145.8	156.9	165.3	158.8	143.8	131.5	122.4	119.1
82.5°	83.3	87.7	94.5	105.2	112.6	116.9	114.1	103.2	98.2	90.1	86.8
85°	41.0	43.6	48.2	51.4	58.0	58.6	59.3	54.7	50.1	48.2	45.6
87.5°	15.1	16.1	18.1	20.1	22.6	23.5	23.3	23.6	21.9	21.6	19.8
90°	5.1	7.5	9.8	12.1	14.1	15.8	17.4	19.2	20.9	22.1	23.4
92.5°	22.9	25.6	28.2	30.9	32.8	34.0	35.1	36.4	37.5	38.2	39.1
95°	58.7	60.7	62.5	64.4	66.1	67.6	69.1	70.5	72.0	72.6	73.2
97.5°	100.8	102.3	103.8	105.3	107.0	108.7	110.4	112.1	113.8	114.6	115.4
100°	133.5	134.3	135.1	136.0	137.4	139.3	141.1	143.0	145.0	145.4	145.8
102.5°	167.8	168.1	168.4	168.8	169.8	171.5	173.3	175.0	176.8	177.3	177.9
105°	220.9	221.1	221.4	221.5	222.1	222.9	223.7	224.6	225.4	226.1	226.7
107.5°	276.9	277.1	277.4	277.6	277.8	277.9	278.0	278.2	278.3	278.9	279.5
110°	314.9	315.3	315.8	316.2	316.3	316.1	315.8	315.6	315.4	315.0	314.5





TEST NUMBER: P332707-930

CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	354.0	354.1	354.2	354.2	354.1	353.7	353.4	352.9	352.5	352.5	352.4
115°	412.9	412.9	412.9	412.9	412.8	412.4	412.0	411.5	411.1	410.9	410.7
117.5°	468.9	469.0	469.2	469.4	469.3	469.0	468.7	468.4	468.1	467.4	466.7
120°	506.6	507.5	508.3	509.2	509.3	508.7	508.0	507.4	506.8	505.7	504.7
122.5°	544.8	545.1	545.4	545.8	545.8	545.5	545.3	544.9	544.6	544.0	543.2
125°	601.4	601.4	601.4	601.4	601.4	601.2	601.0	600.7	600.5	600.1	599.7
127.5°	653.9	654.4	655.1	655.7	655.9	655.5	655.2	654.8	654.5	654.1	653.7
130°	690.2	690.8	691.5	692.1	692.4	692.4	692.4	692.4	692.4	692.0	691.5
132.5°	727.2	727.7	728.1	728.6	728.7	728.6	728.4	728.2	728.1	727.6	727.2
135°	777.1	778.3	779.6	780.8	781.5	781.5	781.5	781.5	781.5	781.1	780.6
137.5°	829.8	830.4	831.0	831.5	832.0	832.3	832.7	833.0	833.3	832.8	832.3
140°	865.2	865.7	866.1	866.5	866.7	866.7	866.7	866.7	866.7	866.5	866.3
142.5°	897.8	898.2	898.6	899.1	899.2	899.0	898.9	898.7	898.5	898.5	898.5
145°	943.3	944.2	945.0	945.8	946.4	946.6	946.8	947.0	947.2	947.0	946.8
147.5°	988.2	989.2	990.2	991.2	991.6	991.5	991.3	991.2	991.0	990.8	990.7
150°	1015.3	1016.2	1017.0	1017.8	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2	1018.2
152.5°	1040.7	1041.2	1041.7	1042.3	1042.6	1042.8	1042.9	1043.1	1043.3	1043.7	1044.2
155°	1079.8	1079.8	1079.8	1079.8	1079.7	1079.5	1079.3	1079.0	1078.9	1079.7	1080.6
157.5°	1112.8	1112.4	1112.1	1111.7	1111.4	1111.4	1111.3	1111.3	1111.3	1111.9	1112.6
160°	1132.7	1132.5	1132.2	1132.0	1131.8	1131.6	1131.4	1131.1	1131.0	1131.6	1132.2
162.5°	1150.5	1150.0	1149.4	1148.8	1148.5	1148.3	1148.1	1147.9	1147.6	1148.8	1149.9
165°	1174.8	1174.2	1173.6	1173.0	1172.4	1172.0	1171.6	1171.2	1170.8	1172.0	1173.3
167.5°	1193.4	1192.5	1191.6	1190.7	1190.3	1190.3	1190.3	1190.4	1190.4	1191.7	1192.9
170°	1203.8	1202.7	1201.7	1200.6	1200.2	1200.4	1200.6	1200.9	1201.1	1202.3	1203.6
172.5°	1211.5	1210.6	1209.7	1208.9	1208.4	1208.5	1208.6	1208.6	1208.7	1210.1	1211.5
175°	1221.8	1220.7	1219.7	1218.6	1218.0	1217.8	1217.6	1217.4	1217.2	1218.6	1220.1
177.5°	1225.4	1224.6	1223.8	1222.9	1222.5	1222.5	1222.5	1222.5	1222.5	1223.7	1224.8
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7



TEST NUMBER: P332707-930

CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4	1571.4
2.5°	1656.3	1657.3	1662.0	1665.7	1666.7	1671.9	1672.4
5°	1801.8	1812.9	1834.3	1836.3	1839.6	1856.5	1843.5
7.5°	1972.4	2000.5	2019.3	2035.8	2041.8	2049.2	2047.6
10°	2081.7	2123.4	2144.2	2177.4	2178.7	2187.2	2182.0
12.5°	2191.6	2240.0	2278.0	2284.1	2312.0	2316.3	2323.6
15°	2347.3	2398.7	2451.4	2470.4	2508.8	2517.9	2532.2
17.5°	2493.7	2546.3	2583.2	2632.0	2647.8	2668.9	2654.5
20°	2573.8	2631.1	2678.0	2716.4	2732.6	2744.4	2743.1
22.5°	2622.2	2680.1	2718.0	2747.2	2762.3	2767.3	2767.0
25°	2652.6	2685.8	2697.5	2708.6	2691.6	2685.8	2688.4
27.5°	2568.3	2559.6	2529.1	2488.9	2447.3	2414.2	2396.2
30°	2452.1	2401.3	2355.2	2274.4	2232.8	2208.0	2185.9
32.5°	2287.6	2207.1	2118.1	2044.2	1996.8	1960.1	1954.7
35°	2005.6	1884.5	1775.8	1685.3	1638.4	1598.7	1589.6
37.5°	1705.1	1579.3	1481.4	1401.7	1351.4	1323.4	1297.2
40°	1505.6	1397.6	1301.2	1233.5	1195.1	1174.9	1158.7
42.5°	1352.0	1253.4	1157.5	1106.0	1071.2	1058.8	1049.3
45°	1139.8	1048.0	981.6	942.6	922.3	901.6	891.8
47.5°	969.9	895.2	851.4	818.2	796.6	784.2	778.0
50°	873.6	812.4	773.3	748.0	728.4	718.6	713.5
52.5°	788.1	737.9	705.1	684.9	671.6	664.5	662.4
55°	678.9	640.5	619.7	602.1	592.4	585.9	583.3
57.5°	590.1	560.6	543.6	529.2	525.5	520.0	518.1
60°	531.8	509.1	494.7	484.9	481.7	475.2	476.5
62.5°	480.3	461.6	449.4	443.8	439.5	434.1	435.9
65°	406.2	392.5	386.0	380.8	375.6	372.3	375.0
67.5°	340.8	331.5	322.6	319.6	317.0	316.5	313.7
70°	298.2	290.3	282.5	280.5	280.5	277.9	277.3
72.5°	257.0	251.3	246.1	244.6	242.6	243.6	240.8
75°	198.5	194.0	192.0	190.0	189.4	189.4	187.4
77.5°	146.8	143.3	140.2	140.2	137.9	137.0	136.7
80°	111.3	110.0	107.4	107.4	106.1	106.7	105.4
82.5°	83.7	81.9	81.4	80.3	78.5	78.6	77.4
85°	44.9	43.0	42.3	40.4	39.1	40.4	39.1
87.5°	20.5	20.3	19.9	19.0	18.5	18.6	17.1
90°	24.6	25.9	26.7	27.1	27.6	28.0	28.5
92.5°	39.8	40.5	41.0	41.3	41.6	41.8	42.1
95°	73.9	74.5	74.8	74.8	74.8	74.8	74.8
97.5°	116.1	116.9	117.2	117.2	117.2	117.2	117.2
100°	146.2	146.6	146.8	146.8	146.8	146.8	146.8
102.5°	178.6	179.1	179.4	179.7	179.9	180.0	180.2
105°	227.3	228.0	228.6	229.3	229.8	230.5	231.1
107.5°	280.1	280.6	281.0	280.9	280.9	280.8	280.8
110°	314.1	313.7	313.8	314.5	315.1	315.8	316.3



TEST NUMBER: P332707-930

CATALOG NUMBER: SA4XXDIP-C1195D1205U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	352.3	352.2	352.2	352.4	352.5	352.6	352.8
115°	410.4	410.3	410.0	409.9	409.6	409.4	409.2
117.5°	465.9	465.2	464.7	464.2	463.8	463.4	463.0
120°	503.6	502.6	502.2	502.6	503.0	503.5	503.9
122.5°	542.5	541.8	541.0	540.3	539.6	538.7	538.0
125°	599.2	598.8	598.4	598.0	597.6	597.1	596.7
127.5°	653.3	652.8	652.5	652.2	651.8	651.4	651.1
130°	691.1	690.7	690.1	689.3	688.4	687.5	686.7
132.5°	726.8	726.4	725.9	725.6	725.3	725.0	724.6
135°	780.2	779.8	779.3	778.6	778.0	777.3	776.7
137.5°	831.7	831.2	831.0	831.1	831.2	831.4	831.4
140°	866.1	865.8	865.7	865.4	865.2	865.0	864.8
142.5°	898.4	898.4	898.3	898.3	898.2	898.2	898.1
145°	946.6	946.4	945.9	945.3	944.7	944.0	943.5
147.5°	990.5	990.3	990.1	989.9	989.7	989.4	989.3
150°	1018.2	1018.2	1018.1	1017.9	1017.7	1017.5	1017.3
152.5°	1044.8	1045.3	1045.3	1044.7	1044.2	1043.6	1043.1
155°	1081.4	1082.2	1082.2	1081.4	1080.6	1079.7	1078.9
157.5°	1113.1	1113.8	1113.8	1113.0	1112.3	1111.6	1110.9
160°	1132.9	1133.5	1133.3	1132.2	1131.1	1130.2	1129.1
162.5°	1151.0	1152.2	1152.3	1151.2	1150.1	1149.1	1148.0
165°	1174.5	1175.8	1176.0	1175.2	1174.4	1173.5	1172.6
167.5°	1194.3	1195.5	1195.5	1194.2	1192.9	1191.6	1190.3
170°	1204.8	1206.2	1206.0	1204.5	1203.1	1201.6	1200.1
172.5°	1212.9	1214.4	1214.4	1212.8	1211.4	1209.9	1208.4
175°	1221.6	1223.0	1223.0	1221.6	1220.1	1218.6	1217.2
177.5°	1226.0	1227.2	1227.1	1225.7	1224.4	1223.0	1221.7
180°	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7	1224.7

(END OF REPORT)