

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332507-930

Luminaire Tested: **SA4XXDIP-C350D590U930-4F0-1E-UDD-F4**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332507-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXDIP-C350D590U930-4F0-1E-UDD-F4  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 590 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2958.9 lumens  
Efficiency: N/A  
Efficacy: 115.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 25.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332507-930  
CATALOG NUMBER: SA4XXDIP-C350D590U930-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

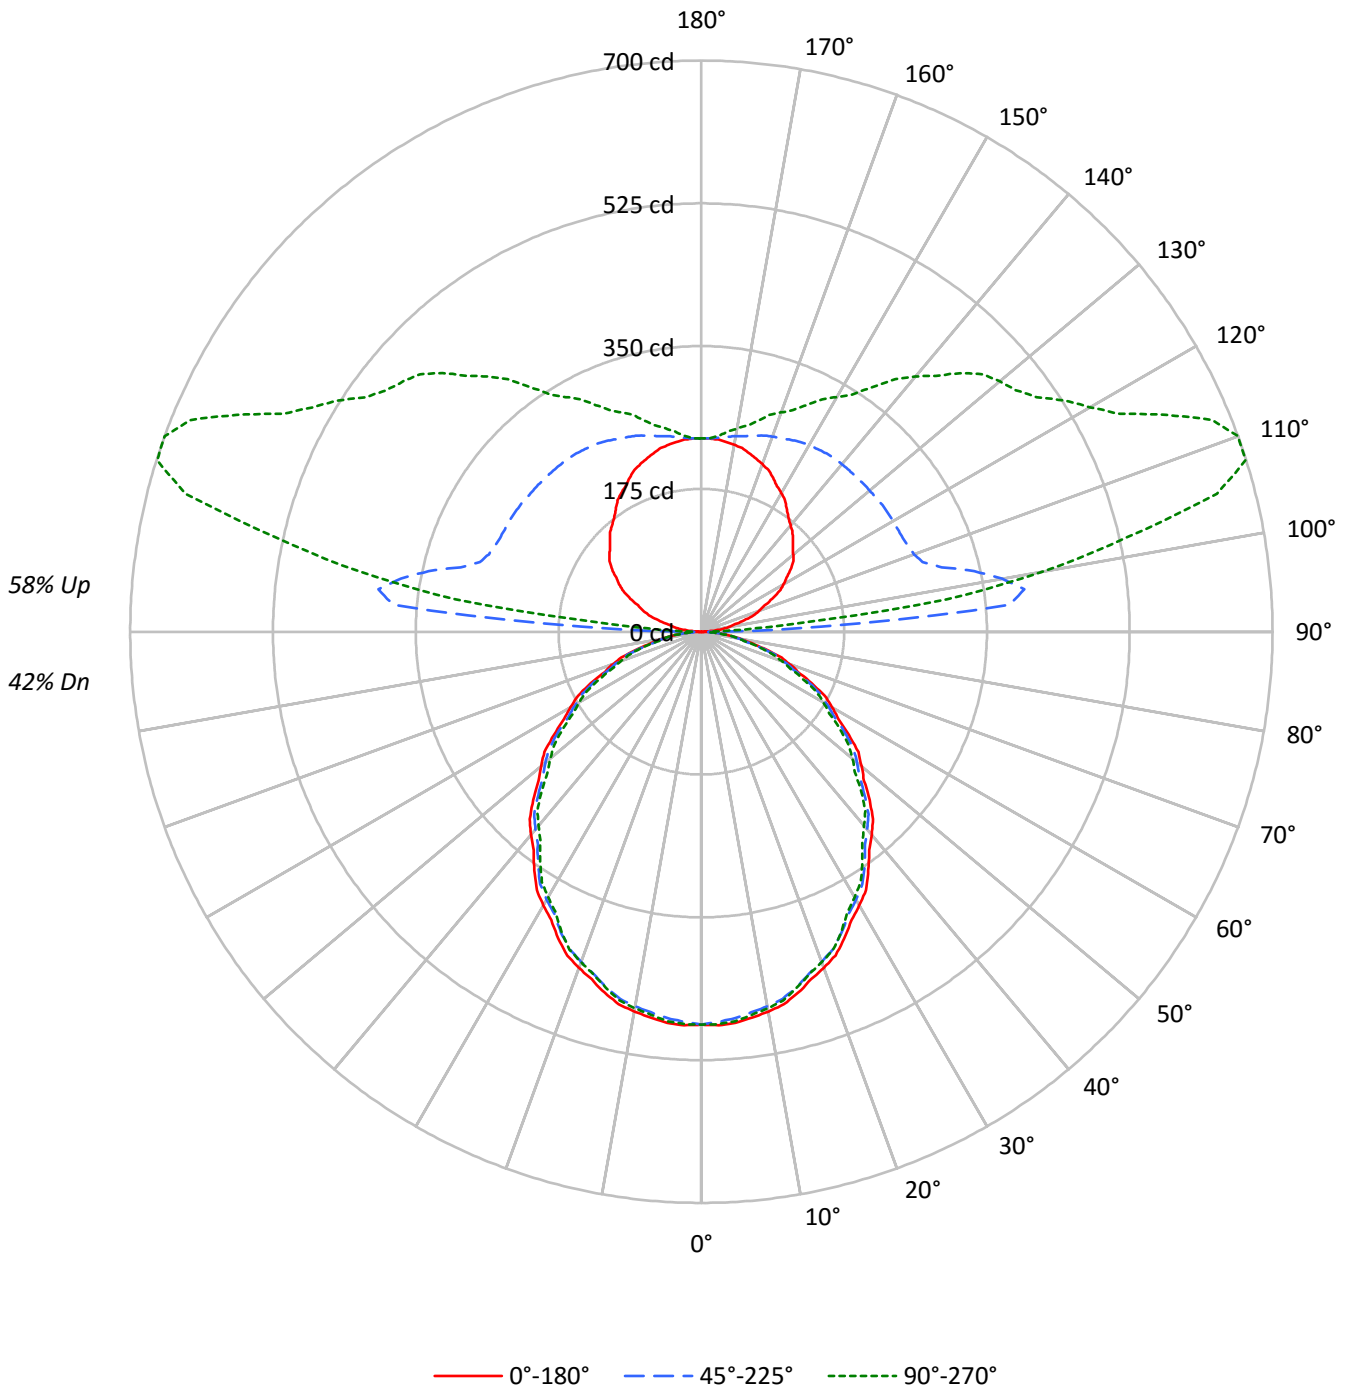



TEST NUMBER: P332507-930

CATALOG NUMBER: SA4XXDIP-C350D590U930-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49	42				
1	96	92	88	84	87	84	80	77	69	67	65	55	54	52	43	42	41	35				
2	87	80	74	69	79	73	68	64	60	57	53	49	46	44	38	36	34	29				
3	80	70	63	57	72	64	58	53	53	49	45	43	40	37	33	31	29	25				
4	73	62	54	48	66	57	50	45	47	42	38	38	35	32	30	27	25	21				
5	67	55	47	41	61	51	44	39	42	37	33	34	30	27	27	24	22	19				
6	61	50	42	36	56	46	39	33	38	33	29	31	27	24	24	22	19	16				
7	57	45	37	31	52	41	34	29	34	29	25	28	24	21	22	19	17	14				
8	53	41	33	28	48	37	31	26	31	26	22	26	22	19	20	18	15	13				
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14	12				
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	17	15	13	11				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3888	3888	3888
5°	3900	3853	3881
10°	3875	3822	3841
15°	3828	3768	3777
20°	3766	3699	3703
25°	3695	3624	3613
30°	3608	3533	3500
35°	3517	3438	3392
40°	3424	3331	3270
45°	3327	3225	3164
50°	3218	3131	3034
55°	3102	3009	2911
60°	2984	2872	2785
65°	2854	2743	2632
70°	2705	2568	2469
75°	2480	2361	2299
80°	2208	2120	2064
85°	1936	1862	1815



TEST NUMBER: P332507-930

CATALOG NUMBER: SA4XXDIP-C350D590U930-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	45.4	1.5
10°-20°	127.8	4.3
20°-30°	188.1	6.4
30°-40°	218.7	7.4
40°-50°	218.7	7.4
50°-60°	191.3	6.5
60°-70°	142.1	4.8
70°-80°	80.7	2.7
80°-90°	24.6	0.8
90°-100°	171.0	5.8
100°-110°	355.9	12.0
110°-120°	318.7	10.8
120°-130°	268.1	9.1
130°-140°	223.6	7.6
140°-150°	170.8	5.8
150°-160°	120.0	4.1
160°-170°	70.6	2.4
170°-180°	23.0	0.8
0°-30°	361.2	12.2
0°-40°	579.9	19.6
0°-60°	989.8	33.5
0°-90°	1237.2	41.8
90°-120°	845.6	28.6
90°-150°	1508.1	51.0
90°-180°	1722.0	58.2
0°-180°	2958.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	482	482	482	482	482	
5°	481	480	475	479	479	46
15°	458	456	451	453	452	129
25°	415	412	407	407	406	191
35°	357	354	349	346	344	223
45°	291	288	282	278	277	225
55°	220	219	214	209	207	197
65°	149	147	144	140	138	148
75°	80	78	76	74	74	84
85°	21	21	20	20	20	23
90°	0	4	8	9	10	2
95°	15	48	379	188	114	17
105°	54	79	305	657	654	58
115°	96	120	272	523	628	95
125°	134	159	271	445	501	119
135°	159	189	268	395	448	123
145°	183	209	267	333	366	115
155°	208	224	260	294	306	96
165°	226	234	249	263	267	64
175°	236	237	239	242	241	22
180°	237	237	237	237	237	



TEST NUMBER: P332507-930

CATALOG NUMBER: SA4XXDIP-C350D590U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	481.6	481.6	481.6	481.6	481.6	481.6	481.6	481.6	481.6	481.6	481.6
2.5°	482.8	482.7	482.4	482.2	482.0	481.5	480.8	480.0	479.3	478.5	479.2
5°	481.2	480.9	480.5	480.2	479.9	479.2	478.3	477.4	476.4	475.4	476.4
7.5°	476.8	476.4	476.1	475.7	475.4	474.7	473.6	472.6	471.6	470.5	471.2
10°	472.7	472.4	472.1	471.7	471.4	470.7	469.5	468.4	467.3	466.2	466.8
12.5°	467.5	467.2	466.8	466.4	466.1	465.4	464.1	463.0	461.8	460.6	461.4
15°	458.0	457.7	457.4	457.1	456.7	455.9	454.6	453.3	452.0	450.8	451.3
17.5°	446.7	446.3	445.9	445.5	445.0	444.2	443.0	441.7	440.5	439.3	439.6
20°	438.4	438.0	437.6	437.1	436.7	435.9	434.6	433.3	431.9	430.6	431.0
22.5°	429.4	428.8	428.3	427.7	427.1	426.2	424.9	423.7	422.4	421.1	421.6
25°	414.8	414.3	413.7	413.0	412.5	411.6	410.3	409.1	408.0	406.8	406.8
27.5°	398.2	397.5	397.0	396.3	395.7	394.8	393.7	392.6	391.5	390.4	390.2
30°	387.1	386.4	385.7	385.0	384.3	383.4	382.3	381.2	380.1	379.0	378.6
32.5°	375.4	374.7	374.1	373.5	372.8	371.9	370.8	369.6	368.4	367.2	366.8
35°	356.9	356.4	355.8	355.1	354.6	353.7	352.5	351.2	350.1	348.9	348.3
37.5°	337.6	337.0	336.5	336.0	335.4	334.5	333.2	331.9	330.6	329.3	328.6
40°	324.9	324.2	323.6	322.9	322.2	321.2	319.9	318.6	317.3	316.1	315.2
42.5°	311.4	311.0	310.5	310.1	309.7	308.8	307.4	305.9	304.5	303.1	302.1
45°	291.4	290.7	290.2	289.6	288.9	288.0	286.6	285.2	283.9	282.5	281.5
47.5°	270.4	270.0	269.6	269.2	268.8	268.0	266.7	265.4	264.2	262.9	261.8
50°	256.2	255.9	255.6	255.2	254.9	254.1	252.9	251.7	250.5	249.3	248.1
52.5°	242.4	241.9	241.5	241.1	240.7	239.9	238.6	237.3	236.0	234.8	233.7
55°	220.4	220.1	219.8	219.6	219.3	218.6	217.4	216.2	215.0	213.8	212.8
57.5°	199.3	199.1	198.8	198.5	198.2	197.5	196.2	195.1	193.9	192.7	191.8
60°	184.8	184.4	184.0	183.5	183.1	182.4	181.2	180.1	179.0	177.9	177.2
62.5°	170.6	170.3	169.9	169.6	169.2	168.4	167.2	166.1	164.9	163.7	163.0
65°	149.4	149.0	148.5	148.1	147.7	147.0	146.1	145.3	144.4	143.6	142.7
67.5°	127.9	127.5	127.1	126.7	126.3	125.7	124.9	124.1	123.3	122.4	121.6
70°	114.6	114.0	113.4	112.8	112.2	111.5	110.9	110.2	109.5	108.8	108.1
72.5°	100.4	99.8	99.2	98.7	98.0	97.4	96.9	96.4	95.8	95.2	94.7
75°	79.5	79.1	78.7	78.2	77.8	77.4	77.0	76.5	76.1	75.7	75.3
77.5°	59.5	59.4	59.1	58.9	58.8	58.5	58.1	57.7	57.3	57.0	56.8
80°	47.5	47.2	47.0	46.7	46.5	46.2	46.1	45.9	45.7	45.6	45.3
82.5°	35.7	35.6	35.5	35.4	35.2	35.1	35.1	35.1	35.1	35.1	35.0
85°	20.9	20.9	20.9	20.9	20.9	20.8	20.5	20.4	20.2	20.1	20.1
87.5°	8.2	8.2	8.5	8.5	8.5	8.4	8.9	8.9	9.0	9.0	9.0
90°	0.5	1.4	2.8	3.3	3.8	3.8	6.5	6.5	7.4	8.4	7.9
92.5°	5.3	7.7	12.1	17.8	24.5	34.2	57.9	93.9	129.1	147.5	122.9
95°	15.3	16.7	21.4	27.5	38.6	58.1	98.6	174.9	286.0	379.0	389.7
97.5°	27.6	27.6	31.6	37.1	46.7	63.1	94.2	157.2	267.7	399.3	489.7
100°	35.4	35.4	38.6	44.2	53.0	67.9	95.3	147.9	242.8	373.9	493.0
102.5°	42.8	43.5	46.4	51.6	60.1	74.2	99.1	145.3	226.0	342.3	465.0
105°	54.4	55.8	58.1	63.8	72.1	85.6	107.9	146.5	211.7	305.1	414.4
107.5°	67.3	68.2	70.5	76.5	84.5	97.8	118.2	153.4	209.0	284.3	373.5
110°	75.8	76.7	79.1	84.6	93.0	105.6	126.0	158.6	209.8	277.2	353.0



TEST NUMBER: P332507-930

CATALOG NUMBER: SA4XXDIP-C350D590U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	84.0	85.0	87.6	92.9	101.2	113.7	133.5	164.2	212.0	273.9	341.4
115°	95.8	97.2	100.4	105.1	114.0	126.5	145.1	173.0	216.3	272.1	330.7
117.5°	108.1	109.4	112.3	117.4	125.6	138.7	156.4	182.1	220.8	271.6	325.9
120°	116.3	117.2	120.4	125.6	133.5	146.5	164.2	188.3	224.2	271.6	323.3
122.5°	123.7	124.7	127.9	132.6	141.3	153.9	171.6	194.3	227.6	271.3	320.2
125°	133.5	135.3	138.1	143.2	152.1	165.1	181.8	203.3	232.5	270.7	315.4
127.5°	142.1	143.7	147.0	152.8	162.0	175.1	191.4	211.0	236.5	269.6	308.8
130°	147.0	148.8	152.5	159.6	168.4	181.8	197.6	215.8	239.5	269.3	304.6
132.5°	151.8	153.3	158.2	164.8	174.3	187.0	202.8	220.6	242.1	268.9	300.9
135°	158.6	160.5	165.1	173.0	182.8	194.9	210.2	227.0	246.1	268.3	295.3
137.5°	165.4	167.1	172.3	179.8	190.0	201.5	215.8	231.5	248.3	268.2	290.5
140°	170.2	171.6	176.8	184.7	194.4	205.5	219.6	234.4	250.2	267.9	287.9
142.5°	175.5	176.8	181.6	189.1	198.5	209.3	222.9	236.6	251.7	267.9	285.7
145°	182.8	184.2	188.8	195.3	204.2	214.4	226.5	239.0	252.6	266.9	281.8
147.5°	191.0	191.5	195.6	202.3	209.7	218.9	230.2	241.2	253.0	265.3	278.4
150°	196.2	196.7	200.5	206.0	213.0	221.8	232.1	242.3	253.0	264.2	275.8
152.5°	201.1	201.2	204.9	210.1	216.4	224.5	233.6	243.0	252.3	262.3	272.8
155°	207.9	208.4	211.2	215.8	220.9	227.9	235.8	243.7	251.1	259.5	268.3
157.5°	214.5	214.5	217.1	220.7	225.2	230.6	237.4	243.7	250.0	256.7	263.8
160°	218.6	218.6	220.5	223.7	227.4	232.5	238.1	243.7	248.8	254.4	260.5
162.5°	222.3	221.9	223.4	226.3	229.7	233.7	238.9	243.7	247.7	252.2	257.5
165°	226.5	226.5	227.4	229.8	232.1	234.9	239.0	242.8	245.6	248.8	252.6
167.5°	230.6	230.2	230.6	232.4	233.7	235.9	239.0	241.7	243.4	245.5	248.1
170°	232.5	232.1	232.5	233.9	234.9	236.3	238.6	240.9	241.8	243.2	245.1
172.5°	234.4	233.9	234.0	235.1	235.6	236.6	238.2	240.2	240.4	241.0	242.5
175°	236.3	235.8	235.8	236.3	236.8	236.8	237.7	239.0	238.6	238.6	239.5
177.5°	237.1	236.8	236.4	236.8	236.8	236.8	237.1	237.8	237.1	237.1	237.5
180°	236.8	236.8	236.8	236.8	236.8	236.8	236.8	236.8	236.8	236.8	236.8



TEST NUMBER: P332507-930

CATALOG NUMBER: SA4XXDIP-C350D590U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	481.6	481.6	481.6	481.6	481.6	481.6	481.6	481.6
2.5°	479.9	480.6	481.3	481.6	481.5	481.4	481.4	481.3
5°	477.4	478.3	479.2	479.6	479.4	479.2	479.1	478.9
7.5°	472.0	472.8	473.5	473.9	473.8	473.6	473.5	473.4
10°	467.6	468.2	469.0	469.2	469.0	468.8	468.6	468.5
12.5°	462.1	462.8	463.7	463.9	463.7	463.4	463.2	462.9
15°	451.8	452.2	452.8	452.9	452.7	452.4	452.2	451.9
17.5°	439.9	440.3	440.6	440.7	440.5	440.3	440.2	440.0
20°	431.2	431.5	431.7	431.8	431.5	431.4	431.2	431.0
22.5°	422.0	422.5	423.0	423.1	422.7	422.4	422.1	421.8
25°	406.9	407.0	407.1	407.0	406.6	406.3	405.9	405.6
27.5°	390.0	389.8	389.6	389.2	388.8	388.4	387.9	387.5
30°	378.3	378.0	377.6	377.2	376.7	376.3	375.9	375.5
32.5°	366.4	366.0	365.6	365.2	364.8	364.3	363.9	363.5
35°	347.6	347.1	346.4	345.9	345.5	345.1	344.6	344.2
37.5°	328.0	327.3	326.7	326.1	325.5	325.0	324.4	323.8
40°	314.4	313.5	312.7	312.0	311.5	311.1	310.7	310.3
42.5°	301.1	300.1	299.1	298.5	298.2	297.9	297.6	297.3
45°	280.6	279.6	278.8	278.1	277.9	277.6	277.4	277.1
47.5°	260.7	259.7	258.6	257.8	257.1	256.5	255.8	255.2
50°	246.9	245.7	244.5	243.6	243.1	242.6	242.1	241.6
52.5°	232.7	231.6	230.6	229.7	229.0	228.4	227.7	227.1
55°	211.7	210.7	209.7	208.9	208.4	207.9	207.3	206.8
57.5°	190.8	189.8	188.8	188.1	187.6	187.1	186.6	186.1
60°	176.3	175.6	174.8	174.2	173.8	173.3	172.9	172.5
62.5°	162.3	161.6	160.9	160.3	159.9	159.5	159.1	158.6
65°	141.9	141.0	140.1	139.5	139.1	138.6	138.2	137.8
67.5°	120.7	119.9	119.1	118.6	118.5	118.4	118.3	118.1
70°	107.5	106.8	106.1	105.6	105.3	105.1	104.8	104.6
72.5°	94.2	93.6	93.0	92.6	92.4	92.1	91.9	91.6
75°	74.9	74.6	74.3	74.0	73.9	73.9	73.8	73.7
77.5°	56.7	56.7	56.6	56.4	56.2	55.9	55.7	55.5
80°	45.2	45.0	44.8	44.8	44.6	44.5	44.4	44.4
82.5°	34.8	34.7	34.7	34.6	34.5	34.3	34.2	34.2
85°	20.1	20.1	20.1	20.1	20.0	19.9	19.7	19.6
87.5°	9.0	9.2	9.3	9.3	9.4	9.5	9.4	9.4
90°	8.4	8.8	9.3	9.3	9.8	10.2	9.8	9.8
92.5°	91.3	68.7	54.7	45.4	39.9	37.4	35.8	35.8
95°	344.6	272.6	210.2	165.1	142.4	127.9	119.5	113.5
97.5°	509.2	482.4	436.9	388.3	355.0	326.9	313.0	303.3
100°	560.9	570.2	547.4	513.0	472.5	444.2	430.2	426.5
102.5°	558.3	604.5	611.1	596.7	571.9	551.3	536.6	533.6
105°	520.9	601.4	647.4	666.5	667.4	663.7	657.1	654.4
107.5°	467.8	553.4	618.3	659.7	682.7	693.3	698.0	699.2
110°	435.8	516.2	583.7	634.9	667.9	687.4	695.8	699.9





TEST NUMBER: P332507-930

CATALOG NUMBER: SA4XXDIP-C350D590U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	412.4	483.5	547.2	598.3	635.9	659.5	671.2	678.0
115°	388.8	446.1	500.4	545.1	581.8	609.8	624.6	628.4
117.5°	377.2	424.6	467.4	505.2	536.6	560.0	575.1	578.0
120°	372.1	415.3	452.5	485.5	512.1	532.6	544.6	549.8
122.5°	367.6	409.4	443.2	472.1	494.6	512.1	522.3	527.4
125°	360.0	400.0	432.0	457.6	476.2	489.8	498.6	501.3
127.5°	350.7	388.9	420.9	445.2	463.9	475.9	483.3	486.1
130°	343.2	380.0	411.6	436.3	455.3	466.9	474.4	477.2
132.5°	335.4	369.9	400.8	425.4	444.2	457.3	464.3	467.2
135°	324.7	354.9	383.2	406.5	425.1	438.1	445.6	448.3
137.5°	314.9	340.5	364.4	385.4	402.8	415.6	421.8	425.1
140°	309.2	331.2	352.0	371.6	387.9	398.1	404.6	408.4
142.5°	304.1	323.3	341.3	358.2	372.6	382.1	387.9	390.4
145°	296.7	312.5	326.5	339.5	351.1	359.1	363.7	366.0
147.5°	290.7	303.2	314.4	324.7	333.2	340.0	343.5	344.4
150°	287.0	297.7	307.0	315.4	322.8	328.8	331.6	332.1
152.5°	282.8	292.0	300.6	307.5	313.8	318.8	320.4	320.9
155°	276.7	284.1	291.1	296.7	301.4	305.1	306.5	306.5
157.5°	270.1	276.4	282.2	286.7	290.2	293.0	293.8	293.8
160°	266.0	271.2	276.2	280.0	282.7	285.6	286.0	286.0
162.5°	262.0	266.3	270.3	273.7	275.7	278.5	279.0	278.6
165°	256.2	259.0	262.3	264.6	266.5	268.3	267.9	267.4
167.5°	250.8	252.9	255.5	256.9	257.9	259.0	258.9	258.6
170°	247.4	248.8	250.7	252.1	253.0	253.5	253.0	253.0
172.5°	244.4	245.5	246.6	247.6	248.2	248.7	248.2	247.4
175°	240.4	240.9	241.8	241.8	241.8	242.8	241.8	240.9
177.5°	237.8	238.2	238.2	238.6	238.2	238.6	237.8	237.1
180°	236.8	236.8	236.8	236.8	236.8	236.8	236.8	236.8

(END OF REPORT)