

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332559-930

Luminaire Tested: **SA4XXDIP-C575D810U930-4F0-1E-UDD-F**

Issue Date: 10/7/2019

**Test Information**

Test Method: LM-79-08  
Report Number: P332559-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,  
Test Lab: INNOVATION CENTER  
Issue Date: 10/7/2019  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: SA4XXDIP-C575D810U930-4F0-1E-UDD-F  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 810 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 4670.7 lumens  
Efficiency: N/A  
Efficacy: 121.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 38.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332559-930  
CATALOG NUMBER: SA4XXDIP-C575D810U930-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

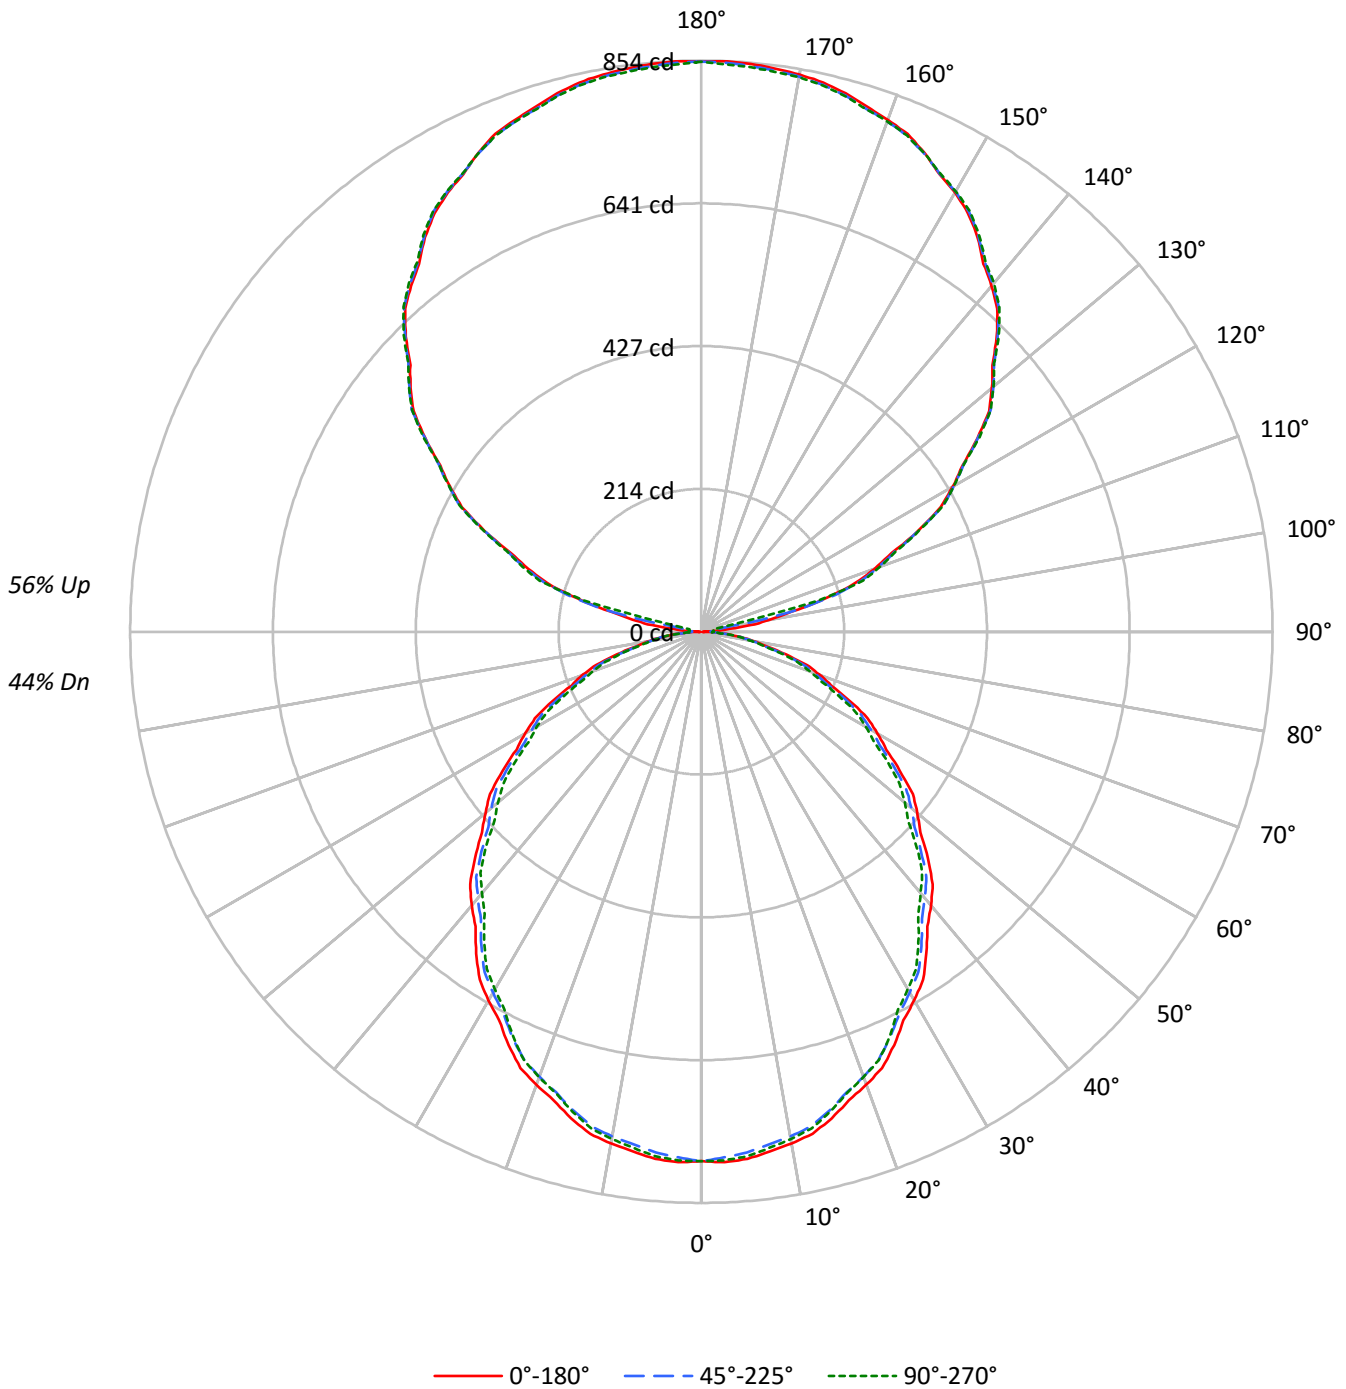



TEST NUMBER: P332559-930

CATALOG NUMBER: SA4XXDIP-C575D810U930-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	80	80	80	64	64	64	50	50	50	44	44	44	44	
1	96	92	88	85	88	84	81	78	70	67	65	57	55	53	44	43	42	37	37	37	37	
2	88	80	74	69	80	74	68	64	61	57	54	50	47	45	39	37	36	31	31	31	31	
3	80	71	63	58	73	65	58	53	54	49	45	44	41	38	35	32	30	26	26	26	26	
4	73	62	55	49	67	57	51	45	48	43	39	39	35	32	31	28	26	22	22	22	22	
5	67	56	48	42	61	51	44	39	43	37	33	35	31	28	28	25	23	19	19	19	19	
6	62	50	42	36	56	46	39	34	39	33	29	32	28	24	25	22	20	17	17	17	17	
7	57	45	37	32	52	41	34	29	35	29	26	29	25	22	23	20	18	15	15	15	15	
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16	13	13	13	13	
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	17	14	12	12	12	12	
10	46	34	27	22	42	32	25	21	27	22	18	22	18	16	18	15	13	11	11	11	11	

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6391	6391	6391
5°	6412	6334	6380
10°	6370	6283	6314
15°	6294	6193	6209
20°	6192	6082	6088
25°	6075	5956	5940
30°	5931	5808	5754
35°	5784	5653	5577
40°	5630	5476	5376
45°	5469	5302	5200
50°	5291	5148	4987
55°	5098	4947	4787
60°	4907	4721	4579
65°	4690	4508	4327
70°	4447	4223	4057
75°	4077	3877	3780
80°	3626	3477	3394
85°	3168	3057	3001



TEST NUMBER: P332559-930

CATALOG NUMBER: SA4XXDIP-C575D810U930-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	74.6	1.6
10°-20°	210.1	4.5
20°-30°	309.2	6.6
30°-40°	359.5	7.7
40°-50°	359.5	7.7
50°-60°	314.5	6.7
60°-70°	233.5	5.0
70°-80°	132.7	2.8
80°-90°	40.7	0.9
90°-100°	29.1	0.6
100°-110°	185.9	4.0
110°-120°	355.6	7.6
120°-130°	451.4	9.7
130°-140°	482.9	10.3
140°-150°	451.6	9.7
150°-160°	364.2	7.8
160°-170°	234.9	5.0
170°-180°	81.0	1.7
0°-30°	593.9	12.7
0°-40°	953.4	20.4
0°-60°	1627.3	34.8
0°-90°	2034.3	43.6
90°-120°	570.6	12.2
90°-150°	1956.4	41.9
90°-180°	2636.0	56.4
0°-180°	4670.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	792	792	792	792	792	
5°	791	788	782	788	787	75
15°	753	750	741	744	743	212
25°	682	677	669	669	667	314
35°	587	582	574	569	566	367
45°	479	474	464	458	456	369
55°	362	360	352	344	340	324
65°	246	242	236	230	226	243
75°	131	128	124	122	121	139
85°	34	34	33	33	32	38
90°	2	9	14	18	19	3
95°	35	15	14	18	18	45
105°	192	196	199	203	182	201
115°	358	360	360	361	361	352
125°	504	506	505	507	507	449
135°	625	624	627	628	629	481
145°	720	722	722	723	724	450
155°	790	790	789	791	789	364
165°	833	830	830	834	829	235
175°	852	849	849	854	847	81
180°	852	852	852	852	852	



TEST NUMBER: P332559-930

CATALOG NUMBER: SA4XXDIP-C575D810U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	791.7	791.7	791.7	791.7	791.7	791.7	791.7	791.7	791.7	791.7	791.7
2.5°	793.8	793.4	793.1	792.8	792.5	791.7	790.4	789.2	787.9	786.7	787.8
5°	791.2	790.6	790.0	789.5	788.9	787.8	786.3	784.7	783.2	781.6	783.2
7.5°	783.7	783.2	782.7	782.1	781.5	780.4	778.7	777.0	775.2	773.5	774.8
10°	777.1	776.7	776.1	775.5	774.9	773.7	771.9	770.1	768.3	766.4	767.5
12.5°	768.6	768.0	767.4	766.9	766.3	765.1	763.1	761.2	759.2	757.2	758.5
15°	753.1	752.5	752.0	751.4	750.8	749.5	747.4	745.3	743.1	741.0	741.8
17.5°	734.4	733.7	733.0	732.3	731.6	730.3	728.2	726.3	724.2	722.3	722.8
20°	720.7	720.0	719.3	718.6	717.9	716.5	714.4	712.2	710.1	708.0	708.4
22.5°	706.0	705.1	704.2	703.2	702.3	700.7	698.6	696.5	694.4	692.3	693.1
25°	682.0	681.0	680.0	679.1	678.1	676.6	674.6	672.6	670.7	668.7	668.9
27.5°	654.6	653.6	652.6	651.6	650.5	649.1	647.3	645.5	643.6	641.8	641.5
30°	636.3	635.2	634.1	632.9	631.9	630.3	628.5	626.6	624.8	623.1	622.5
32.5°	617.0	616.0	615.0	614.0	613.0	611.5	609.6	607.6	605.7	603.7	603.1
35°	586.9	585.9	584.9	583.9	582.9	581.4	579.4	577.5	575.5	573.6	572.5
37.5°	555.0	554.1	553.2	552.3	551.4	549.9	547.8	545.7	543.6	541.4	540.4
40°	534.2	533.0	531.9	530.8	529.7	528.1	525.9	523.8	521.7	519.6	518.2
42.5°	511.8	511.2	510.5	509.8	509.2	507.6	505.3	503.0	500.6	498.3	496.7
45°	479.0	478.0	477.0	476.1	475.1	473.4	471.2	468.9	466.7	464.4	462.8
47.5°	444.6	443.9	443.3	442.5	441.9	440.5	438.5	436.3	434.2	432.2	430.4
50°	421.3	420.7	420.1	419.6	419.0	417.8	415.8	413.8	411.8	409.9	407.9
52.5°	398.4	397.8	397.1	396.4	395.7	394.4	392.2	390.2	388.1	386.0	384.3
55°	362.2	361.8	361.4	361.0	360.6	359.4	357.4	355.4	353.4	351.5	349.8
57.5°	327.8	327.3	326.8	326.3	325.8	324.7	322.7	320.7	318.8	316.8	315.2
60°	303.9	303.2	302.5	301.7	301.1	299.8	298.0	296.1	294.3	292.4	291.2
62.5°	280.5	280.0	279.3	278.8	278.2	276.9	275.0	273.0	271.1	269.1	268.0
65°	245.5	244.8	244.1	243.4	242.7	241.7	240.3	238.8	237.4	236.0	234.6
67.5°	210.3	209.6	209.0	208.3	207.7	206.7	205.3	204.0	202.6	201.2	199.9
70°	188.4	187.4	186.5	185.5	184.5	183.4	182.3	181.2	180.0	178.9	177.8
72.5°	165.1	164.1	163.1	162.1	161.1	160.2	159.3	158.4	157.5	156.5	155.6
75°	130.7	130.0	129.3	128.6	127.8	127.2	126.5	125.7	125.1	124.3	123.8
77.5°	97.8	97.5	97.2	96.9	96.6	96.1	95.5	94.9	94.2	93.7	93.4
80°	78.0	77.6	77.2	76.8	76.3	76.0	75.7	75.4	75.2	74.8	74.6
82.5°	58.8	58.5	58.4	58.1	58.0	57.8	57.8	57.7	57.6	57.6	57.4
85°	34.2	34.2	34.2	34.2	34.2	34.1	33.8	33.6	33.3	33.0	33.0
87.5°	13.6	13.8	13.9	14.2	14.3	14.5	14.7	14.8	14.8	15.0	15.2
90°	1.9	3.5	5.1	6.6	8.2	9.5	10.6	11.7	12.9	14.0	14.8
92.5°	8.1	8.2	8.2	8.3	8.4	9.0	10.1	11.3	12.4	13.5	14.3
95°	35.1	30.2	25.4	20.6	15.8	13.5	13.6	13.8	13.9	14.0	14.8
97.5°	74.4	77.5	80.5	83.5	86.5	80.1	64.2	48.4	32.6	16.8	16.9
100°	104.5	107.1	109.7	112.2	114.7	106.2	86.7	67.2	47.6	28.0	25.6
102.5°	138.2	140.1	141.9	143.8	145.7	145.4	142.8	140.2	137.7	135.2	109.2
105°	191.8	192.7	193.6	194.4	195.3	196.1	196.7	197.5	198.2	198.9	200.2
107.5°	241.7	242.1	242.6	243.0	243.4	244.1	245.1	246.1	247.0	248.0	248.6
110°	275.4	275.8	276.2	276.6	277.1	277.7	278.6	279.4	280.3	281.1	281.4



TEST NUMBER: P332559-930

CATALOG NUMBER: SA4XXDIP-C575D810U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	308.0	308.8	309.6	310.3	311.1	311.7	312.1	312.4	312.8	313.2	313.2
115°	358.2	358.7	359.1	359.5	360.0	360.1	360.0	359.8	359.7	359.5	359.8
117.5°	403.5	404.1	404.6	405.2	405.8	406.3	406.5	406.8	407.2	407.5	407.4
120°	434.1	434.7	435.3	435.9	436.3	436.6	436.4	436.3	436.2	436.0	436.3
122.5°	462.7	463.0	463.3	463.7	464.1	464.3	464.5	464.7	464.9	465.1	465.3
125°	503.6	504.2	504.8	505.3	505.9	506.0	505.7	505.5	505.2	504.9	505.3
127.5°	542.3	542.5	542.7	542.8	542.9	543.3	544.0	544.6	545.3	545.9	545.8
130°	567.4	567.5	567.6	567.8	567.9	568.2	568.6	569.1	569.5	569.9	570.1
132.5°	590.3	590.5	590.8	591.1	591.3	591.7	592.2	592.8	593.3	593.9	594.0
135°	624.8	624.6	624.4	624.3	624.2	624.4	624.9	625.5	626.1	626.6	626.9
137.5°	655.2	655.3	655.3	655.3	655.4	655.7	656.4	657.0	657.6	658.3	658.6
140°	675.1	675.4	675.6	676.0	676.2	676.5	676.8	677.1	677.4	677.6	678.1
142.5°	692.9	693.4	694.0	694.5	695.0	695.3	695.5	695.7	695.9	696.0	696.3
145°	720.3	720.8	721.2	721.6	722.0	722.3	722.3	722.3	722.3	722.3	722.4
147.5°	742.2	743.0	743.7	744.5	745.3	745.7	745.5	745.3	745.2	745.1	745.2
150°	758.0	758.6	759.1	759.7	760.2	760.4	760.3	760.2	760.0	759.9	759.9
152.5°	771.2	771.7	772.1	772.6	773.1	773.1	772.9	772.7	772.3	772.1	772.3
155°	789.9	789.9	790.1	790.3	790.4	790.3	789.9	789.4	789.0	788.6	789.1
157.5°	805.5	805.4	805.4	805.3	805.2	804.9	804.4	804.0	803.5	803.0	803.7
160°	814.7	814.2	813.8	813.4	813.0	812.7	812.6	812.4	812.3	812.1	813.0
162.5°	822.9	822.3	821.7	821.3	820.7	820.4	820.2	820.1	819.9	819.8	820.7
165°	833.2	832.5	831.8	831.0	830.4	830.0	830.0	830.0	830.0	830.0	831.1
167.5°	841.3	840.6	839.8	839.1	838.4	838.0	837.9	837.8	837.7	837.6	838.9
170°	846.0	845.1	844.2	843.3	842.5	842.2	842.3	842.4	842.6	842.8	843.8
172.5°	849.0	848.2	847.3	846.4	845.6	845.2	845.4	845.5	845.6	845.8	846.9
175°	852.3	851.4	850.6	849.8	848.9	848.6	848.7	848.8	849.0	849.1	850.4
177.5°	853.9	853.0	852.2	851.4	850.7	850.4	850.6	850.8	851.1	851.3	852.2
180°	852.3	852.3	852.3	852.3	852.3	852.3	852.3	852.3	852.3	852.3	852.3



TEST NUMBER: P332559-930

CATALOG NUMBER: SA4XXDIP-C575D810U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	791.7	791.7	791.7	791.7	791.7	791.7	791.7	791.7
2.5°	789.0	790.1	791.2	791.7	791.6	791.5	791.4	791.2
5°	784.7	786.3	787.8	788.5	788.1	787.9	787.6	787.3
7.5°	776.0	777.2	778.4	779.0	778.9	778.7	778.5	778.3
10°	768.7	769.8	770.9	771.4	771.0	770.8	770.5	770.2
12.5°	759.8	761.0	762.2	762.6	762.2	761.8	761.5	761.1
15°	742.7	743.6	744.4	744.6	744.2	743.8	743.3	742.9
17.5°	723.3	723.8	724.4	724.5	724.2	723.9	723.7	723.4
20°	708.9	709.3	709.7	709.8	709.5	709.2	709.0	708.7
22.5°	693.8	694.6	695.4	695.5	695.0	694.5	694.0	693.4
25°	669.0	669.1	669.3	669.0	668.5	667.9	667.3	666.8
27.5°	641.2	640.7	640.4	639.9	639.2	638.5	637.8	637.1
30°	621.9	621.3	620.8	620.1	619.4	618.7	618.0	617.3
32.5°	602.3	601.7	601.0	600.3	599.7	598.9	598.2	597.5
35°	571.5	570.5	569.6	568.8	568.0	567.3	566.6	565.9
37.5°	539.3	538.2	537.1	536.1	535.2	534.3	533.4	532.4
40°	516.8	515.4	514.0	512.9	512.2	511.5	510.8	510.1
42.5°	495.0	493.3	491.7	490.6	490.2	489.8	489.3	488.8
45°	461.3	459.7	458.2	457.2	456.8	456.4	455.9	455.5
47.5°	428.7	426.9	425.2	423.8	422.7	421.6	420.5	419.5
50°	405.9	403.9	401.9	400.6	399.7	398.8	398.0	397.1
52.5°	382.5	380.7	379.0	377.6	376.5	375.4	374.4	373.3
55°	348.1	346.4	344.7	343.4	342.6	341.8	340.9	340.1
57.5°	313.6	312.0	310.4	309.2	308.3	307.5	306.7	305.9
60°	289.9	288.7	287.4	286.4	285.7	285.0	284.3	283.6
62.5°	266.8	265.6	264.5	263.6	262.9	262.2	261.5	260.7
65°	233.2	231.8	230.4	229.3	228.6	227.9	227.2	226.5
67.5°	198.5	197.2	195.8	195.0	194.9	194.7	194.4	194.3
70°	176.7	175.5	174.4	173.7	173.2	172.8	172.4	171.9
72.5°	154.7	153.8	153.0	152.3	151.9	151.5	151.1	150.6
75°	123.2	122.6	122.1	121.7	121.6	121.5	121.3	121.2
77.5°	93.3	93.1	92.9	92.7	92.3	92.0	91.6	91.2
80°	74.3	74.0	73.7	73.5	73.4	73.2	73.1	73.0
82.5°	57.2	57.1	56.9	56.7	56.7	56.5	56.3	56.2
85°	33.0	33.0	33.0	32.9	32.8	32.6	32.5	32.4
87.5°	15.3	15.5	15.7	15.8	15.8	15.9	16.0	16.0
90°	15.7	16.6	17.4	18.0	18.3	18.6	18.8	19.2
92.5°	15.2	16.1	16.9	17.4	17.4	17.4	17.5	17.6
95°	15.7	16.6	17.4	17.9	18.1	18.2	18.3	18.5
97.5°	17.0	17.1	17.2	17.3	17.4	17.5	17.7	17.9
100°	23.2	20.8	18.4	17.3	17.4	17.5	17.7	17.9
102.5°	83.2	57.2	31.2	18.3	18.3	18.3	18.3	18.3
105°	201.5	202.7	204.0	202.1	197.0	191.8	186.8	181.6
107.5°	249.2	249.8	250.5	251.0	251.6	252.1	252.7	253.2
110°	281.7	282.0	282.3	282.6	283.1	283.5	283.9	284.3





TEST NUMBER: P332559-930

CATALOG NUMBER: SA4XXDIP-C575D810U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	313.2	313.1	313.0	313.2	313.8	314.4	314.9	315.4
115°	360.1	360.4	360.7	360.9	360.9	360.9	360.9	360.9
117.5°	407.3	407.3	407.2	407.2	407.2	407.1	407.0	407.0
120°	436.6	436.9	437.2	437.2	436.9	436.6	436.3	436.0
122.5°	465.5	465.6	465.8	465.7	465.5	465.1	464.9	464.6
125°	505.7	506.1	506.5	506.9	507.0	507.1	507.3	507.4
127.5°	545.8	545.7	545.6	545.5	545.4	545.3	545.2	545.0
130°	570.2	570.3	570.5	570.5	570.5	570.5	570.5	570.5
132.5°	594.2	594.3	594.4	594.4	594.4	594.2	594.1	594.0
135°	627.2	627.5	627.8	628.0	628.4	628.6	628.9	629.2
137.5°	658.8	659.2	659.5	659.6	659.5	659.4	659.3	659.3
140°	678.5	678.9	679.3	679.6	679.8	679.9	680.0	680.2
142.5°	696.6	696.9	697.2	697.4	697.4	697.5	697.5	697.5
145°	722.5	722.7	722.8	723.0	723.3	723.6	723.9	724.1
147.5°	745.3	745.4	745.5	745.7	745.8	745.9	746.1	746.2
150°	759.9	759.9	759.9	759.9	760.1	760.2	760.3	760.5
152.5°	772.6	772.8	773.0	773.1	773.0	772.9	772.8	772.7
155°	789.7	790.3	790.8	790.9	790.4	790.0	789.6	789.2
157.5°	804.5	805.2	805.9	805.9	805.2	804.5	803.7	803.0
160°	813.8	814.7	815.5	815.5	814.7	813.8	813.0	812.1
162.5°	821.5	822.3	823.2	823.1	822.1	821.2	820.3	819.3
165°	832.3	833.4	834.5	834.5	833.2	831.9	830.6	829.3
167.5°	840.2	841.4	842.6	842.5	841.1	839.7	838.3	836.9
170°	845.0	846.1	847.3	847.1	845.7	844.3	842.9	841.5
172.5°	848.1	849.2	850.4	850.1	848.6	847.1	845.5	844.0
175°	851.7	853.0	854.2	854.0	852.3	850.6	848.9	847.2
177.5°	853.1	854.0	854.9	854.7	853.3	852.0	850.6	849.2
180°	852.3	852.3	852.3	852.3	852.3	852.3	852.3	852.3

(END OF REPORT)